Model Documentation of the 'Mach 2.7 flight condition of a supersonic transport aircraft'

1 Nomenclature

1.1 Nomenclature for Model Equations

- x state vector
- u control input vector
- w noise vector
- z regulated output vector
- y measurement vector

2 Model Equations

State Vector and Input Vector:

$$x \in \mathbb{R}^4 u \qquad \qquad \in \mathbb{R}^2 w \in \mathbb{R}^4 z \qquad \qquad \in \mathbb{R}^6 y \in \mathbb{R}^3$$

System Equations:

$$\dot{x}(t) = Ax(t) + B_1 w(t) + Bu(t) \tag{1a}$$

$$z(t) = C_1 x(t) + D_{11} w(t) + D_{12} u(t)$$
(1b)

$$y(t) = Cx(t) + D21w(t) \tag{1c}$$

Outputs: z

2.1 Exemplary parameter values

-	
Symbol	Value
A	$\begin{bmatrix} -0.037 & 0.0123 & 0.00055 & -1.0 \end{bmatrix}$
	0 0 1.0 0
	$\begin{bmatrix} -6.37 & 0 & -0.23 & 0.0618 \end{bmatrix}$
	$\begin{bmatrix} 1.25 & 0 & 0.016 & -0.0457 \end{bmatrix}$
	0.00084 0.000236
B	0 0
Б	0.08 0.804
	$\begin{bmatrix} -0.0862 & -0.0665 \end{bmatrix}$
B_1	$\begin{bmatrix} 0.00084 & 0.000236 \end{bmatrix}$
	0 0
	0.08 0.804
	$\begin{bmatrix} -0.0862 & -0.0665 \end{bmatrix}$
C_1	[1.0 0 0 0]
	0 1.0 0 0
	0 0 1.0 0
	0 0 0 1.0
	$\begin{bmatrix} 0 & 1.0 & 0 & 0 \end{bmatrix}$
C	0 0 1.0 0
	0 0 0 1.0
	[0 0 0 0]
D_{11}	
	$\begin{bmatrix} 0 & 0 & 0 & 0 \end{bmatrix}$
D_{12}	
	$\begin{bmatrix} 0 & 0 \\ 1.0 & 0 \end{bmatrix}$
	$\begin{bmatrix} 1.0 & 0 \\ 0 & 1.0 \end{bmatrix}$
D_{21}	
21	
	[

3 Derivation and Explanation

This model is part of the "'COMPleib"' - library and was automatically imported into ACKREP.

The original description was:

AC15 Mach 2.7 flight condition of a supersonic transport aircraft ehemalsNN2 "Computation of Optimal Output Feedback Gains for Linear Multivariable Systems", TOAC, Vol. 19, pp. 257-258, 1974

4 Simulation

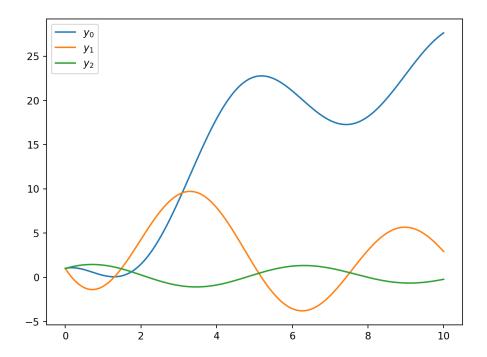


Figure 1: Simulation of the Mach 2.7 flight condition of a supersonic transport aircraft.

References

[1] Computation of Optimal Output Feedback Gains for Linear Multivariable Systems", TOAC, Vol. 19, pp. 257-258, 1974