


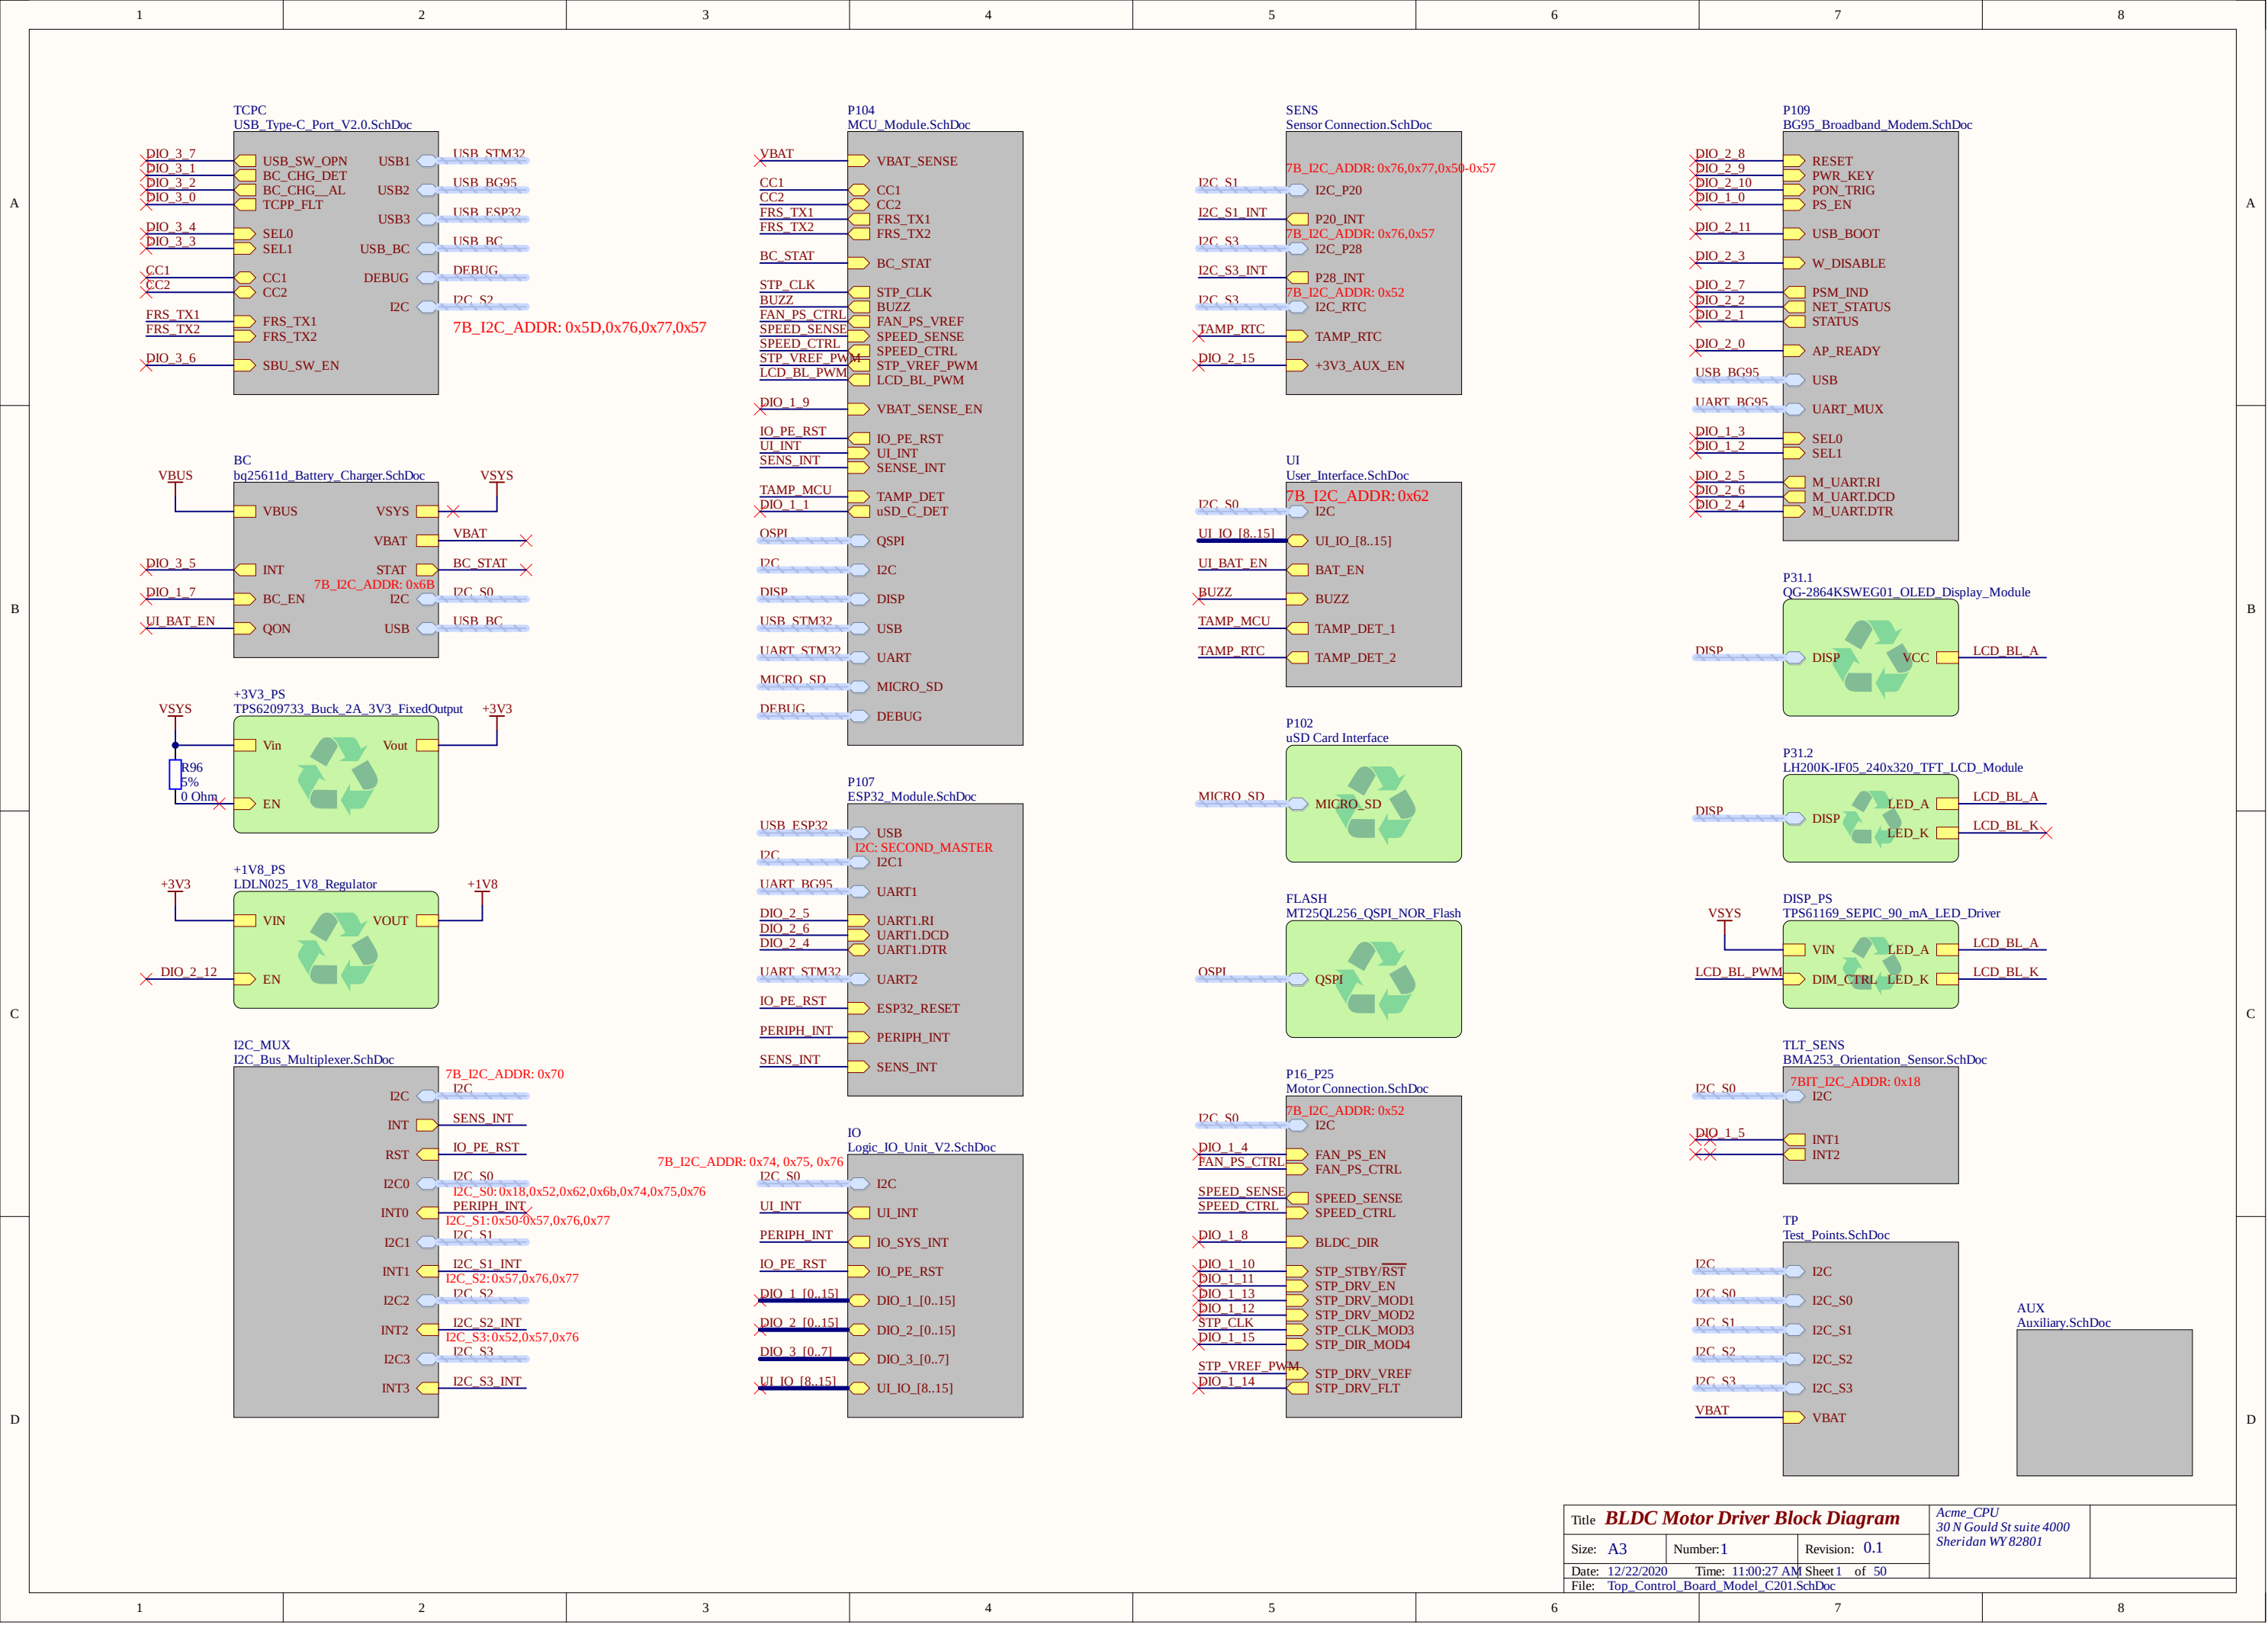

A

B

C








D

A


B

C

D

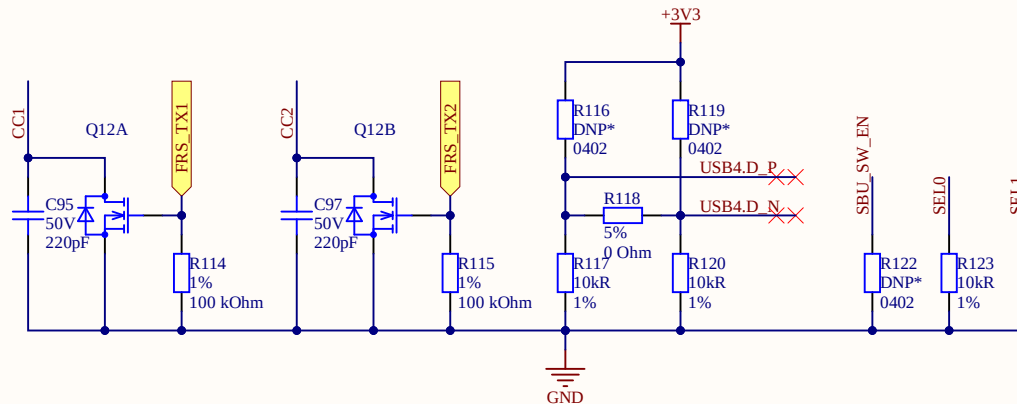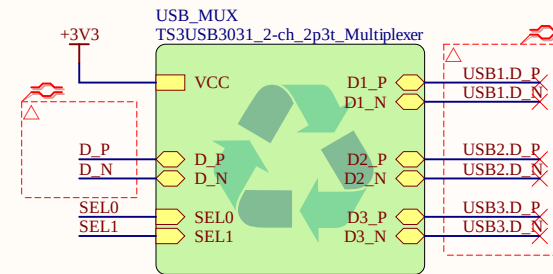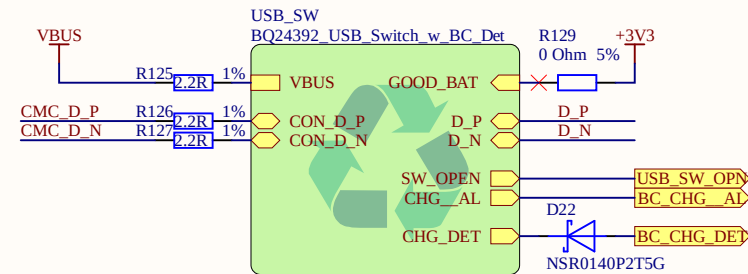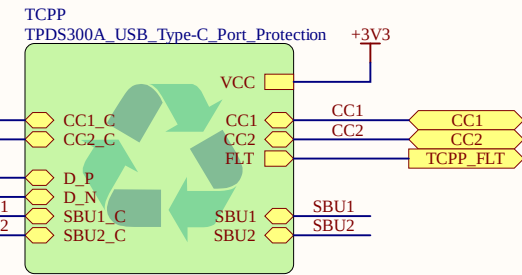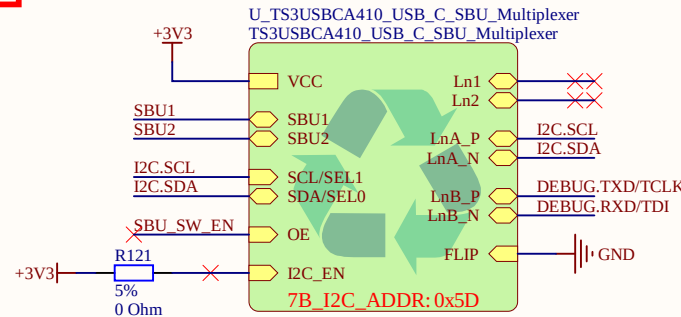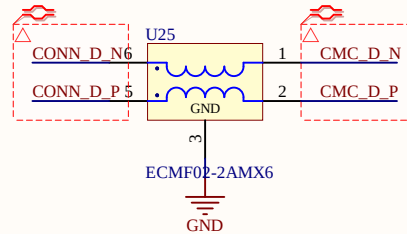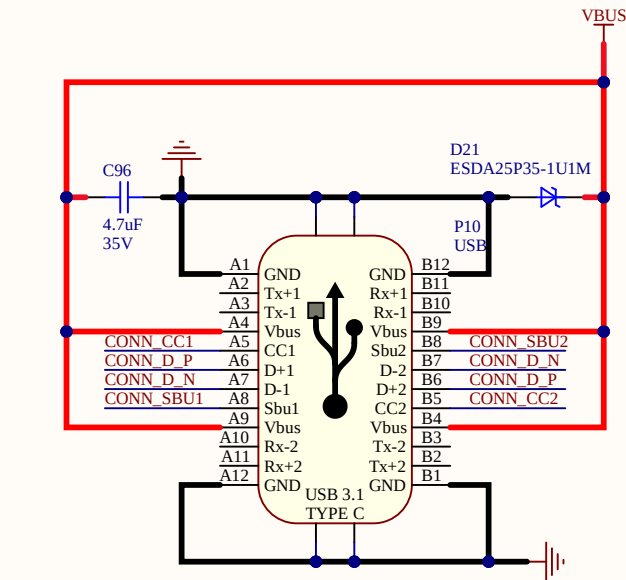

After power up, the USB2.0 interface is routed to STM32 for these resistors

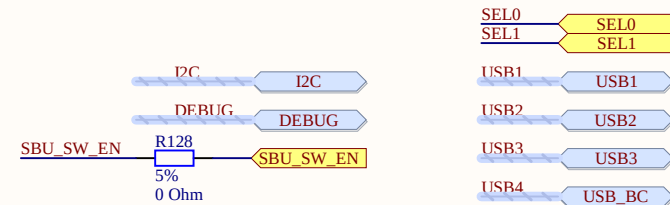

Title **USB Type-C PD Port Controller**

Size: A4

Number: 2


Revision: 0.1

Date: 12/22/2020


Time: 11:00:27 AM Sheet 2 of 50

File: USB_Type-C_Port_V2.0.SchDoc


Acme_CPU
30 N Gould St suite 4000
Sheridan WY 82801

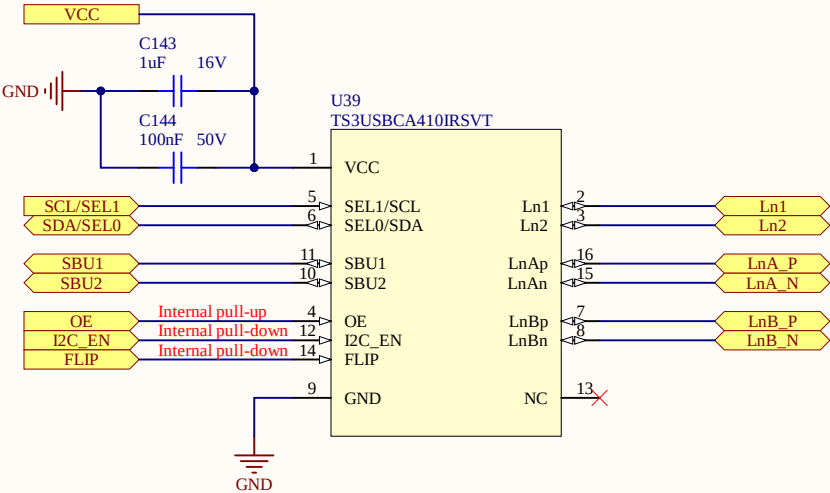

Title BQ24392 SPST USB Switch			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:27 AM	Sheet* of *	
File: TS3USBCA410_USB_C_SBU_Multiplexer.SchDoc			

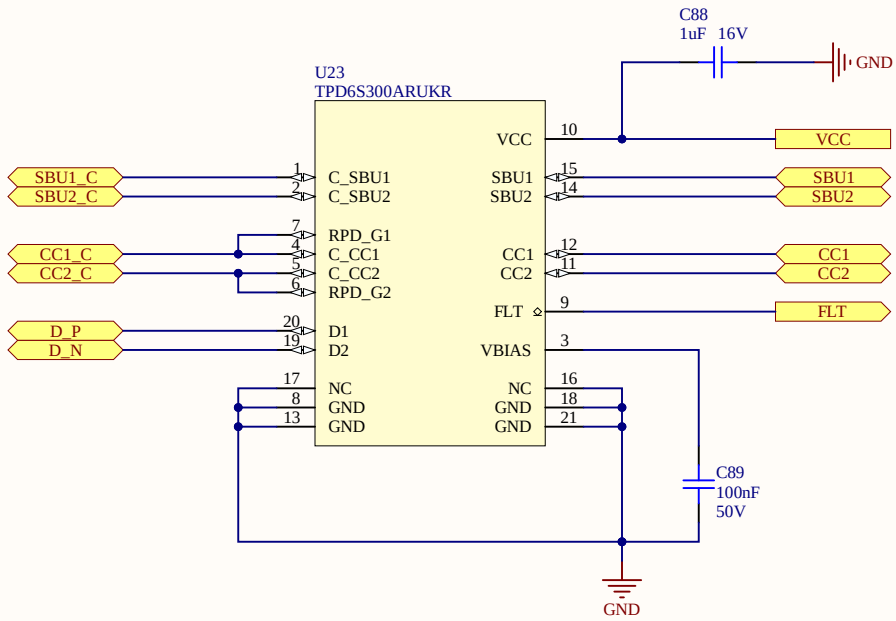

Title TPD6S300A USB Type-C Protection			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:27 AM	Sheet * of *	
File: TPDS300A_USB_Type-C_Port_Protection.SchDoc			

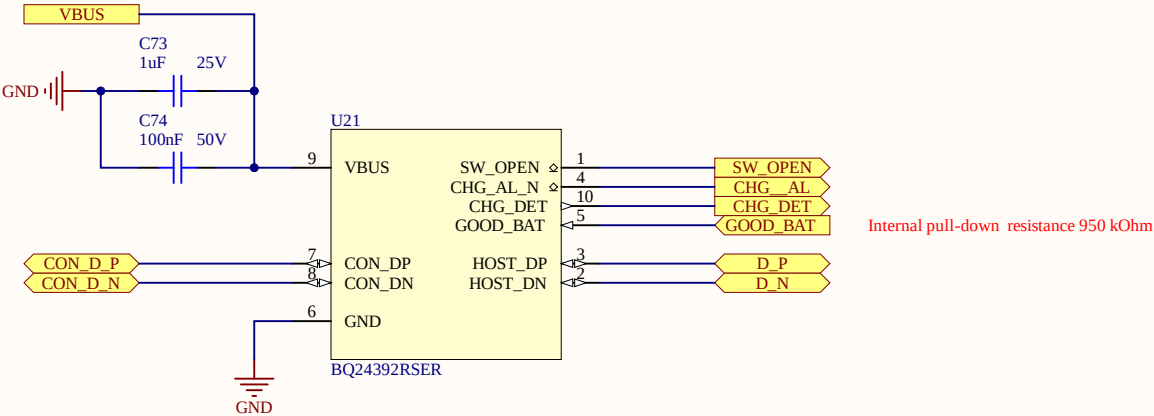

Title BQ24392 SPST USB Switch			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:27 AM	Sheet* of *	
File: BQ24392_USB_Switch_w_BC_Det.SchDoc			

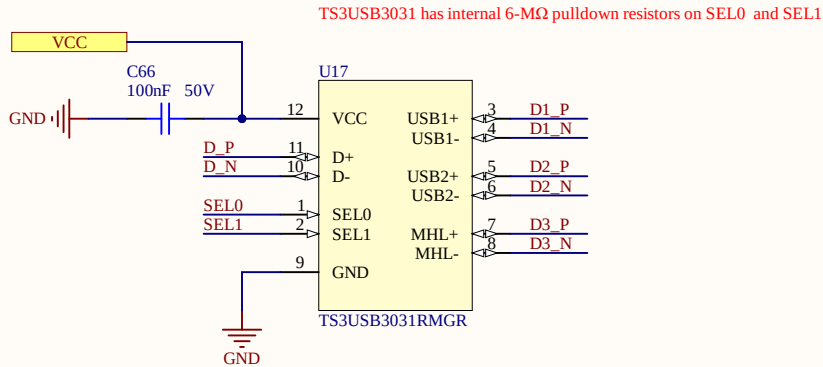



Table 1. Function Table

SEL1	SEL0	SWITCH STATUS
Low	Low	D+/D– connected to USB1+/USB1–
Low	High	D+/D– connected to USB2+/USB2–
High	Low	D+/D– connected to MHL+/MHL–
High	High	USB and MHL switches in High-Z

Title TS3USB3031 2-ch 2p3t Multiplexer			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number: *	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:27 AM	Sheet * of *	
File: TS3USB3031_2-ch_2p3t_Multiplexer.SchDoc			

A

B

C


D

A

B

C

D

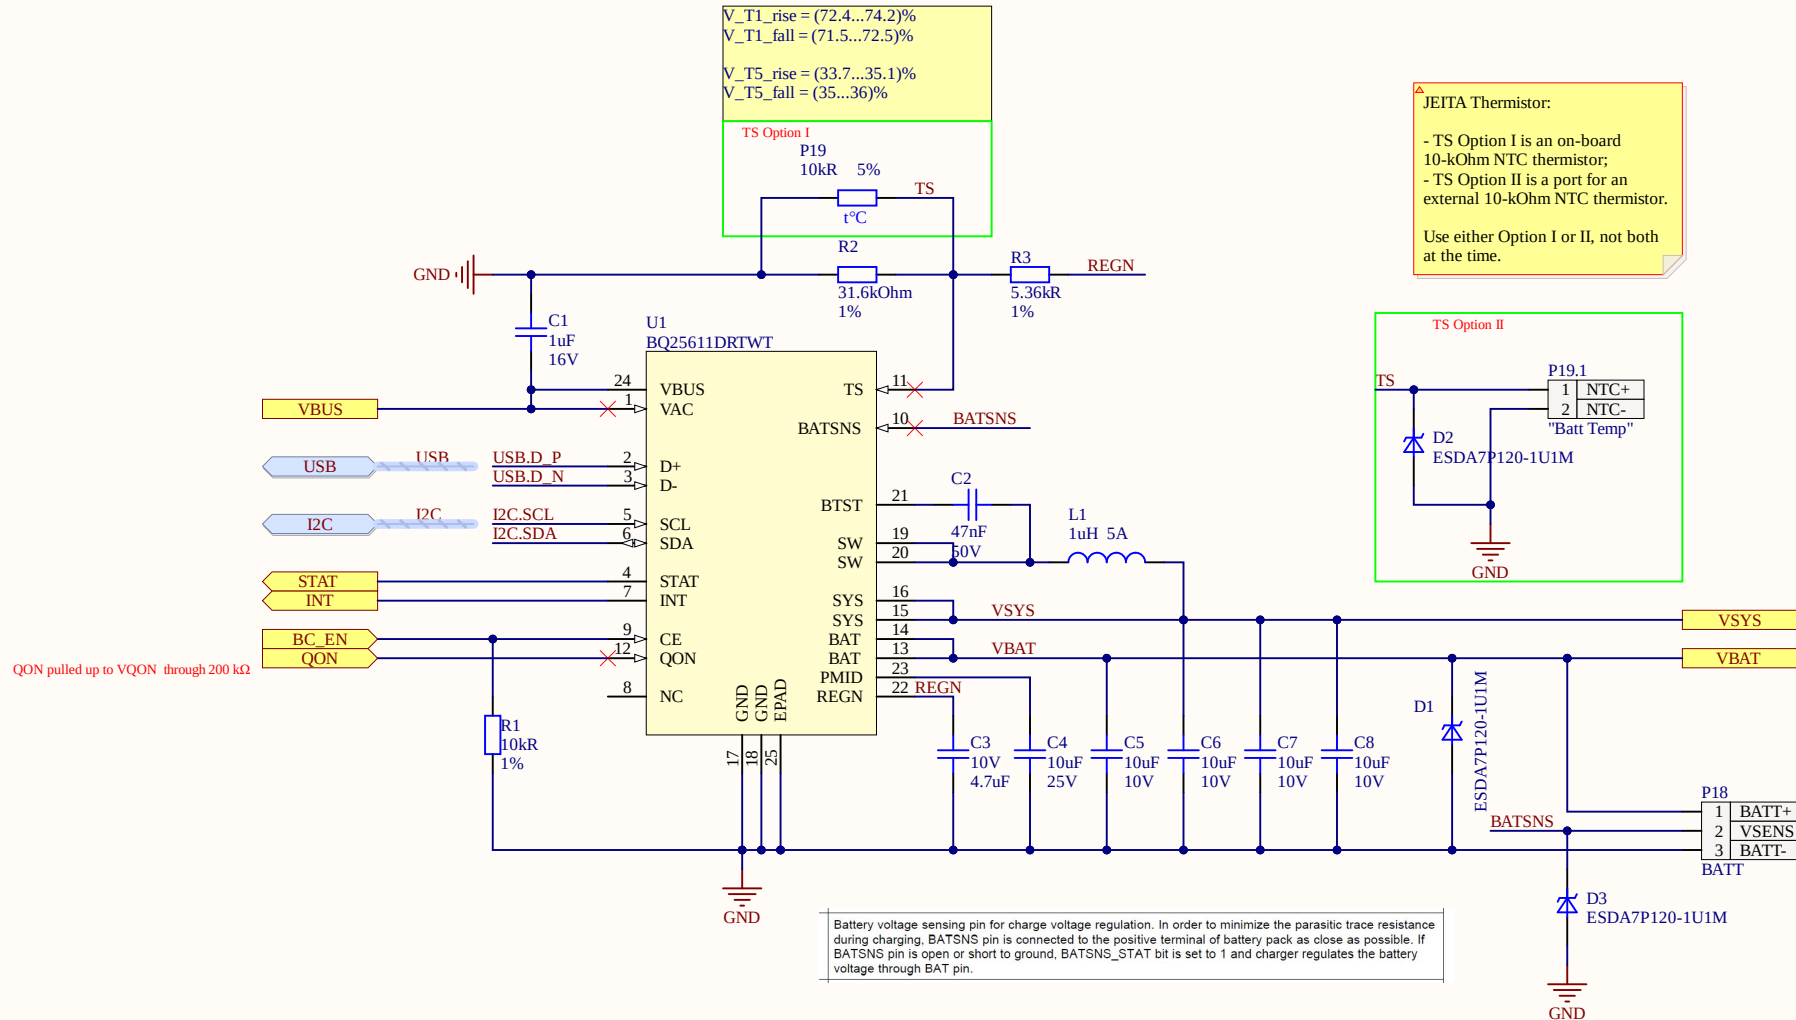

The Power Path management regulates the system slightly above battery voltage but does not drop below 3.5-V minimum system voltage (programmable) with adapter applied. With this feature, the system maintains operation even when the battery is completely depleted or removed. When the input current limit or voltage limit is reached, the Power Path management automatically reduces the charge current. As the system load continues to increase, the battery starts to discharge the battery until the system power requirement is met. This supplement mode prevents overloading the input source.

Title **bq25611d Battery Charger**

Acme_CPU
30 N Gould St suite 4000
Sheridan WY 82801

Size: **A4**

Number: **3**

Revision: **0.1**

Date: **12/22/2020**

Time: **11:00:27 AM** Sheet 3 of 50

File: **bq25611d_Battery_Charger.SchDoc**

A

A

B


B

C








C

D

D

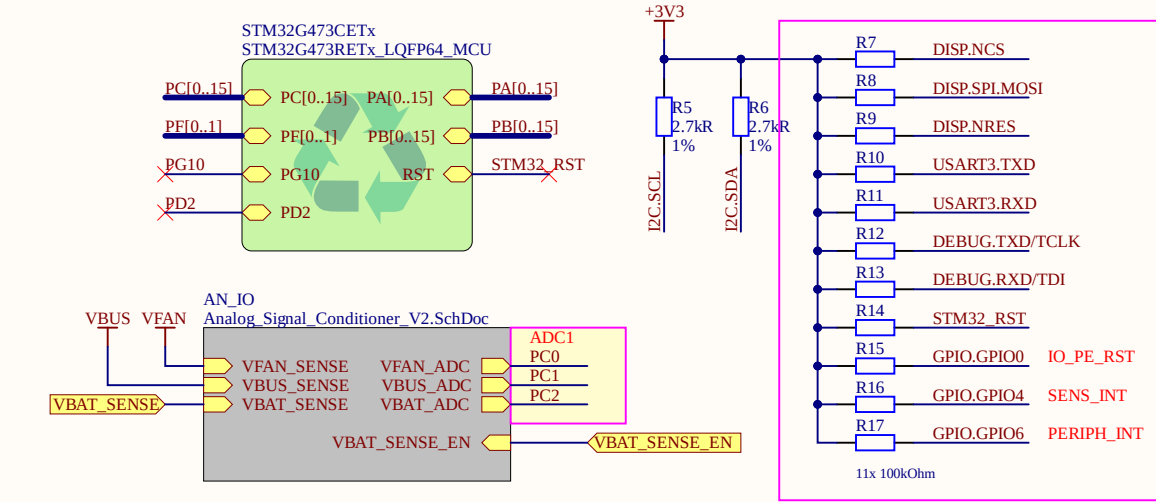

TXD and RXD signals of the USART3 interface are crossed over on the ESP32 schematic sheet. RTS and CTS signals are crossed over in the BG95 Module such that MAIN_CTS is the output and MAIN_RTS is the input. No need to cross the signals over again here.

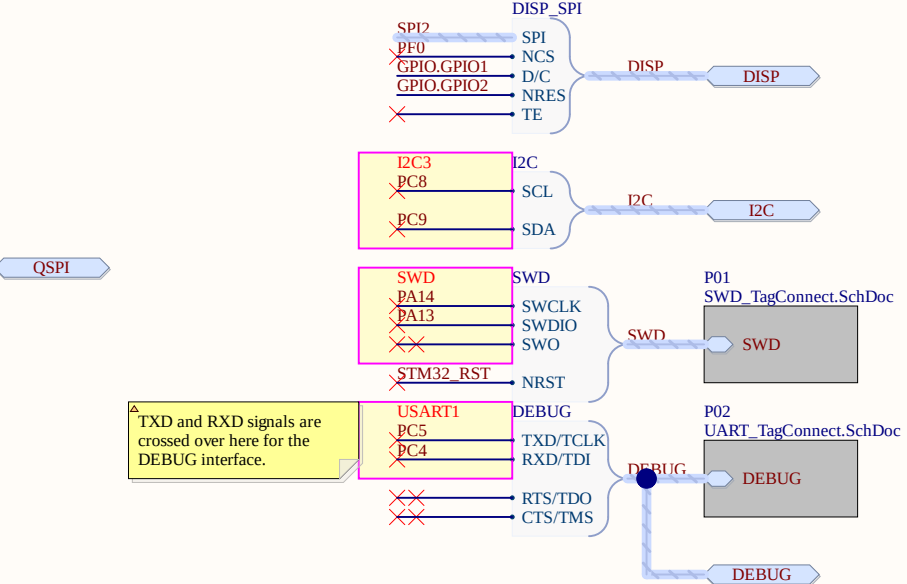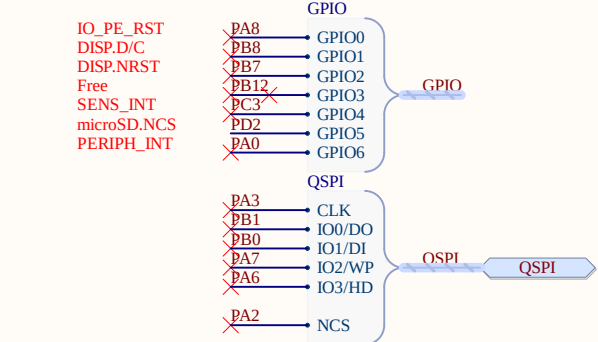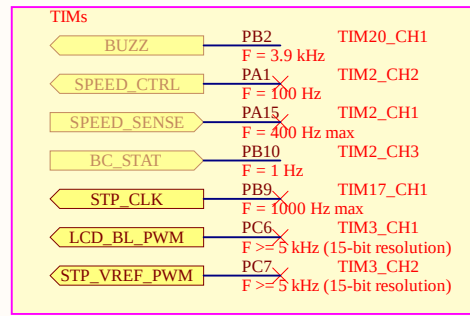

Title MCU Module			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: 4	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:27 AM	Sheet 4 of 50		
File: MCU_Module.SchDoc				

A

B

C





D

A


B

C


D

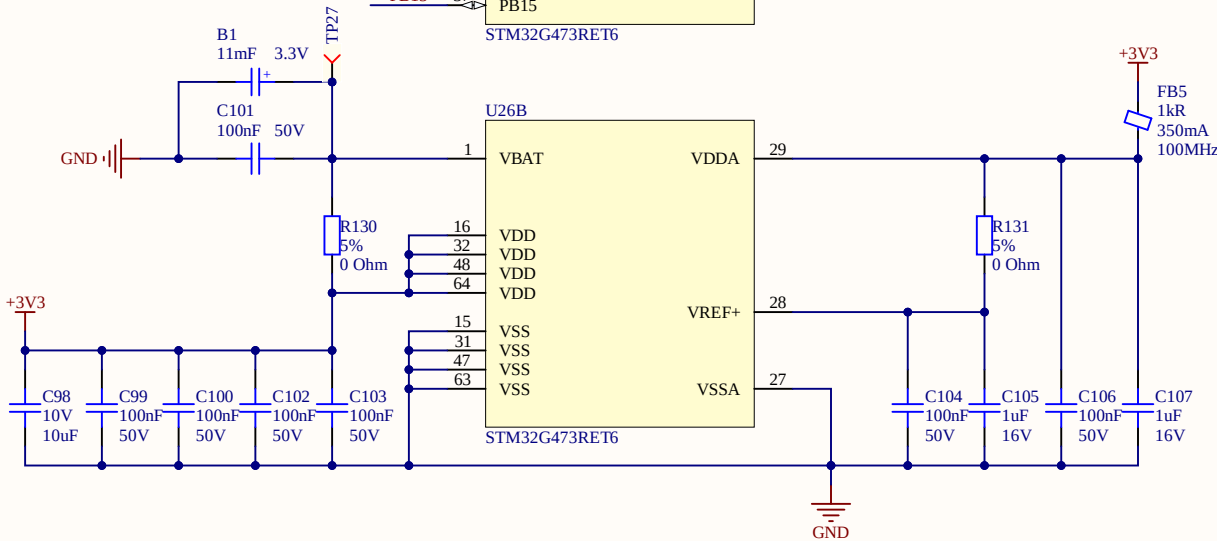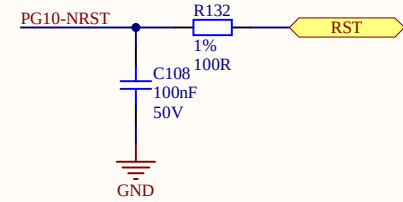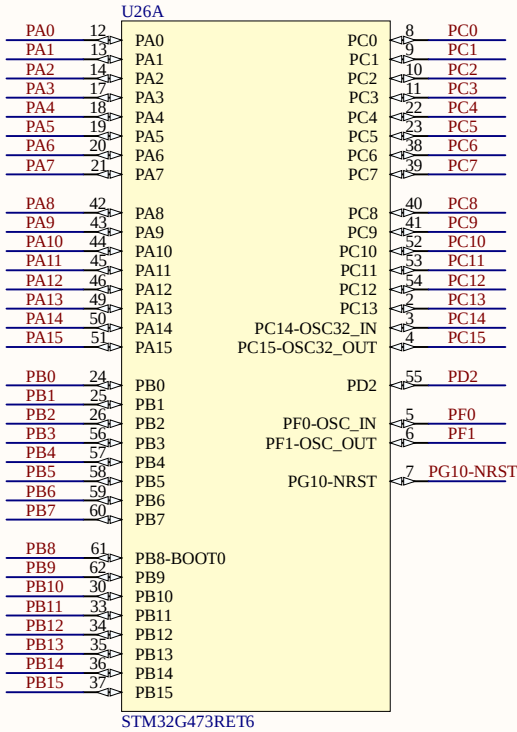


Title STM32G473CETx Microcontroller			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:28 AM	Sheet* of *	
File: STM32G473RETx_LQFP64_MCU.SchDoc			

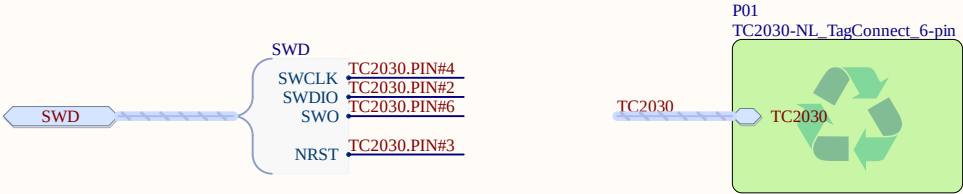


Title Tag-Connect SWD Port			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number:5	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:29 AM	Sheet 5 of 50		
File: SWD_TagConnect.SchDoc				

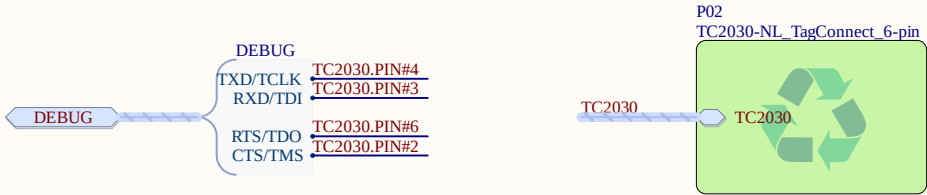

Title Tag-Connect DEBUG Port			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number: 6	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:29 AM	Sheet 6 of 50	
File: UART_TagConnect.SchDoc			

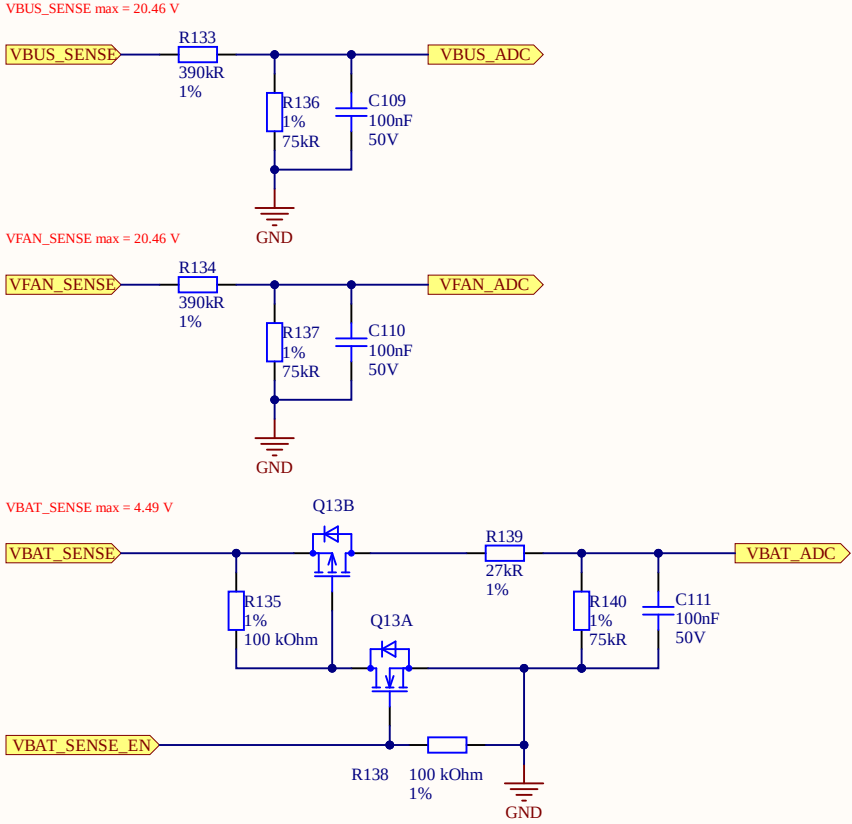

Title Analog Signal Conditioner			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: 8	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:29 AM	Sheet 8 of 50		
File: Analog_Signal_Conditioner_V2.SchDoc				

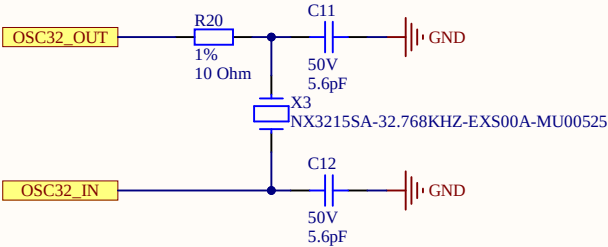

Title <i>NX3215SA-32.768K Crystall Oscillator</i>			<i>Acme_CPU</i> <i>30 N Gould St suite 4000</i> <i>Sheridan WY 82801</i>	
Size: A4	Number: 7	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:29 AM Sheet 7 of 50			
File: <u>NX3215SA-32.768k_Crystall_Oscillator.SchDoc</u>				

A

B

C






D

A


B

C

D

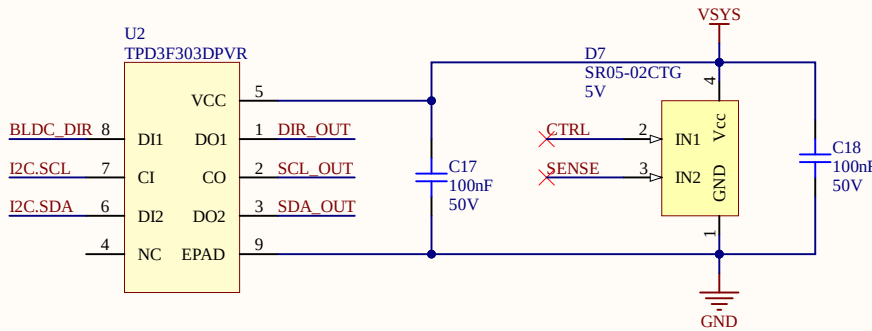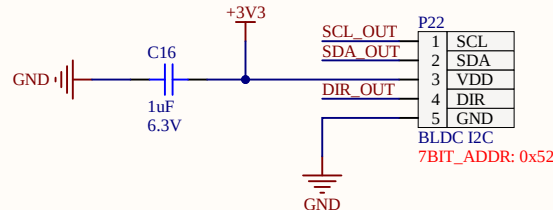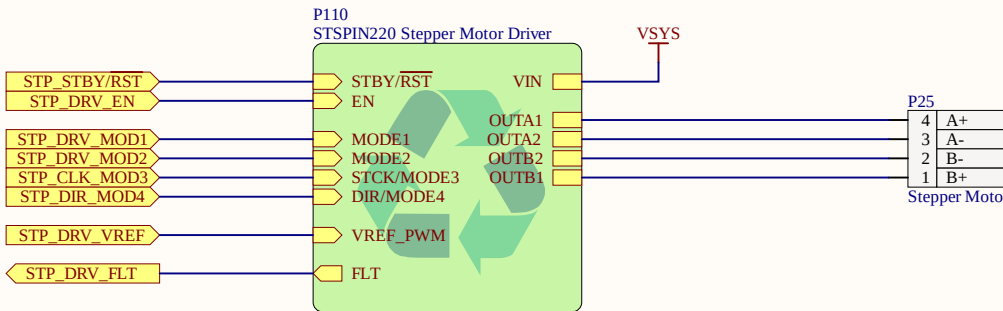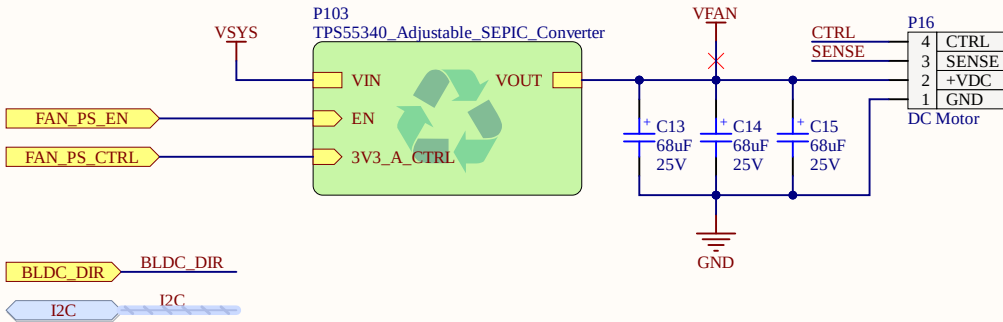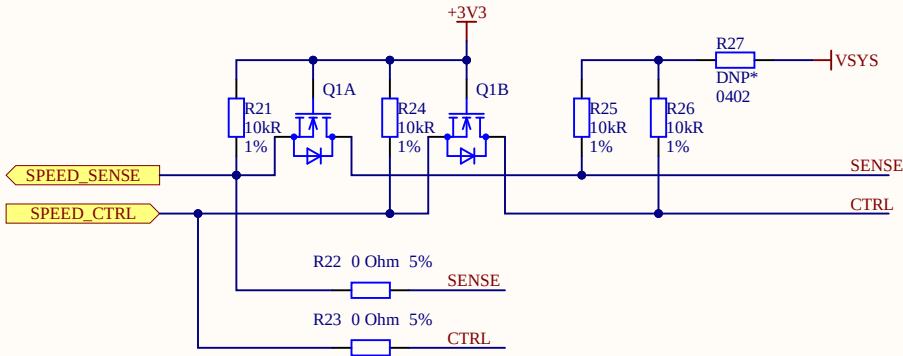

Title Motor Connection			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: 9	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:29 AM	Sheet 9 of 50		
File: Motor Connection.SchDoc				

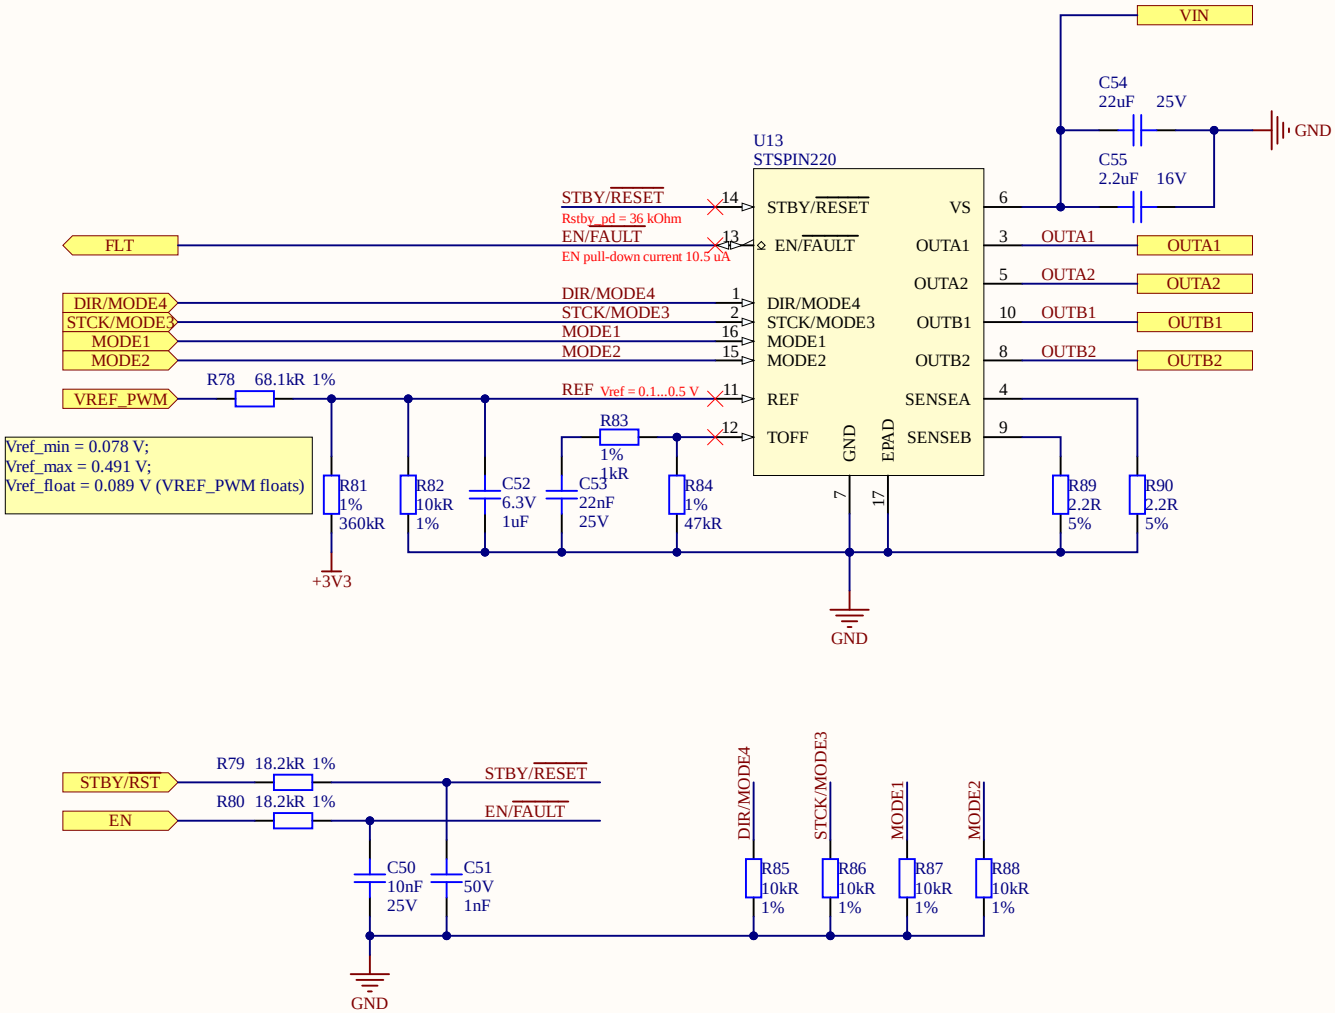

A

B

C






D

A


B

C


D

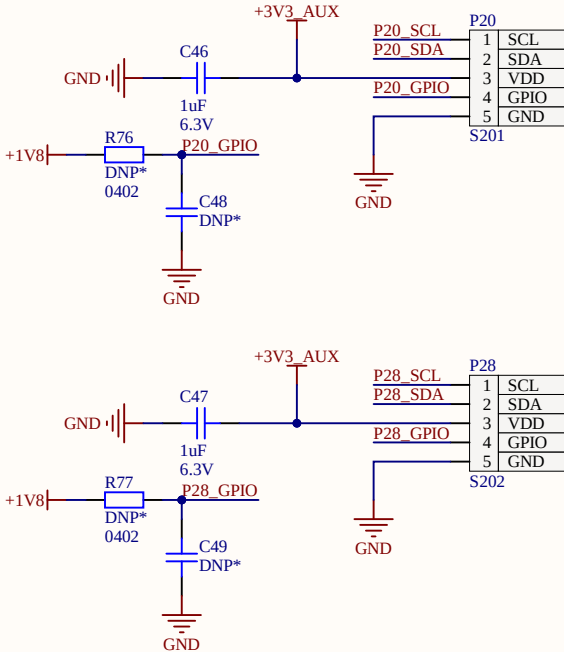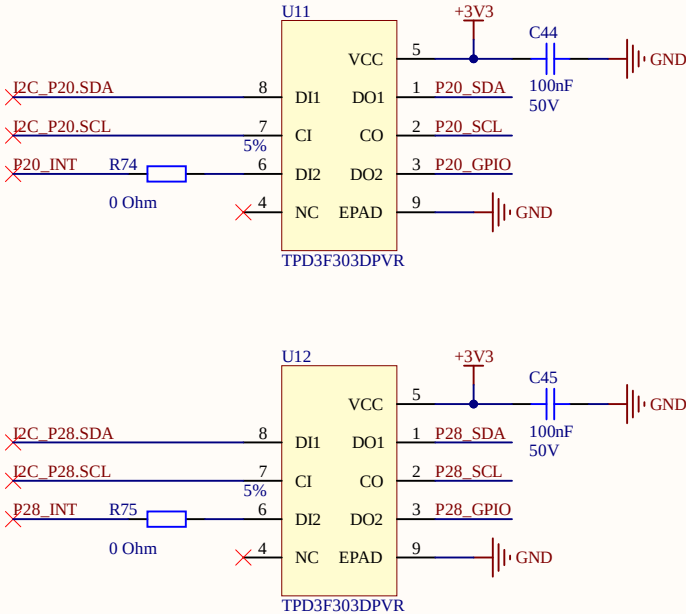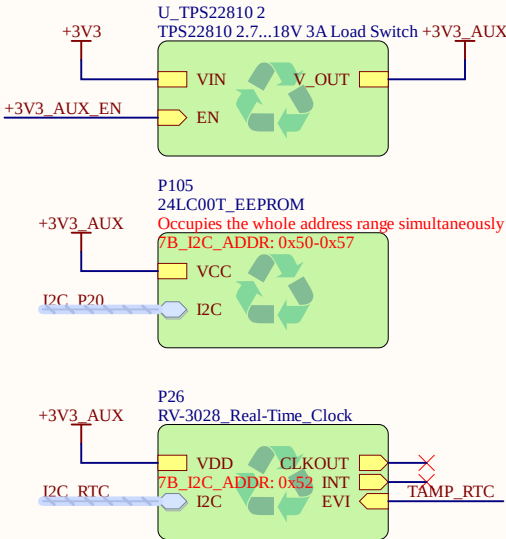



Title Sensor Connection			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: 10	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:29 AM	Sheet 10 of 50		
File: Sensor Connection.SchDoc				

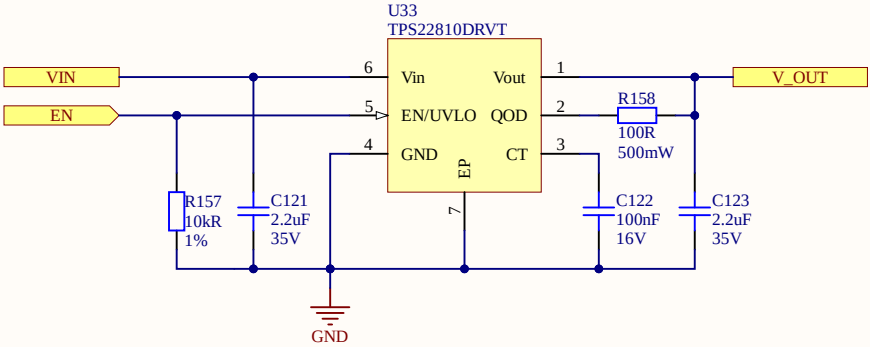

Title TPS22810 2.7...18V 3A Load Switch			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:29 AM	Sheet* of *	
File: TPS22810 2.7...18V 3A Load Switch.SchDoc			

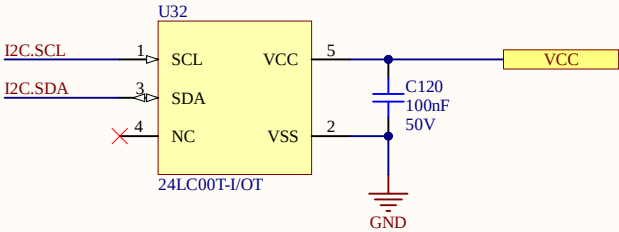


Title 24LC00T EEPROM			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number:*	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:29 AM	Sheet* of *		
File: 24LC00T_EEPROM.SchDoc				

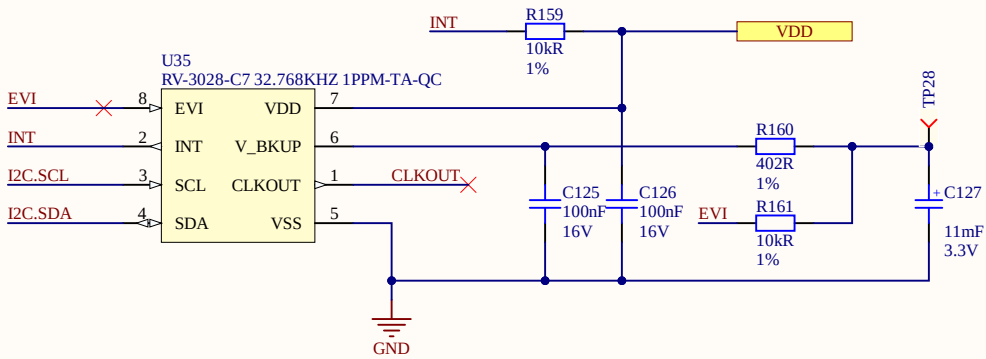

Title RV-3028-C7 Real-Time Clock			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: *	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:29 AM	Sheet * of *		
File: RV-3028_Real-Time_Clock.SchDoc				


A

A

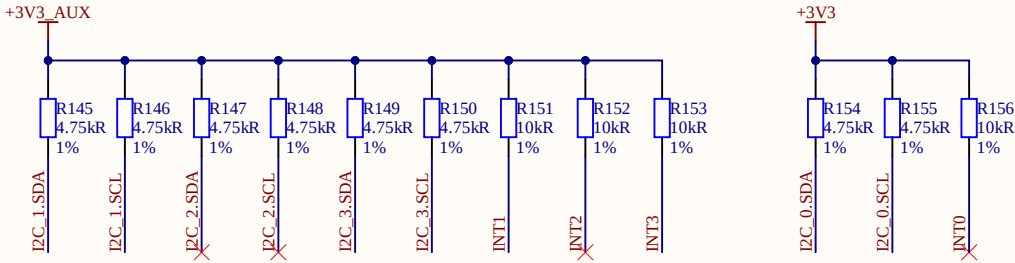

B

B

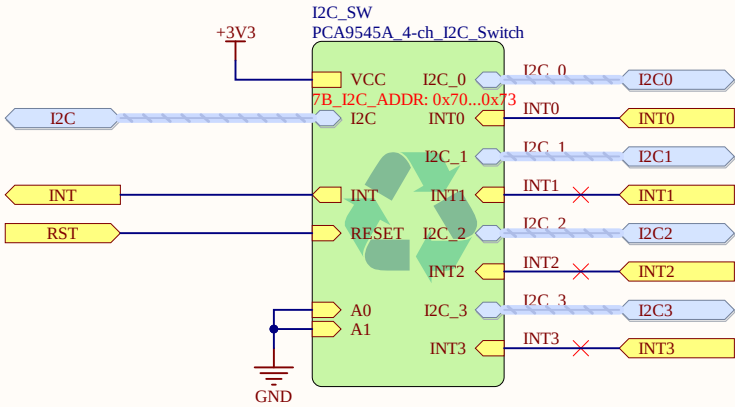

C



C

D

D


Title I2C Bus Multiplexer			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: 11	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:29 AM	Sheet 11 of 50		
File: I2C_Bus_Multiplexer.SchDoc				

A

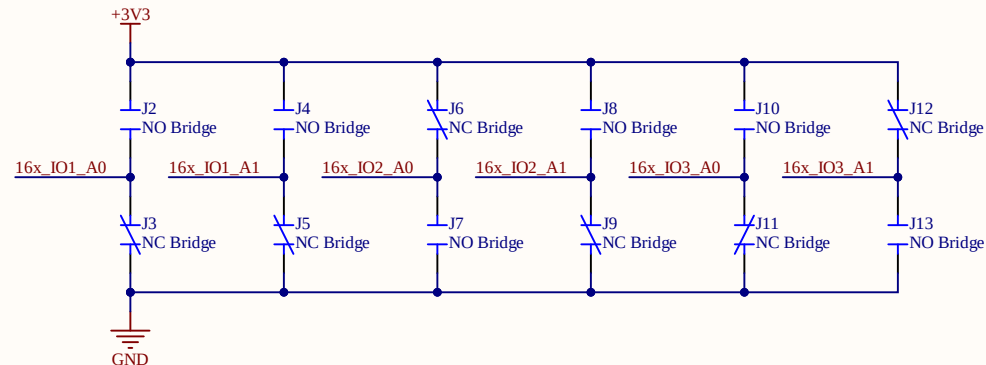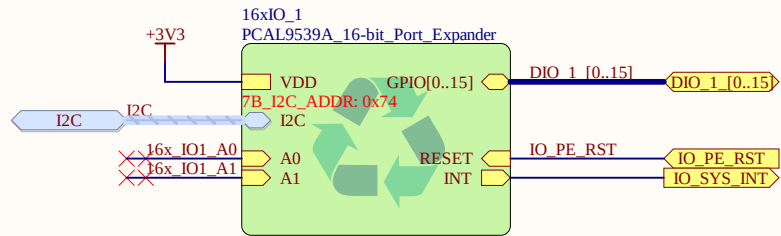

A


B

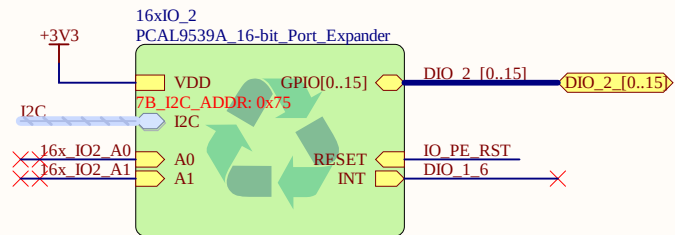


DIO_2_13
DIO_2_14

B

C

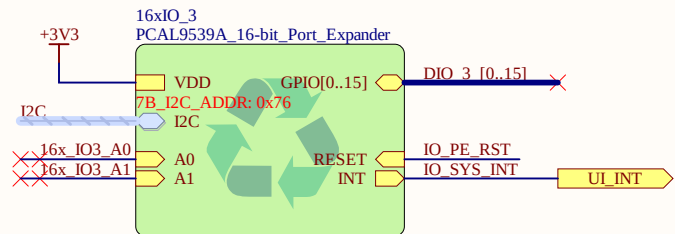

DIO_3 [0..7] DIO_3 [8..15]
UI_IO [8..15]


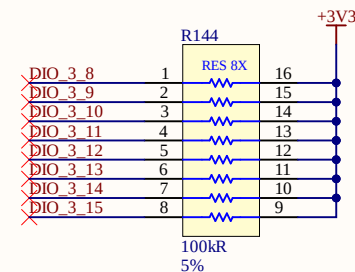


C



D

Title Logic IO System			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: 12	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:30 AM	Sheet 12 of 50		
File: Logic_IO_Unit_V2.SchDoc				



D

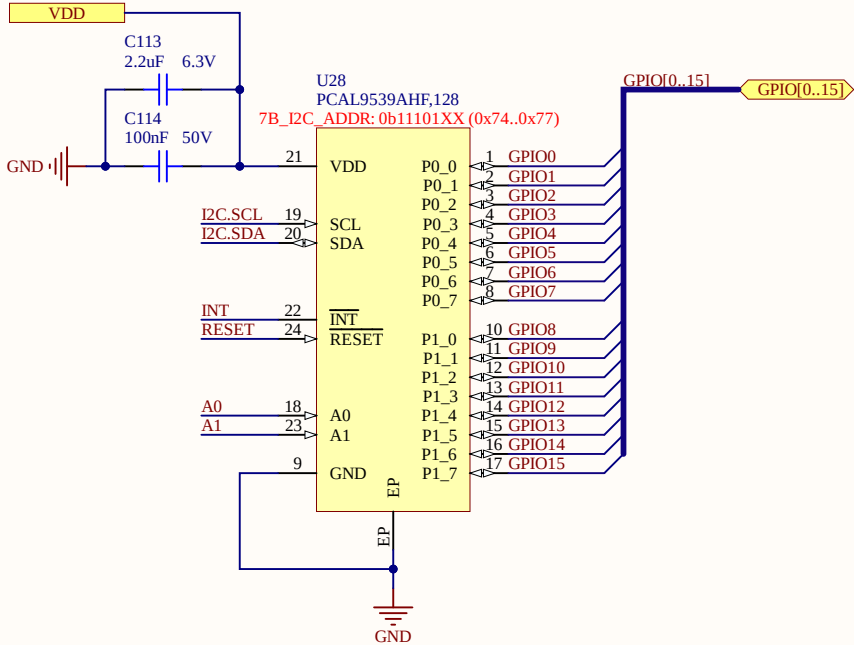

Title PCAL9539A 16-bit Port Expander			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:30 AM	Sheet* of *	
File: PCAL9539A_16-bit_Port_Expander.SchDoc			

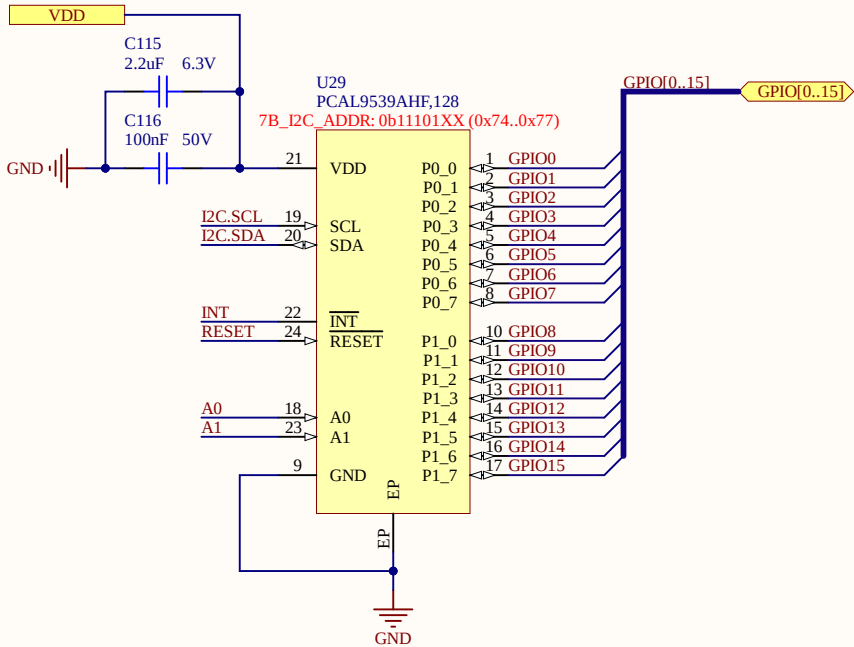

Title PCAL9539A 16-bit Port Expander			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:30 AM	Sheet* of *	
File: PCAL9539A_16-bit_Port_Expander.SchDoc			

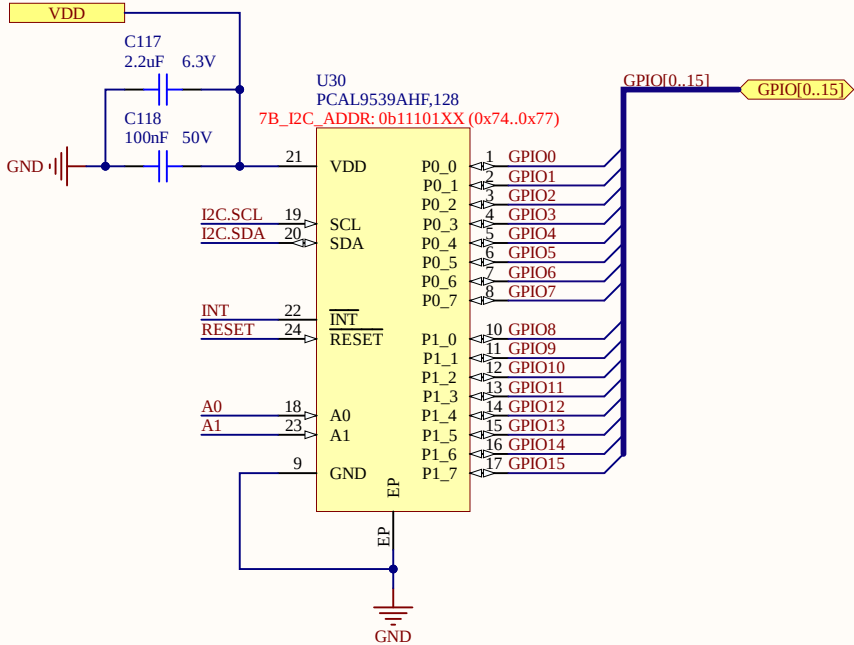

Title PCAL9539A 16-bit Port Expander			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:30 AM	Sheet* of *	
File: PCAL9539A_16-bit_Port_Expander.SchDoc			

A

B

C







D

A


B

C

D

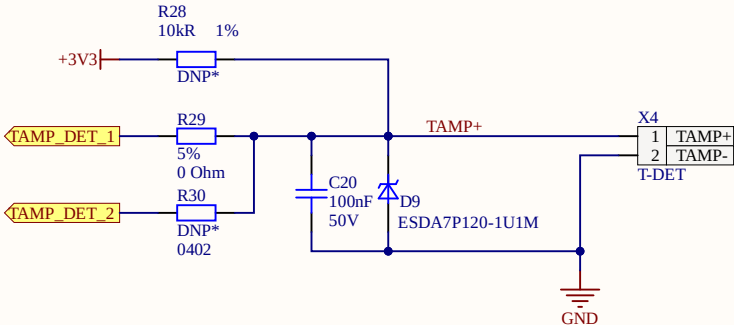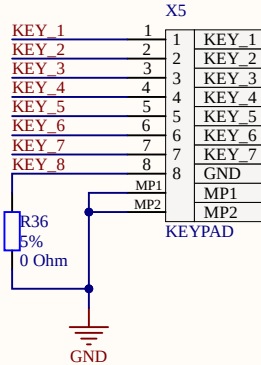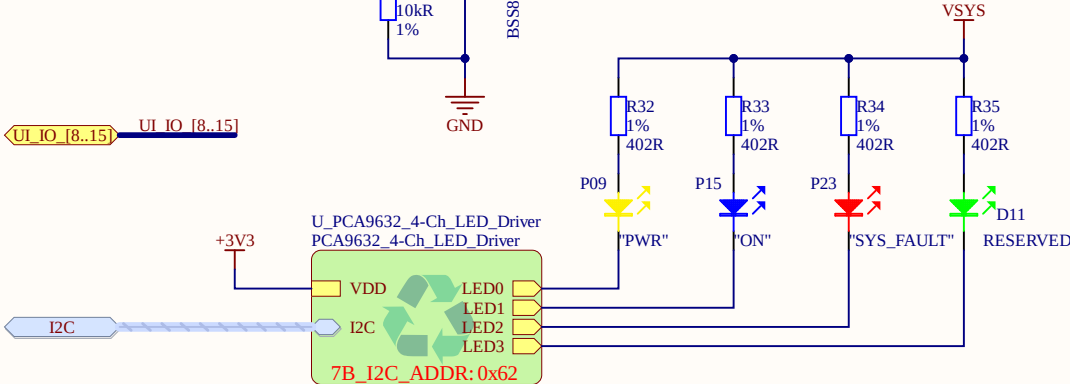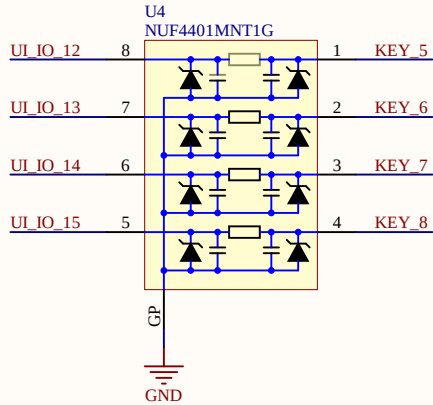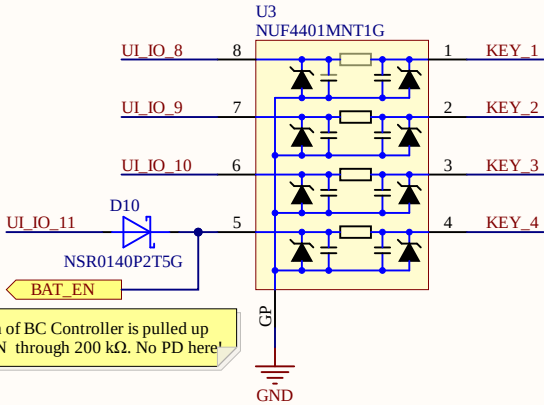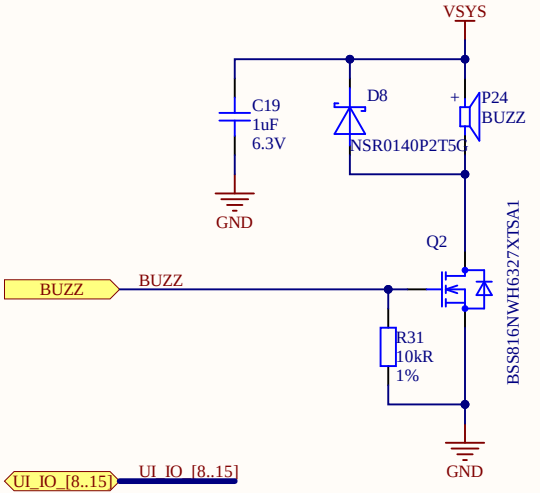




Title User Interface			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: 13	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:30 AM	Sheet 13 of 50		
File: User_Interface.SchDoc				

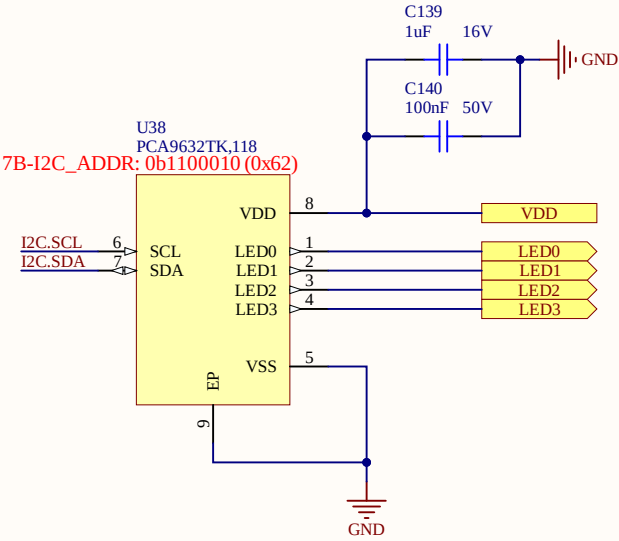

Each LED output can be off, on (no PWM control), set at its Individual PWM controller value or at both Individual and Group PWM controller values. The LED output driver is programmed to be either open-drain with a 25 mA current sink capability at 5 V or totem pole with a 25 mA sink, 10 mA source capability at 5 V. The PCA9632 operates with a supply voltage range of 2.3 V to 5.5 V and the outputs are 5.5 V tolerant.

Title PCA9632 4-ch LED Driver			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number:*	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:30 AM	Sheet* of *		
File: PCA9632_4-Ch_LED_Driver.SchDoc				


A

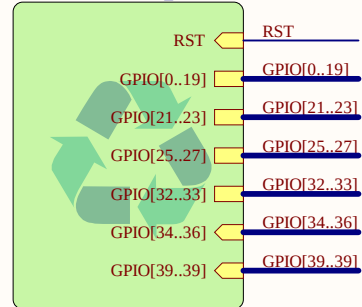U_ESP32-WROOM32D_Module
ESP32-WROOM32D_ModuleAUTH
ATECC608A_Crypto_Authentication

RESEVED FOR THE INT. FLASH

GPIO6
GPIO7
GPIO8
GPIO9
GPIO10
GPIO11


LEFTOVER PINS

GPIO19
GPIO22

4x 100kOhm

TXD and RXD signals of the UART1 and UART2 interfaces of the ESP32 module are crossed over here so that if ESP32 Module is not installed and the STM32 MCU is connected to the BG95 Module through the resistor array, the TXD and RXD signals of the STM32 would meet respective RXD and TXD signals of the BG95 Broadband Modem.








RTS and CTS signals are crossed over in the BG95 Module so no need to cross them over again here.



USB






A

B

JTAG
TC2050-NL_TagConnect_10-pin

B

C

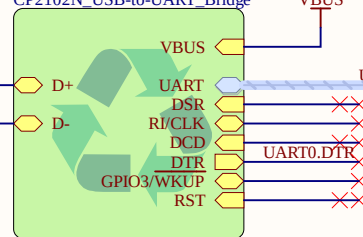U_CP2102N_USB-to-UART_Bridge
CP2102N_USB-to-UART_Bridge

TXD and RXD and RTS and CTS signals of the UART0 interface of the ESP32 module are crossed over here to meet respective signals of the CP2102N USB-UART bridge.

Title **ESP32-WROOM32D Module**

Size: A4

Number: 14

Revision: 0.1



Date: 12/22/2020

Time: 11:00:30 AM Sheet 14 of 50


File: ESP32_Module.SchDoc

Acme_CPU
30 N Gould St suite 4000
Sheridan WY 82801


D

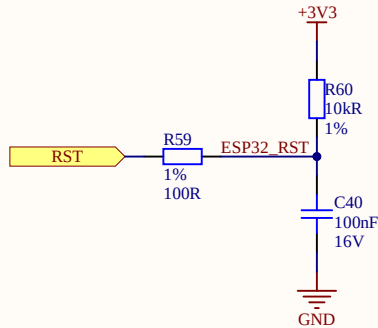

Pins SCK/CLK, SDO/SD0, SDI/SD1, SHD/SD2, SWP/SD3 and SCS/CMD, namely, GPIO6 to GPIO11 are connected to the integrated SPI flash integrated on the module and are not recommended for other uses.

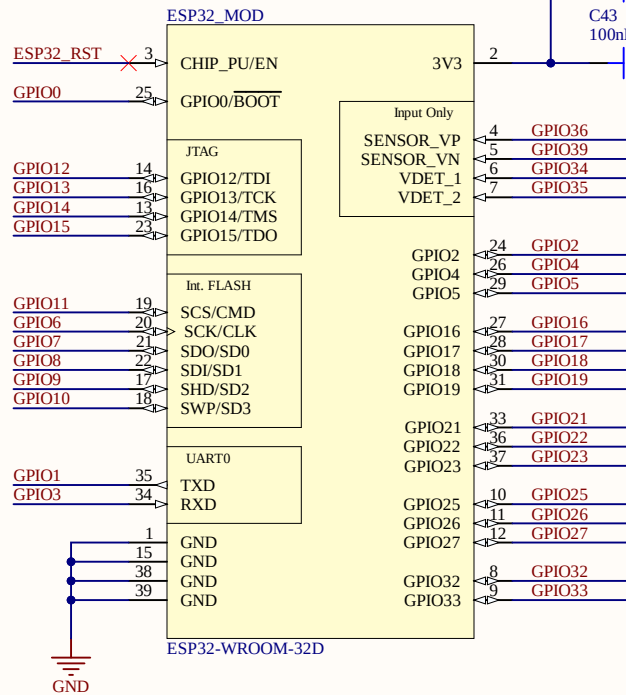


Title ESP32-WROOM32D Module			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: *	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:30 AM	Sheet * of *		
File: ESP32-WROOM32D_Module.SchDoc				

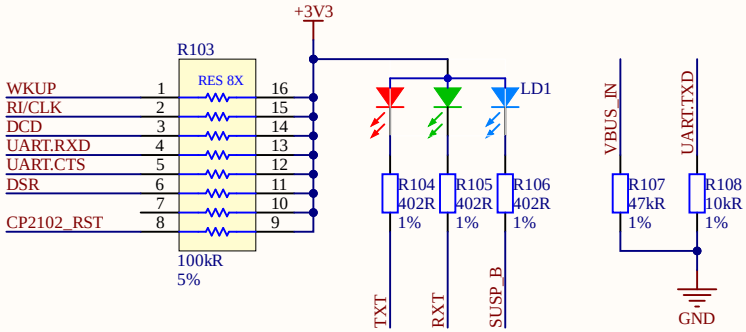




4.2.2 Sending Break Signaling

The CP2102N supports break signaling with an external 10k Ohm resistor between TXD and ground. This resistor is sufficient for break signaling across all baud rates.

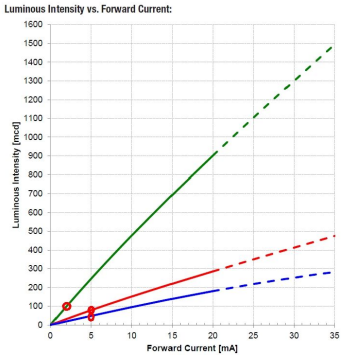


LED's current
Green - 2 mA or less;
Red & Blue - approx. 3-5 mA.


Forward Voltage @ desired current:
Red - 1.8 V;
Green & Blue - approx. 2.8 V.

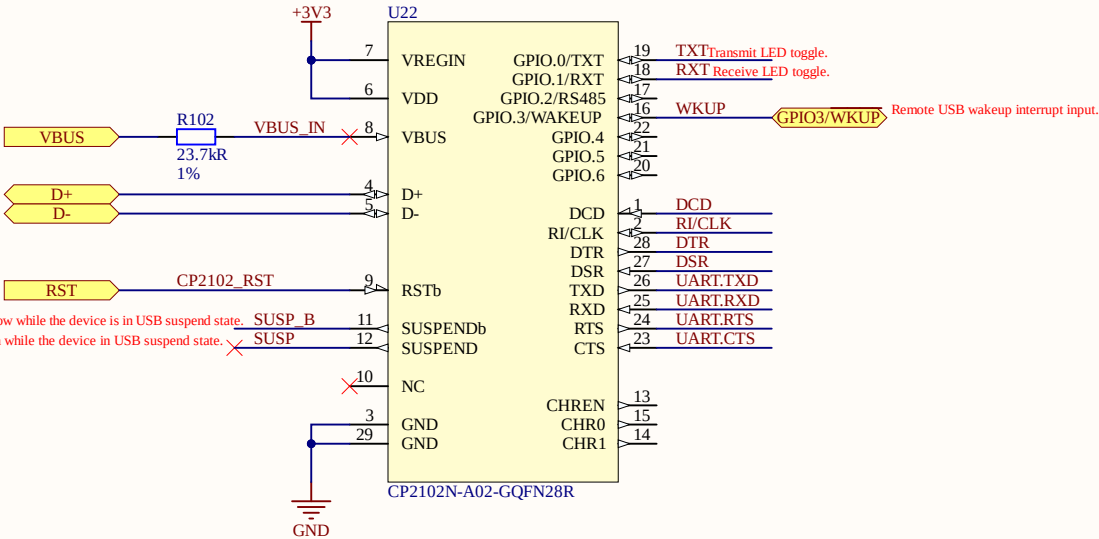

Title CP2102 USB-to-UART Bridge			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: *	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:30 AM	Sheet * of *		
File: CP2102N_USB-to-UART_Bridge.SchDoc				

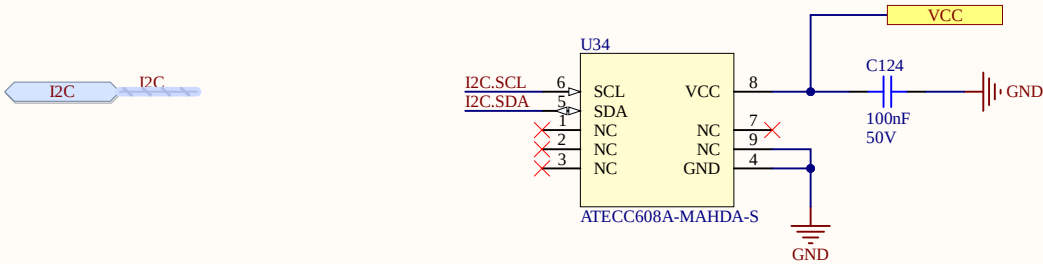

Title ATECC608A Crypto Co-Processor			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:30 AM	Sheet* of *	
File: ATECC608A_Crypto_Authentication.SchDoc			

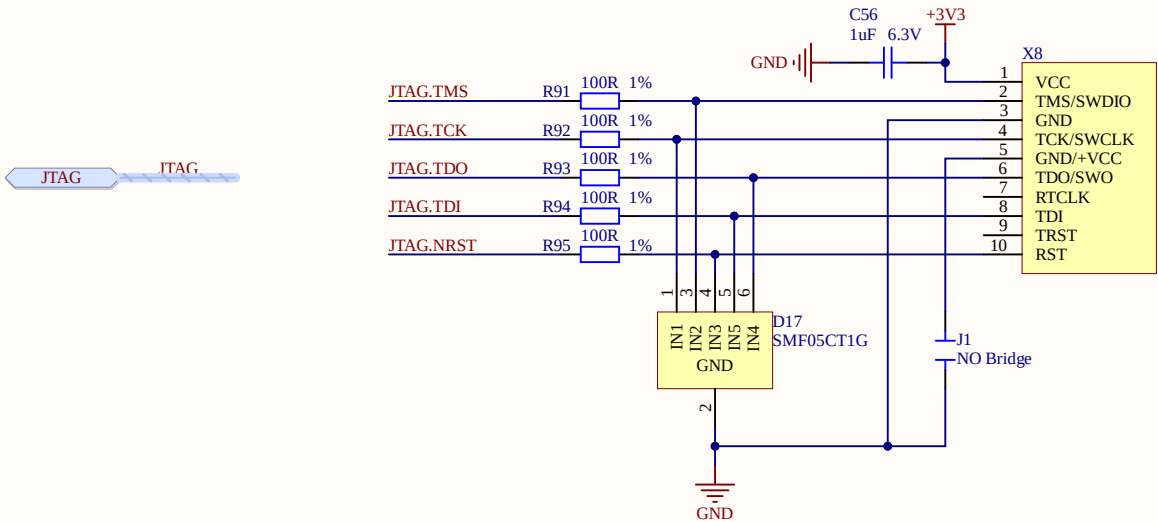

Title ESP32 JTAG Port			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number:*	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:30 AM	Sheet* of *		
File: TC2050-NL_TagConnect_10-pin.SchDoc				

A

B

C







D

A

B

C



D

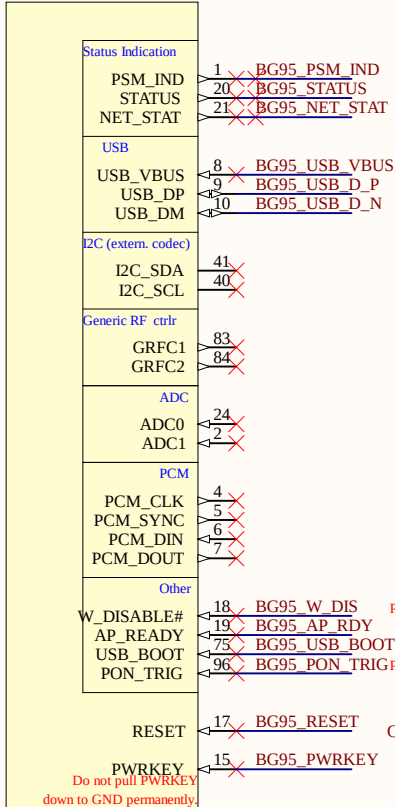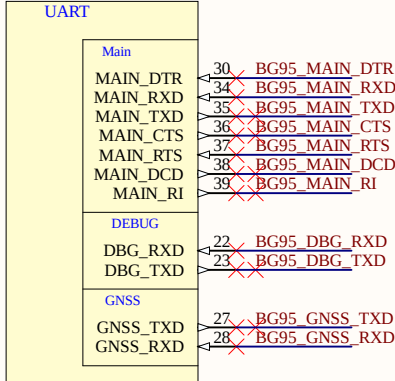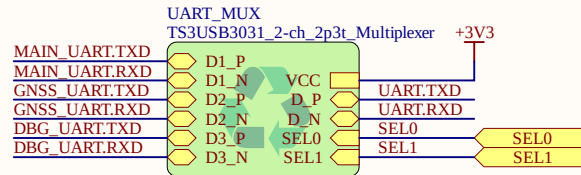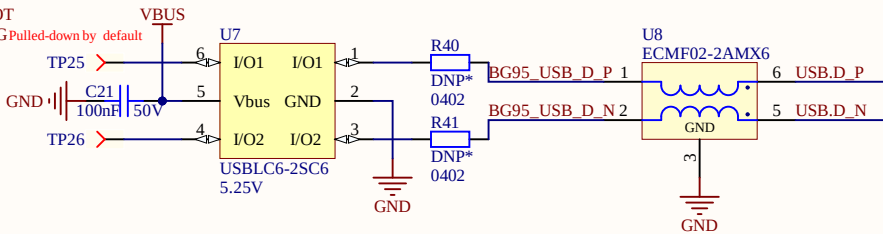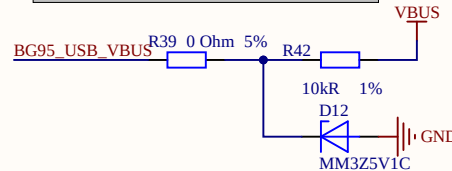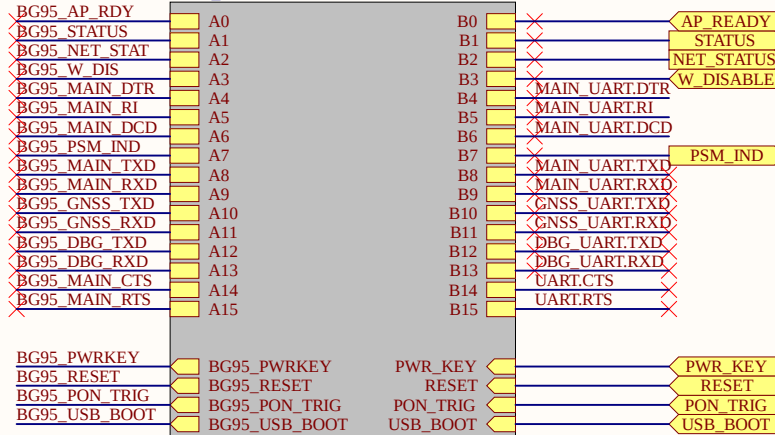U6A
BG95-M1U6B
BG95-M1BG95_VLT
BG95_VLT.SchDoc


After power up, the Main UART Interface is routed to the MCUs for these resistors

Table 1. Function Table


SEL1	SEL0	SWITCH STATUS
Low	Low	D+/D- connected to USB1+/USB1-
Low	High	D+/D- connected to USB2+/USB2-
High	Low	D+/D- connected to MHL+/MHL-
High	High	USB and MHL switches in High-Z

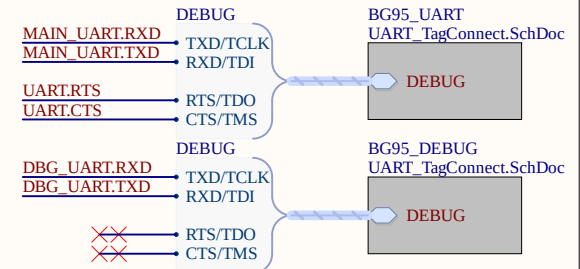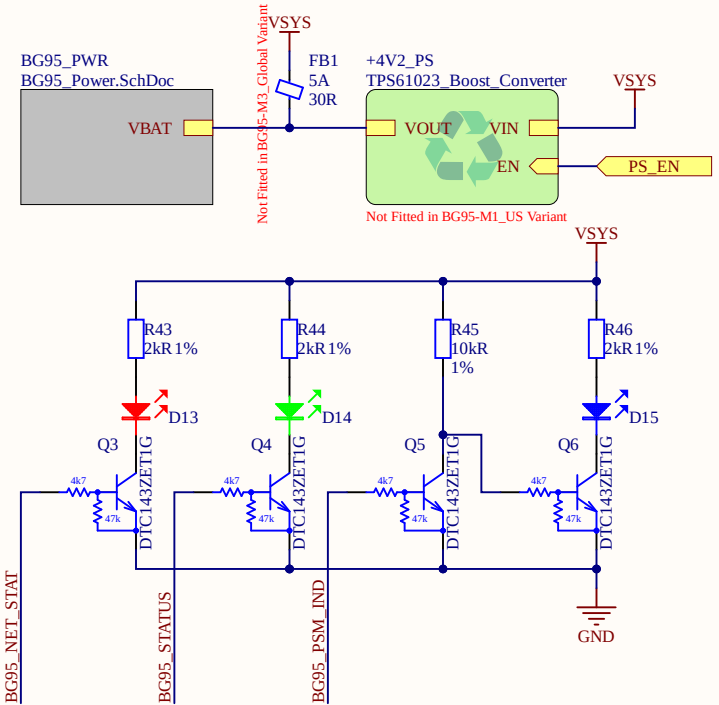

SEL1	SEL0	
0	0	MAIN_UART
0	1	DBG_UART
1	0	GNSS_UART
1	1	ALL HiZ

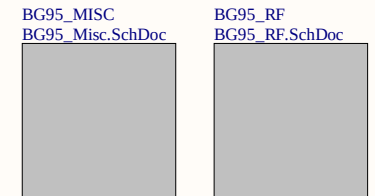Title **BG95 Broadband Modem**Size: **A4**Number: **15**Revision: **0.1**Date: **12/22/2020**Time: **11:00:30 AM** Sheet 15 of 50File: **BG95_Broadband_Modem.SchDoc**

Acme_CPU
30 N Gould St suite 4000
Sheridan WY 82801

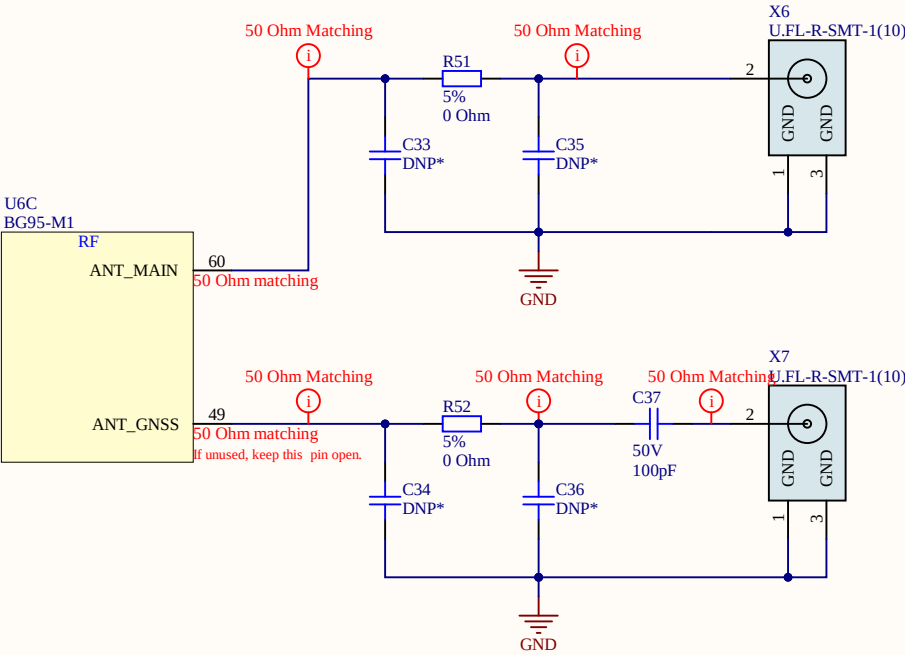

Title BG95 RF Interface			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: 16	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:31 AM	Sheet 16 of 50		
File: BG95_RF.SchDoc				

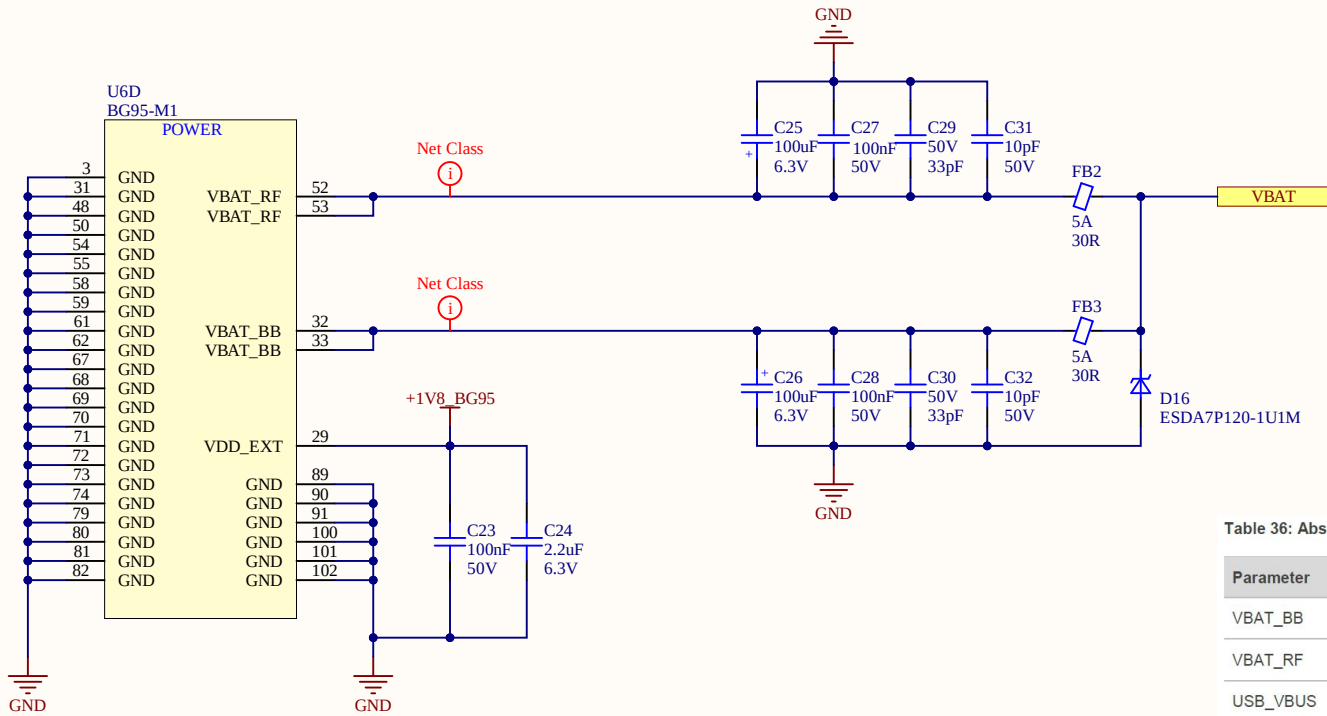


Table 36: Absolute Maximum Ratings

Parameter	Min.	Max.	Unit
VBAT_BB	-0.5	6.0	V
VBAT_RF	-0.3	6.0	V
USB_VBUS	-0.3	5.5	V
Voltage at Digital Pins	-0.3	2.09	V

Table 37: Power Supply Ratings

Parameter	Description	Conditions	Module	Min.	Typ.	Max.	Unit
VBAT	VBAT_BB/ VBAT_RF	The actual input voltages must be kept between the minimum and the maximum values.	BG95-M1/ BG95-M2/ BG95-N1	2.6	3.3	4.8	V
			BG95-M3/ BG95-M5	3.3	3.8	4.3	V
I _{VBAT}	Peak supply current (during transmission slot)	Maximum power control level on EGSM900	BG95-M3/ BG95-M5	1.8	2.0		A
USB_VBUS	USB detection		BG95-M1/ BG95-M2/ BG95-M3/ BG95-N1/ BG95-M4/ BG95-M5	5.0			V

U6E
BG95-M1

MISC

25	GPIO1	RESERVED	11
26	GPIO2	RESERVED	12
64	GPIO3	RESERVED	13
65	GPIO4	RESERVED	14
66	GPIO5	RESERVED	16
85	GPIO6	RESERVED	51
86	GPIO7	RESERVED	56
87	GPIO8	RESERVED	57
88	GPIO9	RESERVED	63
94	RESERVED	RESERVED	76
95	RESERVED	RESERVED	77
97	RESERVED	RESERVED	78
98	RESERVED	RESERVED	92
99	RESERVED	RESERVED	93

U6F
BG95-M1

U_SIM

USIM_VDD	43
USIM_DET	42
USIM_DATA	45
USIM_CLK	46
USIM_RST	44
USIM_GND	47

U9	
VCC	
DI1	DO1
CI	CO
DI2	DO2
NC	EPAD
TPD3F303DPVR	

VCC	VPP	S5
I/O		S6
CLK		S3
RST		S2
GND	GND	G1
GND	GND	G2
GND	GND	G3
GND	GND	G4

1042240820

Title **BG95_Misc**

Size: **A4**

Number: **18**

Revision: **0.1**

Date: **12/22/2020**


Time: **11:00:31 AM** Sheet 18 of 50

File: **BG95_Misc.SchDoc**


Acme_CPU
30 N Gould St suite 4000
Sheridan WY 82801

A0	A1_0
A1	A1_1
A2	A1_2
A3	A1_3
A4	A1_4
A5	A1_5
A6	A1_6
A7	A1_7
A8	A2_0
A9	A2_1
A10	A2_2
A11	A2_3
A12	A2_4
A13	A2_5
A14	A2_6
A15	A2_7

B1_0	B0
B1_1	B1
B1_2	B2
B1_3	B3
B1_4	B4
B1_5	B5
B1_6	B6
B1_7	B7
B2_0	B8
B2_1	B9
B2_2	B10
B2_3	B11
B2_4	B12
B2_5	B13
B2_6	B14
B2_7	B15

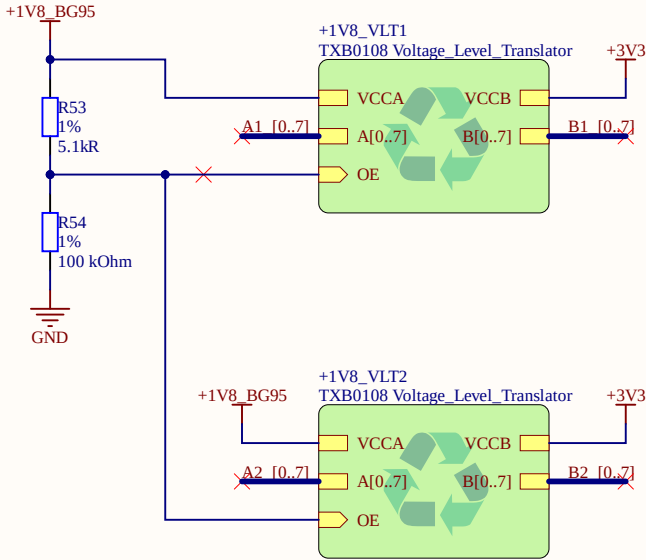

BG95_PON_TRIG	BG95_PON_TRIG
BG95_USB_BOOT	BG95_USB_BOOT

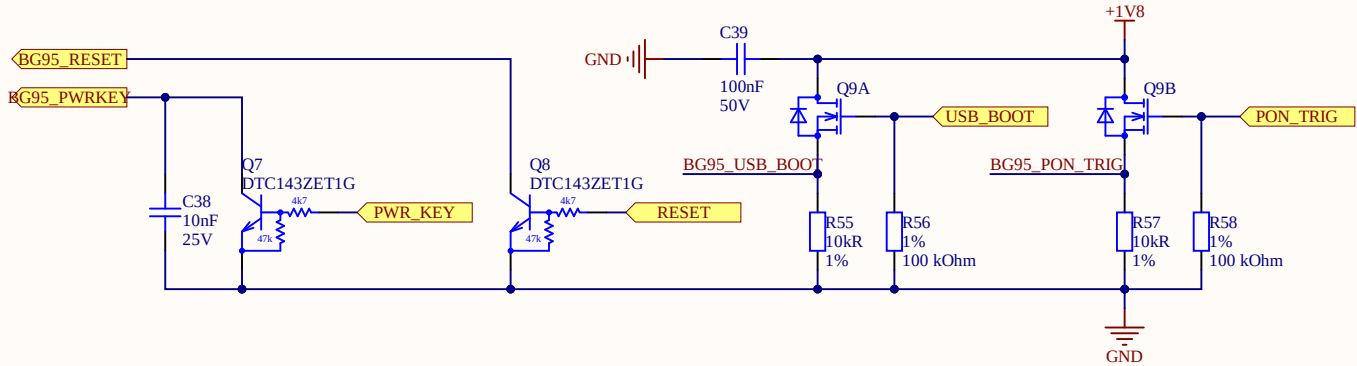

Title BG95 Voltage Level Translator			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number: 19	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:31 AM	Sheet 19 of 50	
File: BG95_VLT.SchDoc			

A

B

C


D

A

B

C

D

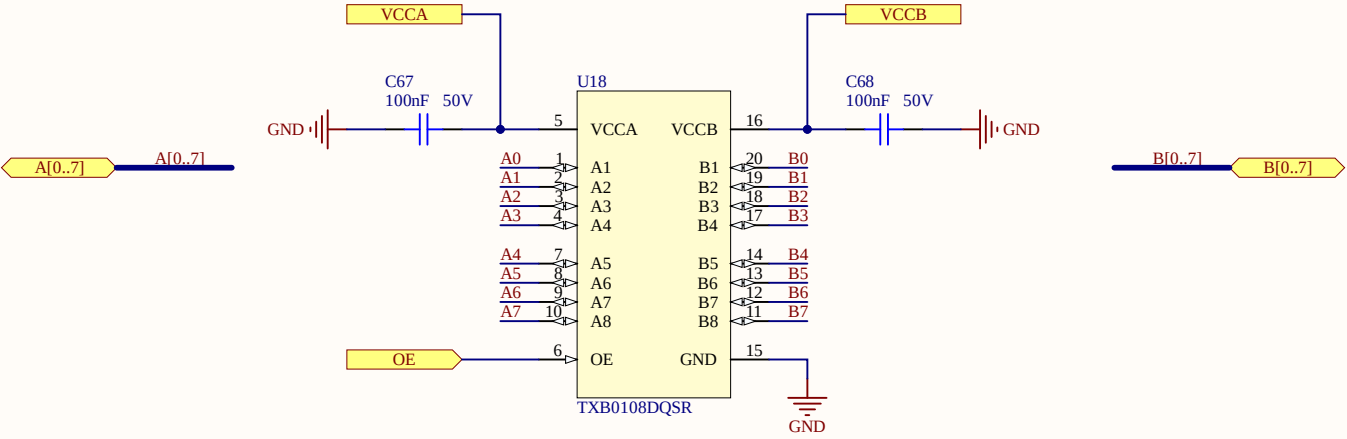

Title TXB0108 Voltage Level Translator			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number:*	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:31 AM	Sheet * of *		
File: TXB0108 Voltage_Level_Translator.SchDoc				

A

B

C


D

A

B

C

D

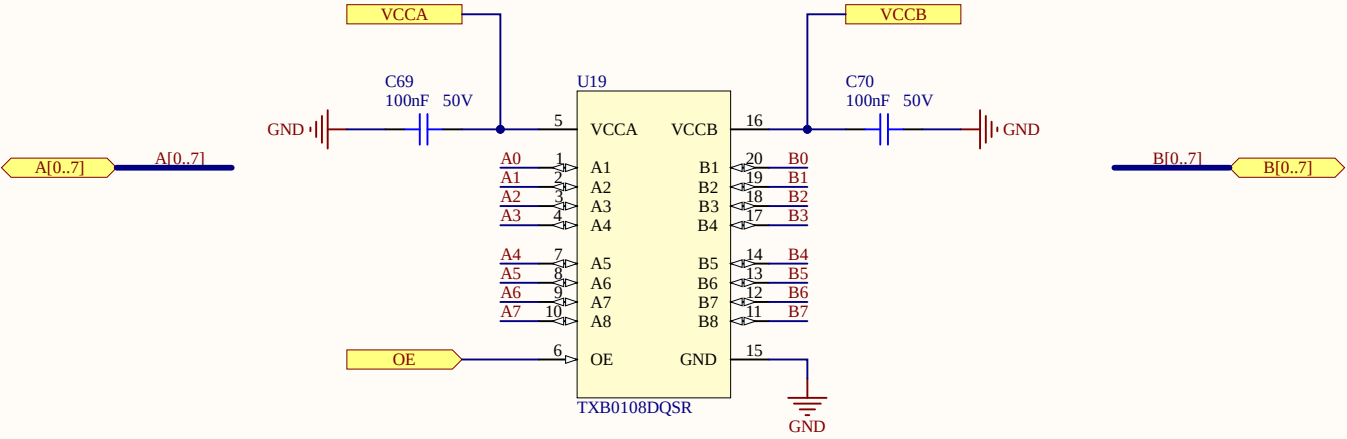

Title TXB0108 Voltage Level Translator			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number:*	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:31 AM	Sheet * of *		
File: TXB0108 Voltage_Level_Translator.SchDoc				

A

A

B

B

C

C

D

D



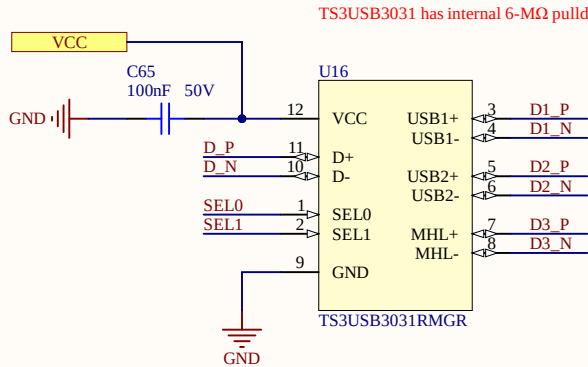



Table 1. Function Table

SEL1	SEL0	SWITCH STATUS
Low	Low	D+/D– connected to USB1+/USB1–
Low	High	D+/D– connected to USB2+/USB2–
High	Low	D+/D– connected to MHL+/MHL–
High	High	USB and MHL switches in High-Z


Title TS3USB3031 2-ch 2p3t Multiplexer			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: *	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:31 AM	Sheet * of *		
File: TS3USB3031_2-ch_2p3t_Multiplexer.SchDoc				

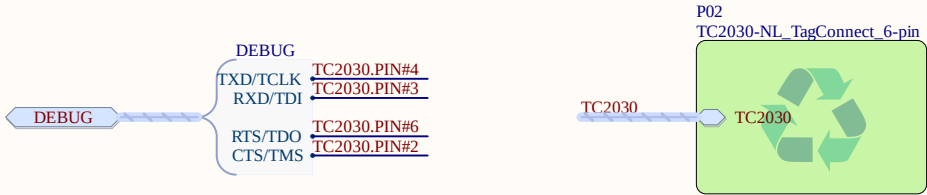


Title Tag-Connect DEBUG Port			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number: 6	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:31 AM	Sheet 6 of 50	
File: UART_TagConnect.SchDoc			

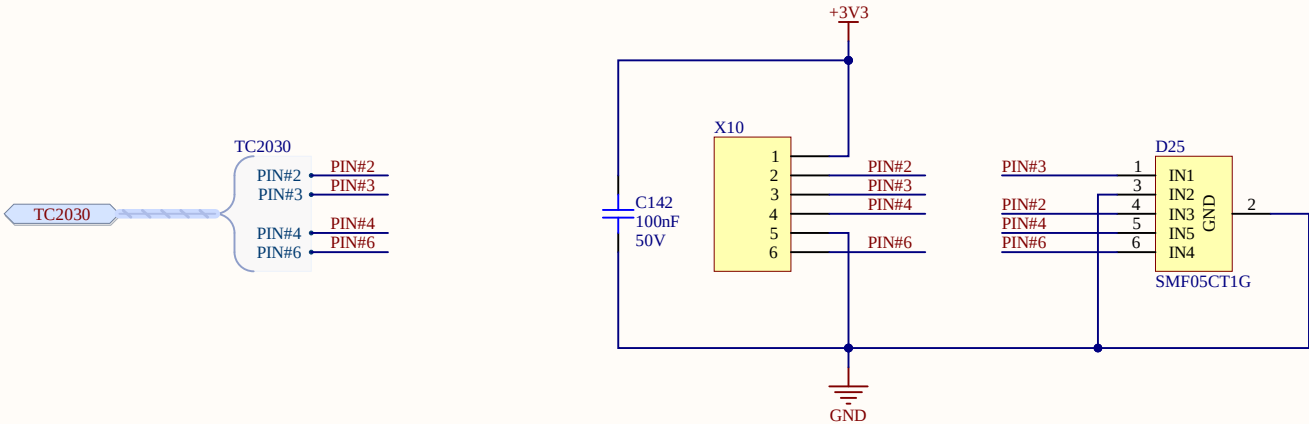


Title TC2030-NL Tag-Connect			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:31 AM	Sheet* of *	
File: TC2030-NL_TagConnect_6-pin.SchDoc			

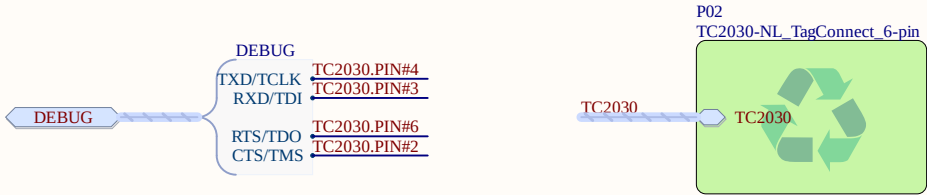


Title Tag-Connect DEBUG Port			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number: 6	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:31 AM	Sheet 6 of 50	
File: UART_TagConnect.SchDoc			

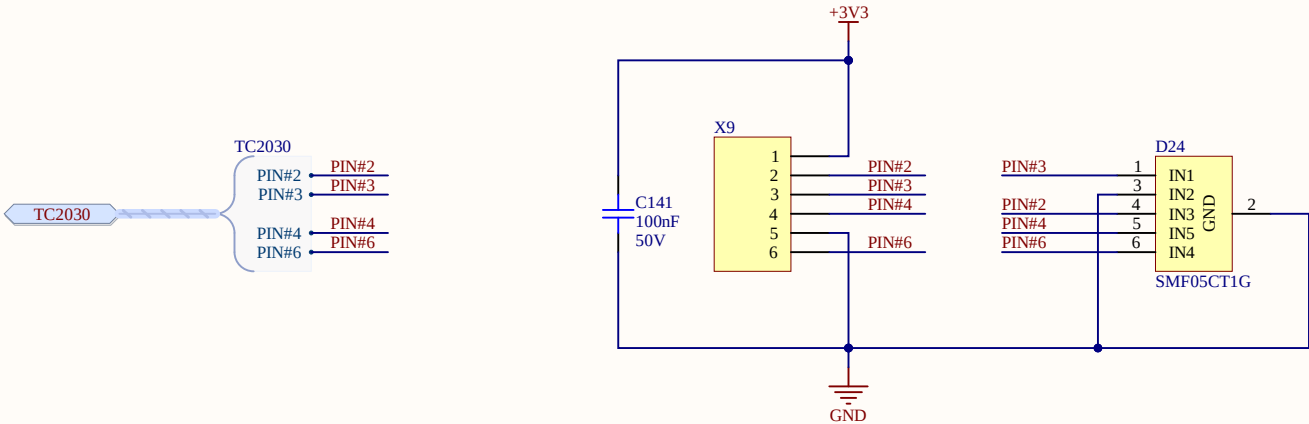


Title TC2030-NL Tag-Connect			<i>Acme_CPU</i> 30 N Gould St suite 4000 Sheridan WY 82801		
Size: A4	Number:*	Revision: 0.1			
Date: 12/22/2020	Time: 11:00:31 AM	Sheet* of *			
File: TC2030-NL_TagConnect_6-pin.SchDoc					

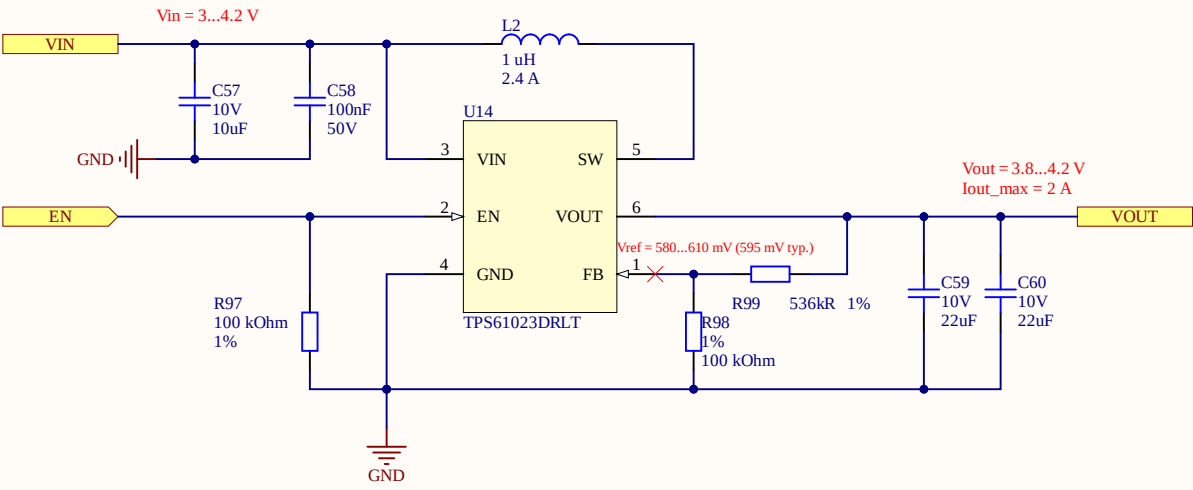


Title TPS61023 Boost Converter			<i>Acme_CPU</i> 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: *	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:31 AM	Sheet * of *		
File: TPS61023_Boost_Converter.SchDoc				

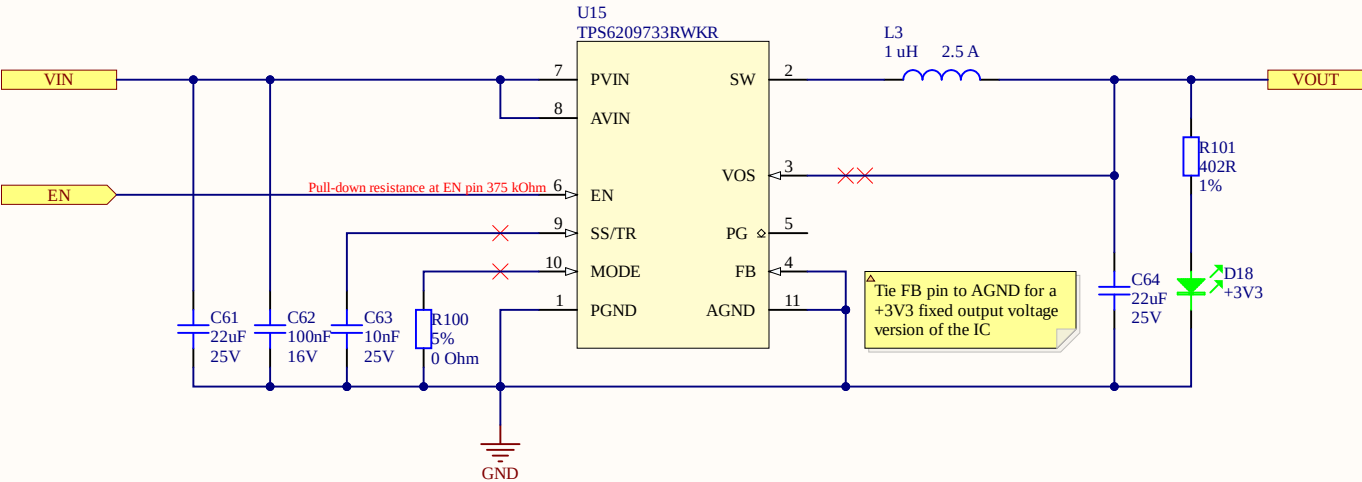


Title +3V3 Output DC-DC Converter			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number:*	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:31 AM	Sheet* of *		
File: TPS6209733_Buck_2A_3V3_FixedOutput.SchDoc				

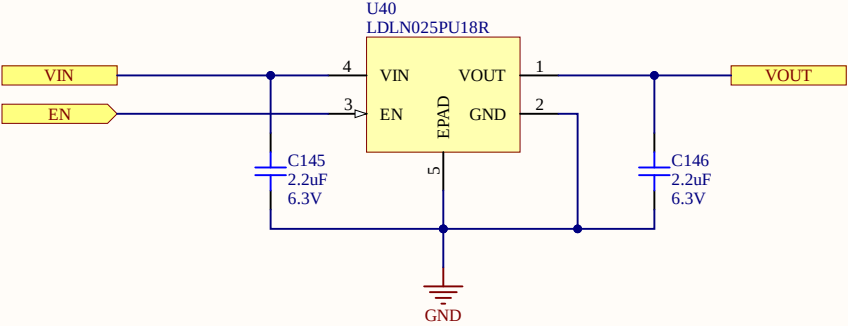


Title LDLN025 +1V8 Fix Voltage Regulator			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:31 AM	Sheet* of *	
File: LDLN025_1V8_Regulator.SchDoc			

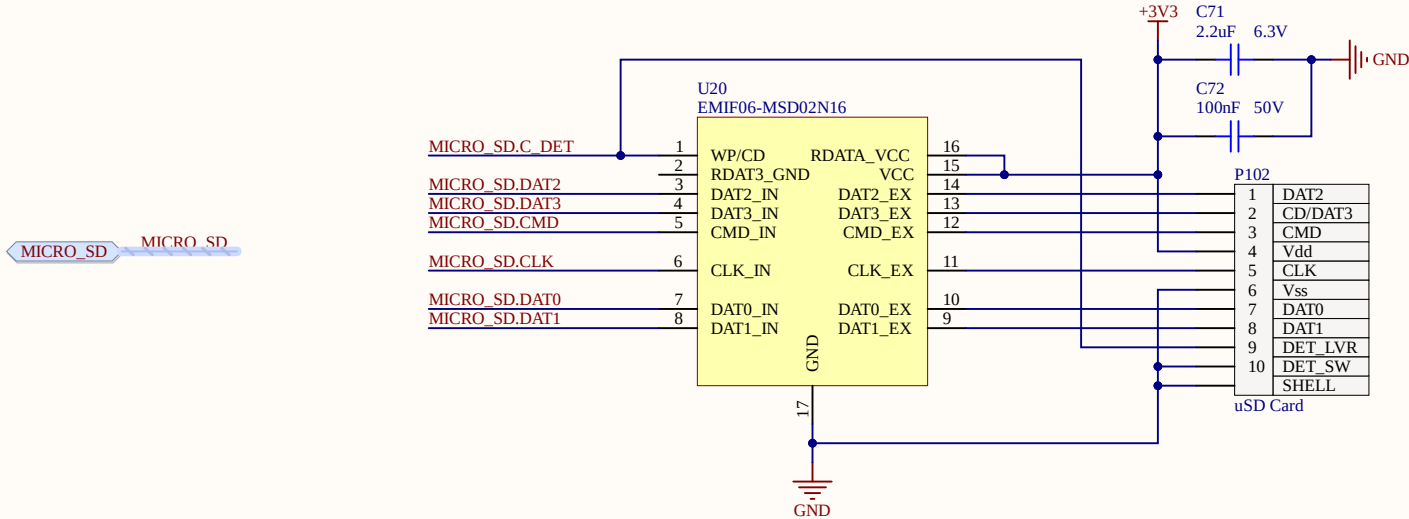


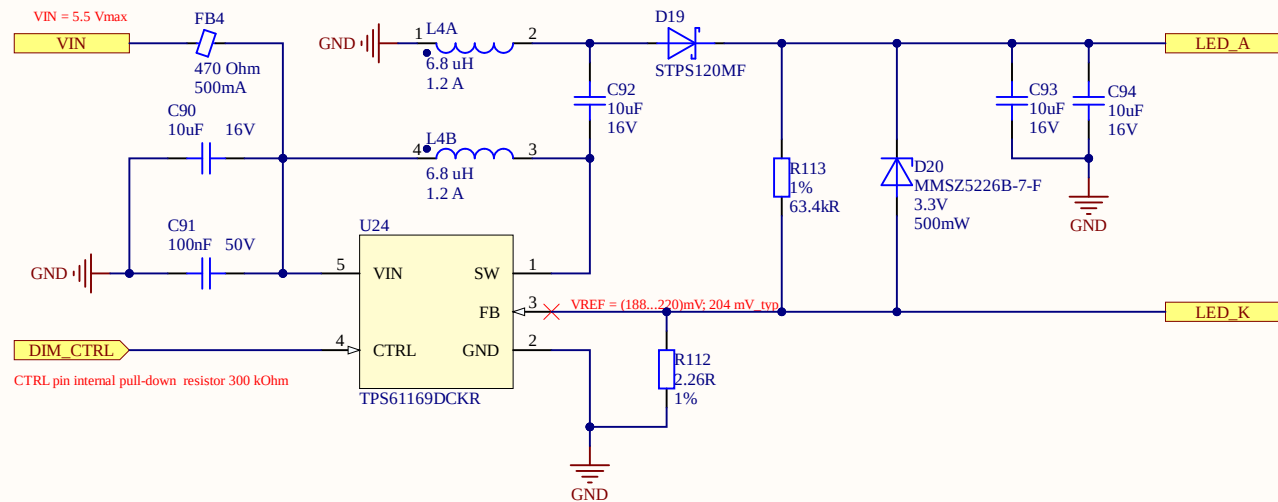


Title TPS61169 SEPIC 100 mA LED Driver			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: *	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:32 AM	Sheet * of *		
File: TPS61169_SEPIC_90_mA_LED_Driver.SchDoc				

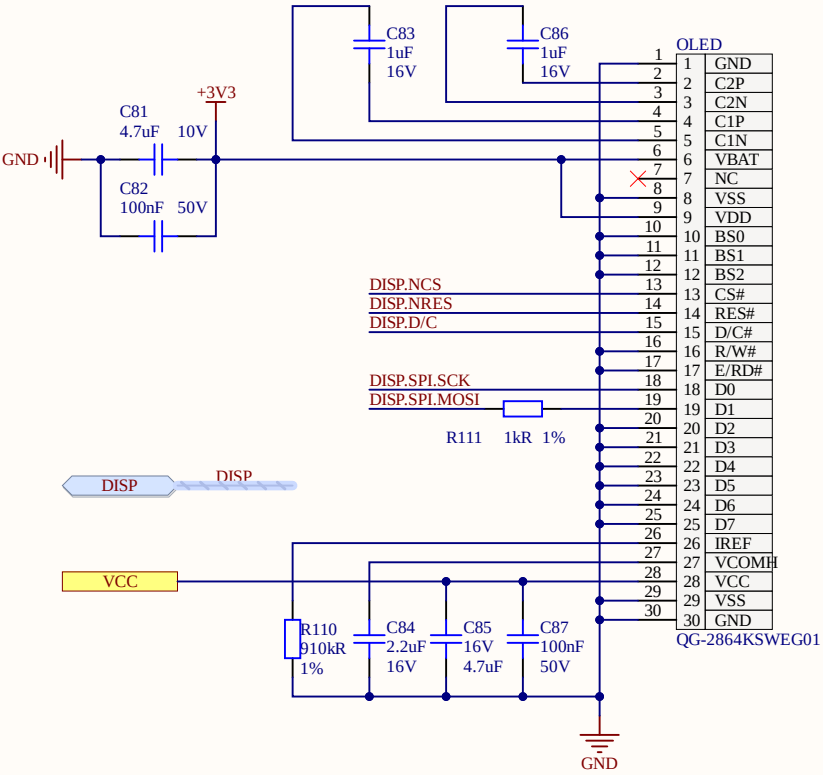


Title QG-2864KSWEG01 Display Module			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:32 AM	Sheet* of *	
File: QG-2864KSWEG01_OLED_Display_Module.SchDoc			

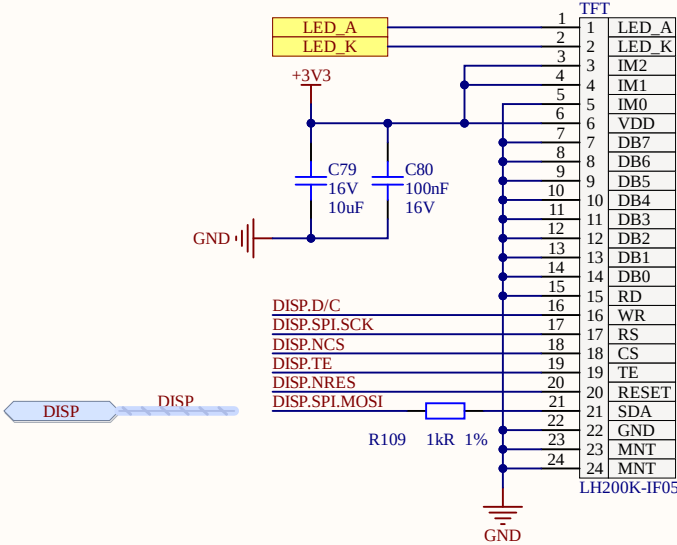


Title LH200K-IF05 2" 240x320 TFT LCD			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:32 AM	Sheet* of *	
File: LH200K-IF05_240x320_TFT_LCD_Module.SchDoc			

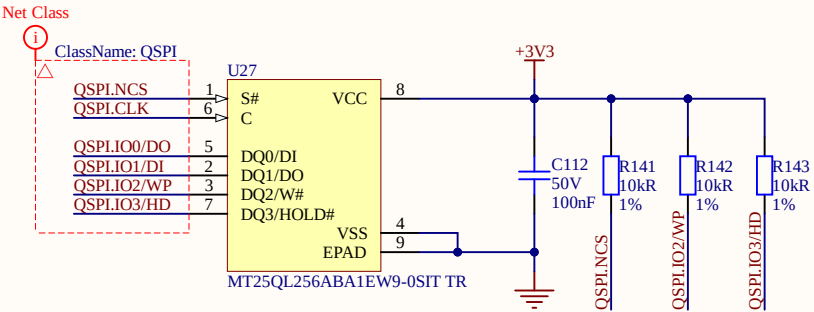



Title Quad SPI Flash Memory			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:32 AM	Sheet* of *	
File: MT25QL256_QSPI_NOR_Flash.SchDoc			

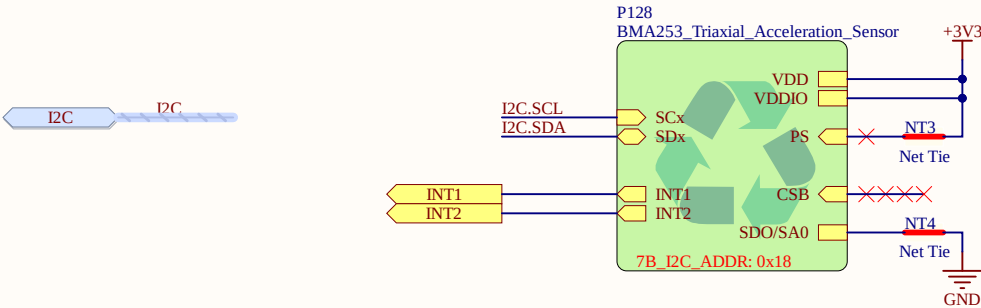


Title BMA253 Orientation Sensor			<i>Acme_CPU</i> <i>30 N Gould St suite 4000</i> <i>Sheridan WY 82801</i>	
Size: A4	Number: 20	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:32 AM Sheet 20 of 50			
File: BMA253_Orientation_Sensor.SchDoc				

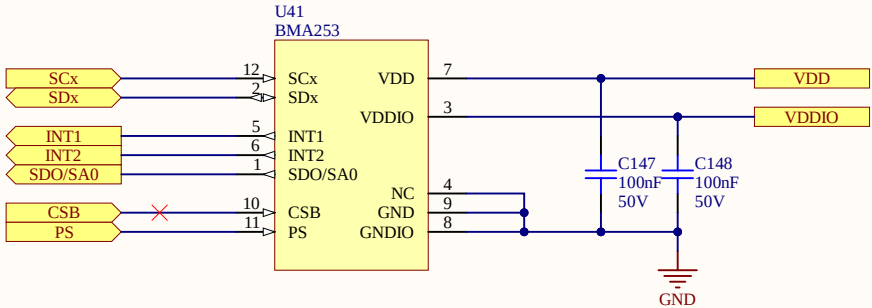

Title: BMA253 Digital Accelerometer			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number:*	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:32 AM	Sheet* of *	
File: BMA253_Triaxial_Acceleration_Sensor.SchDoc			

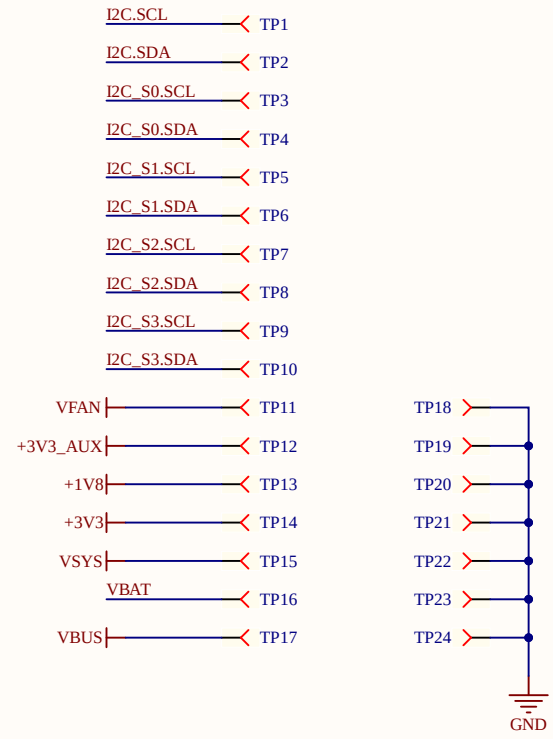


Title Test Points			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number:21	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:32 AM	Sheet 21 of 50		
File: Test_Points.SchDoc				

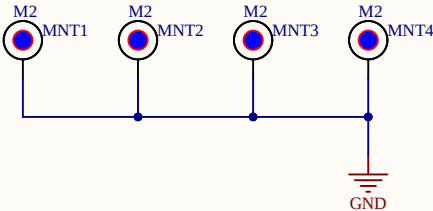


G1
ESD
Logo_ESD

Logo1
Acme CPU Logo
Logo ACME_CPU

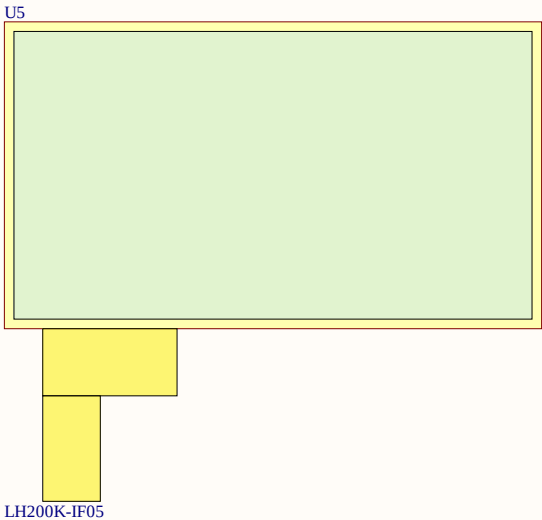

Title Auxiliary Components			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801
Size: A4	Number: 22	Revision: 0.1	
Date: 12/22/2020	Time: 11:00:32 AM	Sheet 22 of 50	
File: Auxiliary.SchDoc			

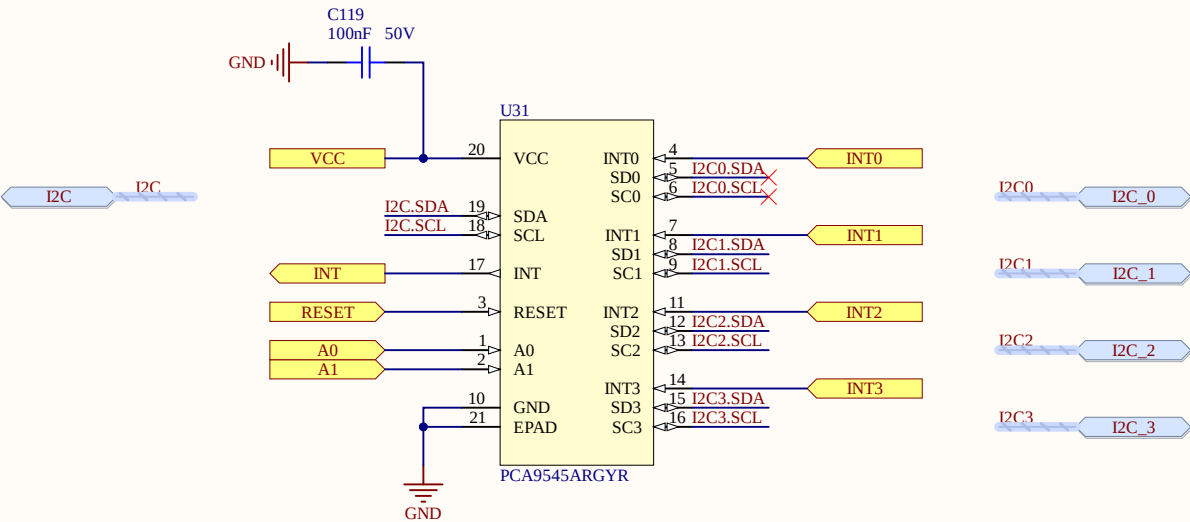

Title PCA9545A 4-ch I2C Switch			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number:*	Revision: 0.1		
Date: 12/22/2020	Time: 11:00:32 AM	Sheet* of *		
File: PCA9545A_4-ch_I2C_Switch.SchDoc				