

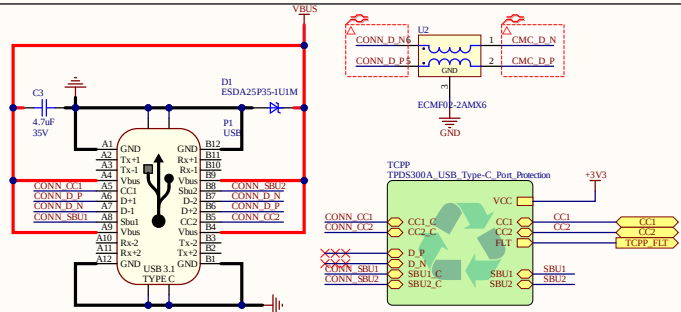




3V3 1A Regulator

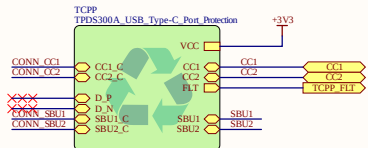


USB - C Section




GND Motor A2




Pulse-Oxy-Connector

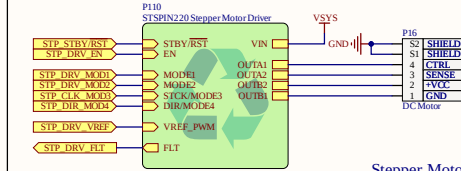


Stepper Motors

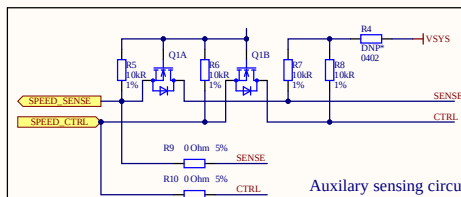


Auxiliary sensing circuit

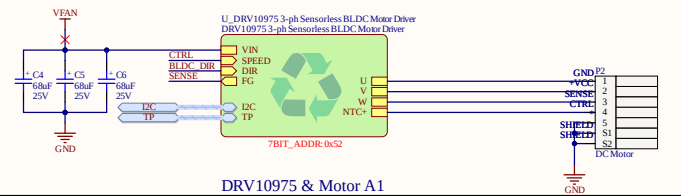

DRV10975 & Motor A1

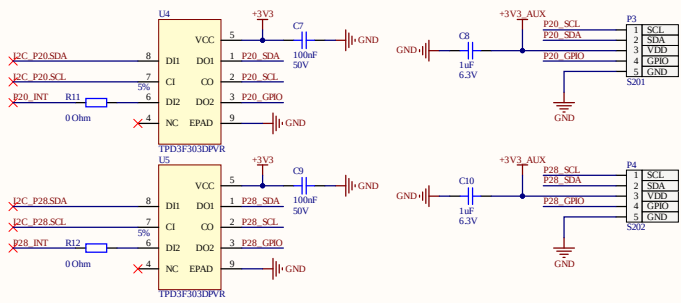

Senspr Board S201 & 202 with passive filters



GNDIO


*) if INT1 and/or INT2 are not used, please do not connect them (DNC). INT1 and/or INT2 can also be configured as input in case the external data synchronization of FIFO is used.

**) If secondary interface is unused, ASDX and ASCX can be connected to VDDIO or left unconnected. Do not connect to GND.


***) Can be tied to GND only if register IF_CONF.ois_en = 0

****) DNC is not recommended, but possible, if the system design ensures that the voltage never drops below VIH (internal pull-up available).


Title			
Size C	Number		Revision
Date: File:	3/06/2021 D:\acmecpu\202\PCB_Proj\crt202	Sheet of Scri	Drawn By:

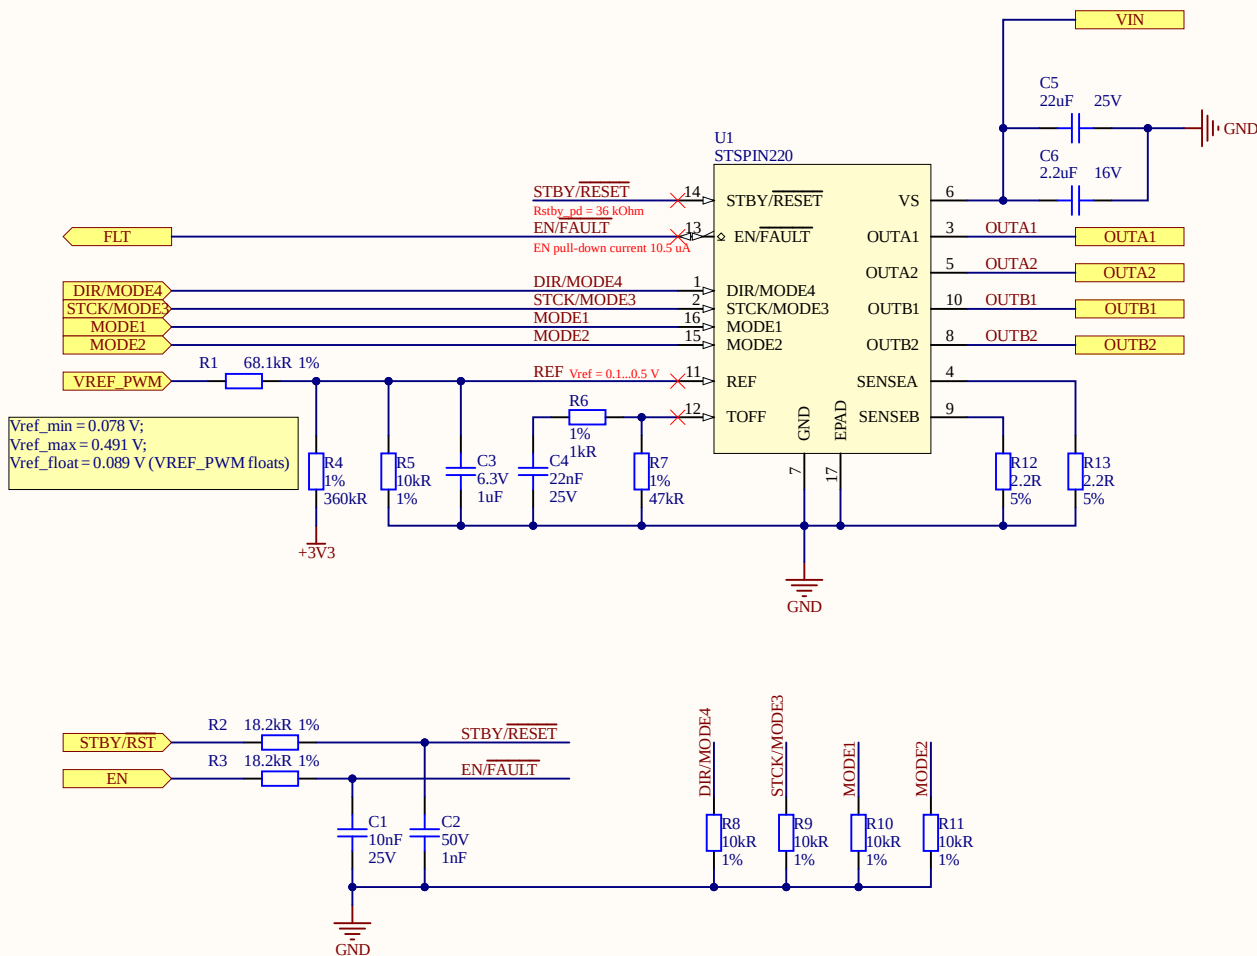

Title Stepper Motor Driver				
Size: A4	Number:*	Revision:		
Date: 3/6/2021	Time: 1:58:26 PM	Sheet2 of 5		
File: STSPIN220 Stepper Motor Driver.SchDoc				

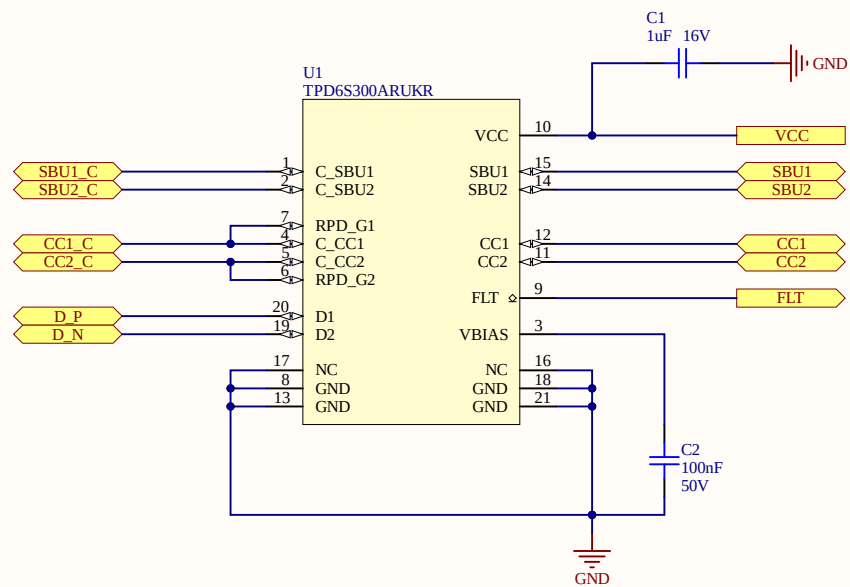

Title TPD6S300A USB Type-C Protection				
Size: A4	Number:*	Revision:		
Date: 3/6/2021	Time: 1:58:26 PM	Sheet 3 of 5		
File: TPDS300A_USB_Type-C_Port_Protection.SchDoc				

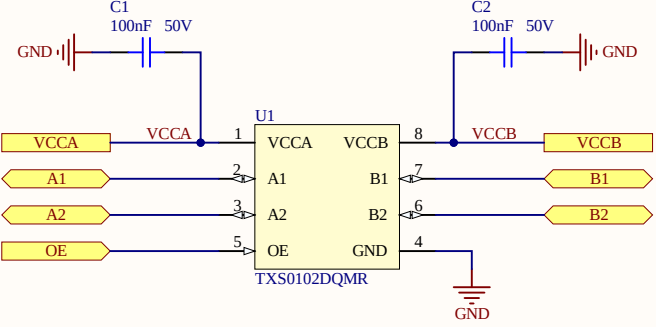

Title: <i>I2C Bus Buffer - Voltage Translator</i>				
Size: A4	Number:*	Revision:		
Date: 3/6/2021	Time: 1:58:26 PM	Sheet5 of 5		
File: TXS0102_I2C_Bus_Voltage_Translator.SchDoc				

