

Specification for PCB: Motor_Driver_D201.PcbDoc

The 4-layer PCB is intended for manual and automatic soldering of SMT and THT parts on the top side.

General requirements

IPC-A-600/6010 class 2

Laminate

Laminate: IPC 4101/124 with minimum Tg=150°C

Flammability: V0 according to UL94

CTI index 3: $175 < CTI \leq 400$ or better

CTE: Pre-Tg. 60ppm/°C Post-Tg. 300ppm/°C

Copper plating

Hole plating: min. 20µm. and min. avg. 25µm according to IPC-6012 class 3


Dimensions and Marking

PCB Size (X,Y): 20x30 mm

Tolerances on outline dimensions: +/- 0.2mm

Layer stackup

The PCB stack is in the picture below. The total thickness of the PCB is 0,98 mm ±10%.

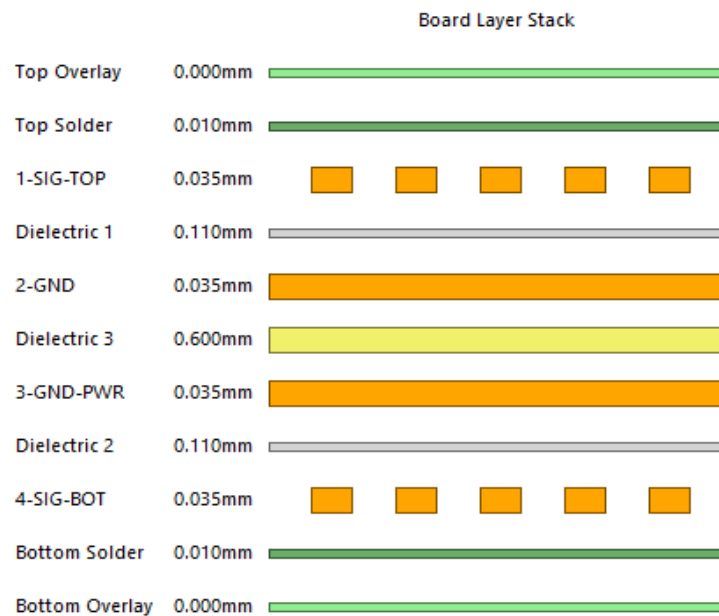

Controlled impedance traces

There is no need to control impedance of traces on the PCB.

Layer	Impedance Structure	Trace width, mm	Diff line space, mm	1 ref. plane	2 ref. plane	Target Impedance, Ohm*
1						
2						
3						
4						
5						
6						

*Tolerance on all impedances is $\pm 10\%$.

Solder mask

Liquid film or electrostatic spray coating on top and bottom sides .

According to: IPC-SM-840E, Class T

Minimum thickness: 8 μ m

Maximum thickness: 30 μ m

Legend:

Silkscreen Colour: White on top and bottom layers.

Plugged via holes:

Via holes covered by solder mask on both sides must be plugged.

Via holes with solder mask opening on one side and covered by solder mask on the other side, must be plugged from the same side they are covered by solder mask – solder mask opening on the other side must remain.

Surface finish

ENIG – Au 0.05 μ m / Ni 3.0 μ m;

Solderability accordingly to IPC J-STD-003, test C1 PTH, SMD test F1 set A

Gerber data (.Manufacturing\Gerber Files)

Filename	Contents
20201105-VSI-AcmeCPU_Motor_Driver_Board_D201_001_PCB_SPECIFICATION.pdf	This file
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GTL	Layer 1, 1-SIG-Top
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GP1	Layer 2, 2-GND
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GP2	Layer 3, 3-GND-PWR
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GBL	Layer 4, 4-SIG-BOT
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GTO	Top Overlay (Top Silk)
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GTS	Top Solder (Solder Mask)
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GBS	Bottom Solder (Solder Mask)
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GBO	Bottom Overlay
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GM12	Board Outline
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GD1	Drill Drawing
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GG1	Drill Guide
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.GM14	Top Assembly

Stencils (.\\Manufacturing\\Stencil Files)

Filename	Contents
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Stencil.GTP	Top Paste

Drill and milling data (.\\Manufacturing\\Gerber Files)

Filename	Contents
20201105-VSI-30041113_Acme_CPU_Motor_Driver_D201_001_NC_Drill-Plated.TXT	NCDrill Plated Holes File

Text Reports

Filename	Contents
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.REP	Gerber Generation report
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Gerber.EXTREP	Gerber File Extension Report
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_NC_Drill.DRR	NCDrill File Report
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Stencil.REP	Stencil Generation report
20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Stencil.EXTREP	Gerber File Extension Report

Schematic (.\\Design\\Schematic - pdf)

20201105-VSI-Acme_CPU_Motor_Driver_D201_001_No Variations.PDF

Assembly Drawings (.\\Assembly\\PCB Layout - pdf)

20201105-VSI-Acme_CPU_Motor_Driver_D201_001_PCB.PDF

Pick and Place (.\\Assembly\\Pick_n_Place)

20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Pick_and_Place.txt

BOM (.\\Assembly\\BOM - Excel)

20201105-VSI-Acme_CPU_Motor_Driver_D201_001_No_Variations_DFM_BOM.xls

Additional info**Mechanical Files (.\\Assembly\\Mechanical)**

20201105-VSI-Acme_CPU_Motor_Driver_D201_001_Plain_AutoCAD.DXF

20201105-VSI-Acme_CPU_Motor_Driver_D201_001_3D_STEP.step

General

Extended gerber / excellon drill.

Layout

Filename: Altium 17.1: Motor_Driver_D201.PcbDoc

Fiducials

TOP FID1: 7.50mm; 18.00mm
TOP FID2: 20.50mm; 18.00mm
TOP FID3: 27.94mm; 7.62mm

Contacts

If there are any questions regarding the layout please contact:

HW Developer
Volodymyr Sirous
Email: volodymyr@acmecpu.com

Project Manager
Pankaj Gupta
Email: pg@acmecpu.com

[Homepage: www.acmecpu.com](http://www.acmecpu.com)