

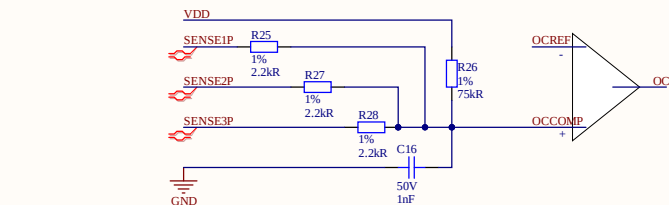
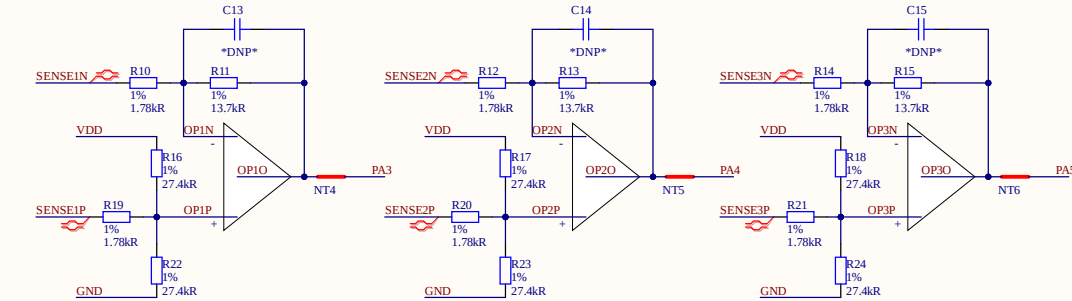







When the VM voltage is below to 12 V, the VM pin and the linear regulator output can be shorted together providing the gate driver supply externally.



Note: OPxO = Output | OPxN = Inverting Input | OPxP = Non-Inverted Input

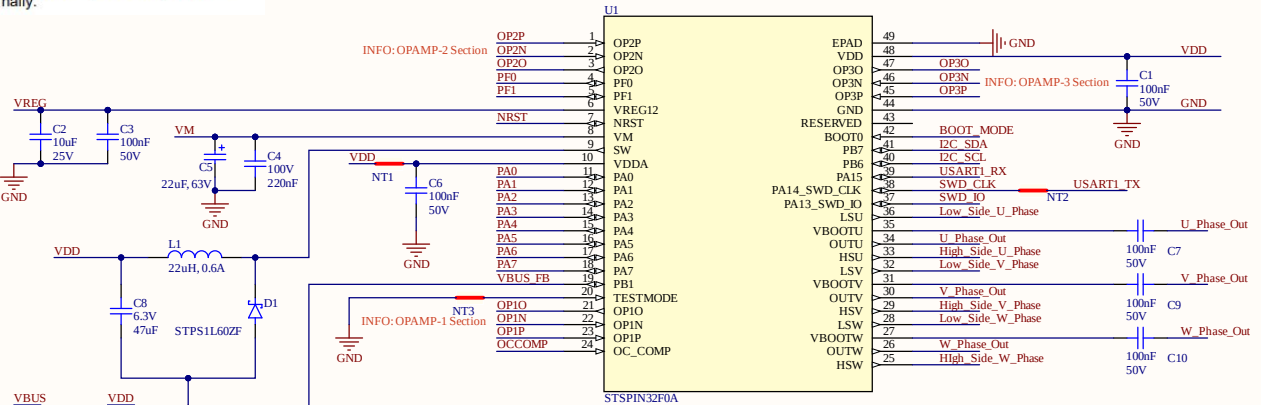

- The device exits the standby mode when an external reset (NRST pin), an IWDG reset,
- a rising edge on the WKUP pins, or an RTC event occurs.



INFO: Unused Pins



Each unused GPIO inside the SIP should be configured in the OUTPUT mode low level after the startup by software.

Title:		Acme_CPU	
Size: A3	Number:	30 N Gould St suite 4000 Sheridan WY 82801	
Date: 5/14/2021	Time: 2:13:44 AM	Revision:0.1	Acme CPU
File: STSPIN32F0A-bldc-driver.SchDoc	Sheet	of	