



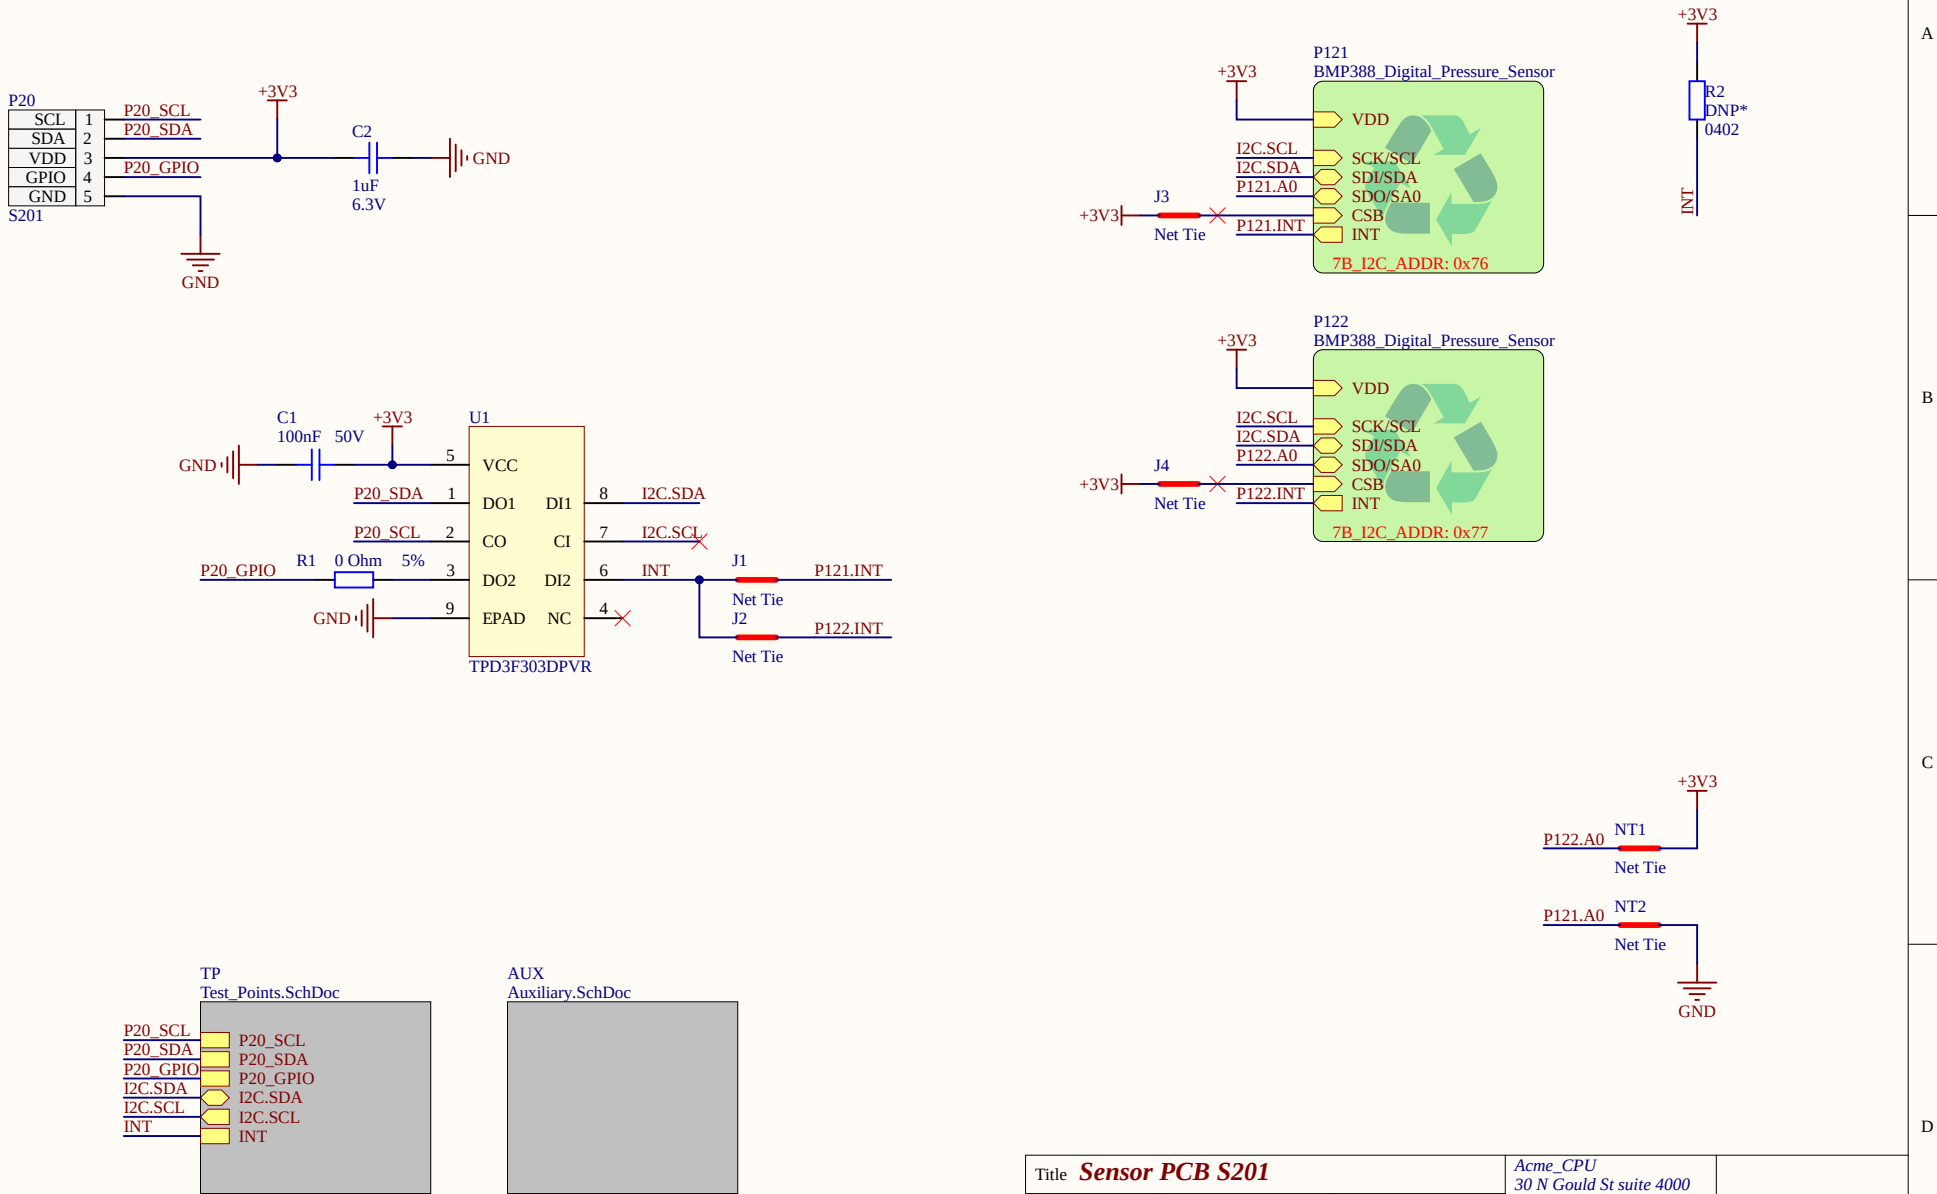

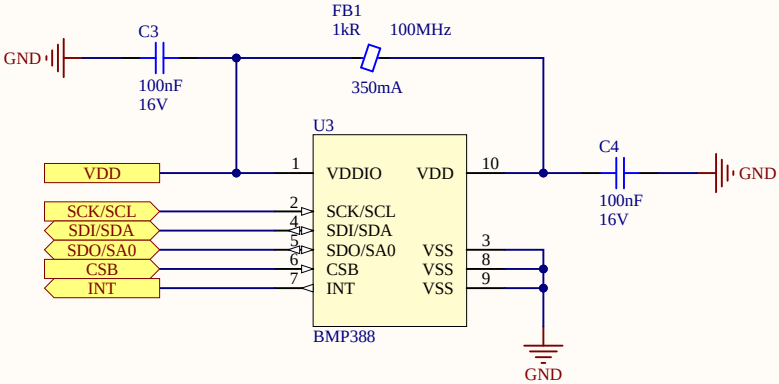

The output mode of the INT pad is controlled by *int_od* bit:

Table 18: *int_od*

<i>int_od</i> = '0'	Push-pull
<i>int_od</i> = '1'	Open-drain

Title **BMP388 Digital Pressure Sensor**

Acme_CPU
30 N Gould St suite 4000
Sheridan WY 82801

Size: A4


Number: *

Revision: 0.1

Date: 12/7/2020

Time: 10:13:18 PM Sheet * of *

File: BMP388_Digital_Pressure_Sensor.SchDoc

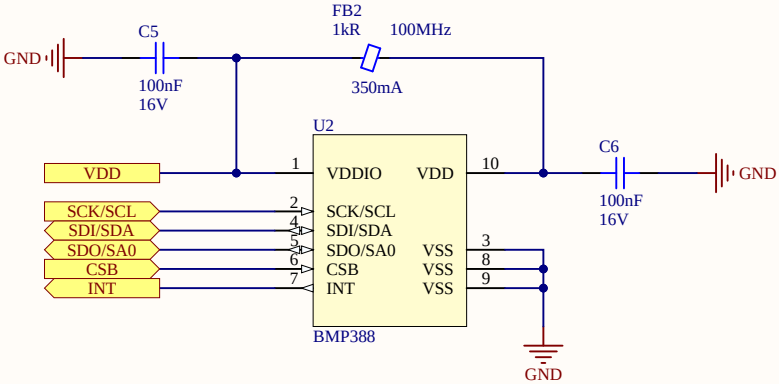

The output mode of the INT pad is controlled by *int_od* bit:

Table 18: *int_od*

<i>int_od</i> ='0'	Push-pull
<i>int_od</i> ='1'	Open-drain

Title **BMP388 Digital Pressure Sensor**

Acme_CPU
30 N Gould St suite 4000
Sheridan WY 82801

Size: A4


Number:*

Revision: 0.1

Date: 12/7/2020

Time: 10:13:18 PM Sheet * of *

File: BMP388_Digital_Pressure_Sensor.SchDoc

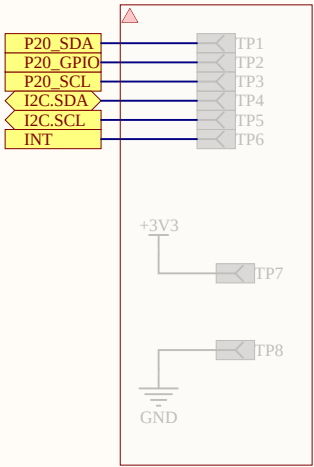

Title Test Points			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: 2	Revision: 0.1		
Date: 12/7/2020	Time: 10:13:18 PM	Sheet 2 of 4		
File: Test_Points.SchDoc				

A

B

C


D

A

B

C

D

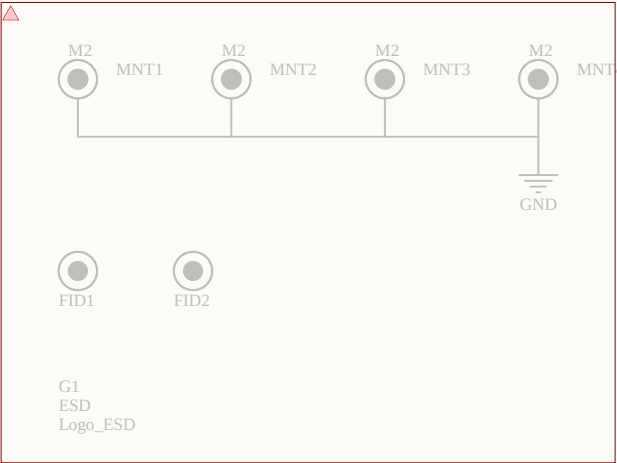

Logo1
Acme CPU Logo
Logo ACME_CPU

Title Auxiliary Components			Acme_CPU 30 N Gould St suite 4000 Sheridan WY 82801	
Size: A4	Number: 3	Revision: 0.1		
Date: 12/7/2020	Time: 10:13:18 PM	Sheet 3 of 4		
File: Auxiliary.SchDoc				