

Arbor

- The Arbor's primary use is for pathway, entrance and area lighting, side-mounted to walls or posts. Other applications include stairwell, emergency lighting, exterior and interior residential use. The Arbor light is based around a die cast aluminium body with anti-vandal polycarbonate glazing. A bollard version is also available in both single and twin versions.
- Modern, stylish bulkhead luminaire
- Durable and easily maintained
- Wall & Soffit mounting versions
- Die cast Aluminium Body
- Anti-vandal polycarbonate glazing
- Wall Light is IP66 rated and the Soffit version




Technical info

Materials	Body: Die-cast LM6 aluminium Glazing: Double UV stable polycarbonate
Ingress Protection	IP66
Finishes	Polyester powdercoat to any BS / RAL colours Stoving acrylic to any BS / RAL colours
Optics	Asymmetric distribution
Gear	Upto 42W Compact Fluorescent PLT with integral control gear
Fixings	Stainless Steel
Recommended Height	1m - 4m
Mounting	Wall mount Post mount
Mounting Details	For post mount adaptor brackets are required these must be ordered seperately
Maintenance	Removable cover for lamp and gear access
Weight	Call for specific details
Photo Cell	Miniature PEC

Typical Applications

- | | |
|------------|-----------------|
| ✓ Amenity | ✓ Interior |
| ✓ Exterior | ✓ House Builder |

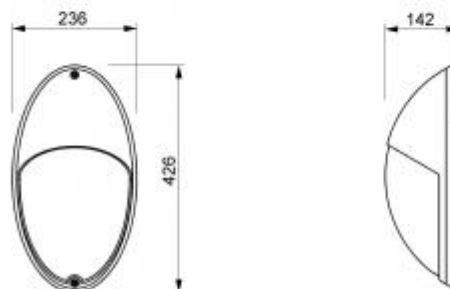

c a n d e l a

L I G H T