CONVENTIONAL

Hot pressing of boards

a mat of resin-coated chips is pressed and cured

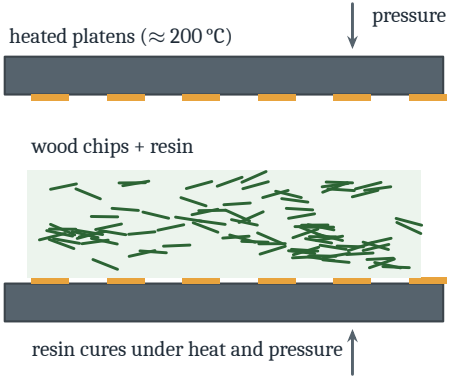

ADDITIVE

Continuous-fibre extrusion

a fibre tow is laid inside each polymer road

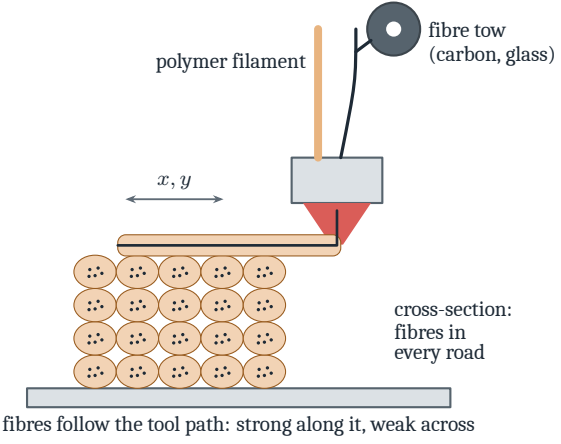

DIN 8580 primary shaping 1.5 · from the chip or fibre state