

Technical Specifications



TD 200 Tablet

Size	270.9×173.5×33.2mm
Weight	1.3kg
Screen	10.1 1280×800px
System	Android 14.0
CPU	8 core
Operation Temperature	-30 C ~+70 C
Storage Temperature	-40 C ~+85 C
Ingress Protection	IP65



AT400 GNSS Antenna

Size	156.2×140×55.5mm
Weight	634g
Gain	40±2dB
Shock	50 g/6ms
Operating Temperature	-40 C ~+85 C
Storage Temperature	-40 C ~+85 C
Ingress Protection	IP67



Receiver

Size	221.5×159.5×58.5mm
Weight	1.15kg
Radio Protocol	HITARGET、Hi-far、TRIMTALK450S、TT450S 4800、TRIMMARKIII、TRANSEOT、SATEL-3AS(25k)、SATEL-3AS(12.5k)、SOUTH
Frequency	410-470MHz
CAN Baud Rate	250Kbps
RTK Correction Format	RTCM3.X, ,CMR
RTK(RMS)	Horizontal: 8mm+1ppm Elevation: 15mm+1ppm
Operation Temperature	-30 C ~+75 C
Storage Temperature	-40 C ~+85 C
External Power Input	9~36V
Ingress Protection	IP67



IMU Sensor

Size	95×48×27.5mm
Weight	183±10g
Dynamic Accuracy	0.3°
Static Accuracy	0.1°
Anti-Vibration Design	10g (10~2kHz)
High Impact Resistance	2000g
Operation Temperature	-40 C ~+85 C
Ingress Protection	IP68



Ground Leveling



Dredging & Desilting



Slope Trimming



Trenching & Grooving



Headquarters:
Geosolution iGoteborg AB
Stora Avagen 21, 436 34 ASKIM,
Sweden

Regional Offices:
Budapest, Hungary
Ankara, Turkey
Dubai, UAE
New Delhi, India
Scottsdale, USA
Tokyo, Japan
Hong Kong, China

www.satlab.com.se

25D122




Flexidig 3D
Machine Control Excavator

E20 & E50

A System for all your excavators

Flexidig 3D is an advanced machine control system for excavator, that supports one-click switching between 2D and 3D interfaces. Dynamic rendering of excavation trajectories provides operators with visual quality feedback, effectively preventing over- and under-excavation while delivering centimeter-level accuracy. Featuring an innovative "1+N" model, the system enables quick installation and disassembly across multiple excavators.

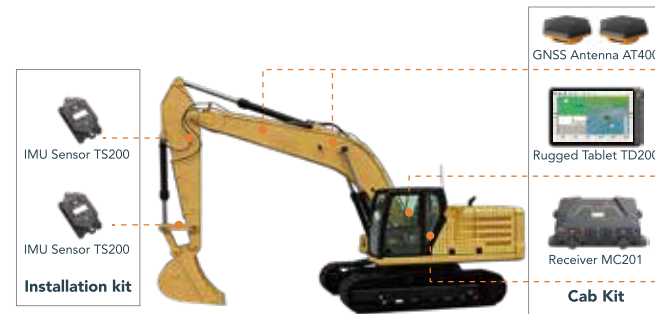

Flexidig 3D Compact-E20



Flexidig 3D Standard-E50

Super Economic

Super Easy

Super Flexible

Features



Surface



Continuous Slope



Full-posture 3D Modeling




2D Model Guidance

Software
UPGRADE



Full Version

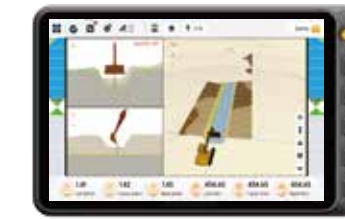

3D Model Guidance

Files Types: xml,dxf, sjw, ttin, road



V-Shaped Slope



Trenching



Real-time Quality Rendering

Real-time quality heatmaps are generated from dynamic on-site construction data, visualizing all quality metrics dynamically

1+N Model

One cabin kit can be applied to multiple installation kits



Dual Boom



Swing Boom



Tiltrotator Bucket