


CPU / CLOCK

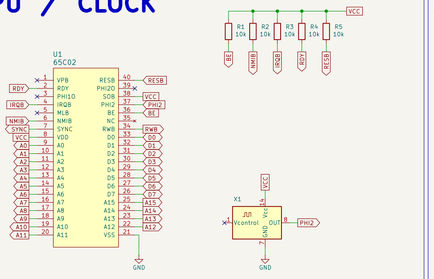


KIM MONITOR

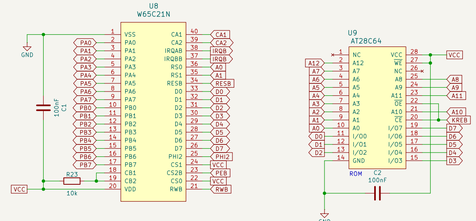



IO5 | SERIAL

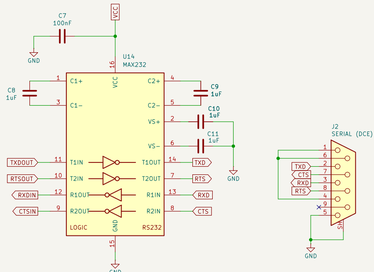




KEYPAD

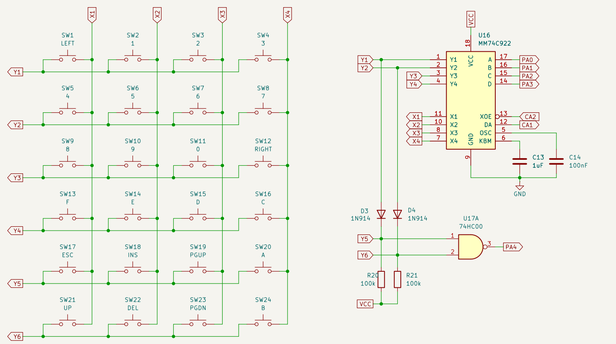




RAM / ROM

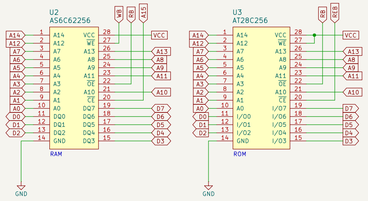


RESET




CARD SLOT / 6502 BUS





POWER




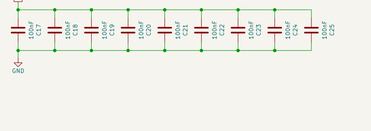


IO DECODING









LCD




BREADBOARD HEADERS


One strip of female headers above the breadboards, for jumper wires.
Row 1 is the 6502 BUS odd pins. Row 2 the even pins (EXP0 and EXP1 are HRDB).
Select the eight I/O selects after the DIP switch.








ROM DECODING

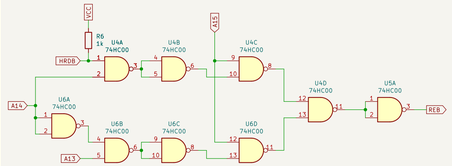


RAM ENABLE



KIM ENABLE: pins 1-2 = KIM monitor; pins 2-3 = BASIC over serial: set to BASIC before fitting a cartridge.
A cartridge pulling HRDB low cannot pull KIMB low.

BREADBOARD HEADERS



A.C. Wright Design
Sheet: /
File: KIM Board.kicad_sch

Title: 6502 KIM Board

Size: User	Date: 2026-11-06	Rev: 1.1
KiCad E.D.A. 10.0.3		Id: 1/1