

# CPU / CLOCK






# KIM MONITOR



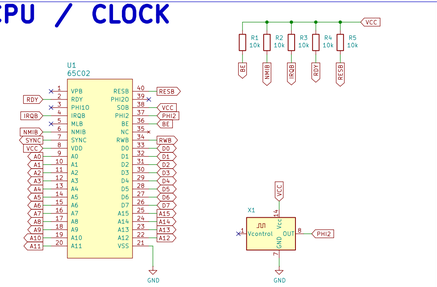

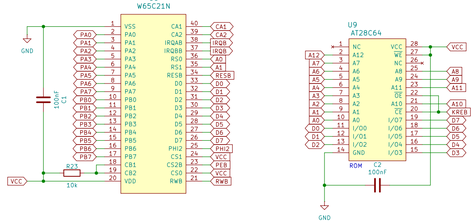


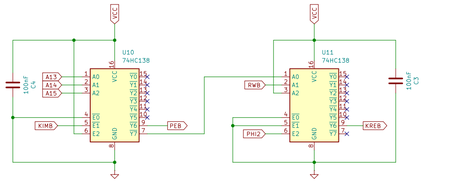




KIM ENABLE: fitted = KIM monitor; open = BASIC over serial;
open before fitting a cartridge.
A cartridge pulling HRDB low cannot pull KIMB low.

# IO5 | SERIAL



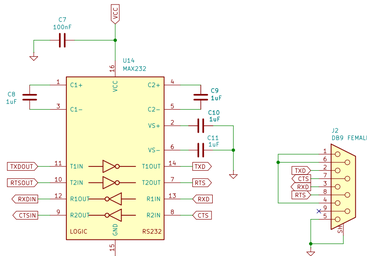



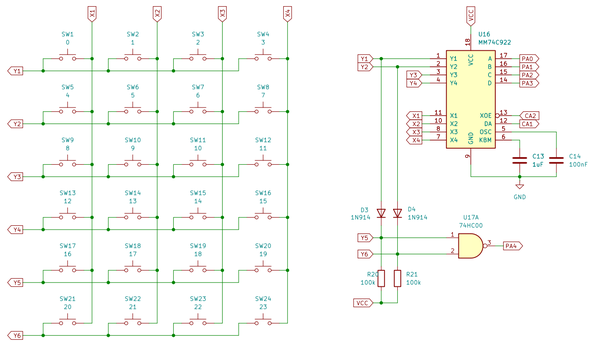
# KEYPAD













# RAM / ROM

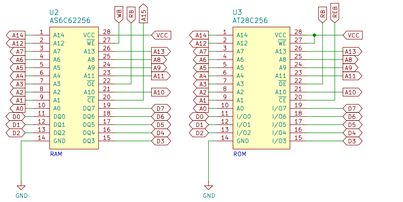



# ROM DECODING

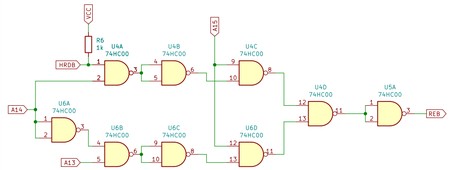



# RESET





# CARD SLOT / 6502 BUS





# POWER

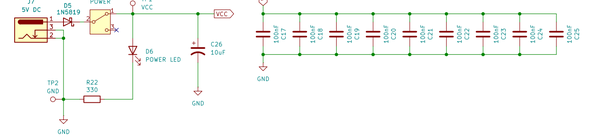


# IO DECODING

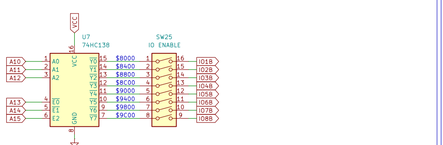








# LCD




# BREADBOARD HEADERS

One strip of female headers above the breadboards, for jumper wires.
Row 1 is the 6502 BUS odd pins. Row 2 the even pins (EXP0 and EXP1 are HRDB).
Select the eight I/O selects after the DIP switch.

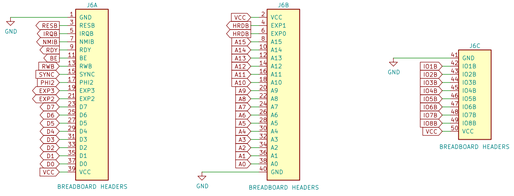



A.C. Wright Design


Sheet: /
File: KIM Board.kicad_sch

**Title: 6502 KIM Board**

| Size: User | Date: 2026-10-25 | Rev: 1.0 |
|---|---|---|
| KiCad E.D.A. 10.0.3 | | Id: 1/1 |