



Pins 4 and 6 (EXP1, EXP0) ground HRDB (High ROM disable bar),
which takes $C000–$FFFF from the ROM.

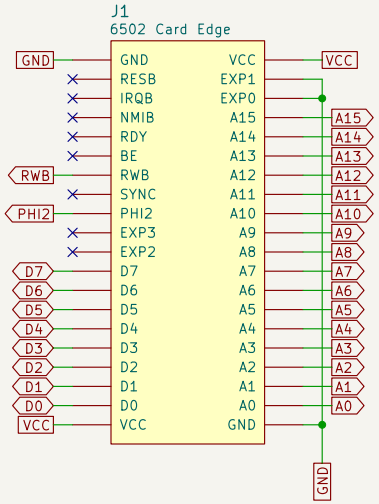

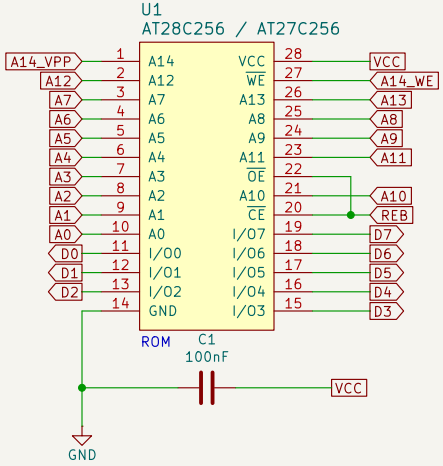

ROM chip select: bridged 1–2 (28C) for an AT28C256, as made.
For an AT27C256, cut both 1–2 and bridge 2–3 (27C):
JP1 puts VPP on VCC, JP2 puts A14 on pin 27.

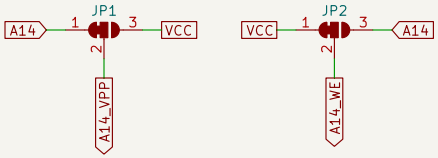

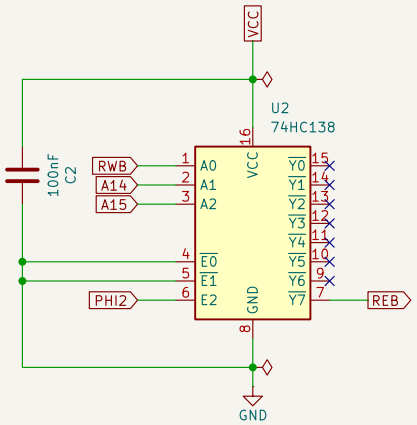

A.C. Wright Design		
Sheet: /		
File: ROM Cart.kicad_sch		
Title: 6502 ROM Cart		
Size: USLetter	Date: 2026-11-09	**Rev: 1.1**
KiCad E.D.A. 10.0.3		Id: 1/1