



Pins 4 and 6 (EXP1, EXP0) ground HRDB (High ROM disable bar),
which takes $C000–$FFFF from the ROM.

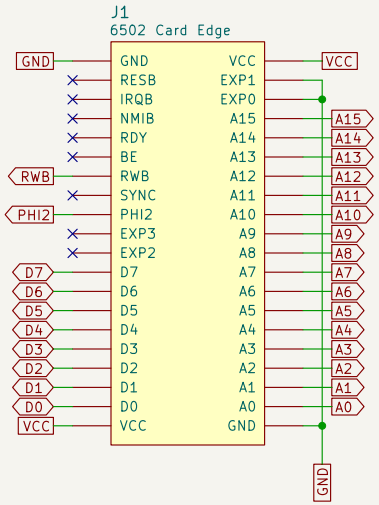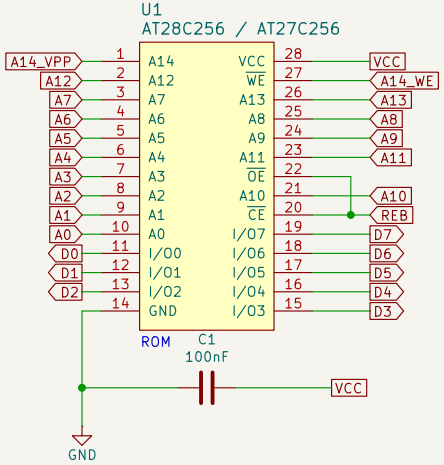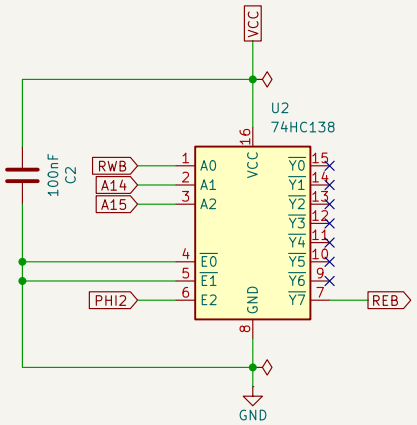


ROM chip select: bridged 1–2 (28C) for an AT28C256, as made.
For an AT27C256, cut both 1–2 and bridge 2–3 (27C):
JP1 puts VPP on VCC, JP2 puts ROM_A14 on pin 27.

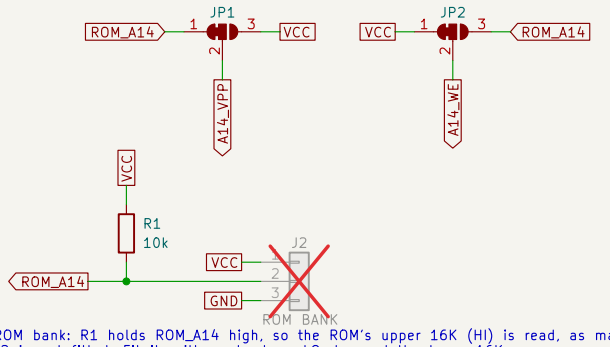


ROM bank: R1 holds ROM_A14 high, so the ROM's upper 16K (HI) is read, as made.
J2 is not fitted. Fit it, with a shunt on LO, to read the lower 16K.

| | |
|---|---|
| **A.C. Wright Design** | |
| Sheet: / | |
| File: ROM Cart.kicad_sch | |
| ***Title: AC6502 ROM Cart*** | |
| Size: USLetter \| Date: 2026-11-09 | **Rev: 1.1** |
| KiCad E.D.A. 10.0.3 | Id: 1/1 |