

AUTOSAR MCAL R4.0.3

User's Manual

MCU Driver Component Ver.1.0.7

Generation Tool User's Manual

Target Device:
RH850/P1x

All information contained in these materials, including products and product specifications, represents information on the product at the time of publication and is subject to change by Renesas Electronics Corp. without notice. Please review the latest information published by Renesas Electronics Corp. through various means, including the Renesas Electronics Corp. website (<http://www.renesas.com>).

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - "Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

Abbreviations and Acronyms

Abbreviation / Acronym	Description
AUTOSAR	AUTomotive Open System ARchitecture
BSWMDT	Basic Software Module Description Template
DEM	Diagnostic Event Manager
ECM	Error Control Module
ECU	Electronic Control Unit
Id	Identifier
MCAL	Micro Controller Abstraction Layer
MCU	Micro Controller Unit
SPAL	Standard Peripheral Abstraction Layer
XML	eXtensible Mark-up Language
RUCG	Renesas Unified Code Generator

Definitions

Terminology	Description
BSWMDT File	This file is the template for the Basic Software Module Description.
Configuration XML File	This file contains the setting of command line options.
ECU Configuration Description File	Input file to MCU Driver Generation Tool. It is generated by ECU Configuration Editor.
SI.No	Serial Number.
Translation XML File	This file contains the translation and device specific header file path.

Table of Contents

Chapter 1	Introduction	9
1.1.	Document Overview	9
Chapter 2	Reference	11
2.1.	Reference Documents	11
2.2.	Trademark Notice	11
Chapter 3	MCU Driver Generation Tool Overview	13
Chapter 4	Input Files	15
Chapter 5	Output Files	17
Chapter 6	Precautions.....	19
Chapter 7	User Configuration Validation	21
Chapter 8	Messages	23
8.1	Error Messages.....	23
8.2	Warning Messages	32
8.3	Information Messages	33
Chapter 9	Notes	35

List of Figures

Figure 3-1	Overview of MCU Driver Generation Tool	13
Figure 3-2	Generator Concept Flow Chart.....	14

List of Tables

Table 5-1	Output Files Description	17
Table 8-1	Parameters and Container related to error ERR101004	23
Table 8-2	Parameters and containers related to error ERR101005	26
Table 8-3	Parameter and Container related to error ERR101017	27
Table 8-4	Parameters and Container related to error ERR101026	28
Table 8-5	Parameters and Container related to error ERR101032	29
Table 8-6	Parameters and Containers related to error ERR101041	30
Table 8-7	Parameters and Container related to error ERR101042	31

Chapter 1 Introduction

The MCU Driver component provides services for basic microcontroller initialization, Error Control Module (ECM), reset and microcontroller specific functions required from other SPAL components.

The MCU Driver Component comprises of two sections i.e., Embedded Software and Generation Tool to achieve scalability and configurability.

The document describes the features of the MCU Driver Generation Tool. MCU Driver Generation Tool is a command line tool that extracts information from ECU Configuration Description File, BSWMDT File and generates MCU Driver C source and C header files (Mcu_PBcfg.c, Mcu_Reg.h, Mcu_Cbk.h and Mcu_Cfg.h).

1.1. Document Overview

This user manual is organized as given in the table below:

Section	Contents
Section 1 (Introduction)	Provides an introduction to the document and explains how information is organized in this manual.
Section 2 (Reference)	Provides a list of documents referred while developing this document.
Section 3 (MCU Driver Generation Tool Overview)	Provides the MCU Driver Generation Tool Overview.
Section 4 (Input Files)	Provides information about ECU Configuration Description File.
Section 5 (Output Files)	Explains the output files that are generated by the MCU Driver Generation Tool.
Section 6 (Precautions)	Contains precautions to be taken during configuration of ECU Configuration Description File.
Section 7 (User Configuration Validation)	Describes about user configuration validation done by the MCU Driver Generation Tool.
Section 8 (Messages)	Describes all the Error/Warning/Information messages of R4.0.3 which helps the user to understand the probable reason for the same.
Section 9 (Notes)	Provides notes to help the user to understand this document better.

Chapter 2 Reference

2.1. Reference Documents

The following table lists the documents referred to develop this document:

Sl. No	Title	Version
1.	<u>Autosar R4.0</u> AUTOSAR_SWS_MCUDriver.pdf	3.2.0
2.	<u>P1x Parameter Definition File</u> R403_MCU_P1M_04_05.arxml	1.1.8
3.	<u>P1x Parameter Definition File</u> R403_MCU_P1M_10_to_15_18_to_23.arxml	1.0.5

2.2. Trademark Notice

Microsoft and Windows are trademarks/registered trademarks of Microsoft Corporation.

Chapter 3 MCU Driver Generation Tool Overview

MCU Driver Generation Tool overview is shown below.

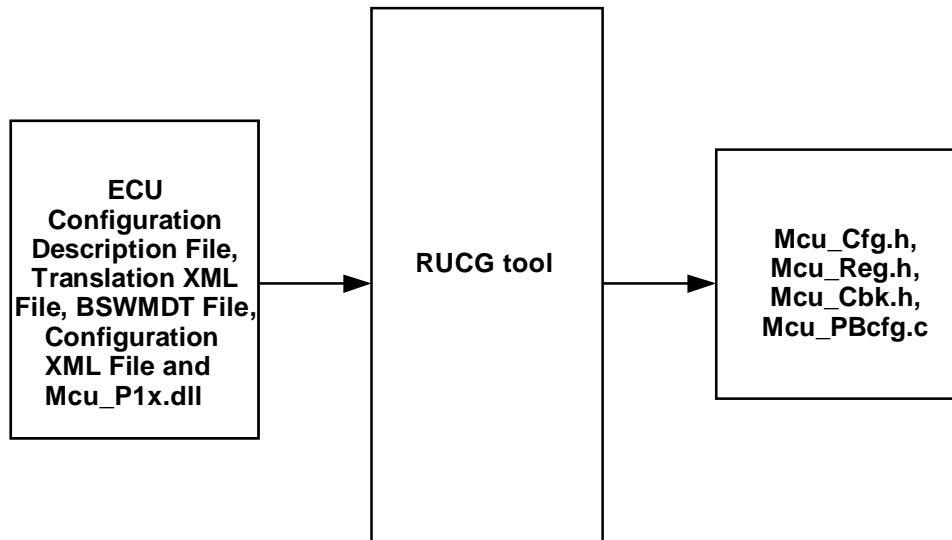


Figure 3-1 Overview of MCU Driver Generation Tool

Renesas Unified Code Generator (RUCG) tool shall be used for MCU driver configuration generation.

MCU Driver Generation Tool is a command line tool that extracts, analyzes the configuration details provided in the input file and validates correctness of the data and provides scalability and configurability for MCU Driver module. It accepts ECU Configuration Description File(s), Translation XML File, BSWMDT File and Configuration XML File as input and displays appropriate context sensitive error messages for wrong input and exits. Tool creates the Log file (Mcu.log) that contains the list of Error/Warning/Information messages in the output directory.

For the error free input file, the tool generates the following output files: Mcu_Cfg.h, Mcu_Reg.h, Mcu_Cbk.h and Mcu_PBcfg.c.

Mcu_Cfg.h, Mcu_Reg.h and Mcu_Cbk.h will be compiled and linked with MCU Driver Module. Mcu_PBcfg.c will be compiled and linked separately from the other C Source files and placed in flash.

ECU Configuration Description File can be created or edited using ECU Configuration Editor.

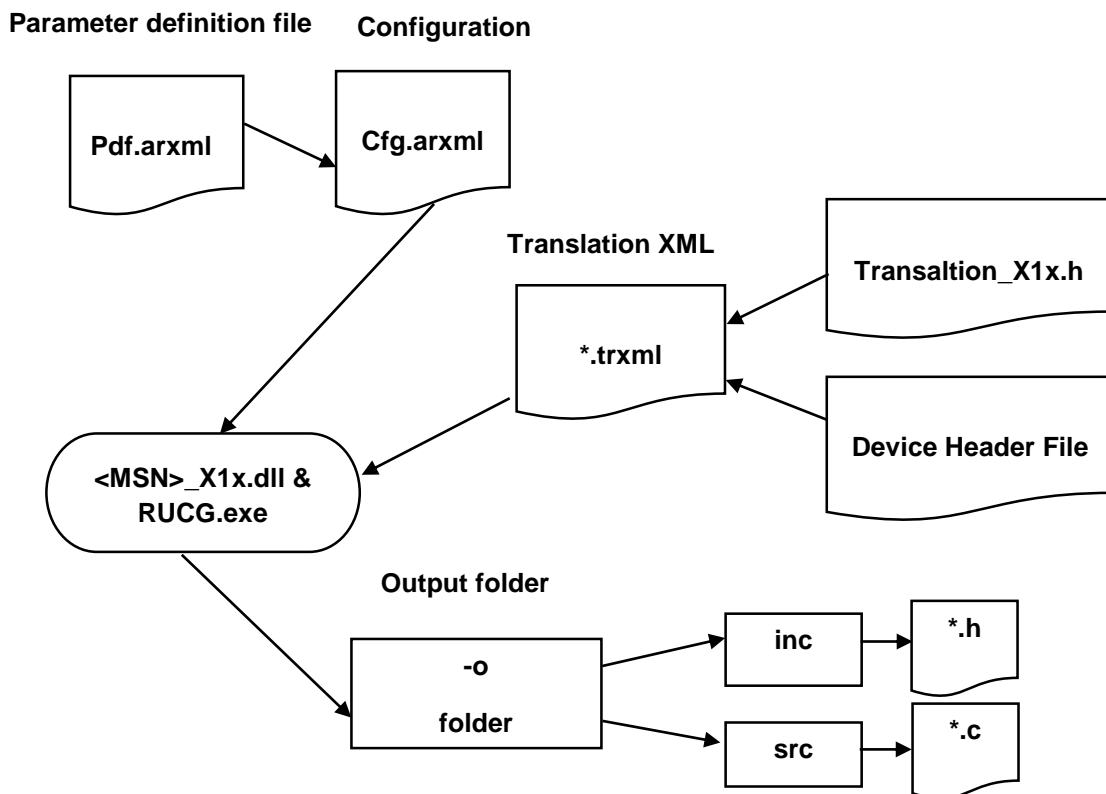


Figure 3-2 Generator Concept Flow Chart

Remark

- In case of errors the generation tool returns a 1, in case of no errors the generation tool returns a 0.
- MCU Driver Generation Tool uses “Common Published Information” from MCU module specific BSWMDT File. MCU module specific BSWMDT File should not be updated manually since it is “Static Configuration” file.

Chapter 4 Input Files

RUCG Tool accepts ECU Configuration Description File(s), Translation XML File, BSWMDT File Configuration XML File and Mcu_P1x.dll as input. MCU Driver Generation Tool needs information about MCU Driver module. Hence ECU Configuration Description File should contain configuration of MCU Driver module. Generation Tool ignores any other AUTOSAR component configured in the ECU Configuration Description File. ECU Configuration Description File can be generated using configuration editor.

ECU Configuration Description File must comply with AUTOSAR standard ECU Configuration Description File format.

Remark The detailed explanation about the parameters and containers are found in Parameter Definition File mentioned in Reference Documents section.

Chapter 5 Output Files

MCU Driver Generation Tool generates configuration details in C Header and C Source files Mcu_Cfg.h, Mcu_Reg.h, Mcu_Cbk.h and Mcu_PBcfg.c.

The content of each output file is given in the table below:

Table 5-1 Output Files Description

Output File	Details
Mcu_Cfg.h	This file contains pre-compile time parameters.
Mcu_Reg.h	This file contains the definitions for addresses of the hardware registers used in the MCU Driver Module.
Mcu_Cbk.h	This file contains callback function prototype declarations to be used by application.
Mcu_PBcfg.c	This file contains post-build configuration data.

Remark Output files generated by MCU Driver Generation Tool should not be modified or edited manually.

Chapter 6 Precautions

- ECU Configuration Description File and BSWMDT File must comply with AUTOSAR standard for R4.0.3 ECU Configuration Description File and BSWMDT File respectively.
- The input file must contain MCU Driver and DEM component related configuration.
- Default Translation XML File (Mcu_P1x.trxml) should be present in same location of Mcu_P1x.dll and RUCG.exe when the variant specific trxml file is not given as input in command line.
- Default Configuration XML File (Mcu_P1x.cfgxml) must be present in same location of Mcu_P1x.dll.
- If Translation XML File is not provided on the command line, Mcu_P1x.trxml which is present in same location of Mcu_P1x.dll is considered as 'default' Translation XML File.
- If Configuration XML File is not provided on the command line, Mcu_P1x.cfgxml which is present in same location of Mcu_P1x.dll is considered as 'default' Configuration XML File.
- Translation XML File should contain the file extension '.trxml'.
- Configuration XML File should contain the file extension '.cfgxml'.
- All the function names and the string values configured should follow C syntax for variables. It can only contain alphanumeric characters and "_". It should start with an alphabet.
- If the output files generated by MCU Driver Generation Tool are modified externally, then they may not produce the expected results or may lead to error/warning/Information messages.
- Short Name for a container should be unique within a name space.
- An error free ECU Configuration Description File generated from configuration editor has to be provided as input to the MCU Driver Generation Tool. Otherwise Tool may not produce the expected results or may lead to errors/warnings/information messages.
- User has to make sure that the respective device specific configuration file is used. Otherwise Tool may not produce the expected results or may lead to errors/warnings/information messages.
- The description file should always be generated using AUTOSAR specified configuration editor and it should not be edited manually.
- There is a limitation to the number of instances of the generator tools running in parallel. Up to 15 instances of the generator tool will run in parallel without any problem.

Remark Please refer the MCU Component User Manual for deviations from AUTOSAR specifications, if any.

Chapter 7 User Configuration Validation

This section provides help to analyze the error, warning and information messages displayed during the execution of MCU Driver Generation Tool. It ensures conformance of input file with syntax and semantics. It also performs validation on the input file for correctness of the data.

For more details on list of Error/Warning/Information messages that are displayed as a result of input file(s) validation, refer Chapter 8 “*Messages*”.

The Generation Tool displays error or warning or information when the user has configured incorrect inputs. The format of Error/Warning/Information message is as shown below.

- ERR/WRN/INF<mid><xxx>: <Error/Warning/Information Message>.where,
<mid>: 101 - MCU Driver Module Id (101) for user configuration checks.
000 - for command line checks.
<xxx>: 001-999 - Message Id.
- File Name: Name of the file in which the error has occurred.
- Path: Absolute path of the container in which the parameter is present.

‘File Name’ and ‘Path’ need not be present for all Error/Warning/Information messages.

Chapter 8 Messages

The messages help to identify the syntax or semantic errors in the ECU Configuration Description File. Hence it ensures validity and correctness of the information available in the ECU Configuration Description File.

The following section gives the list of error, warning and information messages displayed by the Generation Tool.

8.1 Error Messages

ERR101001: Number of fields is not same for the entity 'Structure Name'.

This error occurs, if the number of fields is not same in the structure that is to be generated in the output file.

ERR101002: Field 'Field Name' is empty in the entity 'Structure Name'.

This error occurs, if the structure fields that are to be generated in the output file are empty.

ERR101003: 'MCU Driver' or 'DEM Driver' Component is not present in the input file(s).

This error occurs, if MCU Driver or DEM Driver component is not present in the input ECU Configuration Description File(s).

ERR101004: The parameter 'parameter name' in the container 'container name' should be configured.

This error occurs, if any of the mandatory configuration parameter(s) mentioned below is (are) not configured in ECU Configuration Description File.

The list of mandatory parameters with respect to container is listed below:

Table 8-1 Parameters and Container related to error ERR101004

Parameter Name	Container Name
McuVersionCheckExternalModules	McuGeneralConfiguration
McuDevErrorDetect	
McuGetRamStateApi	
McuInitClock	
McuNoPll	
McuPerformResetApi	
McuVersionInfoApi	
McuCriticalSectionProtection	
McuSwResetCallApi	
McuEcmDelayTimerOverflowValue	

Parameter Name	Container Name
McuEcmErrorOutputMode	McuGeneralConfiguration
McuEcmErrorOutTimer	
McuRamSectorSetting	
McuDeviceName	
McuClm0Operation	
McuClm0MonitoringClockAccuracy	
McuClm0SamplingClockAccuracy	
McuClm1Operation	
McuClm1MonitoringClockAccuracy	
McuClm1SamplingClockAccuracy	
McuClm2Operation	
McuClm2MonitoringClockAccuracy	
McuClm2SamplingClockAccuracy	
McuClm3Operation	
McuClm3MonitoringClockAccuracy	
McuClm3SamplingClockAccuracy	
McuCvmSelfDiagnosticTest	
McuClma0SelfDiagnosticTest	
McuClma1SelfDiagnosticTest	
McuClma2SelfDiagnosticTest	
McuClma3SelfDiagnosticTest	
McuEcmSelfDiagnosticTest	
McuLoopCount	
McuLockStepSelfDiagnosticTest	
McuStartUpSWResetTest	
McuStartUpECMResetTest	
McuInterruptConsistencyCheck	
McuWriteVerify	
McuClockSrcFailureNotification	McuModuleConfiguration
McuLviDetectionLevel	
McuLviResetMask	
McuNumberOfMcuModes	
McuRamSectors	
McuCvmOutMaskFbist	
McuCvmOutMaskDiag	
McuCvmOutputFilter	
McuCvmDiagLockBit	
McuCvmResetEnable	
McuClockSettingId	McuClockSettingConfig
McuMainOsciFrequency	
McuCpuMainSysClk	
McuUnitName	
McuUnitName	McuHighspeedPeriClk
McuPeripheralClock	
McuUnitName	McuLowspeedPeriClk
McuPeripheralClock	

Parameter Name	Container Name
McuWdtCounterDivider	McuWdtacounterClk
McuUnitName	
McuPeripheralClock	
McuExternalClk0SourceSel	McuExternalClkOutSetting
McuExternalClk0DividerSel	
McuExternalClock0	
McuExternalClk1SourceSel	
McuExternalClk1DividerSel	
McuExternalClock1	
McuDivClockSel	McuAdcClk
McuUnitName	
McuPeripheralClock	
McuEcmErrorMaskableInterrupt	McuEcmErrorSource0 to McuEcmErrorSource42 (except McuEcmErrorSource2, McuEcmErrorSource3, McuEcmErrorSource13, McuEcmErrorSource25 and McuEcmErrorSource35)
McuEcmErrorNonMaskableInterrupt	
McuEcmErrorInternalReset	
McuEcmErrorNMIDelayTimer	
McuEcmErrorMIDelayTimer	
McuEcmErrorOutputMask	
McuEcmErrorInternalReset	McuEcmErrorSource129
McuEcmErrorOutputMask	
MCU_E_CLOCK_FAILURE	McuDemEventParameterRefs
MCU_E_WRITE_TIMEOUT_FAILURE	
McuModeType	McuModeSettingConf
McuMode	
McuRamDefaultValue	McuRamSectorSettingConf
McuRamSectionBaseAddress	
McuRamSectionSize	
McuRamTypeSel	
McuResetReason	McuRstRsnConfPowOnClr
	McuRstRsnConfPinRst
	McuRstRsnConfSwRst
	McuRstRsnConfWdta
	McuRstRsnConfLockStepCompare
	McuRstRsnConfClkMonUpLimErMosc
	McuRstRsnConfClkMonLwrLimErMosc
	McuRstRsnConfClkMonUpLimErWdt
	McuRstRsnConfClkMonLwrLimErWdt
	McuRstRsnConfClkMonUpLimErPclk
	McuRstRsnConfClkMonLwrLimErPclk
	McuRstRsnConfClkMonUpLimErPe1
	McuRstRsnConfClkMonLwrLimErPe1
	McuRstRsnConfLRamEcc2AddPrt
	McuRstRsnConfInstCacheRamEcc2
	McuRstRsnConfCodeFlsEcc2AddPrt
	McuRstRsnConfDataFlsEcc2
	McuRstRsnConfDtsRamEcc2
	McuRstRsnConfCsihRamEcc2

Parameter Name	Container Name
McuResetReason	McuRstRsnConfCanRamEcc2
	McuRstRsnConfFrRamEcc2
	McuRstRsnConfFlsProgMode
	McuRstRsnConfTestMode
	McuRstRsnConfSingChipModInact
	McuRstRsnConfPeGuard
	McuRstRsnConfPBusGuard
	McuRstRsnConfSarAdcPrty
	McuRstRsnConfBusDataPrty
	McuRstRsnConfEcmCompare
	McuRstRsnConfLvi
	McuRstRsnConfTempSensor
	McuRstRsnConfDmaTrans
	McuRstRsnConfDmaViol
	McuRstRsnConfLRamEcc1
	McuRstRsnConfCodeFlsEcc1
	McuRstRsnConfDataFlsEcc1
	McuRstRsnConfDtsRamEcc1
	McuRstRsnConfPeriRamEcc1
	McuRstRsnConfBistCodeEcc1
	McuRstRsnConfBistCodeEcc2
	McuRstRsnConfFaci
	McuRstRsnConfEcmDelayOverFlow
	McuRstRsnConfRstUndefined
	McuRstRsnConfRstUnknown
	McuRstRsnConfCvmRst

ERR101005: The value for parameter 'parameter name' present in the container 'container name' should be same across multiple configuration set 'McuModuleConfiguration'.

This error occurs, if the value configured for the following parameter present in the respective container is not same across multiple configuration set McuModuleConfiguration. The validation for McuWdtCounterDivider parameter will be carried out only if McuCIma2operation is TRUE.

Table 8-2 Parameters and containers related to error ERR101005

Parameter	Container
McuMainOsciFrequency	McuClockSettingConfig
McuWdtCounterDivider	McuWdtacounterClk

ERR101006: The value of the parameter 'McuEcmErrorMaskableInterrupt' should configure as <true> since the 'McuMiNotification' parameter is configured in container <Configured ecm error source container>.

This error occurs, if the value of the parameter McuEcmErrorMaskableInterrupt is not configure as true, since the

McuMiNotification parameter is configured in container <Configured ecm error source container>.

ERR101007: The configured value in 'McuPeripheralClock' in container 'McuWdtacounterClk' should be equal to <8000000/configured value of McuWdtCounterDivider parameter>.

This error occurs, if the configured value in McuPeripheralClock in container McuWdtacounterClk is not equal to <8000000/configured value of McuWdtCounterDivider parameter>.

ERR101008: The configured value in 'McuExternalClockX' in container 'McuExternalClkOutSetting' should be equal to <McuExternalClkXSourceSel/McuExternalClkXDividerSel>.

This error occurs, if the configured value in McuExternalClockX in container McuExternalClkOutSetting is not equal to <McuExternalClkXSourceSel/McuExternalClkXDividerSel>.

Remark Where X=0 or 1

ERR101009: The value of the parameter 'McuEcmErrorNonMaskableInterrupt' should configure as <true> since the 'McuNmiNotification' parameter is configured in container <Configured ecm error source container>.

This error occurs, if the value for parameter McuEcmErrorNonMaskableInterrupt is not configure as true, since the McuNmiNotification parameter is configured in container <Configured ecm error source container>.

ERR101017: The value for parameter 'parameter name' configured in container 'container name' should be <expected value of parameter>. In general per configuration set, the value of 'parameter name' parameter should start with <0> and should be sequential without any gaps.

This error occurs, if the value configured for the following parameter in the respective container does not start with 0 and not sequential in multiple configurations set container McuModuleConfiguration.

Table 8-3 Parameter and Container related to error ERR101017

Parameter	Container
McuClockSettingId	McuClockSettingConfig

Remark As issue raised in Bugzilla: 54536 Autosar parameter McuClockSettingId in McuClockSettingConfig container range is changed to 0 to 255 instead of 1 to 255.

ERR101020: The value for parameter 'McuRamSectionBaseAddress' in container 'McuRamSectorSettingConf' should be in the range.

This error occurs, if value for parameter McuRamSectionBaseAddress in container McuRamSectorSettingConf is not in the range of <configured value for McuRamTypeSel>.

ERR101022: Atleast one 'McuRamSectorSettingConf' container should be configured. Since 'McuRamSectorSetting' parameter in 'McuGeneralConfiguration' container is configured as <true>.

This error occurs, if no McuRamSectorSettingConf container is configured and parameter McuRamSectorSetting in McuGeneralConfiguration container is configured as <true>.

ERR101026: The reference path <McuDemEventParameterRefs> provided for the parameter 'Parameter Name' within the container 'Container Name' is incorrect.

This error occurs, if the reference path <McuDemEventParameterRefs> provided for the following parameters in McuDemEventParameterRefs container is not correct.

Table 8-4 Parameters and Container related to error ERR101026

Parameter	Container
MCU_E_CLOCK_FAILURE	McuDemEventParameterRefs
MCU_E_WRITE_TIMEOUT_FAILURE	
MCU_E_CVM_SELFDIAG_FAILURE	
MCU_E_CLM_SELFDIAG_FAILURE	
MCU_E_ECM_SELFDIAG_FAILURE	
MCU_E_LOCKSTEP_SELFDIAG_FAILURE	
MCU_E_RESETCONTROLLER_STARTUP_FAILURE	
MCU_E_INT_INCONSISTENT	

ERR101027: The short name of the container 'McuClockSettingConfig' should be same for clock having 'McuClockSettingId' <value of McuClockSettingId> across multiple configuration sets.

This error occurs, if the short name of the container McuClockSettingConfig is not same for clock having same McuClockSettingId across multiple configuration sets.

ERR101029: The value for parameter 'McuLviResetMask' present in container 'McuModuleConfiguration' should be same across multiple configurations set.

This error occurs, if the value for parameter McuLviResetMask present in container McuModuleConfiguration is not same across multiple configurations set.

ERR101031: The value for parameter 'McuInitClock' present in container 'McuGeneralConfiguration' should not be configured as <false>.

This error occurs, if the value for parameter McuInitClock present in container McuGeneralConfiguration is configured as false.

ERR101032: The value for the parameter 'Parameter Name' present in the container 'Container Name' should be same across multiple configuration set 'McuModuleConfiguration'.

This error occurs, if the value configured for the following parameters in McuDemEventParameterRefs container is not same across multiple configuration set container McuModuleConfiguration.

Table 8-5 Parameters and Container related to error ERR101032

Parameter	Container
MCU_E_CLOCK_FAILURE	McuDemEventParameterRefs
MCU_E_WRITE_TIMEOUT_FAILURE	
MCU_E_CVM_SELFDIAG_FAILURE	
MCU_E_CLM_SELFDIAG_FAILURE	
MCU_E_ECM_SELFDIAG_FAILURE	
MCU_E_LOCKSTEP_SELFDIAG_FAILURE	
MCU_E_RESETCONTROLLER_STARTUP_FAILURE	
MCU_E_INT_INCONSISTENT	

ERR101035: The value for parameter 'McuClockSettingId' present in container 'McuClockSettingConfig' should be same across multiple configurations set container 'McuModuleConfiguration'.

This error occurs, if the value for parameter McuClockSettingId present in container McuClockSettingConfig does not same across multiple configurations set container McuModuleConfiguration.

ERR101036: Parameter 'MCU_E_CVM_SELFDIAG_FAILURE' should be configured, since parameter 'McuCvmSelfDiagnosticTest' inside container 'McuGeneralConfiguration' is configured as <true>.

This error occurs, if parameter 'MCU_E_CVM_SELFDIAG_FAILURE' is not configured, since parameter 'McuCvmSelfDiagnosticTest' inside container 'McuGeneralConfiguration' is configured as true.

ERR101037: Parameter 'MCU_E_CLM_SELFDIAG_FAILURE' should be configured, since one or more of parameters 'McuClma0SelfDiagnosticTest', 'McuClma1SelfDiagnosticTest', 'McuClma2SelfDiagnosticTest' and 'McuClma3SelfDiagnosticTest' inside container 'McuGeneralConfiguration' is configured as <true>.

This error occurs, if parameter 'MCU_E_CLM_SELFDIAG_FAILURE' is not configured, since one or more of parameters 'McuClma0SelfDiagnosticTest', 'McuClma1SelfDiagnosticTest', 'McuClma2SelfDiagnosticTest' and 'McuClma3SelfDiagnosticTest' inside container 'McuGeneralConfiguration' is configured as true.

ERR101038: Parameter 'MCU_E_ECM_SELFDIAG_FAILURE' should be configured, since parameter 'McuEcmSelfDiagnosticTest' inside container 'McuGeneralConfiguration' is configured as <true>.

This error occurs, if parameter 'MCU_E_ECM_SELFDIAG_FAILURE' is not configured, since parameter 'McuEcmSelfDiagnosticTest' inside container 'McuGeneralConfiguration' is configured as true.

ERR101039: Parameter 'MCU_E_LOCKSTEP_SELFDIAG_FAILURE' should be configured, since parameter 'McuLockStepSelfDiagnosticTest' inside container 'McuGeneralConfiguration' is configured as <true>.

This error occurs, if parameter 'MCU_E_LOCKSTEP_SELFDIAG_FAILURE' is not configured, since parameter 'McuLockStepSelfDiagnosticTest' inside container 'McuGeneralConfiguration' is configured as true.

ERR101040: The value for parameters 'McuEcmErrorNMIDelayTimer' and 'McuEcmErrorMIDelayTimer' should not be configured as <true> for containers 'McuEcmErrorSource4 to McuEcmErrorSource11'.

This error occurs, if the value for parameter 'McuEcmErrorNMIDelayTimer' and 'McuEcmErrorMIDelayTimer' are configured as true for containers 'McuEcmErrorSource4 to McuEcmErrorSource11'.

ERR101041: The value for parameter 'Parameter Name' present in container 'McuGeneralConfiguration' should be configured as <true> since parameter 'Parameter Name' is configured as <true> ".

This error occurs, if the value configured for parameter on left column of following table present in container 'McuGeneralConfiguration' is true but value configured for parameter on right column of following table is configured as false.

Table 8-6 Parameters and Containers related to error ERR101041

The Parameter which is configured as <true>	Parameter that should be configured as <true>
McuClma0SelfDiagnosticTest	McuClm0Operation
McuClma1SelfDiagnosticTest	McuClm1Operation
McuClma2SelfDiagnosticTest	McuClm2Operation
McuClma3SelfDiagnosticTest	McuClm3Operation

ERR101042: The value for the parameters 'parameter name' and 'parameter name' present in the container 'McuDemEventParameterRefs' should be unique.

This error occurs, if the value configured for the following parameters in 'McuDemEventParameterRefs' container is not unique.

Table 8-7 Parameters and Container related to error ERR101042

Parameter	Container
MCU_E_CLOCK_FAILURE	McuDemEventParameterRefs
MCU_E_WRITE_TIMEOUT_FAILURE	
MCU_E_CVM_SELFDIAG_FAILURE	
MCU_E_CLM_SELFDIAG_FAILURE	
MCU_E_ECM_SELFDIAG_FAILURE	
MCU_E_LOCKSTEP_SELFDIAG_FAILURE	
MCU_E_RESETCONTROLLER_STARTUP_FAILURE	
MCU_E_INT_INCONSISTENT	

ERR101043: At least one 'McuWdtacounterClk' container should be configured. Since 'McuCln2Operation' parameter in 'McuGeneralConfiguration' container is configured as <true>.

This error occurs, if container McuWdtacounterClk is not configured since parameter McuCln2Operation of container McuGeneralConfiguration is configured as true.

ERR101044: The configured value for parameter 'McuExternalClockX' in container 'McuExternalClkOutSetting' should be equal to 0.

This error occurs, if the value configured for the parameter McuExternalClockX in container McuExternalClkOutSetting is not equal to 0.

Remark Where X=0 or 1

ERR101045: The value for parameters 'McuEcmErrorMaskableInterrupt' or 'McuEcmErrorNonMaskableInterrupt' should be <true> in all container McuEcmErrorSource<12 and 34> since 'McuGetRamStateApi' is configured as <true> in 'McuGeneralConfiguration' container.

This error occurs, if the value configured for the parameters McuEcmErrorMaskableInterrupt or should be <true> in all containers McuEcmErrorSource<12 and 34> when 'McuGetRamStateApi' is configured as <true> in 'McuGeneralConfiguration' container.

ERR101046: The order of container 'McuRamSectorSettingConf' configuration and their short names should be same across multiple configuration sets.

This error occurs, if the order of container 'McuRamSectorSettingConf' configuration and their short are not same across multiple configuration

ERR101047: The number of 'McuRamSectorSettingConf' containers should be same across multiple configuration sets.

This error occurs, if the number of 'McuRamSectorSettingConf' containers are not same across multiple configuration sets.

ERR101048: The configured value for 'McuPeripheralClock' in container 'McuAdcClk' should be equal to <20000000, 40000000> since parameter

'McuDivClockSel' is configured as <CLK_LSB, CLK_LSB_BY_2>.

This error occurs, if there is a mismatch in the setting of parameters 'McuPeripheralClock' and 'McuDivClockSel' in 'McuAdcClk' container.

ERR101049: Parameter 'MCU_E_RESETPROCESSOR_STARTUP_FAILURE' should be configured, since parameter 'McuStartUpSWResetTest' inside container 'McuGeneralConfiguration' is configured as <true>.

This error occurs, if parameter 'MCU_E_RESETPROCESSOR_STARTUP_FAILURE' is not configured, since parameter 'McuStartUpSWResetTest' inside container 'McuGeneralConfiguration' is configured as true.

ERR101050: Parameter 'MCU_E_INT_INCONSISTENT' should be configured, since parameter 'McuInterruptConsistencyCheck' inside container 'McuGeneralConfiguration' is configured as <true>.

This error occurs, if parameter 'MCU_E_INT_INCONSISTENT' is not configured, since parameter 'McuInterruptConsistencyCheck' inside container 'McuGeneralConfiguration' is configured as true.

ERR101051: Parameter 'Mcu_UseWVErrorInterface' should be configured, since parameter 'McuWriteVerify' inside container 'McuGeneralConfiguration' is configured as <true>.

This error occurs, if parameter Mcu_UseWVErrorInterface is not configured, when parameter McuWriteVerify inside McuGeneralConfiguration is configured as true.

ERR101052: Parameter 'McuWVErrorNotification' should be configured, since parameter 'Mcu_UseWVErrorInterface' inside container 'McuGeneralConfiguration' is configured as <true>.

This error occurs, if parameter McuWVErrorNotification is not configured, when parameter 'Mcu_UseWVErrorInterface' inside McuGeneralConfiguration is configured as true.

8.2 Warning Messages

WRN101001: The value of the parameters 'McuEcmErrorNonMaskableInterrupt' and 'McuEcmErrorMaskableInterrupt' should not be <true> since the parameter 'McuEcmErrorInternalReset' of the container <configured Ecm error sources> is configured as <true>.

This warning occurs, if the value of the parameters McuEcmErrorNonMaskableInterrupt and McuEcmErrorMaskableInterrupt is <true> since the parameter McuEcmErrorInternalReset of the container <configured Ecm error sources> is configured as <true>.

WRN101002: The value of the parameter 'McuEcmErrorMaskableInterrupt' should not be <true> since the parameter 'McuEcmErrorNonMaskableInterrupt' of the container <configured Ecm error sources> is configured as <true>.

This warning occurs, if the value of the parameter McuEcmErrorMaskableInterrupt is <true> since the parameter McuEcmErrorNonMaskableInterrupt of the container <configured Ecm error sources> is configured as <true>.

WRN101003: The configured External Clock value for McuExternalClockx exceeds 20Mhz

This warning occurs, if the configured External Clock value for McuExternalClockx (x = 0 or 1) exceeds 20Mhz.

8.3 Information Messages

INF101001: The configured 'McuRamSectorSettingConf' container is not used. Since 'McuRamSectorSetting' parameter in 'McuGeneralConfiguration' container is configured as <false>.

This information occurs, if McuRamSectorSettingConf container is configured and parameter McuRamSectorSetting in McuGeneralConfiguration container is configured as <false>.

INF101002: The configured value for parameter 'McuExternalClockX' will be ignored if parameter 'McuExternalClkXSourceSel' is configured as 'MCU_NO_OUTPUT'.

This information occurs, if the configured value of parameter McuExternalClockX is ignored when parameter McuExternalClkXSourceSel is configured as MCU_NO_OUTPUT.

Remark Where X=0 or 1

INF101003: The parameter 'McuEcmErrorMIDelayTimer' / 'McuEcmErrorNMIDelayTimer' does not have any effect since the corresponding interrupt 'McuEcmErrorMaskableInterrupt' / 'McuEcmErrorNonMaskableInterrupt' is configured as <false> in container 'McuEcmErrorSource'.

This information occurs, if the parameter McuEcmErrorMIDelayTimer is configured when McuEcmErrorMaskableInterrupt is configured as false in same or the parameter McuEcmErrorNMIDelayTimer is configured when McuEcmErrorNonMaskableInterrupt is configured as false.

Chapter 9 Notes

“Generation Tool” and “Tool” terminologies are used interchangeably to refer MCU Driver Generation Tool.

Revision History

Sl.No.	Description	Version	Date
1	Initial Version	1.0.0	18-Oct-2013
2	<p>Following changes are made:</p> <ul style="list-style-type: none"> Error message ERR101004 is updated in section 8.1 to add the parameter McuRamSectorSetting, McuRamTypeSel, McuModeType and McuLockStepSelfDiagnosticTest and to remove the parameters MCU_E_CVM_SELFDIAG_FAILURE, MCU_E_CLM_SELFDIAG_FAILURE and MCU_E_ECM_SELFDIAG_FAILURE. Error messages ERR101020, ERR101022, ERR101036, ERR101037, ERR101038, ERR101039, ERR101040, ERR101041, ERR101042, ERR101043 and ERR101044 are added newly in section 8.1. Information message INF101001 and INF101002 is added newly in section 8.3. Error messages ERR101026 and ERR101032 are updated in section 8.1. 	1.0.1	15-Apr-2014
3	<p>Following changes are made:</p> <ul style="list-style-type: none"> Error message ERR101004 is updated in section 8.1. Reference Documents section is updated for adding Parameter Definition Files. Chapter 6 Precautions is updated. Remark of Chapter 4 Input Files is updated for PDF reference. Error messages ERR101045, ERR101046 and ERR101047 are added newly in section 8.1. Information message INF101003 is added newly in section 8.3. McuRstRsnConfCvmRst container is added in error message ERR101004 table. 	1.0.2	30-Oct-2014
4	<p>The following changes are made:</p> <ul style="list-style-type: none"> Pdf name and version are updated in Section 2.1 Updated version and copyright year. 	1.0.3	28-Apr-2015

Sl.No.	Description	Version	Date
5	<p>The following changes are made:</p> <ul style="list-style-type: none"> Figure 3-2 Generator Concept Flow Chart is added. Chapter 6 Precautions is updated. Table numbers are added for tables present in Chapter 8.1 Error Messages. In table 8.1 Parameters and Container related to error ERR101004, parameters of containers McuModuleConfiguration and McuAdcClk are updated. Added Error message ERR101048, ERR101049 and ERR101050. 	1.0.4	08-Jan-2016
6	<p>The following changes are made:</p> <ul style="list-style-type: none"> Error ERR101045 is updated. Warning WRN101003 is added. Copyright information is updated. 	1.0.5	25-Mar-2016
7	<p>The following changes are made:</p> <ul style="list-style-type: none"> Errors ERR101051, ERR101052 added in section 8.1. R number updated. ERR101005, ERR101049 description updated. McuCvmDiagLockBit added in McuModuleConfiguration container under table Table 8-1. 	1.0.6	28-Jun-2016
8	<p>Following changes are made;</p> <ul style="list-style-type: none"> Reference document version updated. 	1.0.7	06-Sep-2016

AUTOSAR MCAL R4.0.3 User's Manual
MCU Driver Component Ver.1.0.7
Generation Tool User's Manual

Publication Date: Rev.1.00, September 06, 2016

Published by: Renesas Electronics Corporation



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "http://www.renesas.com/" for the latest and detailed information.

Renesas Electronics America Inc.
2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.
Tel: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited
1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada
Tel: +1-905-898-5441, Fax: +1-905-898-3220

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: +44-1628-585-100, Fax: +44-1628-585-900

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

Renesas Electronics Taiwan Co., Ltd.
7F, No. 363 Fu Shing North Road Taipei, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
1 HarbourFront Avenue, #05-10, Keppel Bay Tower, Singapore 098632
Tel: +65-6213-0200, Fax: +65-6278-8001

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd.
11F., Samik Laved' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141

AUTOSAR MCAL R4.0.3 User's Manual