



# STM32F412

## Debug Out

BOOT0 should either be pulled up or pulled down  
NEVER Both  
Only populate one of these resistors

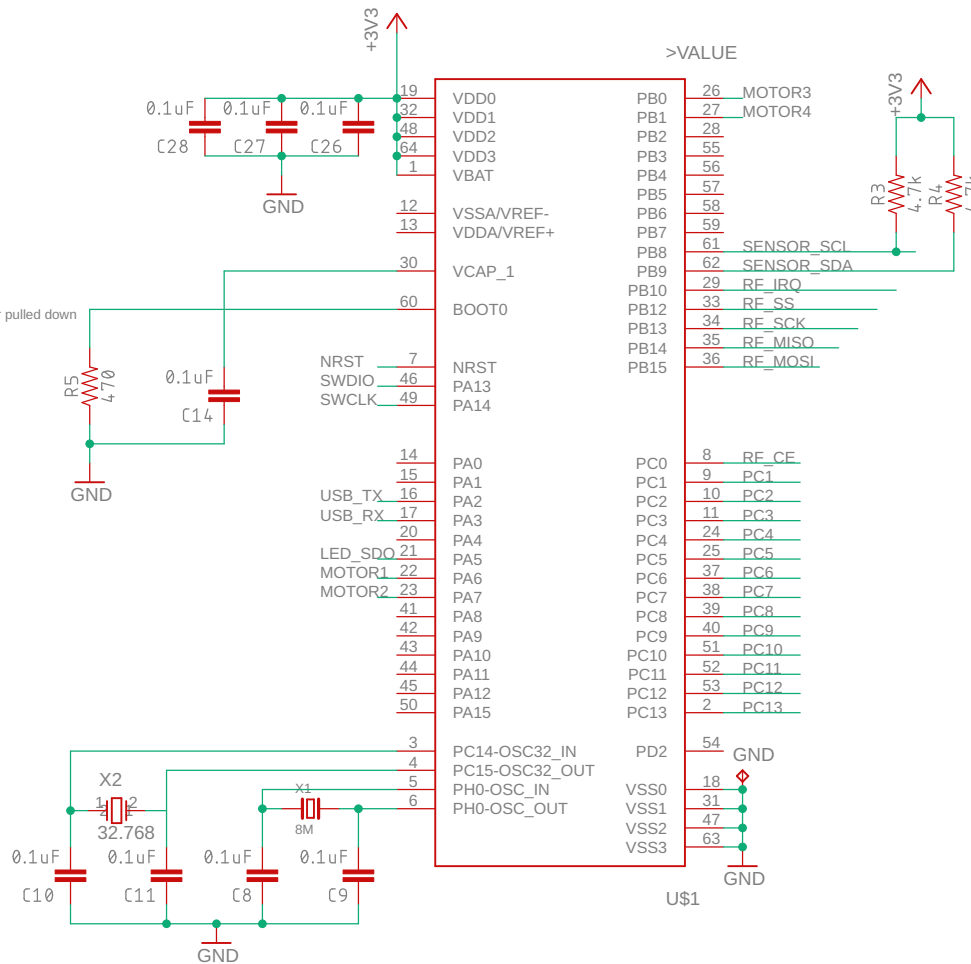


JTAG-10MINI



P1

## Breakout Pins

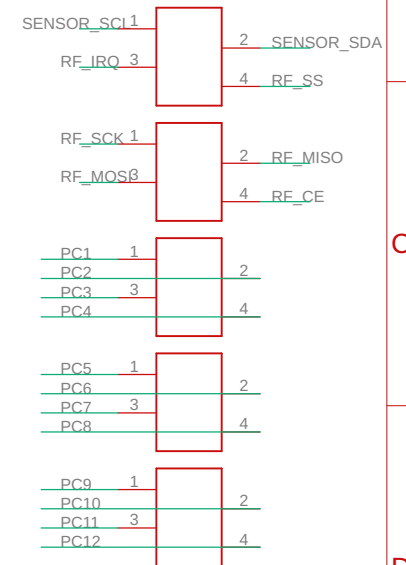


hedwig

10/28/20 12:22 PM

Sheet: 1/6

# NRF24L01 Radio

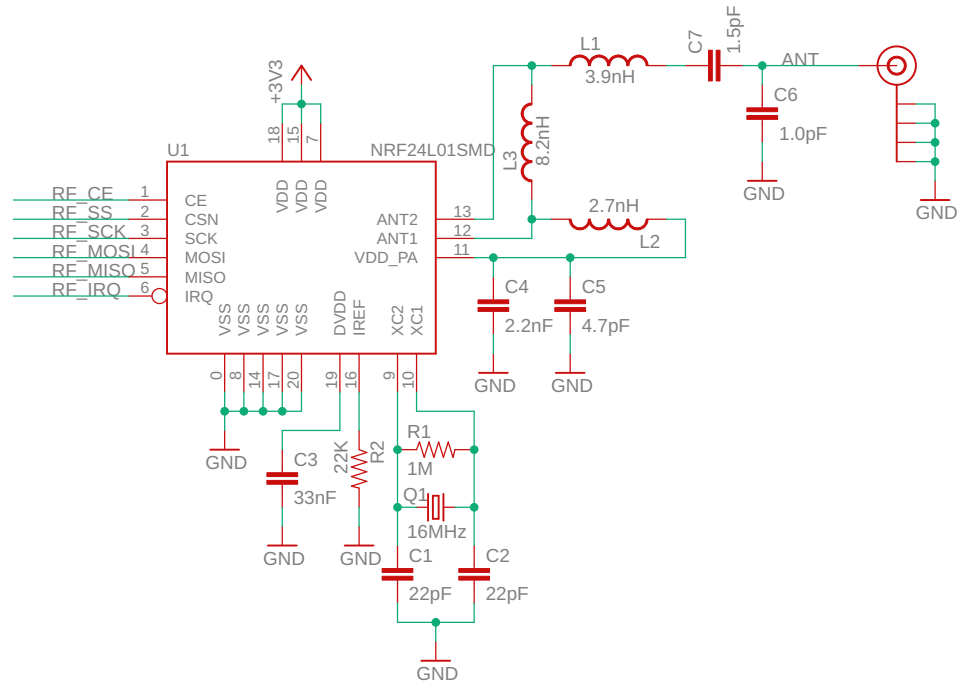


hedwig


10/28/20 12:22 PM

Sheet: 2/6


## IMU

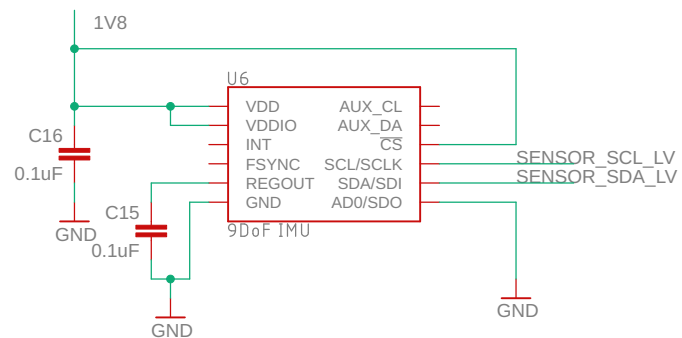

## Barometer

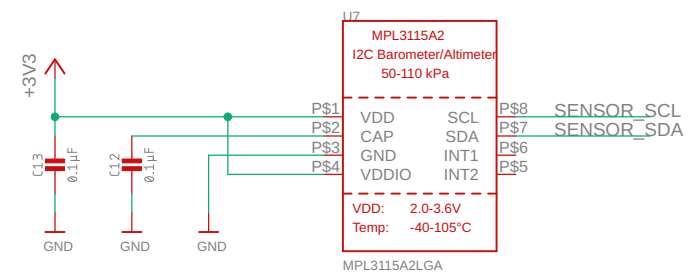

## IMU I2C Voltage Shifters

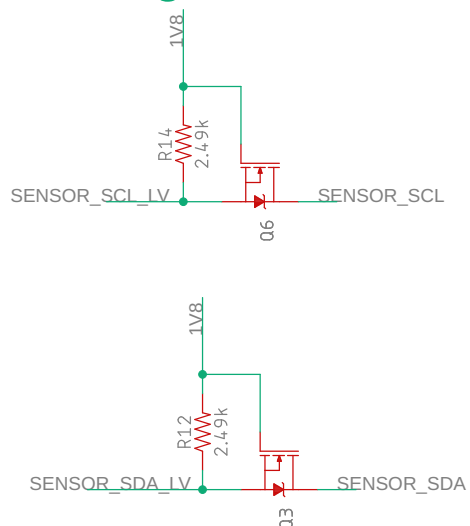


hedwig

10/28/20 12:22 PM

Sheet: 3/6

# USB C Connector and FTDI

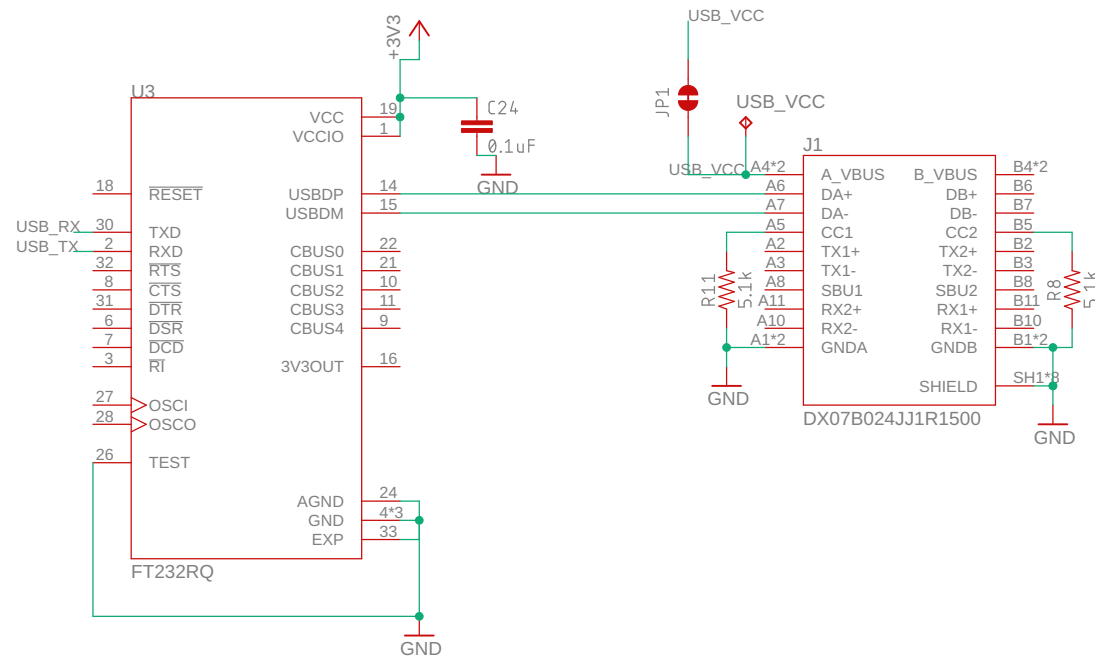


hedwig


10/28/20 12:22 PM

Sheet: 4/6

## Reset Button

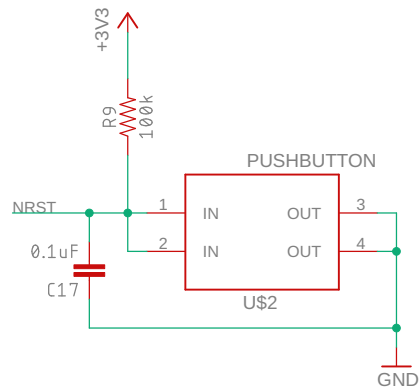

## LED Driver

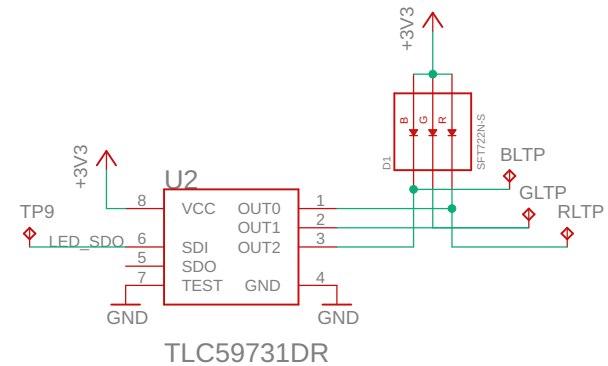


hedwig


10/28/20 12:22 PM

Sheet: 5/6


## Outputs and Input Selection

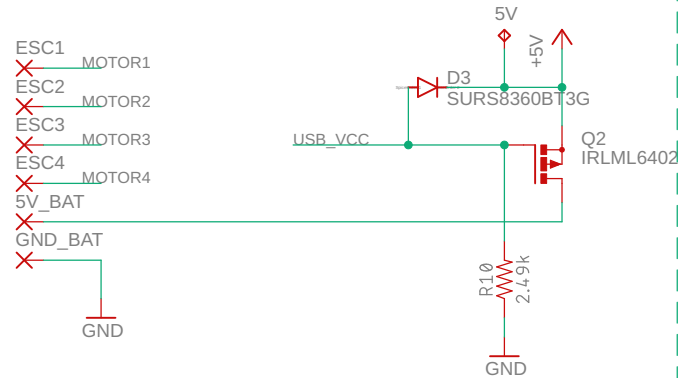

## 3.3V Power Supply

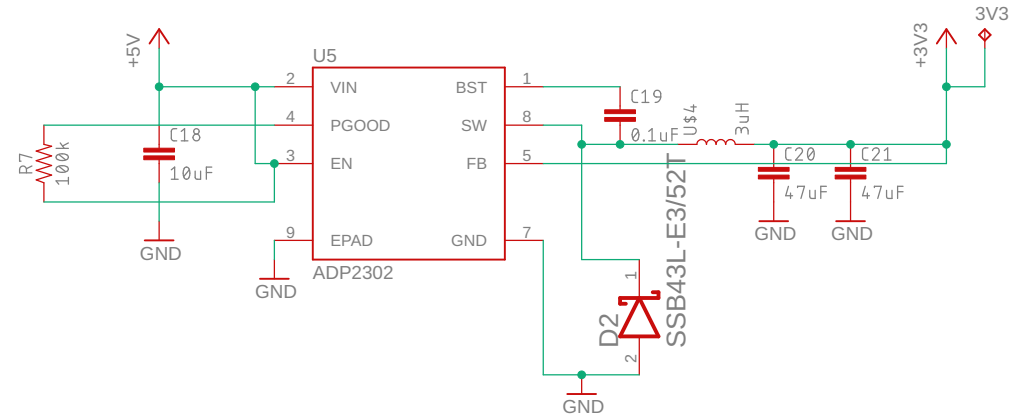

## 1.8V Power Supply

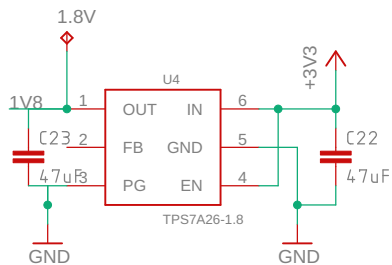

hedwig

10/28/20 12:22 PM

Sheet: 6/6