
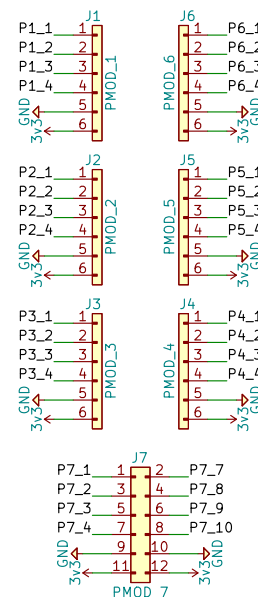
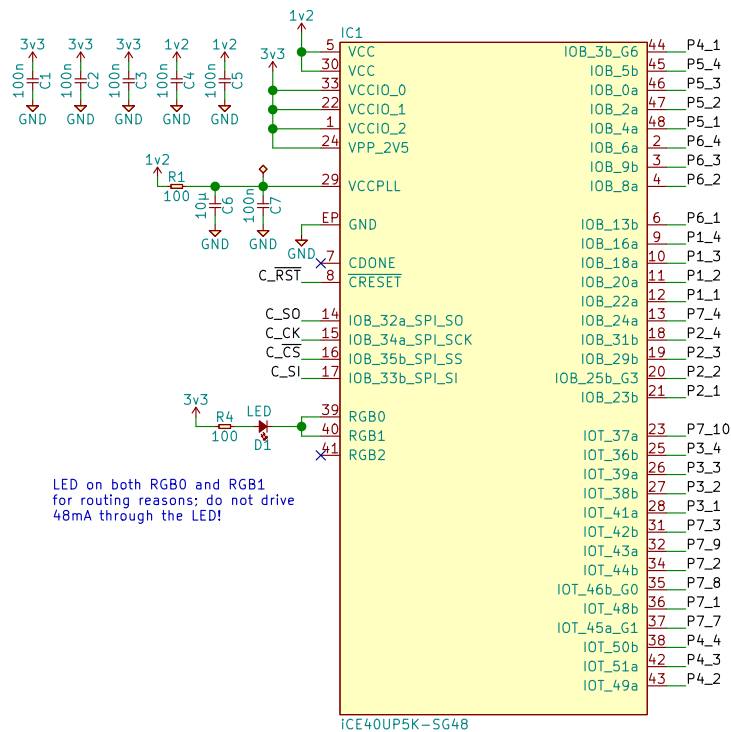


F\_CLK (PA8) and P1\_4 (PA9), and F\_IRQ (PB10) and P1\_3 (PA10) are connected by default but may be isolated by removing the OR jumper. Connection is required to feed clock into iCE40 or receive IRQ from iCE40.



Pin 35 is a PLL input, and cannot be used as a normal input if the PLL is otherwise used.

License: CC0  
Drawn by: AG

Sheet: /  
File: icepill.sch

**Title: iCE Pill**

Size: A4 Date: 2020-11-07  
KiCad E.D.A. kicad 5.1.6-c6e7f7d87ubuntu18.04.1

Rev: 1  
Id: 1/1