
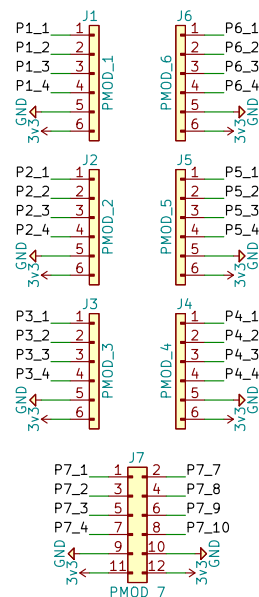
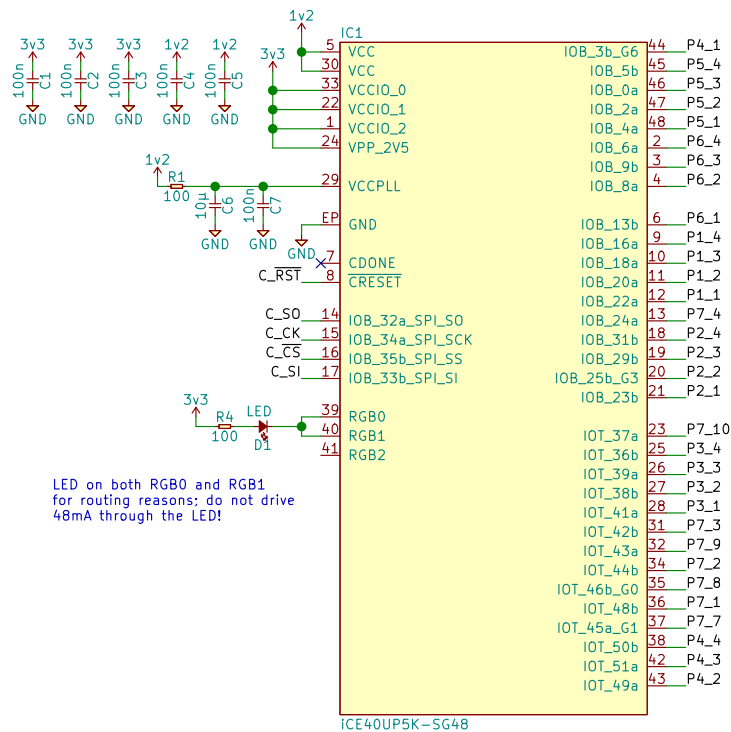
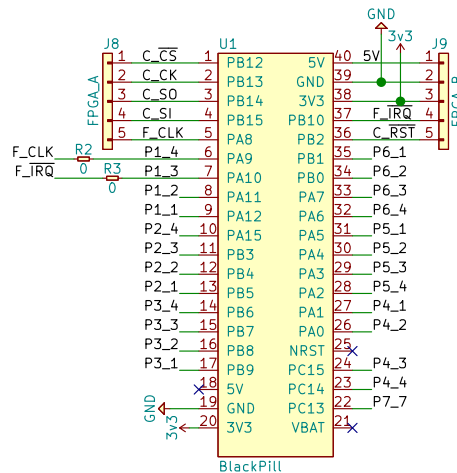


F_CLK (PA8) and P1_4 (PA9), and F_IRQ (PB10) and P1_3 (PA10) are connected by default but may be isolated by removing the OR jumper. Connection is required to feed clock into iCE40 or receive IRQ from iCE40.



Pin 35 is a PLL input, and cannot be used as a normal input if the PLL is otherwise used.

License: CC0
Drawn by: AG

Sheet: /
File: icepill.sch

Title: ICE Pill

Size: A4 Date: 2020-11-07
KiCad E.D.A. kicad 5.1.6-c6e7f7d87ubuntu18.04.1

Rev: 1
Id: 1/1