




## SG-CMH 315WSE

# 315W CPU Smart-Dimmable CMH Single-End Bulb

Dimmable low frequency, square wave digital intelligent electronic ballast and fixture

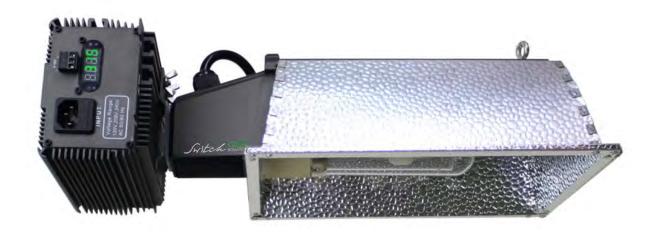

#### 1. Product Features:

- •Next-generation smart digital control of light source ignition technology, the ignition distance up to 20 meters.
- •Using high-performance special lighting CPU control technology, intelligent detection of light source working condition, adjusts the best luminous flux and electricity consumption in real time.
- •Next-generation smart digital ignition energy control technology, it can prevent the damage of the light source and filament and extend the lamp working life.
- •Next-generation smart digital lamp startup control technology, high-precision digital control lamp startup current, it can control the light attenuation and working life of the lamp.
- •Smart digital lamp protection technology, High stability of lamp current control, Dynamic lamp power control, Smart lamp auto-adapt light attenuation control, extends lamp working life up to 5 years.
- •High reliability digital driver circuit. Smart, high sensitivity anti-thunder, open circuit, short circuit, over-current, over-voltage, over-temperature protection technology extends the ballast working life up to 5 years.
- Efficiency: > 92%, High performance APFC circuit, Power factor up to 0.99, THD<6%, Efficient green energy conservation and environmental protection.
- •Using the most sophisticated R&D and production process with high outdoor quality standards.
- Working light source: Ceramic Metal Halide (CMH).
- Multi-voltage input (120V / 208V / 240V).
- Smart infrared remote control dimmer, can memory when power off, can control the output power: 355W,315W,215W, 145W, 0W (power off).
- With 0-10V standard interface input, convenient access control systems to control, adjustable power range: 145W-355W.
- Fixture available with open or closed reflector.
- 3 Year warranty on fixture and ballast. 1 year warranty on bulb.
- UL/CUL USA &Canada ANSI/UL 1029-1994





## SG-CMH 315WSE

# 315W CPU Smart-Dimmable CMH Single-End Bulb

#### 2. Product Specifications

Product Type: Optex SE 315 Watt CMH
AC input voltage: 120V / 208V / 240V ,50/60HZ

AC inrush current (Max): Cold start, 60A/230V AC

Rated Power: 340W

Line Current: 2.83A@120V AC,1.63A@208V AC,1.42A@240V AC

**Light Decay Control attenuation:** <5%/20000h >0.99


. . .

**Operating Frequency:** 140~160HZ **Trigger Voltage:** 6KV(MAX)


THD: <6% Ballast Power Dissipation: 25W

Scalable Communication Interface:  $0\sim10V$ , Infrared remote control interface

#### 3. SE Lamps Available in :



4300 K



3003k