EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

VTL5C1

EN
This Datasheet is presented by the manufacturer

DE
Dieses Datenblatt wird vom Hersteller bereitgestellt

FR
Cette fiche technique est présentée par le fabricant

Low Cost Axial Vactrols

VTL5C1, 5C2

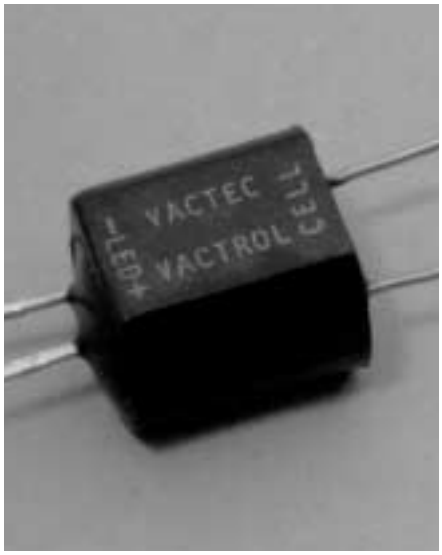

PACKAGE DIMENSIONS inch (mm)

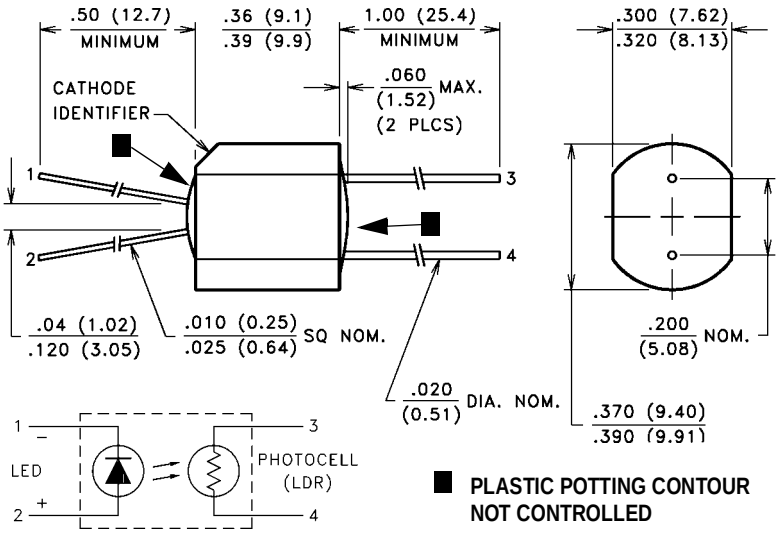

DESCRIPTION

VTL5C1 offers 100db dynamic range, fast response time, and very high dark resistance.
VTL5C2 features a very steep slope, low temperature coefficient of resistance, and a small light history memory.

ABSOLUTE MAXIMUM RATINGS @ 25°C

Maximum Temperatures
Storage and Operating: –40°C to 75°C
Cell Power: 175 mW
Derate above 30°C: 3.9 mW/°C
LED Current: 40 mA [1]
Derate above 30°C: 0.9 mA/°C

LED Reverse Breakdown Voltage: 3.0 V

LED Forward Voltage Drop @ 20 mA: 2.0V (1.65V Typ.)

Min. Isolation Voltage @ 70% Rel. Humidity: 2500 VRMS

Output Cell Capacitance: 5.0 pF

Cell Voltage: 100V (VTL5C1), 200V (VTL5C2)

Input - Output Coupling Capacitance: 0.5 pF

ELECTRO-OPTICAL CHARCTERISTICS @ 25°C

Part Number	Material Type	ON Resistance [2]		OFF [3] Resistance @ 10 sec. (Min.)	Slope (Typ.) $\frac{\text{@ 0.5 mA}}{\text{R@ 5 mA}}$	Dynamic Range (Typ.) $\frac{R_{DARK}}{\text{R@ 20 mA}}$	Response Time [4]	
		Input current	Dark Adapted (Typ.)				Turn-on to 63% Final R_{ON} (Typ.)	Turn-off (Decay) to 100 kΩ (Max.)
VTL5C1	1	1 mA 10 mA 40 mA	20 kΩ 600 Ω 200 Ω	50 MΩ	15	100 db	2.5 ms	35 ms
VTL5C2	0	1 mA 10 mA 40 mA	5.5 kΩ 800 Ω 200 Ω	1 MΩ	24	69 db	3.5 ms	500 ms

Refer to Specification Notes, page 41.

PerkinElmer Optoelectronics, 10900 Page Ave., St. Louis, MO 63132 USA Phone: 314-423-4900 Fax: 314-423-3956 Web: www.perkinelmer.com/opto

Typical Performance Curves

Output Resistance vs. Input Current
VTL5C1

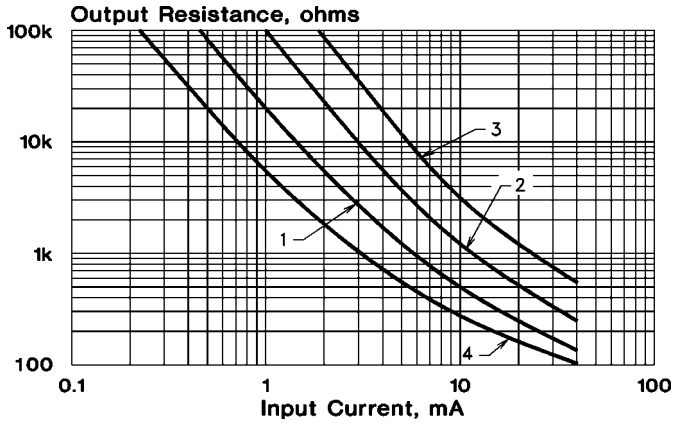

Response Time
VTL5C1

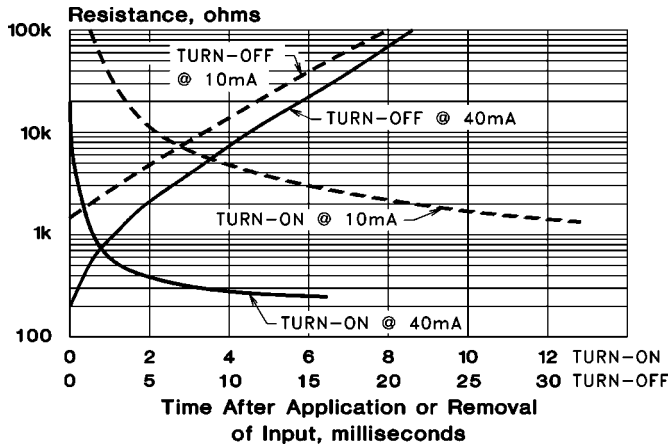

Output Resistance vs. Input Current
VTL5C2

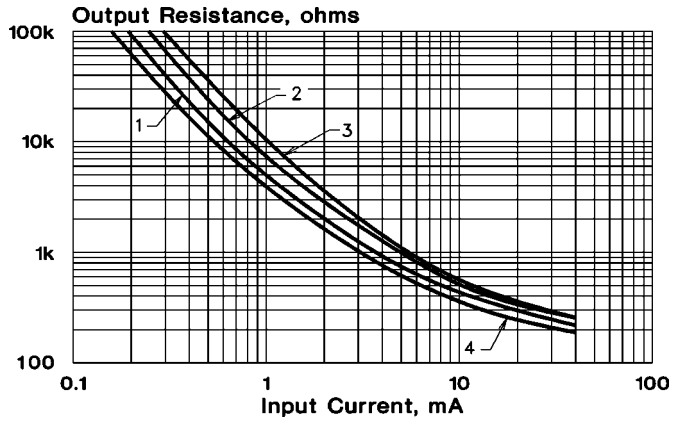

Response Time
VTL5C2

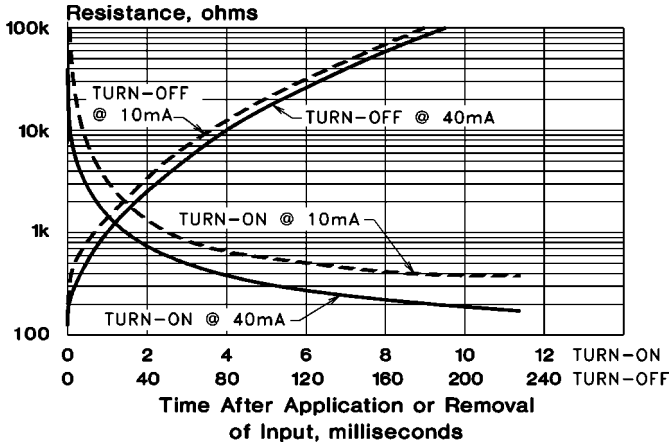

Input Characteristics

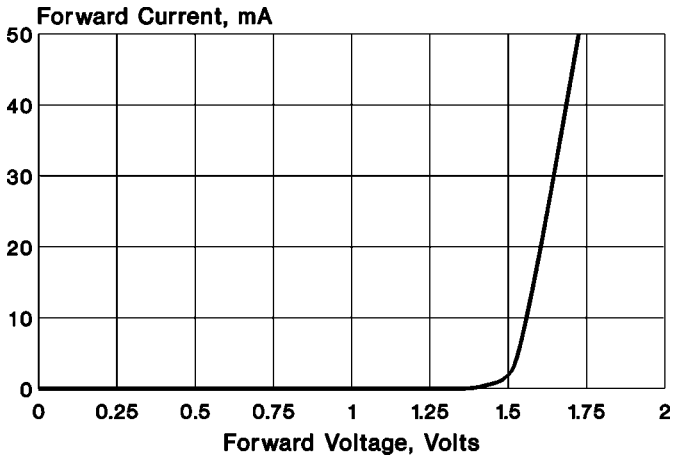

Notes:

1. At 1.0 mA and below, units may have substantially higher resistance than shown in the typical curves. Consult factory if closely controlled characteristics are required at low input currents.
2. Output resistance vs input current transfer curves are given for the following light adapt conditions:

   (1) 25°C — 24 hours @ no input
   (2) 25°C — 24 hours @ 40 mA input
   (3) +50°C — 24 hours @ 40 mA input
   (4) –20°C — 24 hours @ 40 mA input
3. Response time characteristics are based upon test following adapt condition (2) above.

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

VTL5C1

EN
This Datasheet is presented by the manufacturer

DE
Dieses Datenblatt wird vom Hersteller bereitgestellt

FR
Cette fiche technique est présentée par le fabricant