DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE; THE FACILITY OWNER'S QUALIFIED PROCEDURES AND APPLICABLE CODES GOVERN.

WO-200-01 — Internal inspection of vertical vessel C-101

Area	A200 Vessels and column	**Task**	VI Internal inspection
Priority	2 (integrity)	**Issued by**	Facility owner (demonstration)
Primary asset	C-101 — C-101 vertical vessel 48" ID × 240" T/T — E 68'-6" N 25'-0" EL 100'-8-1/4"		
Equipment	C-101	**Lines**	4"-P300-P-1010, 6"-P300-P-1011, 6"-P300-P-1017, 3"-P300-P-1015, 1"-P150-V-6011, 1"-P150-D-6012, 1"-P150-N-3013, 3/4"-P300-I-6013, 3/4"-P300-I-6014, 3/4"-P300-SP-6015
Isometrics	ISO-4"-P300-P-1010, ISO-6"-P300-P-1011, ISO-6"-P300-P-1017, ISO-3"-P300-P-1015, ISO-1"-P150-V-6011, ISO-1"-P150-D-6012, ISO-1"-P150-N-3013, ISO-3/4"-P300-I-6013, ISO-3/4"-P300-I-6014, ISO-3/4"-P300-SP-6015 (generated); owner's drawings ISO-P-1010, ISO-P-1011, ISO-P-1017, ISO-P-1015, ISO-V-6011, ISO-D-6012, ISO-N-3013, ISO-I-6013, ISO-I-6014, ISO-SP-6015		
Permits	General work permit, Confined-space entry permit		

Reason

Scheduled internal inspection of the column.

Scope of work

1. Isolate C-101 per the isolation list; drain, vent, purge and gas-test for entry.
2. Open for entry; clean as needed for inspection.
3. Internal visual examination; ultrasonic thickness at the 16 TMLs.
4. Close with new gaskets on every opened joint; remove blinds; restore the line-up.

Affected items: C-101

Rules: SW-ITP-1, SW-ITP-2, SW-ITP-3, SW-TEST-2, SW-WO-1, SW-WO-2, SW-WO-3, SW-WO-5, SW-WO-6, SW-WO-7

Owner's isometric drawings (SW-IMP-6)

Drawing	Line drawn	Work line	Sheets	Match to the plant model
ISO-P-1010	4"-P300-P-1010	4"-P300-P-1010	4	2 error(s), 2 warning(s) — see below
ISO-P-1011	6"-P300-P-1011	6"-P300-P-1011	2	0 error(s), 3 warning(s) — see below
ISO-P-1017	6"-P300-P-1017	6"-P300-P-1017	4	0 error(s), 5 warning(s) — see below
ISO-P-1015	3"-P300-P-1015	3"-P300-P-1015	6	1 error(s), 9 warning(s) — see below
ISO-V-6011	1"-P150-V-6011	1"-P150-V-6011	1	agrees with the model
ISO-D-6012	1"-P150-D-6012	1"-P150-D-6012	1	agrees with the model
ISO-N-3013	1"-P150-N-3013	1"-P150-N-3013	1	agrees with the model
ISO-I-6013	3/4"-P300-I-6013	3/4"-P300-I-6013	1	agrees with the model
ISO-I-6014	3/4"-P300-I-6014	3/4"-P300-I-6014	1	agrees with the model
ISO-SP-6015	3/4"-P300-SP-6015	3/4"-P300-SP-6015	1	agrees with the model

ISO-P-1010 (PDF): ../isometrics-imported/ISO-P-1010.pdf · ISO-P-1011 (PDF): ../isometrics-imported/ISO-P-1011.pdf · ISO-P-1017 (PDF): ../isometrics-imported/ISO-P-1017.pdf · ISO-P-1015 (PDF): ../isometrics-imported/ISO-P-1015.pdf · ISO-V-6011 (PDF): ../isometrics-imported/ISO-V-6011.pdf · ISO-D-6012 (PDF): ../isometrics-imported/ISO-D-6012.pdf · ISO-N-3013 (PDF): ../isometrics-imported/ISO-N-3013.pdf · ISO-I-6013 (PDF): ../isometrics-imported/ISO-I-6013.pdf · ISO-I-6014 (PDF): ../isometrics-imported/ISO-I-6014.pdf · ISO-SP-6015 (PDF): ../isometrics-imported/ISO-SP-6015.pdf — the generated isometrics follow the ITP.

Drawing	Sheet	Level	Finding
ISO-P-1010	1	error	sheet 1: CONT'D ON ISO-P-1010 SH 2 prints E 133'-6" N -16'-6 5/16" EL 112'-6" for E 133'-6" N -15'-5 11/16" EL 112'-6": the minus sign applies to the feet only; read as written the point is 12.62 in away (still on the centreline, at the wrong place along it)
ISO-P-1010	2	error	sheet 2: CONT'D FROM ISO-P-1010 SH 1 prints E 133'-6" N -16'-6 5/16" EL 112'-6" for E 133'-6" N -15'-5 11/16" EL 112'-6": the minus sign applies to the feet only; read as written the point is 12.62 in away (still on the centreline, at the wrong place along it)
ISO-P-1010	3	warning	branch weld 3/4"-P300-I-7010/W1 (E 70'-0" N 3'-0" EL 116'-9 5/16", sheet 3) has no label
ISO-P-1010	4	warning	TO label 'C-101 NOZ. N1' is not on the drawing
ISO-P-1011	2	warning	W14 (6"-P300-P-1011/W14, sheet 2) is labelled again on sheet 1; it is 162.0 in from the nearest break
ISO-P-1011	2	warning	weld 6"-P300-P-1011/W20 (E 89'-0" N 25'-0" EL 110'-2 1/2", sheet 2) has no label
ISO-P-1011	1	warning	branch weld 3/4"-P300-I-7011/W1 (E 68'-11" N 6" EL 120'-0", sheet 1) has no label
ISO-P-1017	4	warning	W17 (6"-P300-P-1017/W17, sheet 4) is labelled again on sheet 3; it is 11.0 in from the nearest break
ISO-P-1017	4	warning	W18 (6"-P300-P-1017/W18, sheet 4) is labelled again on sheet 3; it is 31.0 in from the nearest break
ISO-P-1017	3	warning	branch weld 3/4"-P300-I-7036/W1 (E 114'-0" N 2'-0" EL 117'-5", sheet 3) has no label
ISO-P-1017	3	warning	branch weld 3/4"-P300-I-7017/W1 (E 115'-0" N 2'-0" EL 117'-5", sheet 3) has no label
ISO-P-1017	4	warning	TO label 'P-104A NOZ. S' is not on the drawing
ISO-P-1015	1	error	sheet 1: CONT'D ON ISO-P-1016 prints E 174'-2 1/2" N -17'-6" EL 107'-6" for E 174'-2 1/2" N -16'-6" EL 107'-6": the minus sign applies to the feet only; read as written the point is 12.00 in away and 12.00 in off where 3"-P300-P-1015 meets 3"-P300-P-1016 (E 174'-2 1/2" N -16'-6" EL 107'-6")

Drawing	Sheet	Level	Finding
ISO-P-1015	5	warning	weld 3"-P300-P-1015/W16 (E 68'-6" N -5'-0" EL 124'-7", sheet 5) has no label
ISO-P-1015	5	warning	weld 3"-P300-P-1015/W17 (E 68'-11" N -5'-0" EL 125'-0", sheet 5) has no label
ISO-P-1015	5	warning	weld 3"-P300-P-1015/W19 (E 69'-6" N -4'-7" EL 125'-0", sheet 5) has no label
ISO-P-1015	5	warning	weld 3"-P300-P-1015/W20 (E 69'-6" N -4'-2 1/2" EL 125'-0", sheet 5) has no label
ISO-P-1015	6	warning	W22 (3"-P300-P-1015/W22, sheet 6) is labelled again on sheet 5; it is 149.8 in from the nearest break
ISO-P-1015	6	warning	W23 (3"-P300-P-1015/W23, sheet 6) is labelled again on sheet 5; it is 159.8 in from the nearest break
ISO-P-1015	6	warning	weld 3"-P300-P-1015/W26 (E 68'-6" N 14'-11 9/16" EL 125'-0", sheet 6) has no label
ISO-P-1015	5	warning	branch weld 3/4"-P300-I-7015/W1 (E 68'-8 1/2" N -5'-0" EL 124'-0", sheet 5) has no label
ISO-P-1015	5	warning	branch weld 3/4"-P300-SP-7026/W1 (E 69'-3 1/2" N -4'-0" EL 125'-0", sheet 5) has no label

Assets in the plant model (SW-WO-7)

Tag	Kind	Description	Line	Location
C-101	equipment	C-101 vertical vessel 48" ID × 240" T/T		E 68'-6" N 25'-0" EL 100'-8-1/4"
4"-P300-P-1010/B2	item	VALVE, GATE, WEDGE, OS&Y 4" P300	4"-P300-P-1010	E 68'-6" N 21'-8-3/16" EL 116'-0"
C-101-N1	nozzle	Nozzle C-101-N1 (feed, 4" P300) on C-101		E 68'-6" N 22'-3-15/16" EL 116'-0"
6"-P300-P-1011/A2	item	VALVE, GATE, WEDGE, OS&Y 6" P300	6"-P300-P-1011	E 68'-6" N 25'-0" EL 127'-11-11/16"
C-101-N2	nozzle	Nozzle C-101-N2 (overhead, 6" P300) on C-101		E 68'-6" N 25'-0" EL 127'-4-9/16"
6"-P300-P-1017/A2	item	VALVE, GATE, WEDGE, OS&Y 6" P300	6"-P300-P-1017	E 68'-6" N 21'-8-9/16" EL 106'-6"
C-101-N3	nozzle	Nozzle C-101-N3 (bottoms, 6" P300) on C-101		E 68'-6" N 22'-3-3/4" EL 106'-6"
3"-P300-P-1015/B2	item	VALVE, GATE, WEDGE, OS&Y 3" P300	3"-P300-P-1015	E 68'-6" N 21'-9-3/4" EL 125'-0"
C-101-N4	nozzle	Nozzle C-101-N4 (reflux, 3" P300) on C-101		E 68'-6" N 22'-4-11/16" EL 125'-0"
1"-P150-V-6011/2	item	VALVE, BALL, FLOATING 1" P150	1"-P150-V-6011	E 70'-0" N 25'-0" EL 127'-4-13/16"
C-101-N5	nozzle	Nozzle C-101-N5 (vent, 1" P150) on C-101		E 70'-0" N 25'-0" EL 126'-9-15/16"
1"-P150-D-6012/2	item	VALVE, BALL, FLOATING 1" P150	1"-P150-D-6012	E 65'-5-1/2" N 25'-0" EL 106'-0"
C-101-N6	nozzle	Nozzle C-101-N6 (drain, 1" P150) on C-101		E 66'-3/8" N 25'-0" EL 106'-0"
1"-P150-N-3013/B2	item	VALVE, BALL, FLOATING 1" P150	1"-P150-N-3013	E 68'-6" N 28'-1/2" EL 115'-0"
C-101-N7	nozzle	Nozzle C-101-N7 (nitrogen, 1" P150) on C-101		E 68'-6" N 27'-5-11/16" EL 115'-0"
3/4"-P300-I-6013/2	item	VALVE, BALL, FLOATING 3/4" P300	3/4"-P300-I-6013	E 65'-5-3/4" N 25'-0" EL 108'-6"
C-101-N8	nozzle	Nozzle C-101-N8 (instrument, 0.75" P300) on C-101		E 66'-1/2" N 25'-0" EL 108'-6"
3/4"-P300-I-6014/2	item	VALVE, BALL, FLOATING 3/4" P300	3/4"-P300-I-6014	E 68'-6" N 28'-1/4" EL 117'-6"
C-101-N9	nozzle	Nozzle C-101-N9 (instrument, 0.75" P300) on C-101		E 68'-6" N 27'-5-9/16" EL 117'-6"
3/4"-P300-SP-6015/2	item	VALVE, BALL, FLOATING 3/4" P300	3/4"-P300-SP-6015	E 65'-5-3/4" N 25'-0" EL 107'-6"
C-101-N10	nozzle	Nozzle C-101-N10 (sample, 0.75" P300) on C-101		E 66'-1/2" N 25'-0" EL 107'-6"

Isolation list (SW-WO-3)

#	Kind	Tag	Line	Action	Location	Fitted ✓	Removed ✓
1	valve	4"-P300-P-1010/B2	4"-P300-P-1010	Close and lock VALVE, GATE, WEDGE, OS&Y 4" P300 (4"-P300-P-1010/B2) on C-101-N1	E 68'-6" N 21'-8-3/16" EL 116'-0"		
2	blind	C-101-N1	4"-P300-P-1010	Fit a blind between 4"-P300-P-1010/B2 and the nozzle flange C-101-N1	E 68'-6" N 22'-3-15/16" EL 116'-0"		
3	valve	6"-P300-P-1011/A2	6"-P300-P-1011	Close and lock VALVE, GATE, WEDGE, OS&Y 6" P300 (6"-P300-P-1011/A2) on C-101-N2	E 68'-6" N 25'-0" EL 127'-11-11/16"		
4	blind	C-101-N2	6"-P300-P-1011	Fit a blind between 6"-P300-P-1011/A2 and the nozzle flange C-101-N2	E 68'-6" N 25'-0" EL 127'-4-9/16"		
5	valve	6"-P300-P-1017/A2	6"-P300-P-1017	Close and lock VALVE, GATE, WEDGE, OS&Y 6" P300 (6"-P300-P-1017/A2) on C-101-N3	E 68'-6" N 21'-8-9/16" EL 106'-6"		
6	blind	C-101-N3	6"-P300-P-1017	Fit a blind between 6"-P300-P-1017/A2 and the nozzle flange C-101-N3	E 68'-6" N 22'-3-3/4" EL 106'-6"		
7	valve	3"-P300-P-1015/B2	3"-P300-P-1015	Close and lock VALVE, GATE, WEDGE, OS&Y 3" P300 (3"-P300-P-1015/B2) on C-101-N4	E 68'-6" N 21'-9-3/4" EL 125'-0"		
8	blind	C-101-N4	3"-P300-P-1015	Fit a blind between 3"-P300-P-1015/B2 and the nozzle flange C-101-N4	E 68'-6" N 22'-4-11/16" EL 125'-0"		
9	valve	1"-P150-V-6011/2	1"-P150-V-6011	Close and lock VALVE, BALL, FLOATING 1" P150 (1"-P150-V-6011/2) on C-101-N5	E 70'-0" N 25'-0" EL 127'-4-13/16"		

#	Kind	Tag	Line	Action	Location	Fitted ✓	Removed ✓
10	blind	C-101-N5	1"-P150-V-6011	Fit a blind between 1"-P150-V-6011/2 and the nozzle flange C-101-N5	E 70'-0" N 25'-0" EL 126'-9-15/16"		
11	valve	1"-P150-D-6012/2	1"-P150-D-6012	Close and lock VALVE, BALL, FLOATING 1" P150 (1"-P150-D-6012/2) on C-101-N6	E 65'-5-1/2" N 25'-0" EL 106'-0"		
12	blind	C-101-N6	1"-P150-D-6012	Fit a blind between 1"-P150-D-6012/2 and the nozzle flange C-101-N6	E 66'-3/8" N 25'-0" EL 106'-0"		
13	valve	1"-P150-N-3013/B2	1"-P150-N-3013	Close and lock VALVE, BALL, FLOATING 1" P150 (1"-P150-N-3013/B2) on C-101-N7	E 68'-6" N 28'-1/2" EL 115'-0"		
14	blind	C-101-N7	1"-P150-N-3013	Fit a blind between 1"-P150-N-3013/B2 and the nozzle flange C-101-N7	E 68'-6" N 27'-5-11/16" EL 115'-0"		
15	valve	3/4"-P300-I-6013/2	3/4"-P300-I-6013	Close and lock VALVE, BALL, FLOATING 3/4" P300 (3/4"-P300-I-6013/2) on C-101-N8	E 65'-5-3/4" N 25'-0" EL 108'-6"		
16	blind	C-101-N8	3/4"-P300-I-6013	Fit a blind between 3/4"-P300-I-6013/2 and the nozzle flange C-101-N8	E 66'-1/2" N 25'-0" EL 108'-6"		
17	valve	3/4"-P300-I-6014/2	3/4"-P300-I-6014	Close and lock VALVE, BALL, FLOATING 3/4" P300 (3/4"-P300-I-6014/2) on C-101-N9	E 68'-6" N 28'-1/4" EL 117'-6"		
18	blind	C-101-N9	3/4"-P300-I-6014	Fit a blind between 3/4"-P300-I-6014/2 and the nozzle flange C-101-N9	E 68'-6" N 27'-5-9/16" EL 117'-6"		
19	valve	3/4"-P300-SP-6015/2	3/4"-P300-SP-6015	Close and lock VALVE, BALL, FLOATING 3/4" P300 (3/4"-P300-SP-6015/2) on C-101-N10	E 65'-5-3/4" N 25'-0" EL 107'-6"		
20	blind	C-101-N10	3/4"-P300-SP-6015	Fit a blind between 3/4"-P300-SP-6015/2 and the nozzle flange C-101-N10	E 66'-1/2" N 25'-0" EL 107'-6"		

Inspections

Id	Inspection	Criteria	Basis
WO-200-01-I1	Internal visual examination of the shell, heads and nozzles	Findings recorded against the owner's integrity criteria	SW-NDE-4
WO-200-01-I2	Ultrasonic thickness at the 16 TMLs listed	Each reading above the owner's minimum wall	SW-WO-6

Thickness monitoring locations (SW-WO-6)

TML	Item	Location	Position	Nominal wall	R1	R2	R3	R4
WO-200-01-TML01	C-101	Nozzle neck C-101-N1	E 68'-6" N 22'-3-15/16" EL 116'-0"		top: ____	side: ____	bottom: ____	side: ____
WO-200-01-TML02	C-101	Nozzle neck C-101-N2	E 68'-6" N 25'-0" EL 127'-4-9/16"		top: ____	side: ____	bottom: ____	side: ____
WO-200-01-TML03	C-101	Nozzle neck C-101-N3	E 68'-6" N 22'-3-3/4" EL 106'-6"		top: ____	side: ____	bottom: ____	side: ____
WO-200-01-TML04	C-101	Nozzle neck C-101-N4	E 68'-6" N 22'-4-11/16" EL 125'-0"		top: ____	side: ____	bottom: ____	side: ____
WO-200-01-TML05	C-101	Nozzle neck C-101-N5	E 70'-0" N 25'-0" EL 126'-9-15/16"		top: ____	side: ____	bottom: ____	side: ____
WO-200-01-TML06	C-101	Nozzle neck C-101-N6	E 66'-3/8" N 25'-0" EL 106'-0"		top: ____	side: ____	bottom: ____	side: ____
WO-200-01-TML07	C-101	Nozzle neck C-101-N7	E 68'-6" N 27'-5-11/16" EL 115'-0"		top: ____	side: ____	bottom: ____	side: ____
WO-200-01-TML08	C-101	Nozzle neck C-101-N8	E 66'-1/2" N 25'-0" EL 108'-6"		top: ____	side: ____	bottom: ____	side: ____
WO-200-01-TML09	C-101	Nozzle neck C-101-N9	E 68'-6" N 27'-5-9/16" EL 117'-6"		top: ____	side: ____	bottom: ____	side: ____
WO-200-01-TML10	C-101	Nozzle neck C-101-N10	E 66'-1/2" N 25'-0" EL 107'-6"		top: ____	side: ____	bottom: ____	side: ____
WO-200-01-TML11	C-101	Bottom head centre	E 68'-6" N 25'-0" EL 103'-8"		centre: ____			
WO-200-01-TML12	C-101	Top head centre	E 68'-6" N 25'-0" EL 125'-8-1/2"		centre: ____			
WO-200-01-TML13	C-101	Shell at 0.000" above the lower tangent	E 68'-6" N 25'-0" EL 104'-8-1/4"		0°: ____	90°: ____	180°: ____	270°: ____
WO-200-01-TML14	C-101	Shell at 6'-0" above the lower tangent	E 68'-6" N 25'-0" EL 110'-8-1/4"		0°: ____	90°: ____	180°: ____	270°: ____
WO-200-01-TML15	C-101	Shell at 12'-0" above the lower tangent	E 68'-6" N 25'-0" EL 116'-8-1/4"		0°: ____	90°: ____	180°: ____	270°: ____
WO-200-01-TML16	C-101	Shell at 18'-0" above the lower tangent	E 68'-6" N 25'-0" EL 122'-8-1/4"		0°: ____	90°: ____	180°: ____	270°: ____

Test — Service leak test


Description	Every opened joint checked at operating pressure on start-up
Basis	SW-TEST-2

Inspection and test plan (SW-ITP-1..3)

H hold · W witness · R review · S surveillance. Status: accepted / rejected / not applicable.

#	Activity	Reference	Acceptance	Record	Contr.	Owner	3rd party	Status	Signed (contr. / owner / 3rd)	Date	Remark
1	Work permit issued; isolation list (valves locked, blinds fitted) verified at zero pressure and drained	SW-WO-3, isolation list	Every isolation in place and tagged; zero pressure at the vent	Signed isolation certificate	H	H	—				
2	Equipment vented, purged and gas-tested for entry; confined-space entry permit issued	Owner entry procedure	Atmosphere safe for entry per owner limits	Gas test record, entry permit	H	H	—				
3	Opened for entry; cleaned for inspection	Owner procedure	Surfaces clean enough to inspect	Daily report	S	S	—				
4	Internal visual examination	SW-NDE-4	Findings recorded	Inspection report with photographs	W	H	W				
5	Ultrasonic thickness at 16 TMLs	SW-WO-6	Above the owner's minimum wall	Thickness record per TML	S	R	R				
6	Owner's decision on findings (repair, monitor or accept)	Owner integrity procedure	Decision recorded	Signed disposition	R	H	R				
7	Closed with new gaskets on every opened joint; studs to preload	SW-WO-5	Preload as stated	Bolt-up record	W	W	—				
8	Service leak test of opened joints on start-up	SW-TEST-2	No leak	Leak test record	W	W	—				
9	Blinds removed, isolations returned to normal line-up per the isolation list	SW-WO-3	Every blind removed and accounted for	Isolation certificate closed	H	H	—				
10	Records complete; work order handed back to operations	SW-ITP-3	All ITP activities accepted or not applicable	Signed ITP and completion record	H	H	R				

ISOMETRIC — 4"-P300-P-1010 — Internal inspection of vertical vessel C-101

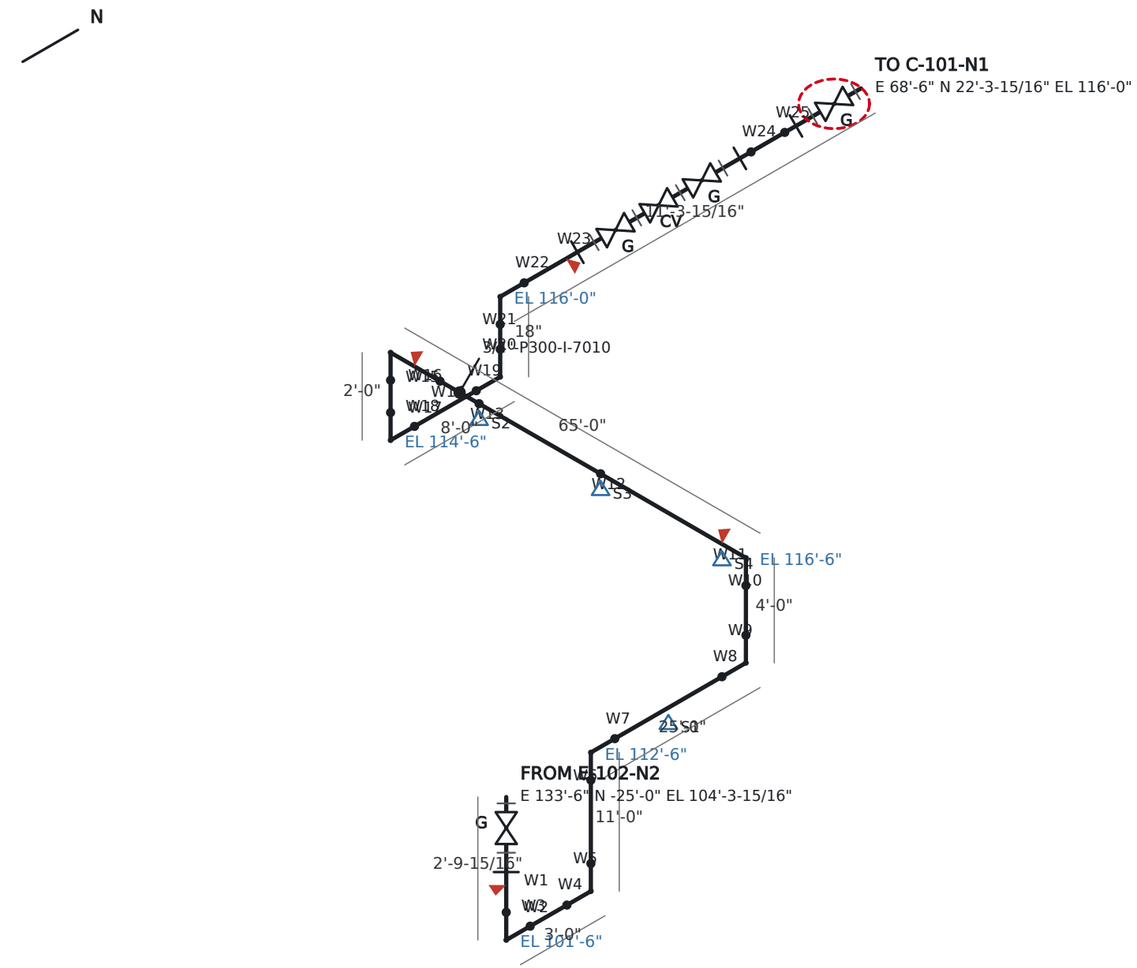

BILL OF MATERIALS

1	GASKET 4" P300 COMPRESSED SHEET	8
2	VALVE, GATE, WEDGE, OS&Y 4" P300	4
3	STUD SET 4 × 1" × 6-1/4" WITH 2 NUTS, FOR 4" P300	8
4	FLANGE WELD-NECK 4" P300 RAISED FACE	4
5	PIPE 4" P300 BEVELLED ENDS	114'-9-1/8"
6	ELBOW 90° R = 5/3 OD 4" P300	9
7	TEE REDUCING 4" × 3/4" P300	1
8	VALVE, CONTROL, GLOBE WITH DIAPHRAGM ACTUATOR 4" P300	1

WELDS 25 (4 FIELD) · SUPPORTS 4 · SPOOLS 6

W1F W2 W3 W4 W5 W6 W7 W8 W9 W10
W11F W12 W13 W14 W15F W16 W17 W18 W19 W20
W21 W22 W23F W24 W25

4"-P300-P-1010


CLASS H300 — Hydrocarbon process
SERVICE P · 4" · P300 · DESIGN 300 psi
E-102-N2 → C-101-N1
PIPE 114'-9-1/8" · WEIGHT 1886 lb

DWG ISO-4"-P300-P-1010 REV 0 WO-200-01

SmartWeld AI · not to scale · E lower right, N upper right, EL up (SW-ISO-1)

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE

ISOMETRIC — 6"-P300-P-1011 — Internal inspection of vertical vessel C-101

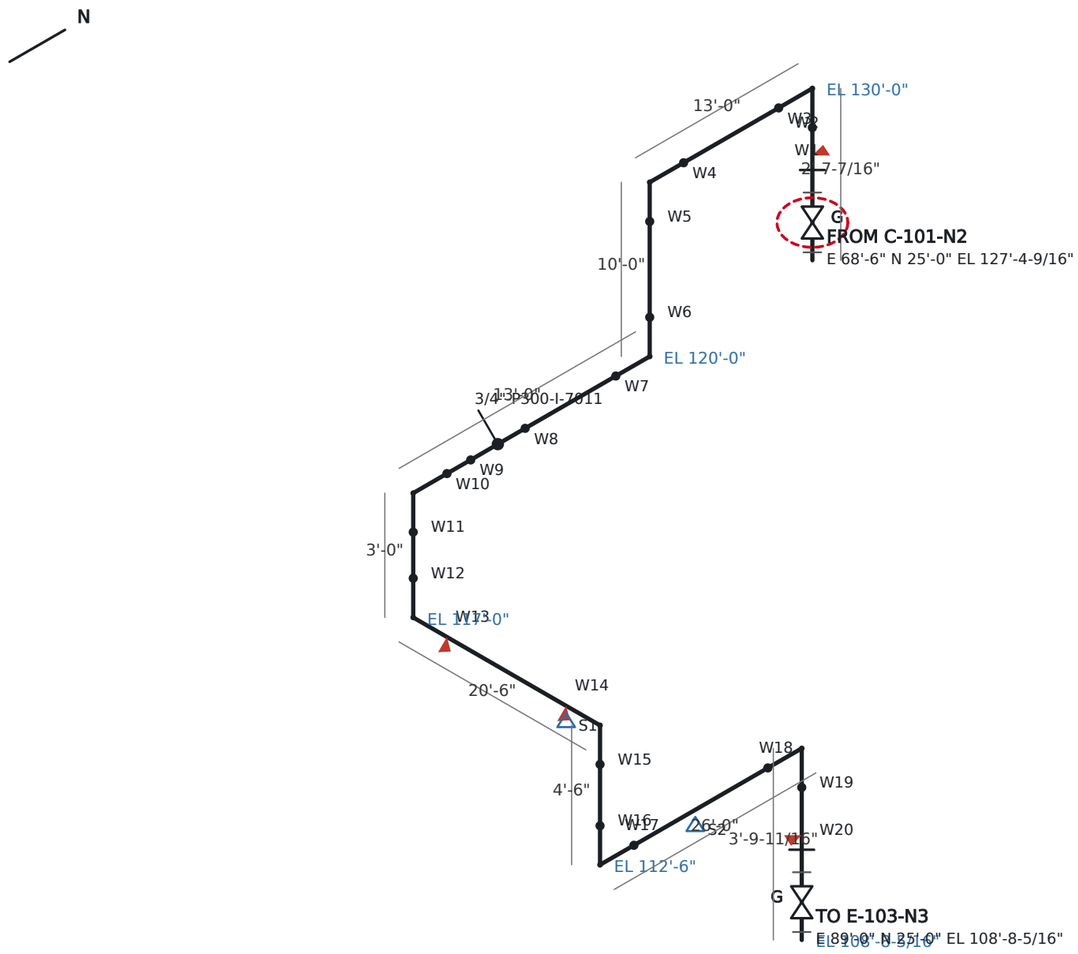

BILL OF MATERIALS

1	GASKET 6" P300 COMPRESSED SHEET	4
2	VALVE, GATE, WEDGE, OS&Y 6" P300	2
3	STUD SET 8 × 0.625" × 4" WITH 2 NUTS, FOR 6" P300	4
4	FLANGE WELD-NECK 6" P300 RAISED FACE	2
5	PIPE 6" P300 BEVELLED ENDS	79'-2-13/16"
6	ELBOW 90° R = 5/3 OD 6" P300	8
7	TEE REDUCING 6" × 3/4" P300	1

WELDS 20 (4 FIELD) · SUPPORTS 2 · SPOOLS 5

W1F W2 W3 W4 W5 W6 W7 W8 W9 W10
W11 W12 W13F W14F W15 W16 W17 W18 W19 W20F

6"-P300-P-1011


CLASS H300 — Hydrocarbon process
SERVICE P · 6" · P300 · DESIGN 300 psi
C-101-N2 → E-103-N3
PIPE 79'-2-13/16" · WEIGHT 1677 lb

DWG ISO-6"-P300-P-1011 REV 0 WO-200-01

SmartWeld AI · not to scale · E lower right, N upper right, EL up (SW-ISO-1)

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE

ISOMETRIC — 6"-P300-P-1017 — Internal inspection of vertical vessel C-101

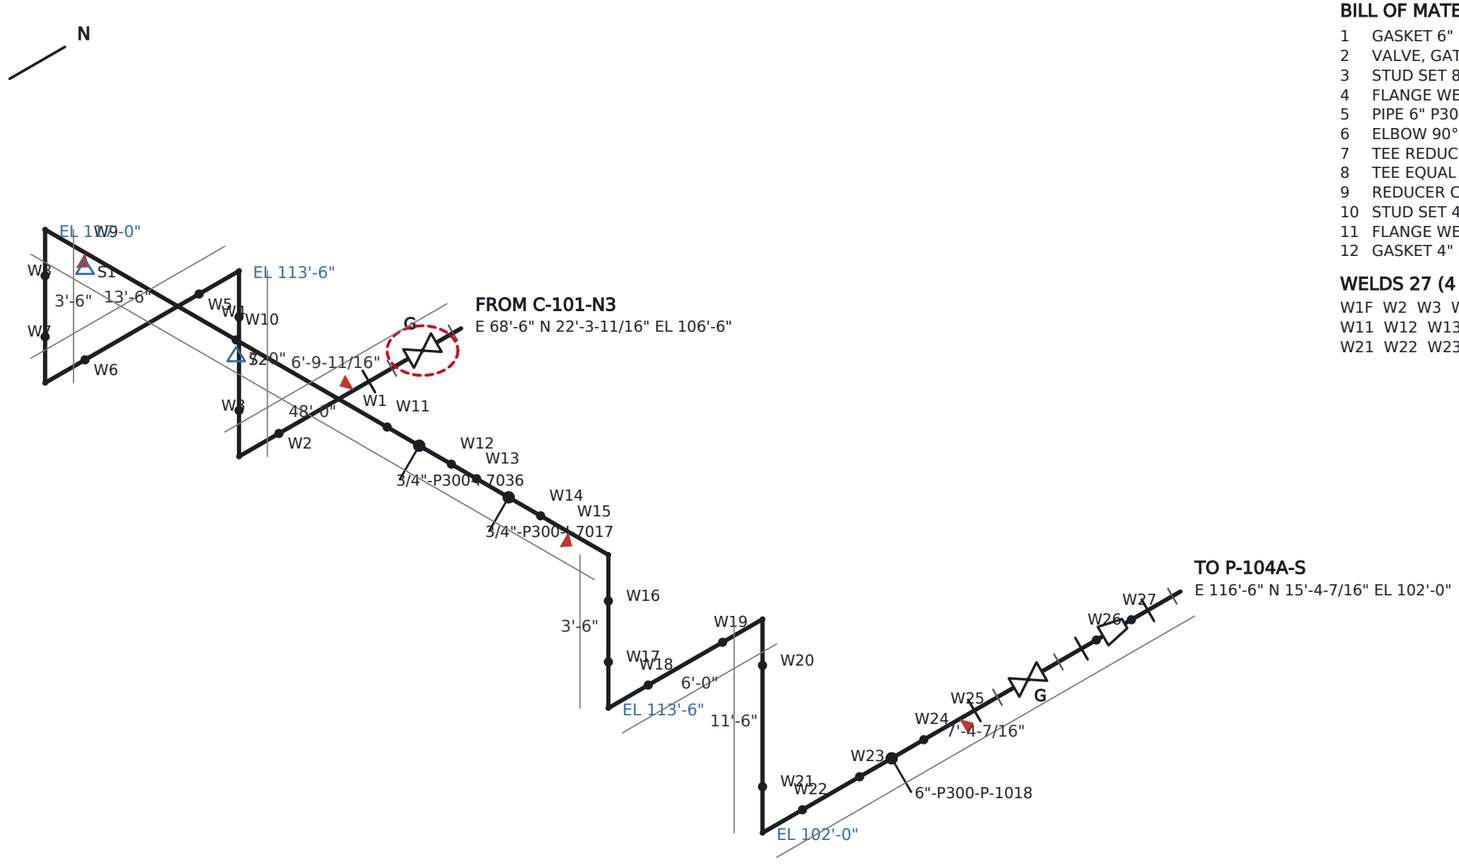

BILL OF MATERIALS

1	GASKET 6" P300 COMPRESSED SHEET	4
2	VALVE, GATE, WEDGE, OS&Y 6" P300	2
3	STUD SET 8 × 0.625" × 4" WITH 2 NUTS, FOR 6" P300	4
4	FLANGE WELD-NECK 6" P300 RAISED FACE	3
5	PIPE 6" P300 BEVELLED ENDS	86'-11-5/8"
6	ELBOW 90° R = 5/3 OD 6" P300	8
7	TEE REDUCING 6" × 3/4" P300	2
8	TEE EQUAL 6" P300	1
9	REDUCER CONCENTRIC 6" × 4" P300	1
10	STUD SET 4 × 1" × 6-1/4" WITH 2 NUTS, FOR 4" P300	1
11	FLANGE WELD-NECK 4" P300 RAISED FACE	1
12	GASKET 4" P300 COMPRESSED SHEET	1

WELDS 27 (4 FIELD) · SUPPORTS 2 · SPOOLS 6

W1F W2 W3 W4 W5 W6 W7 W8 W9F W10
W11 W12 W13 W14 W15F W16 W17 W18 W19 W20
W21 W22 W23 W24 W25F W26 W27

6"-P300-P-1017


CLASS H300 — Hydrocarbon process
SERVICE P · 6" · P300 · DESIGN 300 psi
C-101-N3 → P-104A-S
PIPE 86'-11-5/8" · WEIGHT 1867 lb

DWG ISO-6"-P300-P-1017 REV 0 WO-200-01

SmartWeld AI · not to scale · E lower right, N upper right, EL up (SW-ISO-1)

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE

ISOMETRIC — 3"-P300-P-1015 — Internal inspection of vertical vessel C-101

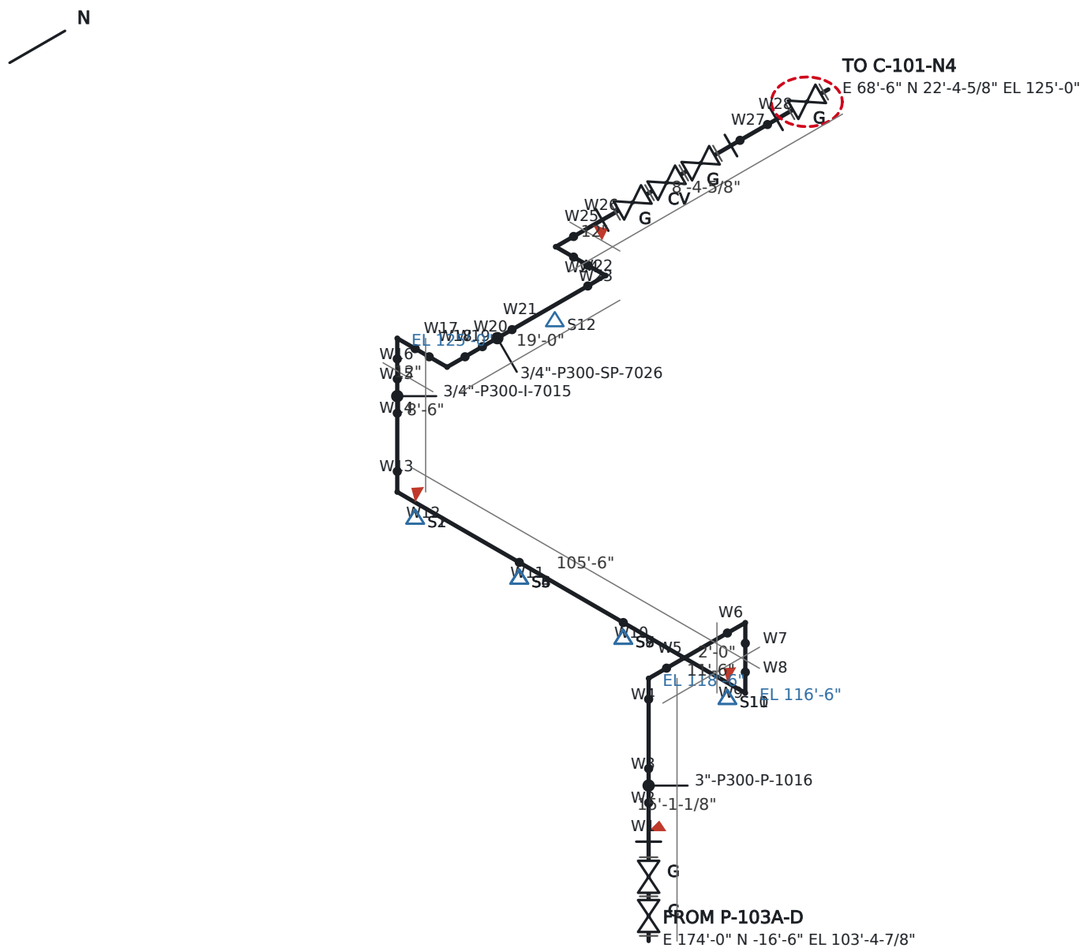

BILL OF MATERIALS

1	GASKET 3" P300 COMPRESSED SHEET	9
2	VALVE, SWING CHECK 3" P300	1
3	STUD SET 4 × 0.875" × 5-3/4" WITH 2 NUTS, FOR 3" P300	9
4	VALVE, GATE, WEDGE, OS&Y 3" P300	4
5	FLANGE WELD-NECK 3" P300 RAISED FACE	4
6	PIPE 3" P300 BEVELLED ENDS	155'-4-3/8"
7	TEE EQUAL 3" P300	1
8	ELBOW 90° R = 5/3 OD 3" P300	8
9	TEE REDUCING 3" × 3/4" P300	2
10	VALVE, CONTROL, GLOBE WITH DIAPHRAGM ACTUATOR 3" P300	1

WELDS 28 (4 FIELD) · SUPPORTS 12 · SPOOLS 6

W1F W2 W3 W4 W5 W6 W7 W8 W9F W10
W11 W12F W13 W14 W15 W16 W17 W18 W19 W20
W21 W22 W23 W24 W25 W26F W27 W28

3"-P300-P-1015


CLASS H300 — Hydrocarbon process
SERVICE P · 3" · P300 · DESIGN 300 psi
P-103A-D → C-101-N4
PIPE 155'-4-3/8" · WEIGHT 1731 lb

DWG ISO-3"-P300-P-1015 REV 0 WO-200-01

SmartWeld AI · not to scale · E lower right, N upper right, EL up (SW-ISO-1)

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE

ISOMETRIC — 1"-P150-V-6011 — Internal inspection of vertical vessel C-101

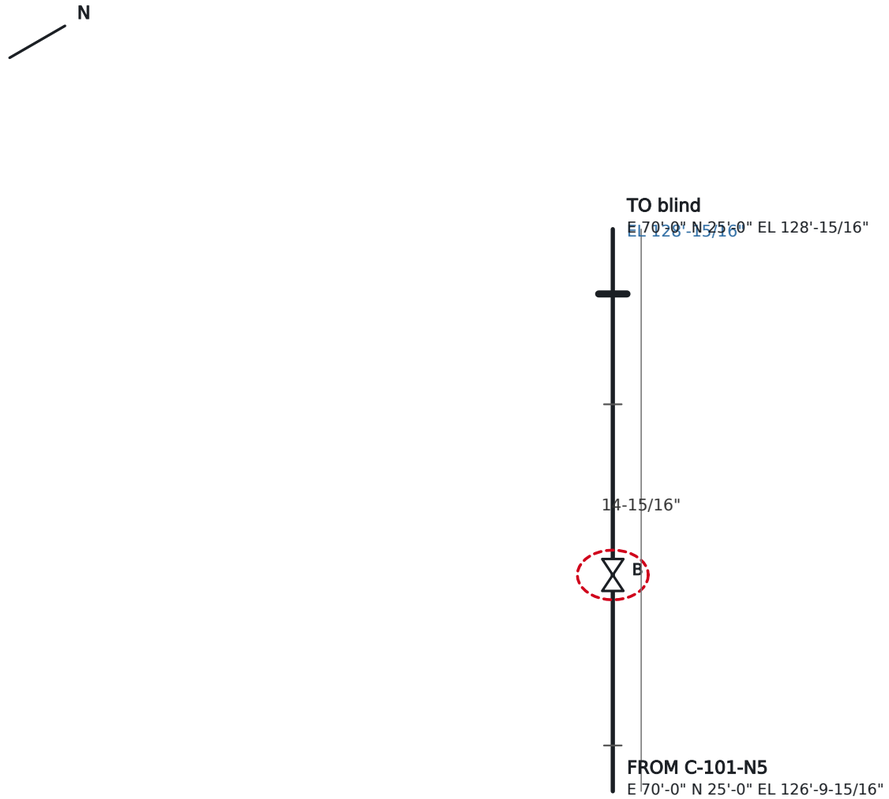

BILL OF MATERIALS

1	GASKET 1" P150 COMPRESSED SHEET	2
2	VALVE, BALL, FLOATING 1" P150	1
3	STUD SET 4 × 0.5" × 4" WITH 2 NUTS, FOR 1" P150	2
4	FLANGE BLIND 1" P150 RAISED FACE	1

WELDS 0 (0 FIELD) · SUPPORTS 0 · SPOOLS 0

1"-P150-V-6011


CLASS H150 — Hydrocarbon process
SERVICE V · 1" · P150 · DESIGN 150 psi
C-101-N5 → blind
PIPE 0.000" · WEIGHT 39 lb

DWG ISO-1"-P150-V-6011 REV 0 WO-200-01

SmartWeld AI · not to scale · E lower right, N upper right, EL up (SW-ISO-1)

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE

ISOMETRIC — 1"-P150-D-6012 — Internal inspection of vertical vessel C-101

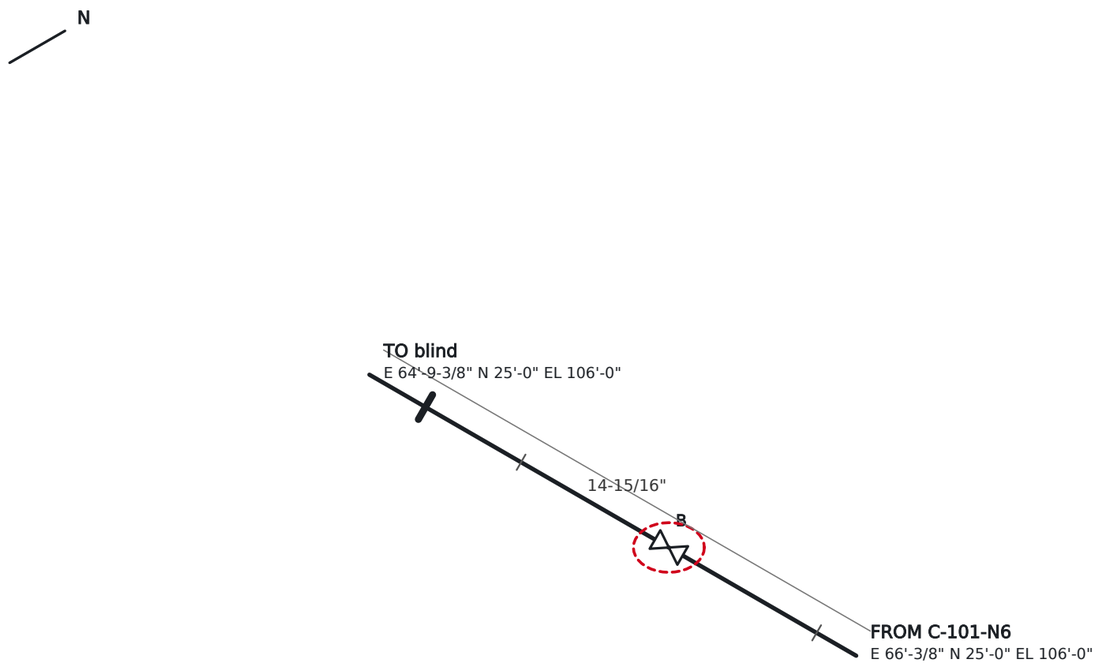

BILL OF MATERIALS

1	GASKET 1" P150 COMPRESSED SHEET	2
2	VALVE, BALL, FLOATING 1" P150	1
3	STUD SET 4 × 0.5" × 4" WITH 2 NUTS, FOR 1" P150	2
4	FLANGE BLIND 1" P150 RAISED FACE	1

WELDS 0 (0 FIELD) · SUPPORTS 0 · SPOOLS 0

1"-P150-D-6012


CLASS H150 — Hydrocarbon process
SERVICE D · 1" · P150 · DESIGN 150 psi
C-101-N6 → blind
PIPE 0.000" · WEIGHT 39 lb

DWG ISO-1"-P150-D-6012 REV 0 WO-200-01

SmartWeld AI · not to scale · E lower right, N upper right, EL up (SW-ISO-1)

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE

ISOMETRIC — 1"-P150-N-3013 — Internal inspection of vertical vessel C-101

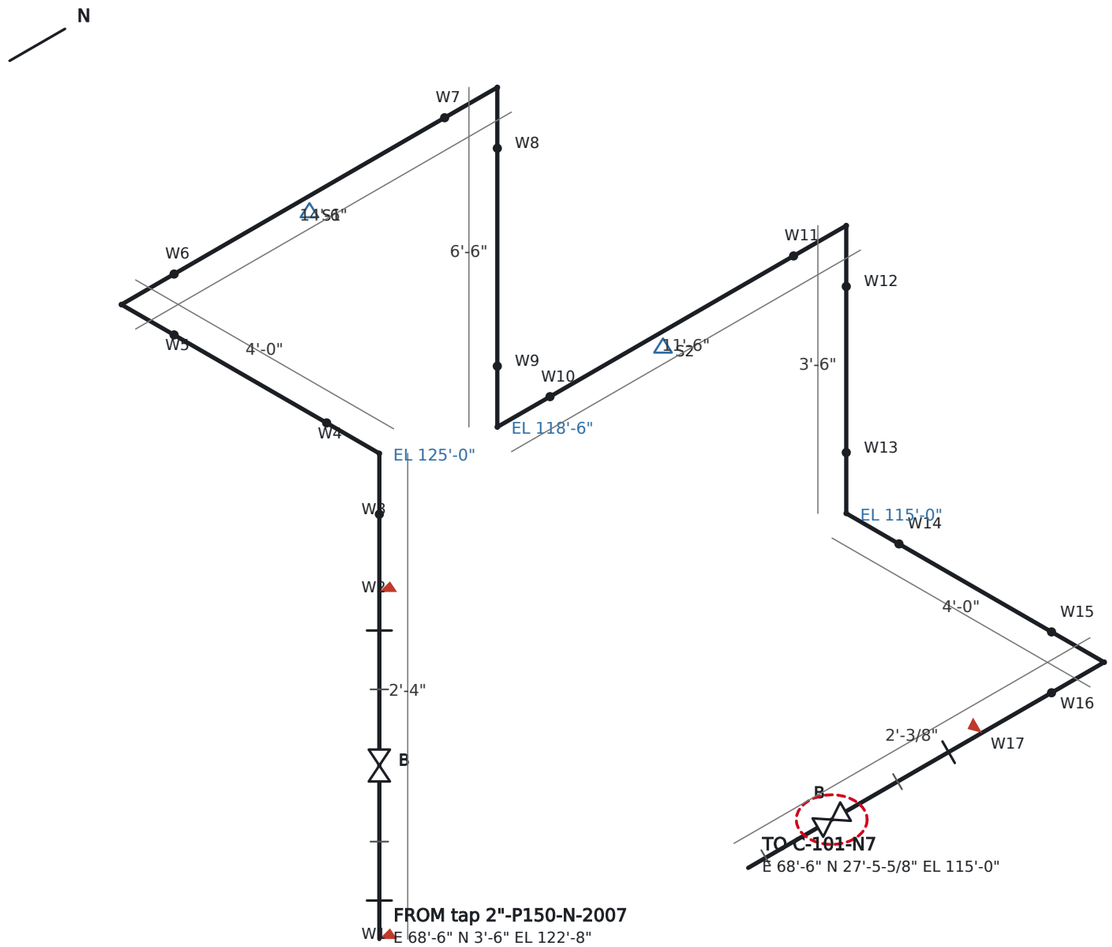

BILL OF MATERIALS

1	FLANGE WELD-NECK 1" P150 RAISED FACE	3
2	GASKET 1" P150 COMPRESSED SHEET	4
3	VALVE, BALL, FLOATING 1" P150	2
4	STUD SET 4 × 0.5" × 4" WITH 2 NUTS, FOR 1" P150	4
5	PIPE 1" P150 BEVELLED ENDS	43'-1-3/16"
6	ELBOW 90° R = 5/3 OD 1" P150	7

WELDS 17 (3 FIELD) · SUPPORTS 2 · SPOOLS 4

W1F W2F W3 W4 W5 W6 W7 W8 W9 W10
W11 W12 W13 W14 W15 W16 W17F

1"-P150-N-3013


CLASS G150 — Air and gases
SERVICE N · 1" · P150 · DESIGN 150 psi
tap 2"-P150-N-2007 → C-101-N7
PIPE 43'-1-3/16" · WEIGHT 123 lb

DWG ISO-1"-P150-N-3013 REV 0 WO-200-01

SmartWeld AI · not to scale · E lower right, N upper right, EL up (SW-ISO-1)

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE

ISOMETRIC — 3/4"-P300-I-6013 — Internal inspection of vertical vessel C-101

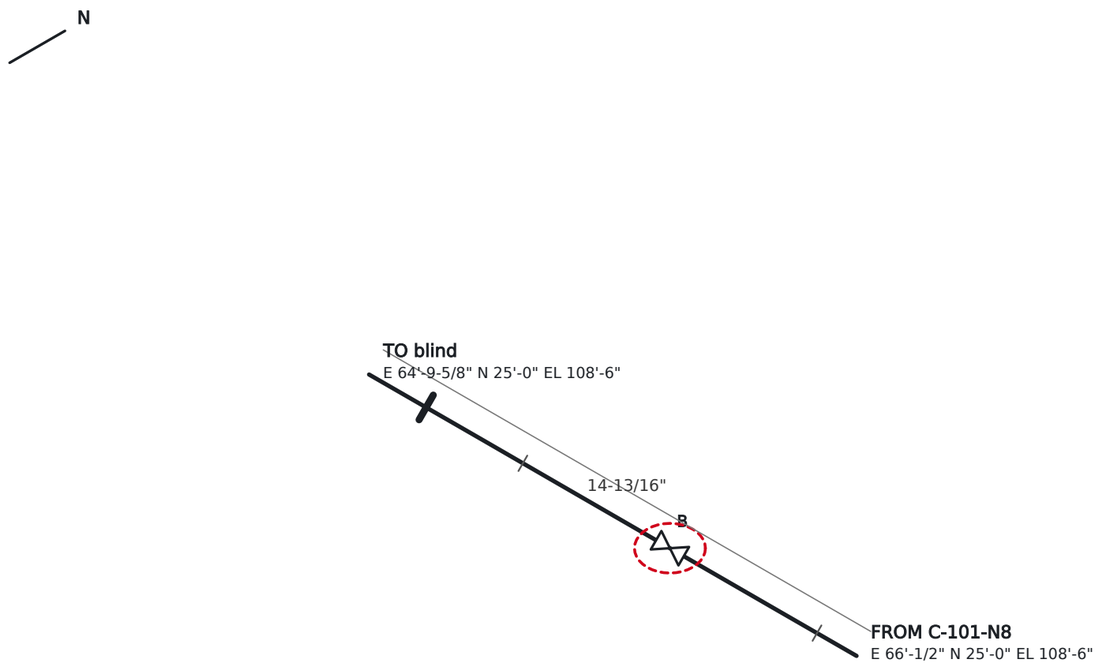

BILL OF MATERIALS

1	GASKET 3/4" P300 COMPRESSED SHEET	2
2	VALVE, BALL, FLOATING 3/4" P300	1
3	STUD SET 4 × 0.5" × 4-1/4" WITH 2 NUTS, FOR 3/4" P300	2
4	FLANGE BLIND 3/4" P300 RAISED FACE	1

WELDS 0 (0 FIELD) · SUPPORTS 0 · SPOOLS 0

3/4"-P300-I-6013


CLASS H300 — Hydrocarbon process
SERVICE I · 0.75" · P300 · DESIGN 300 psi
C-101-N8 → blind
PIPE 0.000" · WEIGHT 32 lb

DWG ISO-3/4"-P300-I-6013 REV 0 WO-200-01

SmartWeld AI · not to scale · E lower right, N upper right, EL up (SW-ISO-1)

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE

ISOMETRIC — 3/4"-P300-I-6014 — Internal inspection of vertical vessel C-101

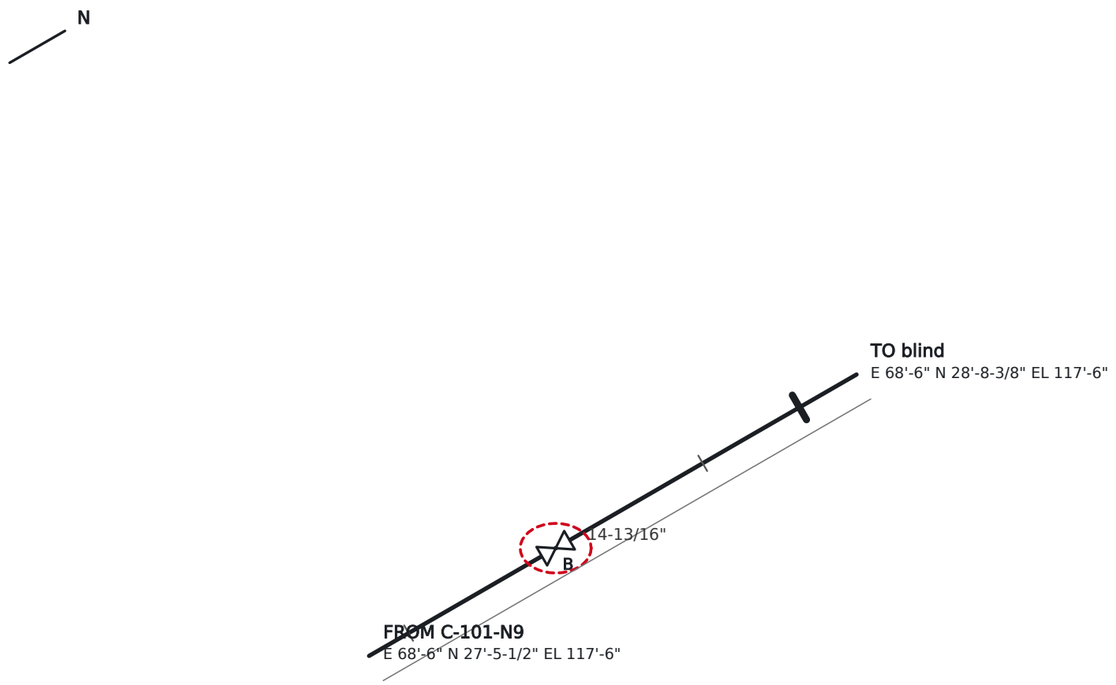

BILL OF MATERIALS

1	GASKET 3/4" P300 COMPRESSED SHEET	2
2	VALVE, BALL, FLOATING 3/4" P300	1
3	STUD SET 4 × 0.5" × 4-1/4" WITH 2 NUTS, FOR 3/4" P300	2
4	FLANGE BLIND 3/4" P300 RAISED FACE	1

WELDS 0 (0 FIELD) · SUPPORTS 0 · SPOOLS 0

3/4"-P300-I-6014


CLASS H300 — Hydrocarbon process
SERVICE I · 0.75" · P300 · DESIGN 300 psi
C-101-N9 → blind
PIPE 0.000" · WEIGHT 32 lb

DWG ISO-3/4"-P300-I-6014 REV 0 WO-200-01

SmartWeld AI · not to scale · E lower right, N upper right, EL up (SW-ISO-1)

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE

ISOMETRIC — 3/4"-P300-SP-6015 — Internal inspection of vertical vessel C-101

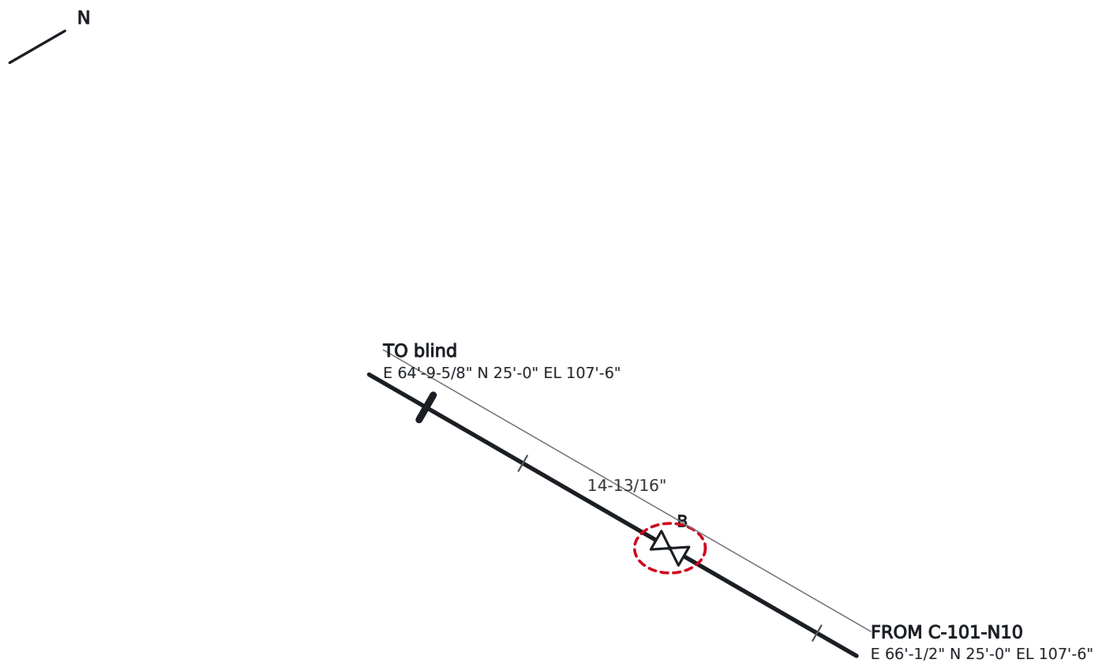

BILL OF MATERIALS

1	GASKET 3/4" P300 COMPRESSED SHEET	2
2	VALVE, BALL, FLOATING 3/4" P300	1
3	STUD SET 4 × 0.5" × 4-1/4" WITH 2 NUTS, FOR 3/4" P300	2
4	FLANGE BLIND 3/4" P300 RAISED FACE	1

WELDS 0 (0 FIELD) · SUPPORTS 0 · SPOOLS 0

3/4"-P300-SP-6015

CLASS H300 — Hydrocarbon process
SERVICE SP · 0.75" · P300 · DESIGN 300 psi
C-101-N10 → blind
PIPE 0.000" · WEIGHT 32 lb

DWG ISO-3/4"-P300-SP-6015 REV 0 WO-200-01

SmartWeld AI · not to scale · E lower right, N upper right, EL up (SW-ISO-1)

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE

Notices

DEMONSTRATION ONLY — NOT A QUALIFIED PROCEDURE; THE FACILITY OWNER'S QUALIFIED PROCEDURES AND APPLICABLE CODES GOVERN.

This document embeds a subset of the DejaVu Sans font (SW-LIC-3), renamed under its licence. DejaVu Sans (assets/fonts/DejaVuSans.ttf), from the DejaVu fonts 2.37 as packaged in the build environment.

Copyright (c) 2003 by Bitstream, Inc. All Rights Reserved. Bitstream Vera is a trademark of Bitstream, Inc.
DejaVu changes are in public domain.

Permission is hereby granted, free of charge, to any person obtaining a copy
of the fonts accompanying this license ("Fonts") and associated
documentation files (the "Font Software"), to reproduce and distribute the
Font Software, including without limitation the rights to use, copy, merge,
publish, distribute, and/or sell copies of the Font Software, and to permit
persons to whom the Font Software is furnished to do so, subject to the
following conditions:

The above copyright and trademark notices and this permission notice shall
be included in all copies of one or more of the Font Software typefaces.

The Font Software may be modified, altered, or added to, and in particular
the designs of glyphs or characters in the Fonts may be modified and
additional glyphs or characters may be added to the Fonts, only if the fonts
are renamed to names not containing either the words "Bitstream" or the word
"Vera".

This License becomes null and void to the extent applicable to Fonts or Font
Software that has been modified and is distributed under the "Bitstream
Vera" names.

The Font Software may be sold as part of a larger software package but no
copy of one or more of the Font Software typefaces may be sold by itself.

THE FONT SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS
OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OF MERCHANTABILITY,
FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF COPYRIGHT, PATENT,
TRADEMARK, OR OTHER RIGHT. IN NO EVENT SHALL BITSTREAM OR THE GNOME
FOUNDATION BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, INCLUDING
ANY GENERAL, SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES,
WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF
THE USE OR INABILITY TO USE THE FONT SOFTWARE OR FROM OTHER DEALINGS IN THE
FONT SOFTWARE.

Except as contained in this notice, the names of Gnome, the Gnome
Foundation, and Bitstream Inc., shall not be used in advertising or
otherwise to promote the sale, use or other dealings in this Font Software
without prior written authorization from the Gnome Foundation or Bitstream
Inc., respectively. For further information, contact: fonts at gnome dot
org.