


Energy-Aware Ergodic Search: Continuous Exploration for Multi-Agent Systems with Battery Constraints

Adam Seewald, Cameron J. Lerch, Marvin Chancán, Aaron M. Dollar, and Ian Abraham

Dept. of Mechanical Engineering and Materials Science, Yale University

Correspondence to: aseewald@ethz.ch

github.com/adamseew/energo

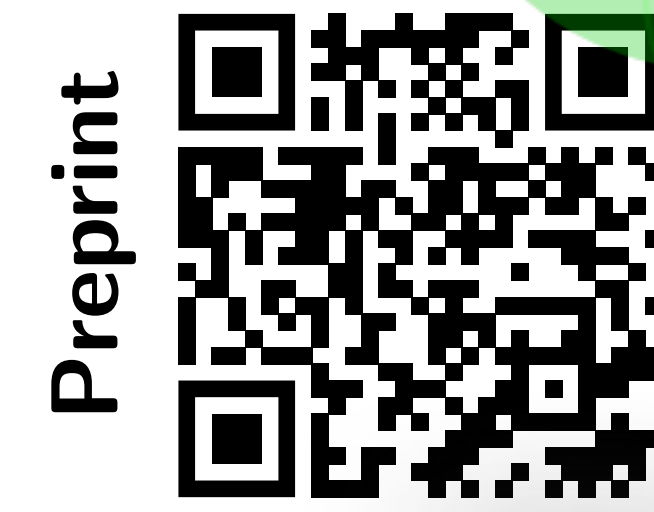

Yale

Context

Ergodic search is a method to derive robots' trajectories that visit areas with high information density while quickly passing areas with low information density [1, 2]. The user specifies areas of interest, e.g., where the robots should spend more time exploring in a search and rescue scenario [3], where the robots should collect more data in a precision agriculture scenario [4], etc.

Recent efforts include swarm control, manipulation, and tactile sensing, among others. However, existing literature does not consider the robot's energy constraints, limiting how long a robot can explore. In fact, if the robots are battery-powered, it is physically not possible to continuously explore on a single battery charge.

Our work tackles this challenge, answering if it is possible to tradeoff battery and coverage so that there is one agent exploring at all times.

Methods: Ergodic search

The goal of ergodic search is to minimize an ergodic metric

$$\mathcal{E}(\delta, \mathbf{q}(t)) := \frac{1}{2} \sum_{k \in \mathcal{K}} \Lambda_k (c_k(\mathbf{q}(t)) - \phi_k(\delta))^2, \quad (1)$$

where ϕ_k are coefficients derived with Fourier series on a spatial distribution ϕ and c_k on the trajectory $\mathbf{q}(t)$ and Λ_k is a weight factor. If ${}^k\mathbf{u}(t)$, ${}^k\mathbf{q}(t)$ is each robot's control and state, the ergodic metric is now evaluated for multiple agents

$$\mathcal{E}(\delta, \Theta_{\mathbf{q}}) := \frac{1}{2} \sum_{k \in \mathcal{K}} \Lambda_k \left(\frac{1}{n} \sum_{j \in [n]} c_k(j\mathbf{q}(t)) - \phi_k(\delta) \right)^2, \quad (2)$$

where the term $\Theta_{\mathbf{q}}$ is ${}^1\mathbf{q}(t), {}^2\mathbf{q}(t), \dots, {}^n\mathbf{q}(t)$, and Θ is $\Theta_{\mathbf{q}}, {}^1\mathbf{u}(t), {}^2\mathbf{u}(t), \dots, {}^n\mathbf{u}(t)$. \mathcal{T}_k is $[{}^k t_0, {}^k t_f]$.

Methods: Battery modeling

To derive a battery model for continuous exploration let us consider an abstract equivalent circuit model [5, 6] ${}^k\mathbf{b}$ per each agent k .


In order to satisfy the battery state of charge (SoC) and always keep at least one agent exploring, ergodic search must satisfy additionally

$$\exists k \in [n] \text{ s.t. } {}^k\mathbf{b}_{\text{SoC}}(t_f) \in (0, b_f], \quad (3)$$


where $b_f \in (0, 1] \subset \mathbb{R}_{>0}$ is a given desired battery SoC at the final time instant derived via the battery model ${}^k\mathbf{b}_{\text{SoC}} \in {}^k\mathbf{b}$.

Results: Uninterrupted exploration

Our experiments are implemented in simulation, and physical experiments are implemented in Python and conducted using Crazyflie 2.0 robots positioned on top of wireless charging stations. We achieve continuous, uninterrupted exploration with at least one agent exploring at all times.

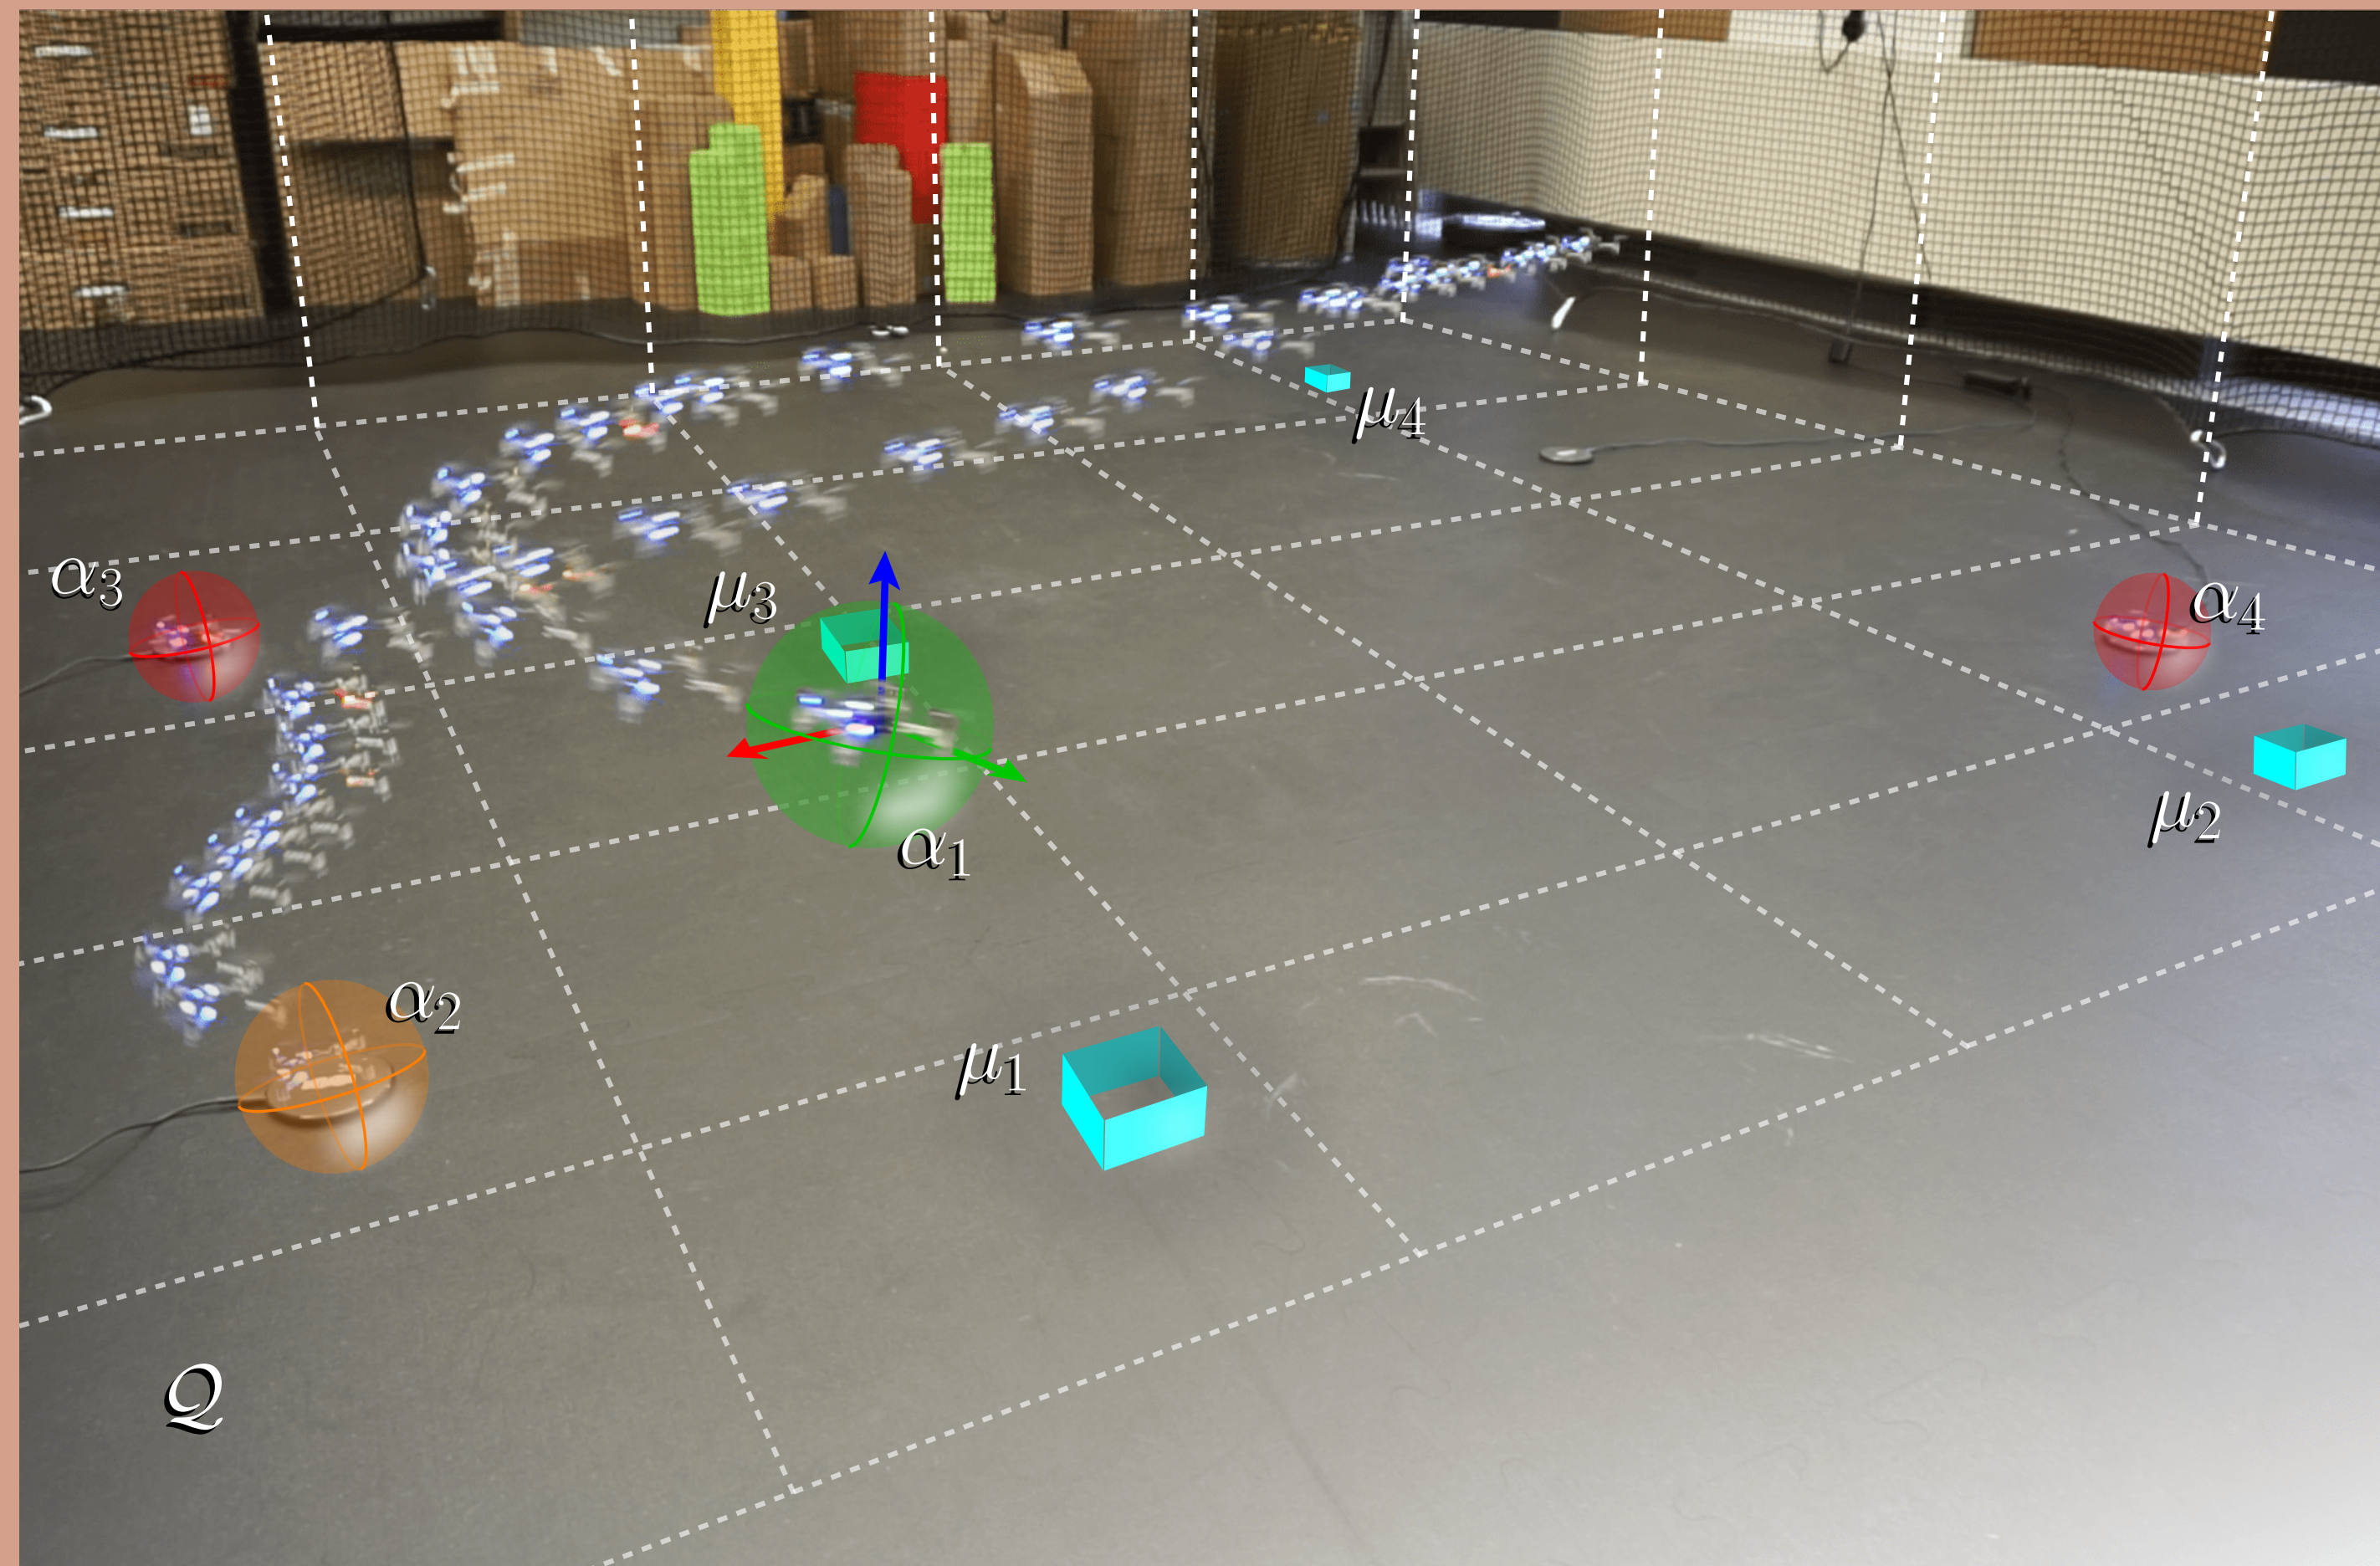

Example of energy-aware ergodic search. A set of agents explores Q , focusing on areas with high information density μ_1, μ_2, μ_3 , and μ_4 , employing ergodic search. The exploration is continuous and uninterrupted so that there is always one agent exploring – α_1 , whereas α_2, α_3 , and α_4 are recharging. The colors of the spheres indicate the state of charge.

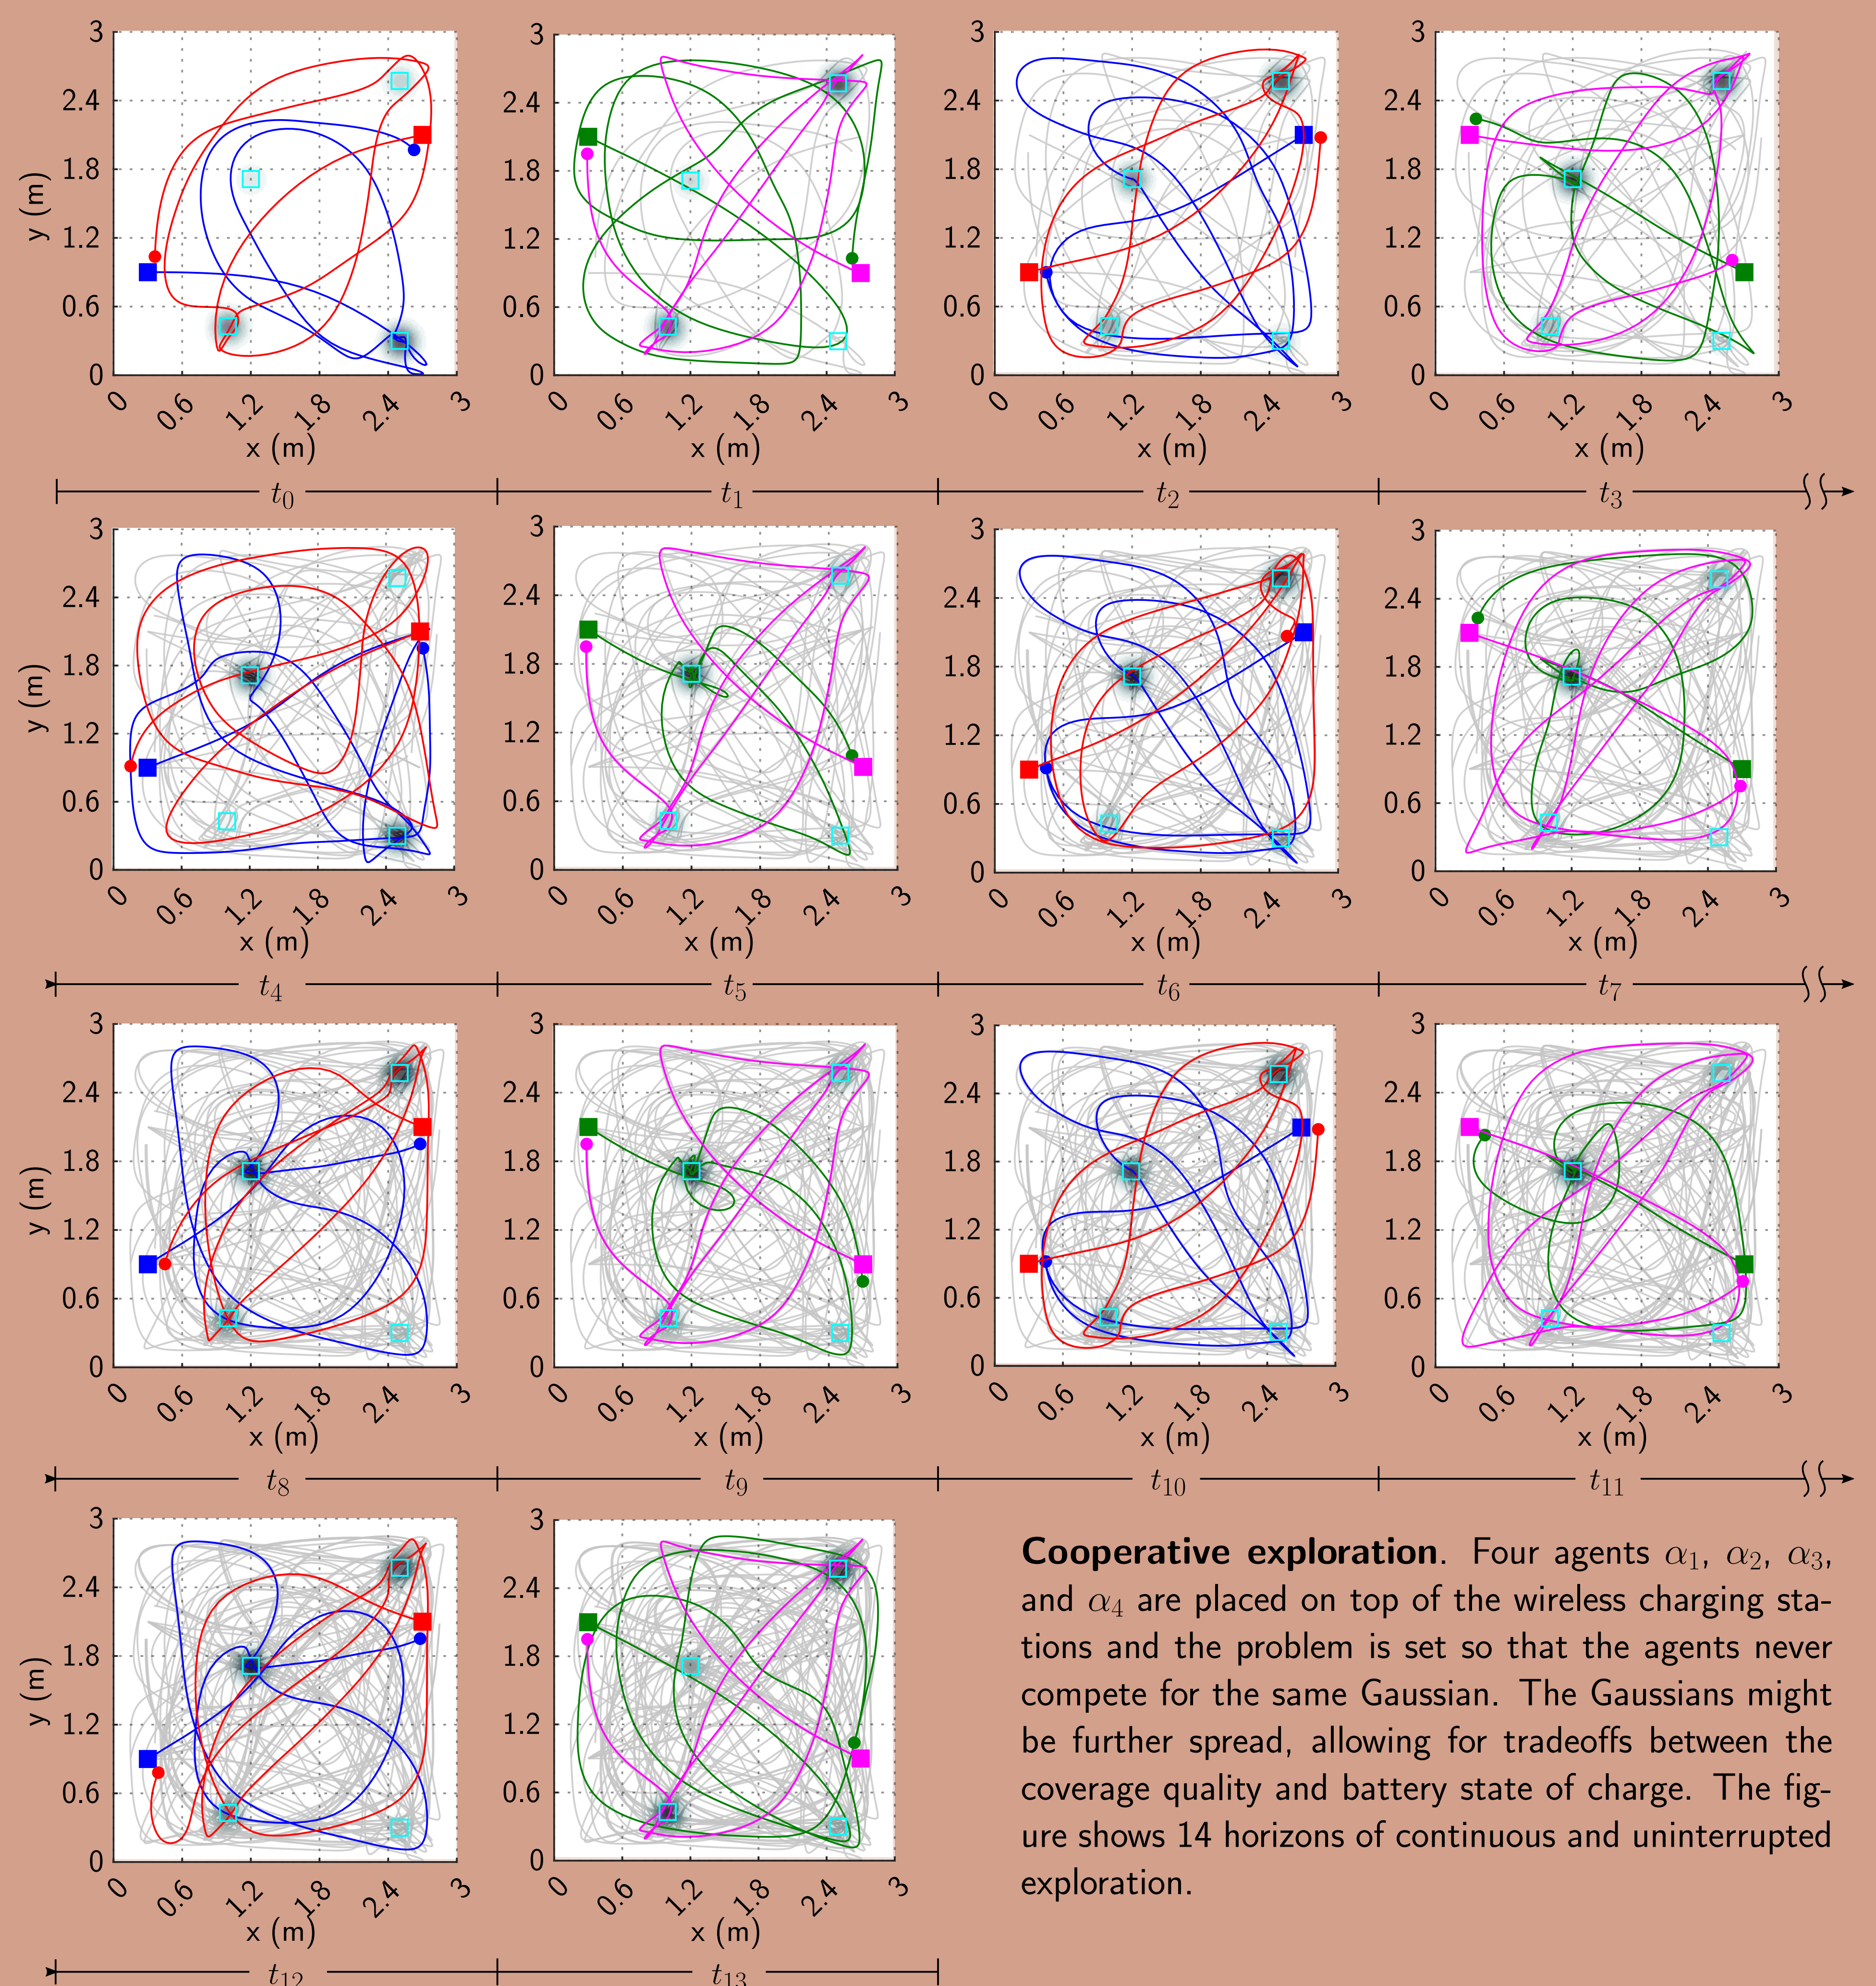

Cooperative exploration. Four agents $\alpha_1, \alpha_2, \alpha_3$, and α_4 are placed on top of the wireless charging stations and the problem is set so that the agents never compete for the same Gaussian. The Gaussians might be further spread, allowing for tradeoffs between the coverage quality and battery state of charge. The figure shows 14 horizons of continuous and uninterrupted exploration.

References

- [1] G. Mathew et al., "Metrics for ergodicity and design of ergodic dynamics for multi-agent systems," *Physica D: Nonlinear Phenomena*, vol. 240, no. 4, pp. 432–442, 2011.
- [2] S. Patel et al., "Multi-agent ergodic coverage in urban environments," in *IEEE International Conference on Robotics and Automation (ICRA)*, 2021, pp. 8764–8771.
- [3] D. Dong et al., "Time optimal ergodic search," in *Conference on Robotics: Science and Systems (RSS)*, 2023, p. 13.
- [4] A. Rao et al., "Multi-objective ergodic search for dynamic information maps," in *IEEE International Conference on Robotics and Automation (ICRA)*, 2023, pp. 10 197–10 204.
- [5] S. Zhao et al., "Observability analysis and state estimation of lithium-ion batteries in the presence of sensor biases," *IEEE Transactions on Control Systems Technology*, vol. 25, no. 1, pp. 326–333, 2017.
- [6] C. Zhang et al., "Online estimation of battery equivalent circuit model parameters and state of charge using decoupled least squares technique," *Energy*, vol. 142, pp. 678–688, 2018.