


CAT 6A U/UTP 23 AWG-LSZH

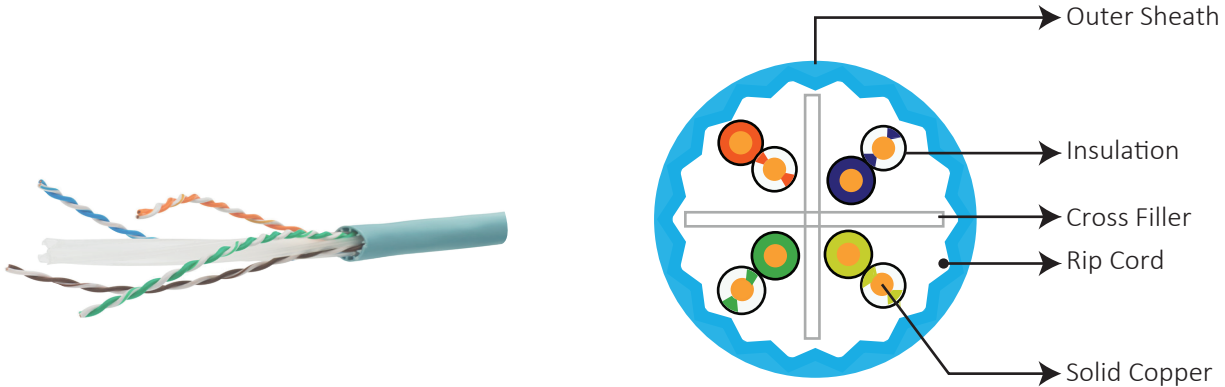

DESCRIPTION

Datacom Cat6A U/UTP LSZH Cable is designed to meet the highest standards of performance and reliability. This cable features a U/UTP (Unshielded Twisted Pair) construction, which provides excellent signal transmission and reduces crosstalk interference.

The LSZH (Low Smoke Zero Halogen) jacket ensures that the cable is safe to use in a variety of environments, as it emits minimal smoke and toxic fumes in the event of a fire. This makes it an ideal choice for enterprise cabling, data centers, server rooms, and other critical applications.

APPLICATION

- 100BASE-T through 10GBASE-T Ethernet
- Power over Ethernet (PoE)- IEEE 802.3bt Type 1 to 4
- ATM and token ring
- Data Center Server farm connectivity

FEATURES

- Supports up to 500 MHz frequency
- IEEE 802.3bt-2018
- ANSI/TIA-568.2-D and ISO 11801 Cat 6A standard verified
- No grounding or bonding required
- Low overall cable diameter- 7.3mm (nom.)
- Backward compatible with legacy protocols and applications.
- The product is 3rd party verified to ANSI/TIA-568.2-D and ISO 11801 Category 6A standards.

DESIGN CONSIDERATIONS

- Use with Datacom Cat 6A UTP connectors.
- Cat 6A patch panels, and Cat 6A patch cords to support 10 Gigabit Ethernet performance.
- POE type 3/4 requirement

STANDARDS COMPLIANCE

- ANSI/TIA-568.2-D
- IEC 60603-7
- IEC 60512-99-002
- ISO/IEC 11801-2nd Edition
- IEEE 802.3BT TYPE 4 POE++ (4PPOE)
- ROHS/REACH
- ANSI/TIA-1096-A

CAT 6A U/UTP 23 AWG-LSZH

TECHNICAL SPECIFICATIONS

Mechanical Properties

Bending Radius	≤ 8 x Cable Diameter
Pulling Tension,maximum	100 N

Electrical Properties (-20° C ± 5° C)

Conductor Resistance (Ω/km)	93.8 (Max.)
Mutual Capacitance (nF/100M)	5.6 (Max.)
Resistance Unbalance (%)	5 (Max.)
Characteristic impedance (Ω)	100 ± 15
Nominal velocity of propagation	69 %
Worst Delay Skew	≤45

Environmental specifications

Operation Temperature	-15 to +75 °C
Installation Temperature	0 to +50 °C

Packing information

Packing Length	305 M per Box
----------------	---------------

CONSTRUCTION

Category	CAT 6A U/UTP	
Conductor	Solid Bare Electrolytic Grade Copper	23 AWG (0.580 mm ± 0.015 mm)
Insulation	High Desnsity Polyethylene (HDPE)	
Insulation diameter	1.10 mm ± 0.05 mm	
Twisting	4 twisted pairs, 2 single conductors paired Twisted pair color code: 1: White Blue/Blue 2: Orange White/Orange 3: White Green/Green 4: Brown White/Brown	
Sheath Design	Teeth (Corrugation Inside the Jacket)	
Outer diameter	7.3mm ± 0.3 mm	
Outer jacket Materials	LSZH , PVC	
Jacket Thickness	0.55 +/- 0.05 mm	
Separator Material	PE	
Bunch Wrapping	Polyester tape and Special Tape barrier	
Acid Gas Test Method	IEC 60754-2	
Flame Test Method	IEC 60332-3-22	
Smoke Test Method	IEC 61034-1	
Remote Powering	75 watts	

TRANSMISSION CHARACTERISTICS

Freq. (MHz)	IL (dB/100)m Max.	NEXT (dB) min.	PSNEXT (dB) min.	ACRF (dB/100) min.	PSACRF (dB/100) min.	Return Loss (dB) min.
1	2.3	65.0	62.0	63.3	60.3	19.0
4	4.2	63.0	60.5	51.2	48.2	19.0
8	5.8	58.2	55.6	45.2	42.2	19.0
10	6.5	56.6	54.0	43.3	40.3	19.0
16	8.2	53.2	50.6	39.2	36.2	18.0
20	9.2	51.6	49.0	37.2	34.2	17.5
25	10.2	50.0	47.3	35.3	32.3	17.0
31.25	11.5	48.4	45.7	33.4	30.4	16.5
62.5	16.4	43.4	40.6	27.3	24.3	14.0
100	20.9	39.9	37.1	23.3	20.3	12.0
200	30.1	34.8	31.9	17.2	14.2	9.0
300	37.4	31.7	28.8	13.7	10.7	7.3
400	43.7	28.7	25.8	11.2	8.2	6.0
500	49.3	26.1	23.2	9.3	6.3	6.0

ORDERING INFORMATION

Description

Datacom Cat 6A U/UTP 4Pair 23AWG LSZH sheath Cable,305m/Box.

Part No.

DC-CBL-C6A-UTP-LSZH

** Available colors -OFF WHITE, LIGHT GREY, GREEN, BLUE, ORANGE, RED