

CAT 6A SHIELDED KEYSTONE JACK



DESCRIPTION

Cat.6A keystone jacks for 22 to 26-gauge stranded and solid cables meet the international standard ISO/IEC 11801 and the ANSI/TIA-568.2-D requirements. Keystone jacks are available in 180 degrees. This helps to achieve easy installation in various commercial buildings and data centers. Each KSJ has a compact casing that will fit into any standard-sized faceplate, blank patch panels, surface boxes, and outlet boxes.

APPLICATION

- Horizontal Distribution and Backbone Cabling.
- 4/16 Mbps Token Ring (IEEE 802.5).
- 10/100/1000/10G BASE-T (IEEE 802.3).
- 155/622 Mbps ATM
- 100 Mbps TP-PMD.
- Analogue Voice, ISDN, ADSL.
- HVAC alarm systems and other signaling.

DESIGN CONSIDERATIONS

- Use Datacom Cat 6A STP Plugs, Cat 6A patch panels, and Cat 6A patch cords to support 10 Gigabit Ethernet performance

FEATURES

- Fully Shielded body reduces EMI/RF interference.
- Tool-less jack design.
- 50-micron gold-plated contacts.
- Universal color-coding according to T568A and T568B.
- IDC termination point at 180° to jack.
- Compatible with a wide range of international faceplates.
- Component level 3P certified.
- Category identification on the front side of the jack.

STANDARDS COMPLIANCE

- ANSI/TIA-568.2-D
- IEC 60603-7, IEC 60512-99-002.
- IEC 60512-99-002.
- ISO/IEC 11801-1 Class E/Ea
- IEEE 802.3bt Type 4 PoE++ (4PPoE)
- RoHS/REACH
- ANSI/TIA-1096-A

CAT 6A SHIELDED KEYSTONE JACK

TECHNICAL SPECIFICATIONS

Mechanical Properties

Termination Punch downs, minimum	20 Times
Plug Insertion Life, minimum	750 cycles min
Plug Retention, Force minimum	≤ 30 N
Pull Force	7.7 kg between Jack and Plug

Environmental specifications

Operating Temperature	10°C-To 60°C
Storage Temperature	-40°C to 70°C
Safety Standard	UL1863


Electrical Characteristics

Modular Jack-(Jack Pin)	60 VDC ,1A
110 Contacts (IDC PIN)	60 VDC ,1A
Current Rating	1.5A @20°C
Contact Resistance Variation	20 m Ohm
Voltage Proof, contact-to-shield	1500Vdc, for 60s
Voltage Proof, contact-to-contact	1000Vdc, for 60s
Insulation Resistance, minimum	500 MΩ
PoE	IEEE802.3bt TYPE 4 PoE++ (4PPoE) 100W
Safety Voltage Rating	150 V (UL 1863)

CONSTRUCTION DETAILS

Body Material	Housing: Zinc die-casting with Nickel Plated
Dust-Cap Color	White
Contact Base Material	Phosphor Bronze with Nickel plated
Contact Plating Material	50 micro-inch gold Plated on plug contact area
Contact Material Type	Phosphor Bronze
Termination Contact Plating	Gold
Contact Plating Thickness	50Micro-inch
Compatible Gauge solid	23-26AWG
Insulation Displacement Contacts	Phosphor bronze with Tin Plating
Insulation Displacement Contacts' Cap	PC, UL94V-2, White color
Insulation Displacement Housing	PC, UL94V-2, Grey color
IDC Color	White
Cable OD range	5.0mm - 8.5mm

TECHNICAL DRAWINGS

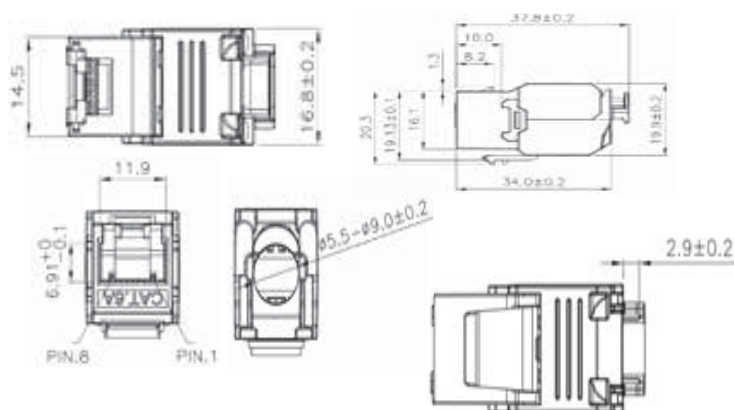

ORDERING INFORMATION

Description

Datacom Cat 6A Shielded 180° Modular Keystone Shutterd Tool Less

Part No.

DC-MJRJ-C6A-SH