


OUTDOOR RATED CAT6A UTP 23 AWG CABLE

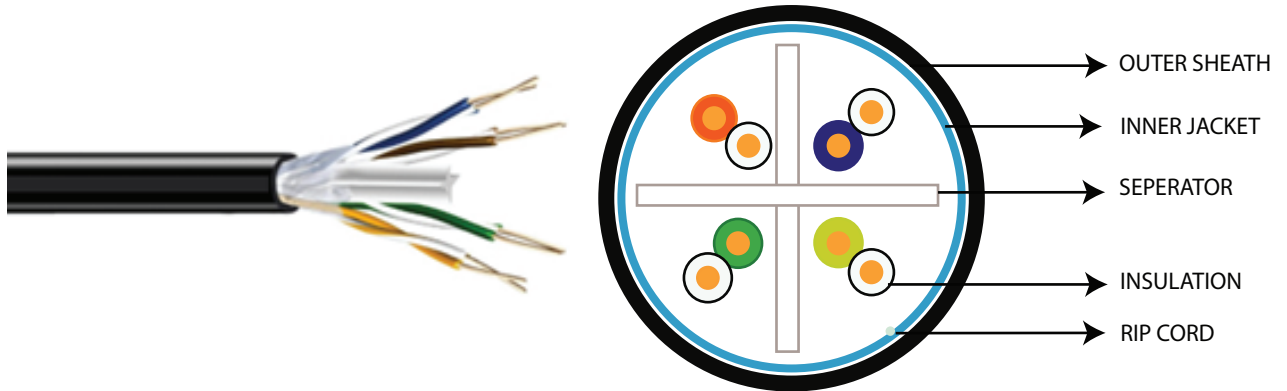

DESCRIPTION

Datacom outdoor Unshielded cable is a robust category cable designed to provide an extension of the LAN beyond the premises or in situations, where the NEC code requires an OSP-rated cable when it is in contact with the earth whether in a conduit or not. Cat 6A Cables support up to 10 Gbps Data rates and are the ideal choice for LAN/WAN Solutions. The cable is constructed of 23-gauge copper conductors. It consists of 8 Copper Conductors, 2 conductor s twisted together to form a pair. Al The cable jacket is made with UV-stabilized outdoor-rated PE material suitable for outdoor applications. The cable covers the category 6A requirements for unshielded twisted pair cables of 100 Ω and is characterized up to 500 MHz suitable for transmitting data over local area networks.

APPLICATION

- Datacom CAT6A cable allows for the transmission of up to 10Gbps and is fast becoming the cabling infrastructure of choice for VoIP, CCTV, and data networks. Specified for use in Class Ea networks, CAT6A cable allows for extremely high data rate transmission of up 10Gbps and at a frequency of 500Mhz.

DESIGN CONSIDERATIONS

- Use with Datacom Cat 6A unshielded connectors.
- Cat 6A unshielded patch panels, and Cat 6 unshielded patch cords to support 10 Gigabit Ethernet performance.

STANDARDS COMPLIANCE

- ANSI/TIA-568-D.2
- ISO/IEC 11801 2ND Edition
- ROHS COMPLIANT

FEATURES

- Assures ample overhead for reliable transmission in an OSP-rated cable allowing extension of the premises LAN.
- Prevents water ingress inner cable preventing damage to equipment.
- OSP-grade black polyethylene jacket ensures the Outside plant-rated cable for years of reliable performance
- The outer jacket is OSP-grade black, polyethylene for superior sunlight and abrasion resistance. This shielded design is suitable for the following d-eployments: Duct, underground conduit, Tower lashed aerial or open trench.

OUTDOOR RATED CAT6A UTP 23 AWG CABLE

TECHNICAL SPECIFICATIONS	
Mechanical Properties	
Bending Radius	≤ 8 x Cable Diameter
Pulling Tension, maximum	100 N
Electrical Properties (-20° C ± 5° C)	
Conductor Resistance (Ω/km)	93.8 (Max.)
Mutual Capacitance (nF/100M)	5.6 (Max.)
Resistance Unbalance (%)	5 (Max.)
Characteristic impedance (Ω)	100 ± 15
Nominal velocity of propagation	69 %
Worst Delay Skew	≤45
Environmental specifications	
Operation Temperature	-15 ~ +75 °C
Installation Temperature	0° C ~ +50° C
Packing information	
Packing Length	305±1.0 Meter
Packing Weight (K.G)	Net weight 11.4kg

CONSTRUCTION		
Category	CAT 6A U/UTP Out door cable PE sheath	
Conductor	Solid Bare Electrolytic Grade Copper	23 AWG(0.550 mm ±0.015 mm)
Insulation	High Density Polyethylene (HDPE)	
Insulation diameter	1.10 mm ± 0.05 mm	
Twisting	4 twisted pairs, 2 single conductors paired Twisted pair color code: 1: White Blue/Blue 2: Orange White/Orange 3: White Green/Green 4: Brown White/Brown	
Cable lay-up	4 Pairs with different pitches	
Outer diameter	6.5 mm ± 0.3 mm	
Outer jacket Materials	PE (Black UV Protected)	
Jacket Thickness	0.55 +/-0.05 mm	
Separator Material	PE	
Remote Powering	60 watts	

TRANSMISSION CHARACTERISTICS						
Freq. (MHz)	IL (dB/100) max	NEXT ≤dB Min.	PSNEXT (dB) min.	ACRF (dB/100) min.	PSACRF (dB/100) min.	Return Loss (dB) min.
1	2.3	65.0	62.0	63.3	60.3	67.8
4	4.2	63.0	60.5	51.2	48.2	55.8
8	5.8	58.2	55.6	45.2	42.2	49.7
10	6.5	56.6	54.0	43.3	40.3	47.8
16	8.2	53.2	50.6	39.2	36.2	18.0
20	9.2	51.6	49.0	37.2	34.2	17.5
25	10.2	50.0	47.3	35.3	32.3	17.0
31.25	11.5	48.4	45.7	33.4	30.4	16.5
62.5	16.4	43.4	40.6	27.3	24.3	14.0
100	20.9	39.9	37.1	23.3	20.3	12.0
200	30.1	34.8	31.9	17.2	14.2	9.0
300	37.4	31.7	28.8	13.7	10.7	7.3
400	43.7	28.7	25.8	11.2	8.2	6.0
500	49.3	26.1	23.2	9.3	6.3	6.0

ORDERING INFORMATION

Description

**Datacom Cat 6A U/UTP 10G 4 Pair 23AWG Cable UV
Stabilized Outdoor Rated-PE305 M/Box Black**

Part No.

DC-CBL-C6AUT-PE