
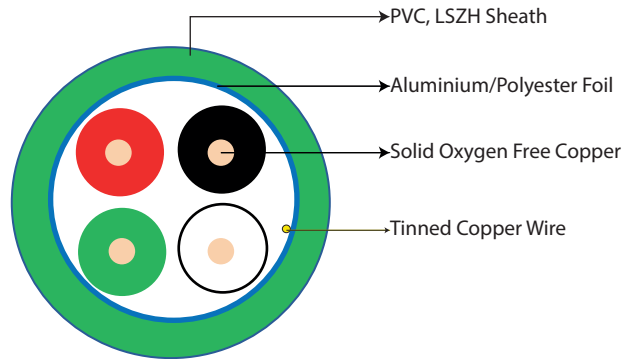


D-SENSE SERIES KNX CABLE

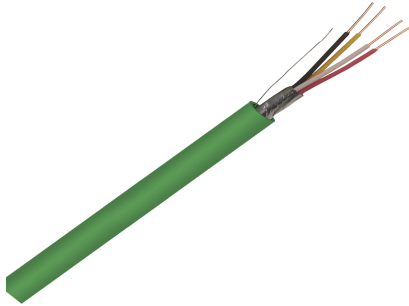

APPLICATION

- Use in KNX system
- Formerly known as EIB
- Application to lighting.
- Heating or ventilation in pipe
- Dry
- Moist and wet areas

STANDARDS COMPLIANCE

- BS EN 50090
- BS EN 60228
- BS EN 50290
- RoHS Directives
- IEC60332-1

ELECTRICAL PERFORMANCE

Working Voltage	150V
Test Voltage	4KV
Conductor DCR	37.0 Ω /km (Max. @ 20°C)
Insulation Resistance	100 M Ω hms/km (Min.)
Mutual Capacitance	100 nF/Km (Max. @ 800Hz)
Unbalanced Capacitance	200 pF/100m (Max.)
Velocity of Propagation	66%

CONSTRUCTION DETAILS

Conductor Material	Solid Oxygen Free Copper
Conductor Size	0.80mm
Insulation	S-PE
Identification	Red, Blue
Cabling	Twisted into a pair or quad
Installation Temperature	Above 0°C
Operating Temperature	-15°C ~ 70°C
Screen	Aluminium/Polyester Foil
Drain Wire	Tinned Copper Wire
Sheath	PVC, LSZH
Sheath Color	Green
Cable Diameter	5.10/5.70mm

MECHANICAL CHARACTERISTICS

Test Object	Sheath	
Test Material	PVC/LSZH	
Aging Condition (°C Xhrs)	80X168	
Cold Bend (-20°CX4hrs)	No crack	
Impact Test (-15°C)	No crack	
Longitudinal Shrinkage (%)	≤5	
Operating Temperature	-15°C ~ 70°C	
Before Aging	Tensile Strength (Mpa)	≥10 (PVC), ≥9 (LSZH)
	Elongation (%)	≥100
After Aging	Tensile Strength (Mpa)	≥70% unaged
	Elongation (%)	≥60% unaged

D-SENSE SERIES KNX CABLE

ORDERING INFORMATION

Part No.	Description
DC-KNYE00819PV	DATACOM D-SENSE 1 Pair KNX CABLE, Bare Copper oxygen free conductor 1x2x20AWG (0.8mm) + 1.40mm PE insulation, Al foil screened with PVC Jacket
DC-KNYE00905LZ	DATACOM D-SENSE 1 Pair KNX CABLE, Bare Copper oxygen free conductor 1x2x20AWG (0.8mm) + 1.40mm PE insulation, Al foil screened with LSZH Jacket
DC-KNYE00820PV	DATACOM D-SENSE 2 Pair KNX CABLE, Bare Copper oxygen free conductor 1x4x20AWG (0.8mm) + 1.40mm PE insulation, Al foil screened with PVC Jacket
DC-KNYE00906LZ	DATACOM D-SENSE 2 Pair KNX CABLE, Bare Copper oxygen free conductor 1x4x20AWG (0.8mm) + 1.40mm PE insulation, Al foil screened with LSZH Jacket