
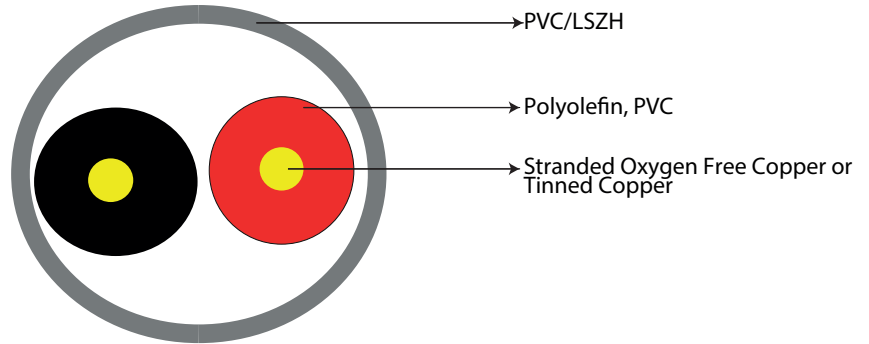


D-SENSE SERIES PUBLIC ADDRESS CABLE



APPLICATION

- Public address
- background music application indoor & outdoor.

STANDARDS COMPLIANCE

- BS EN 60228
- BS EN 50290
- RoHS Directives
- RoHS Directives
- IEC60332-1

CONSTRUCTION DETAILS

Conductor Material	Stranded Oxygen Free Copper or Tinned Copper
Insulation	Polyolefin, PVC
Cabling	Twist Pairs laying-up
Sheath	PVC/LSZH
Installation Temperature	Above 0°C
Operating Temperature	-15°C ~ 70°C

ELECTRICAL PERFORMANCE

Operating Voltage	300V
Test Voltage	1.0 KVdc
Conductor DCR	25.0 Ω/km (Max. @ 20°C) for 18AWG 14.0 Ω/km (Max. @ 20°C) for 16AWG 9.3 Ω/km (Max. @ 20°C) for 14AWG 5.30 Ω/km (Max. @ 20°C) for 12AWG
Insulation Resistance	200 MΩhms/km (Min.)

ORDERING INFORMATION

Part No.	Description
DC-SP5000UPV	DATAKOM D-SENSE Speaker Cable, Bare Copper, 2X12 AWG, Polyethylene insulation with PVC Jacket
DC-SP4000ULZ	DATAKOM D-SENSE Speaker Cable, Bare Copper, 2X12 AWG, Polyethylene insulation with LSZH Jacket
DC-SP5100UPV	DATAKOM D-SENSE Speaker Cable, Bare Copper, 2X14 AWG, Polyethylene insulation with PVC Jacket
DC-SP4100ULZ	DATAKOM D-SENSE Speaker Cable, Bare Copper, 2X14 AWG, Polyethylene insulation with LSZH Jacket
DC-SP5200UPV	DATAKOM D-SENSE Speaker Cable, Bare Copper, 2X16 AWG, Polyethylene insulation with PVC Jacket
DC-SP4200ULZ	DATAKOM D-SENSE Speaker Cable, Bare Copper, 2X16 AWG, Polyethylene insulation with LSZH Jacket
DC-SP5300UPV	DATAKOM D-SENSE Speaker Cable, Bare Copper, 2X18 AWG, Polyethylene insulation with PVC Jacket
DC-SP4300ULZ	DATAKOM D-SENSE Speaker Cable, Bare Copper, 2X18 AWG, Polyethylene insulation with LSZH Jacket