
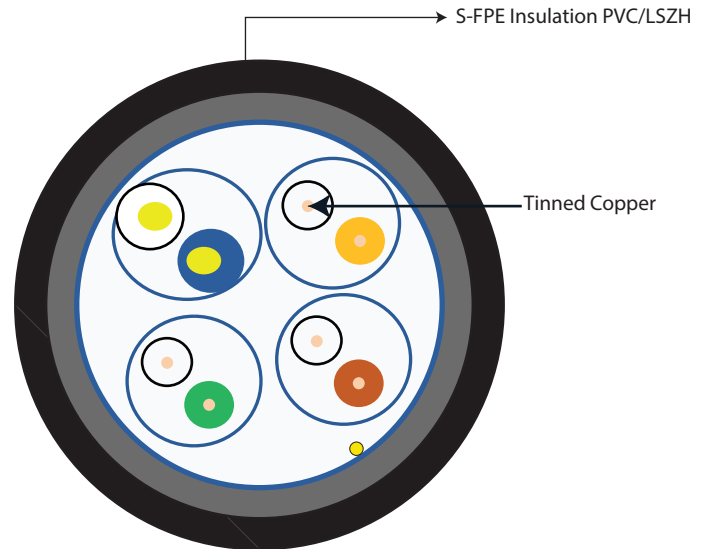


D-SENSE SERIES RS485 AUTOMATION CABLE

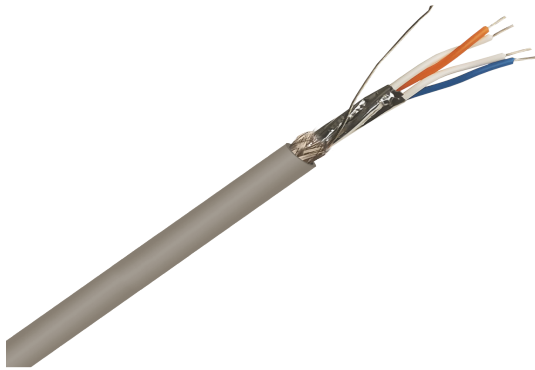

APPLICATION

- Data communication and automation systems
- Microprocessor to device
- Tinned Copper

STANDARDS COMPLIANCE

- TIA/EIA-485
- BS EN 50288-7
- BS EN 60228
- BS EN 50290
- RoHS Directives

CONSTRUCTION DETAILS

Conductor	Stranded Tinned Copper Wire
Insulation	S-PE
Cabling	Twist Pairs laying-up
Armour (Where Applicable)	Galvanized Steel Wire or Steel Tape
Oversheath	PVC/LSZH
Installation Temperature	Above 0°C
Operating Temperature	-15°C ~ 65°C
Screened: Individually Screened (Optional)	
• Al-PET tape with Tinned Copper Drain Wire	
• Tinned Copper Wire Braided Screen	
• Al-PET Tape & Tinned Copper Braided	
Bedding for Armoured Cable (Where Applicable)	
• Polyethylene (PE)	
• LSZH / PVC	

ELECTRICAL PERFORMANCE

Working Voltage	300V
Characteristic Impedance	120 $\Omega \pm 15 \Omega$
Velocity of Propagation	S-FPE: 78%, S-PE: 66%
Velocity of Propagation (%)	66
Conductor DCR	57.0 Ω /km (Max. @ 20°C) for 22AWG
	91.80 Ω /km (Max. @ 20°C) for 24AWG

IDENTIFICATION OF INSULATION

1st Pair	White, Blue	2nd Pair	White, Yellow
3rd Pair	White, Green	4th Pair	White, Brown

D-SENSE SERIES RS485 ATOMATION CABLE

ORDERING INFORMATION

Part No.	Description
DC-RS9841PV	DATACOM D-SENSE RS485, Tinned Copper 1x2x24AWG Al-foil + Braid PVC
DC-RS9842PV	DATACOM D-SENSE RS485, Tinned Copper 2x2x24AWGAl-foil + Braid PVC
DC-RS9843PV	DATACOM D-SENSE RS485, Tinned Copper 3x2x24AWGAl-foil + Braid PVC
DC-RS9844PV	DATACOM D-SENSE RS485, Tinned Copper 4x2x24AWGAl-foil + Braid PVC
DC-RS9841LZ	DATACOM D-SENSE RS485, Tinned Copper 1x2x24AWG Al-foil + Braid LSZH
DC-RS9842LZ	DATACOM D-SENSE RS485, Tinned Copper 2x2x24AWGAl-foil + Braid LSZH
DC-RS9843LZ	DATACOM D-SENSE RS485, Tinned Copper 3x2x24AWGAl-foil + Braid LSZH
DC-RS9844LZ	DATACOM D-SENSE RS485, Tinned Copper 4x2x24AWGAl-foil + Braid LSZH