


INTELLIGENT ePATCH- (Epanel 24 Port COPPER)

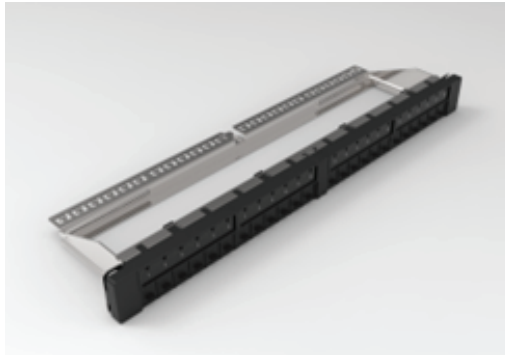

DESCRIPTION

DATACOM 1U 24 ports shielded unloaded blank smart panel (e-panel) w/rear support, every port has dust-proof shutter. Every port has an RGB-led indicator to indicate the status of ports:

- Green-authorized plugged.
- Red-unauthorized unplugged.
- Yellow-unauthorized plugged.

There is a dual-RJ45-type control port at the rear side to connect with the Controller (Management unit) by Cat5e above standard patch cord. This epanel is a port-type-detect e-panel which can detect the status of the port if it is occupied or not.

APPLICATION

- To monitor the status of copper panel port by periodic scanning the port sensor
- To determine the port status is authorized or unauthorized by comparing with the work order pre-stored in Micro Controller Unit(MCU) sent by management software in advance
- Turn on the corresponding color indicator light on the designated port based on the judgment result.
- This panel is specifically designed for indoor applications

FEATURES

- High density with 24 ports in 1U capacity for 24 keystone interface modules (Provide separately)
- Special design 24 cable tie holes on the rear cable support is for easy cable fixation
- The electroplating body with grounding point is designed for tight contact with the shielding module
- The shutter is special designed for dust-proof and sensor trigger
- RGB color lights are special designed to indicate the difference status of the ports.
- The build-in MCU to process the sensor signals, provide comparison results, illuminate the port indicator light, and feed back result information to the management software



INTELLIGENT ePATCH- (Epanel 24 Port COPPER)

FEATURES

- EIA/TIA 568-C.2
- ISO 11801
- Compliant with ROHS & REACH

MECHANICAL CHARACTERISTICS

Height	1RU
Weight (kg) Gross & Net:	0.91 & 0.72
Installation	19" Rack/Cabinet Mount
Port Number	24 Ports
Interface	For 24 Keystone Interface Module

APPLICATION ENVIROMENT

Operating Temperature	0 °C to 50 °C
Operating Humidity	0 % to 90 % (No condensation)
Storage Temperature	-20 °C to 65 °C
Storage Humidity	0 % to 95 % (No condensation)

ORDERING INFORMATION

Description

**DATACOM Intelligent Panel, 24P Shielded J-Type Blank
Smart Panel, With Rear Wire Support Bar**

Part No.

DC-IP312-JFCP-24PG