


INTELLIGENT ePATCH- (Epanel FIBER)

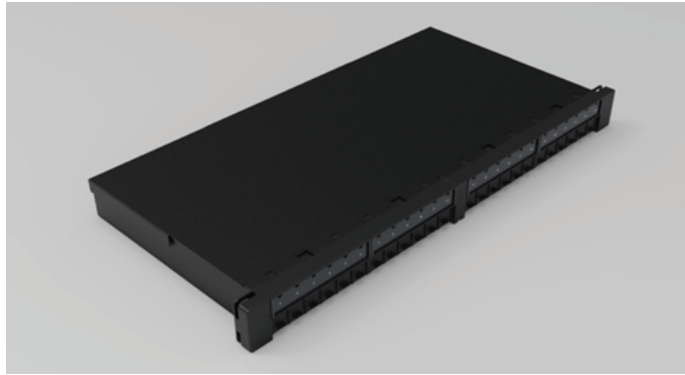

DESCRIPTION

DDATACOM 1U 24 ports optic fiber smart panel (e-panel) w/splice tray, 24 duplex LC (SM/MM) adapters loaded, every port has dust-proof shutter.

Every port has an RGB-led indicator to indicate the status of ports:

- Green-authorized plugged.
- Red-unauthorized unplugged.
- Yellow-unauthorized plugged.

There is a dual-RJ45-type control port at the rear side to connect with the Controller (Management unit) by Cat5e above standard patch cord. This OF e-panel is a port-type-detect e-panel which can detect the status of the port if it is occupied or not.

APPLICATION

- To monitor the status of copper panel port by periodic scanning the port sensor
- To determine the port status is authorized or unauthorized by comparing with the work order pre-stored in Micro Controller Unit(MCU) sent by management software in advance.
- Turn on the corresponding color indicator light on the designated port based on the judgment result.
- This panel is specifically designed for indoor applications

FEATURES

- High density with 24 ports in 1U capacity for 24 duplex LC adapters (Pre-loaded)
- Supports up to 48-core fiber optic connections
- Rear-mounted optical fiber fusion box, equipped with an internal fiber winding reel and fusion chamber
- The shutter is special designed for dust-proof and sensor trigger
- RGB color lights are special designed to indicate the difference status of the ports.
- The build-in MCU to process the sensor signals, provide comparison results, illuminate the port indicator light, and feed back result information to the management software.

INTELLIGENT ePATCH- (Epanel FIBER)

FEATURES

- Connectivity meets or exceeds TIA/EIA-568-C.3 performance requirements
- TSB-67
- ISO 11801
- Compliant with ROHS & REACH

MECHANICAL CHARACTERISTICS

Height	1RU	
Weight (kg) Gross & Net:	3.4 & 2.9	
Installation	19" Rack/Cabinet Mount	
Port Number	24 Ports	
Fiber Interface	Single mode	Duplex LC/PC, or Duplex LC/APC, or Duplex LC/UPC
	Multimode	Duplex LC/PC

APPLICATION ENVIROMENT

Operating Temperature	0 °C to 50 °C
Operating Humidity	0 % to 90 % (No condensation)
Storage Temperature	-20 °C to 65 °C
Storage Humidity	0 % to 95 % (No condensation)

TRANSMISSION SPECIFICATION

Interface Type	Insert Loss (I.L)			Return Loss (R.L)		
	PC	UPC	APC	PC	UPC	APC
Single mode	≤0.3dB	≤0.2dB	≤0.2dB	≥50dB	≥55dB	≥60dB
Multimode	≤0.3dB	/	/	≥35dB	/	/

ORDERING INFORMATION

Description	Part No.
SM Datacom 24 Ports Smart Fiber Panel, W/24 SM Simplex SC Adapter ,W/RJ45-Type Control Port At Back Side	DC-IP312-R10SA0-24PG
OM3 Datacom 24 Ports Smart Fiber Panel, W/24 OM3 Duplex LC Adapter ,W/RJ45-Type Control Port At Back Side	DC-IP312-R10CP3-24PG
OM4 Datacom 24 Ports Smart Fiber Panel, W/24 OM4 Duplex LC Adapter ,W/RJ45-Type Control Port At Back Side	DC-IP312-R10CP4-24PG
OM5 Datacom 24 Ports Smart Fiber Panel, W/24 OM5 Duplex LC Adapter ,W/RJ45-Type Control Port At Back Side	DC-IP312-R10CP5-24PG