


INTELLIGENT ePATCH-NETWORK CONTROLLER

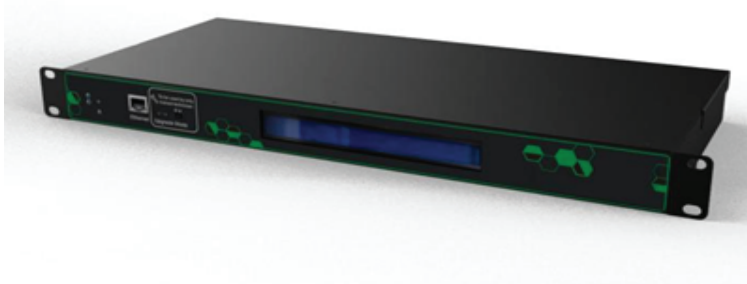

DESCRIPTION

DATACOM network controller, 19" rack mount, height:1RU,w/24 RJ45-type control ports at back side to manage max.24x24 e-panel at max. 20 meter. w/ 1 Ethernet uplink port(10/100M), w/1 LCD display. Power input:AC110-240V, 50/60Hz.

FEATURES

- High density with 24 controller ports in 1U capacity for down-link e-panels by max. Length 20 meter RJ45 patch cord.
- With 24 control ports at back side
- To manage up to 24 e-panels, up to 576 ports (24X24)
- With LCD display to display the network configuration and the number of e-panel connected
- Power input(default):AC110-240V, 50/60Hz
- Power input(option 1):Duplicate supply @AC110-240V, 50/60Hz.
- Power input(option 2):Duplicate supply @DC 48V or -48V
- Power input(option 3):Duplicate supply @AC110-240V,50/60Hz and DC 48V or -48V

APPLICATION


- To management up to 24 e-panels
- Display the network configure such as MAC & IP
- Display the number of e-panel down-loaded
- This panel is specifically designed for indoor applications

MECHANICAL CHARACTERISTICS

Height	1RU
Installation	19" Rack/Cabinet Mount
Input Rated Voltage	AC110~220V, 60/50Hz (default)
Rated Power	15W (Max)
Monitoring channels	24 Monitoring channels to manage up to 24 e-panels, 576 ports
Ethernet Port	one 10/100M Ethernet Port
Display	LCD Display

INTELLIGENT ePATCH-NETWORK CONTROLLER

DRAWING DETAILS

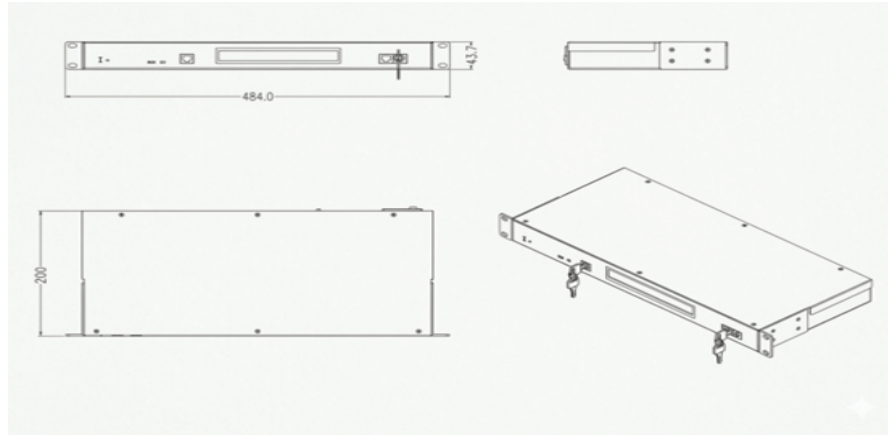

APPLICATION ENVIROMENT

Operating Temperature	0 °C to 50 °C
Operating Humidity	0 % to 90 % (No condensation)
Storage Temperature	-20 °C to 65 °C
Storage Humidity	0 % to 95 % (No condensation)

ORDERING INFORMATION

Description
 Datacom ePatch-Network Controller, Rack Mount,
 Height:1ru,W/24 Rj45-Type Control Ports At Rear Side, 1
 Ethernet Uplink Port(10/100m) &Lcd On Front Side, Power
 Input:Ac110-240v, 50/60hz

Part No.
 DC-IP312-GT4-PNC