


QNET HD6 SERIES MPO/LC CASSETTES

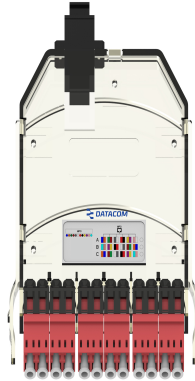

DESCRIPTION

Datacom HD6 cassette based modular patch panel solution allows the IT administrator to seamlessly and conveniently integrate equipment with 1Gb, 10Gb, 40Gb and 100Gb speeds, meeting all the required connectivity needs required of today. It applies to the QNET HD6 High Density MPO Patch Panel Series.

With the characteristics of compact size, light weight and high density, HD6 series cassettes saves a lot of space in networking /equipment cabinet.

Quick and easy deployment in high density applications and provide efficient utilization of rack space and design flexibility. DATACOM HD6 Cassette having high optical performance, utilized ultra insertion loss MPO and LC connectors. Polarity comes in A or B type.

The HD6 12 Port LC Fiber Cassette Module with loaded fanout cable offers a 12-fiber MPO adapter on the rear of the cassette and 6 duplex LC adapters on the front, which interconnect with the supplied high-density fiber fan-out cable assembly for quick connection of remote or data center applications.

APPLICATION

- 10G/40G/100G network.
- Designed for MDA, IDA or HDA datacentres.
- High Density Fiber Interconnection.

STANDARDS COMPLIANCE

- RoHS.
- Reach/SVHC
- TIA/EIA 568.C,ISO/IEC 11801
- EN 50173, IEC 60304,IEC 61754, EN 297-1

FEATURES

- Higher Density,Small size,Save space.
- Suitable for MPO and fiber splice.
- Independently module easy to cable management.
- Cassette module for easy replacement.

SPECIFICATIONS

Material	PC+ABS
Size(W*H*D mm)	235×43.2×24.5mm- (data-EK-G7-H1-J1)

QNET HD6 SERIES MPO/LC CASSETTES



MTP/MPO Connector

Fiber Mode	Single Mode	Multimode
Insertion Loss (dB)	≤ 0.35 (Ultra Loss)	≤ 0.35 (Ultra Loss)
Return Loss (dB)	≥ 60	≥ 20
Durability (dB)	≤ 0.2 (500 times mating)	
Tensile Strength (kgf)	10	
Working Temperature(°C)	-20 ~ +70	

LC Connector

Fiber Mode	Single Mode	Multimode
Insertion Loss (dB)	≤ 0.30	≤ 0.30
Return Loss (dB)	≥ 60	≥ 20
Durability (dB)	≤ 0.2 (500 times mating)	
Tensile Strength (kgf)	10	
Working Temperature(°C)	-20 ~ +70	

TECHNICAL DRAWINGS

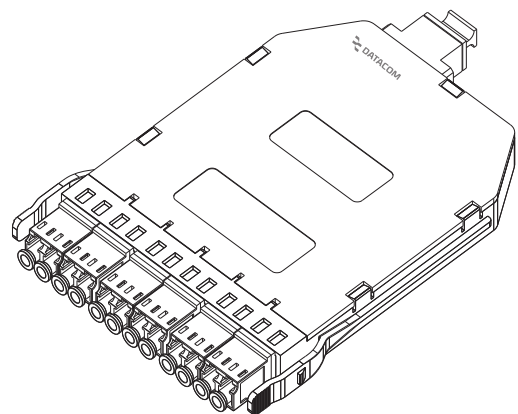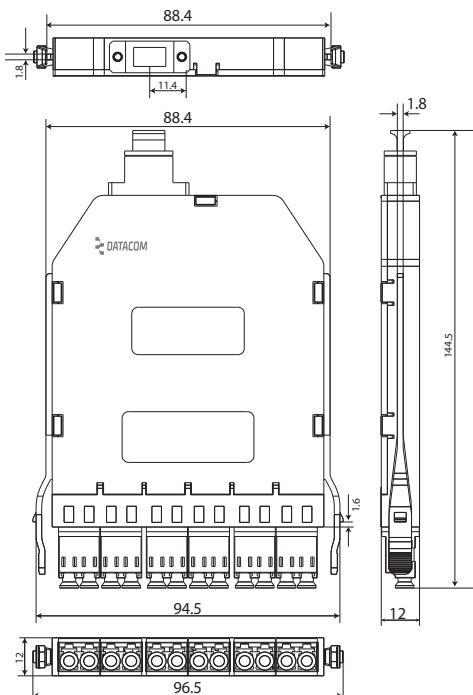

QNET HD6 SERIES MPO/LC CASSETTES

PART NUMBER - CONFIGURATION

Eg :

1

 " - "

2

3

4

5

6

7

8

9

10

DC - QN6 MC Z 12 L M U P B

1- DC
DATACOM

2- QN6
Series Type

3- MC
MPO CASSETS

4-FIBER TYPE
9 = OS2 9/125
X = OM3 50/125
Z = OM4 50/125

5- FIBER COUNT
12 = 12 CORE

6-CONNECTOR TPE
L = LC

7-GENDER
M=MALE
F =FEMALE

8- INSERTION LOSS
U=ULTRA INSERTION LOSS

9-MATERIAL
P = PLASTIC

10- POLARITY
A
B

Examples of Ordering Information

ORDERING INFORMATION

Description
DATACOM QNET SERIES OM4 12 MPO to 12 Duplex LC Cassette Type B, Male

DATACOM QNET SERIES SM 12 MPO to 12 Duplex LC Cassette Type B, Male

Part No.
DC-QN6MCZ12LMUPB

DC-QN6MC912LMUPB