


QNET HD6 SERIES MPO PANEL

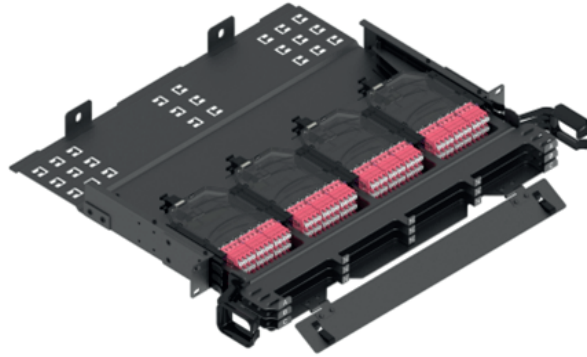

DESCRIPTION

Datacom QNET HD6 1U rack mount enclosure, It provides high density flexible system for managing fiber terminations, connections, and patching in data-center application to maximizing rack space utilization and minimizing floor space. FHX fiber optic enclosure houses, organizes, manages, and protects fiber optic cable, terminations, splices, connectors and patch cords. The 1U enclosure houses 3 independently sliding drawers, each drawer is able to hold cassettes by default. Cassettes are available in a variety of configurations: MPO to LC, MPO to SC, MPO to MPO, splicing, splitter, and WDM. The use of cassettes and variety of functions allow the HDC to be expanded as needed and serves a variety of purposes.

FEATURES

- Higher Density, Up to 144 Cores in 1U space
- Suitable for MPO and MTP and fiber splice.
- Smooth slide rail allows the drawer to extend steady in a straight line
- Unite drawer design, easy to cable management
- Modular cassette for easy replacement
- Provides the highest levels of density and serviceability.

APPLICATION

- 10G/40G/100G optical network
- Designed for MDA, IDA or HDA data centres
- High Density Fiber Interconnection network

STANDARDS COMPLIANCE

- RoHS
- Reach/SVHC

QNET HD6 SERIES MPO PANEL

MECHANICAL CHARACTERISTICS OF PATCH PANEL

Dimension (HxWxD)	483mm x 423mm x 44.5mm
Rack Height	1U
Material	Cold rolled
Thickness	1.2mm
Material coating	Electrostatic Powder Coating
Capacity of Fiber	144
IP Rate	IP20

STORAGE & INSTALLATION ENVIRONMENT

Storage	-0 to +70 °C
Installation	-0 to +50 °C
Operation	-20 to +60 °C

ORDERING INFORMATION

Description

Datacom QNET HD6 1U High Density Sliding MPO Cassett Enclosure, Hold Up to 12 Cassett, Capacity Up to 144 Fibe

Part No.

DC-QN6MPP13S-144B