


12- 48F MLT GLASS YARN ARMORED INDOOR OUTDOOR CABLE

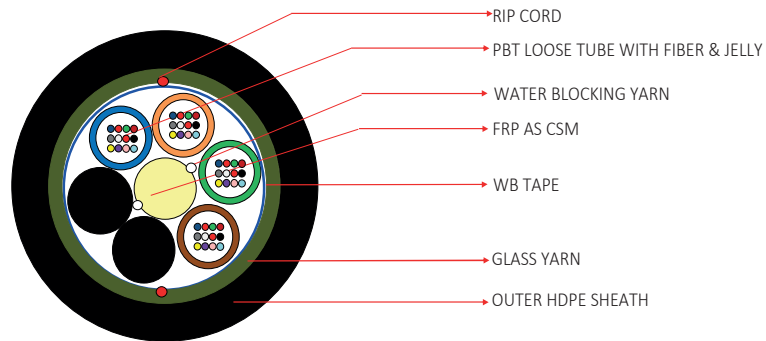

DESCRIPTION

Datacom loose tube Single Mode design offers durable and reliable optical transmission performance over a broad temperature range. Optical fibers are placed inside gel-filled buffer tubes. The core is wrapped with flexible strength members covered with water-blocking tape then encased with a black jacket which provides superior crush resistance for indoor outdoor installation.

APPLICATION

- This cable can be used for outdoor data communications connections including CATV, WAP, CCTV, telecom trunk and access lines.
- These cables are armoured for direct burial and conditions with risk of severe rodent attacks.
- This type of cable can be used as distribution and feeder cables
- Local loop, metro, long-haul and broadband network.

FEATURES

- Gel-filled tube and water-blocking tape :
- Blocks water from entering the cable and damaging the optical fibres.
- ITUG652.D Single Mode fibres: Deliver high bit rate data transmission and are bend insensitive.

STANDARDS COMPLIANCE

- TELECORDIA GR-20
- TIA 568D.3
- ITUG652.D
- ROHS

12- 48F MLT GLASS YARN ARMORED INDOOR OUTDOOR CABLE

CONSTRUCTION DETAILS

No of Fibre/Tube	12F per Tube - Blue, Orange, Green, Brown, Slate/Grey, White, Red, Black, Yellow, Violet, Pink, Aqua.
Loose Tube	PBT Loose Tube Filled With Thixotropic Jelly
No of Loose Tube	4 Loose Tube + 2 Fillers
Tube Identification	Blue, Orange, Green, Brown, Filler01 & Filler02
Central Strength Member	F i b e r Reinforced Plastic - FRP (Non Metallic)
Moisture Barrier	Water Swellable Tape & Water Blocking Yarn
Core Wrapping	Core Wrapped With Water Blocking Tape & Binder Yarn
Armouring	Corrugated ECCS Tape Armour
Rip cord	One Rip cord provided below the Outer Sheath
Outer Jacket	HDPE UV Black Color
Strength Member	Glass Yarn

FIBER CHARACTERISTICS

Attenuation (Transmission Characteristics)	
@ 1310 nm	≤ 0.36 (dB/Km)
@ 1550 nm	≤ 0.23 (dB/Km)
GEOMETRICAL CHARACTERISTICS	
Mode Field Diameter @ 1310 nm	$9.2 \pm 0.4 \mu\text{m}$
Mode Field Diameter @ 1550 nm	$10.4 \pm 0.5 \mu\text{m}$
Cladding Diameter	$125 \pm 0.7 \mu\text{m}$
Cladding Non Circularity	$\leq 1\%$
Core Clad Concentricity Error	$\leq 0.5 \mu\text{m}$
Coating Diameter	$245 \pm 5 \mu\text{m}$
Coating/Cladding Concentricity	$\leq 12 \mu\text{m}$

CUT OFF WAVELENGTH

Fibre cut-off Wavelength	≤ 1320 nm
Cable Cut-off Wavelength	≤ 1260 nm
@ 1550 nm	≤ 0.23 (dB/Km)

MECHANICAL CHARACTERISTICS

Operating Temperature	-20° C to +60° C
Fibre Proof Test	1%
Stripability Force	$1.3 \leq F \leq 8.9$ N
Fibre Curl	≥ 4 meter radius of curvature

DISPERSION

A. Total Dispersion (Chromatic Dispersion)	
1285-1330 nm	≤ 3.5 ps/nm.km
1270-1340 nm	≤ 5.3 ps/nm.km
1550 nm	≤ 18.0 ps/nm.km
1625 nm	≤ 22.0 ps/nm.km
B. Polarization Mode Dispersion at 1310 & 1550 nm	
PMD (Max. Individual)	≤ 0.2 ps/sqrt.km
C. Dispersion Slope & Wave Length	
Zero Dispersion Wavelength	1300-1324 nm
Zero Dispersion Slope	≤ 0.092 ps/nm ² .km

12- 48F MLT GLASS YARN ARMORED INDOOR OUTDOOR CABLE

CABLE MECHANICAL & PHYSICAL CHARACTERISTICS

CABLE MECHANICAL / PHYSICAL / ENVIRONMENTAL CHARACTERISTICS

Max. Tensile Strength (IEC 60794-1-2 E1)	2700 N (Short Term) 800 N (Long Term)	Cable Diameter (Nominal)	9.5 mm $\pm$ 0.5 mm
Crush Resistance (IEC 60794-1-21-E3)	2000 N/100 x 100 mm	Nominal Cable Weight	72 $\pm$ 10% Kg/Km
Impact Resistance (IEC 60794-1-21-E4)	2.94 Nm	Packing Length	2.0 / 4.0 Km $\pm$ 5%
Torsion Test (IEC 60794-1-21-E7)	$\pm$ 180°	Temperature Performance Installation Storage	-30°C to +70°C -10°C to +50°C -40°C to +70°C
Cable Bend Test (IEC 60794-1-21-E11)	Load - 15 x Cable Diameter No Load - 10 x Cable Diameter		
Water Penetration Test (IEC 60794-1-22-F5B)	2 Meter/3 Meter/24 Hrs		

ORDERING INFORMATION

Description

Part No.

**Datacom SM 12F MLT Gel Filled Glass Yarn Armoured
Single PE Jacket ITU G657.A2 Cable**

DC-FO9A2MLTGYSP-012

**Datacom SM 24F MLT Gel Filled Glass Yarn Armoured
Single PE Jacket ITU G657.A2 Cable**

DC-FO9A2MLTGYSP-024

**Datacom SM 48F MLT Gel Filled Glass Yarn Armoured
Single PE Jacket ITU G657.A2 Cable**

DC-FO9A2MLTGYSP-048