


SINGLE MODE LSZH CABLE FOR FTTH- G657A2

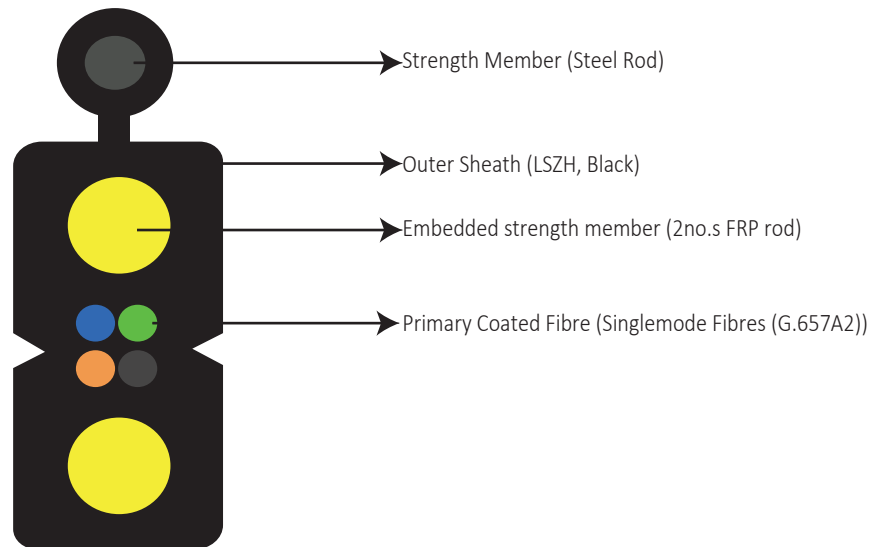

DESCRIPTION

Datacom FTTH flat indoor drop cable has great tensile strength and flexibility in a small cable size, and it also offers top-notch optical transmission and physical performance.

APPLICATION

- Mainly used for FTTH Applications
- ELV fibre application
- LAN & WAN networking
- Security System

COLOR DETAILS

- Blue
- Orange
- Green
- Brown

FEATURES

- Singlemode fibre in full compliance with ITU-T G657A2.
- Strength Member is Steel Rod.
- FRP rod used as Strength Member.
- LSZH Outer sheath, BLACK
- Drop Cables Suitable for indoor/Outdoor Application.
- Reduce installation time and costs.
- LSZH sheath makes the cable suitable for higher fire safety requirements.

STANDARDS COMPLIANCE

- International EN 50173; ISO/IEC 11801
- National ANSI/ICEA S-83-596;
- ANSI/TIA-568.3-D;
- Telcordia GR-409

SINGLE MODE LSZH CABLE FOR FTTH- G657A2

MECHANICAL CHARACTERISTICS

Temperature Range (IEC 60794-1-2-F1)	
Operation Temperature Range	-10° to +60°C
Installation Temperature Range	-20° to +60°C
Storage/Transportation Temperature Range	-30° to +70°C
Bending Radius (IEC 60794-1-2-E11)	
Dynamic	30 D
Static	15 D
Tensile Strength (IEC 60794-1-2-E1)	600N
Crush Resistance (IEC 60794-1-2-E3)	1000N/100mm
Torsion Resistance (IEC 60794-1-2-E7)	(± 180°), 50N, 20 Cycles
Impact Resistance (IEC 60794-1-2-E4)	2 Nm, 10 Impacts

OPTICAL CHARACTERISTICS

Singlemode (G.657A2)	
at 1310 nm	< 0.38 dB/Km
at 1550 nm	< 0.28 dB/Km
at 1625 nm	< 0.30 dB/Km

COLOUR CODING

Colour of Fibres in a Tube	Blue, Orange, Green, Brown
----------------------------	----------------------------

DELIVERY INFORMATION

Approx Cable Weight (Kg/Km)	22
Nominal Cable Diameter (mm)	2.0 x 5.2 +/- 0.5
Standard Length per Drum (Mtr)	1000 ± 5 %

ORDERING INFORMATION

Description

Datacom SM G.657A2 FTTH Drop Outdoor Cable-LSZH Black

Part No.

DC-FO-'xx-FTX097A-ODZH

**XX = Number of cores (02-04)