

144 PORT SC SIMPLEX OR LC DUPLEX UNLOADED HIGH-DENSITY PATCH PANEL



DESCRIPTION

Datacom high-density rack mountable fiber patch panels are designed to accommodate high-density applications in Data Centers and Telecommunication environments. With pre-populated and tested Fiber Patch Panel saves on-site installation time and increases reliability. The design of the enclosure allows for easy connection to the LC adapters using multi-fiber optical patch cords (sold separately) and is mountable in a standard 19" or 23" rack or cabinet frame. Datacom 4U 19" Rackmount 144 –Fiber distribution frame provides a compact solution and is suitable to accommodate up to 12 vertical simplex SC/APC cassettes or 12 vertical duplexes LC/APC cassettes. It includes the metallic casing, adaptor cassettes with splice trays and splice tray cover as per FTTX requirements. Fiber adapters are not included.

APPLICATION

- Telecommunications Room / MDF back bone termination
- Local Area Networks
- FTTX
- Active device termination.

FEATURES

- Capacity- 144 fiber terminations.
- Connector holder SC, LC & E2000.
- 12 vertically placed modules.
- Removable dust cover.
- Optical fiber slack management.
- 19" Rack-mountable, Height 4U.
- Possibility of installing both front and rear support rails.
- Possibility of horizontal sliding.

144 PORT SC SIMPLEX OR LC DUPLEX UNLOADED HIGH-DENSITY PATCH PANEL


SPECIFICATIONS

Material	Cold roll steel 1.5mm Powder coat RAL 9005
Size(W*H*D mm)	484x330x178
No of Cable Entry	4 PG ports
Splice cassette panel	12
Max Capacity	144 F
Adapters	144
Installation Method	Rack-mounting

CONSTRUCTION

Casing Material	Painted steel sheet
Color	Black
Weight	3.2 kg
Environment	Indoor
Conductor Type	LC, SC, SC/APC, LC/APC

TECHNICAL DRAWINGS

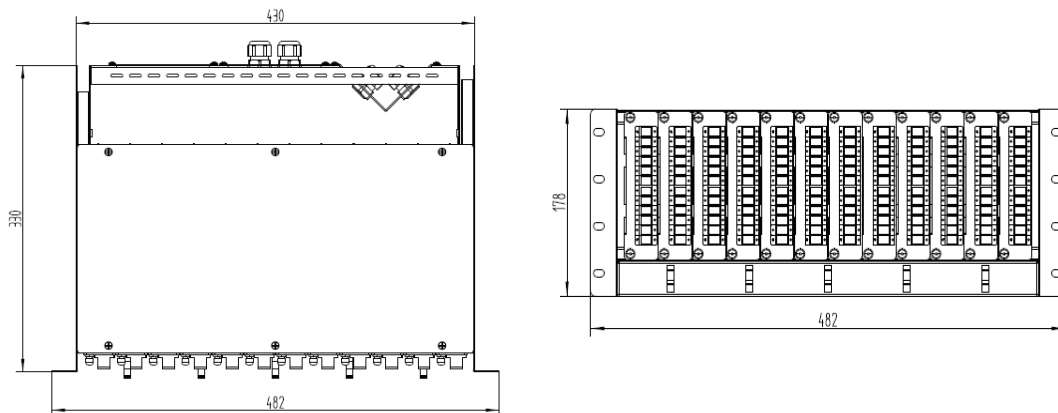

ORDERING INFORMATION

Description

Datacom 4U 19"144Port SC Simplex or LC Duplex Unloaded High-Density Patch Panel With 12 Splice Cassettes and Sleeves-Black

Part No.

DC-PPU-19-FO-144-BK