

DOME CLOSURE 240F IP68 RATED HEAT SHRINK SEALING



DESCRIPTION

Datacom Heat Shrink Sealing type Closure is specially designed to provide reliable and long-lasting protection for optical fibers and splices, combined with maximum ease of installation and maintenance. The closure is made of glass-filled polypropylene, which can make sure long time service. Heat shrink seal for cable ports, excellent sealing performance.

APPLICATION

- Direct buried
- Aerial
- Pole
- Pipeline
- Manhole etc.

FEATURES

- Cable diameter: 1 Uncut port meet $\phi 10 \sim 15$ mm cable; 6 branch ports meet $\phi 8 \sim 15$ mm cable.
- Suitable for direct buried, aerial, pole, pipeline, manhole, etc.
- Heat shrink seal is adopted for cable ports, with a protection grade of IP68.
- Easy installation with no special tool required.
- Single fiber max capacity is up to 240F, also supports max 432F ribbon fiber.

STANDARDS COMPLIANCE


- ROHS

DOME CLOSURE 240F IP68 RATED HEAT SHRINK SEALING

CONSTRUCTION

Style	Dome Type
Dimensions(mm)	585 × Ø230
Weight (kg)	6 - 7
Material	The compound of Polypropylene with glass fibers
Sealing Type	Heat shrink seal
Protection Grade	IP68
Cable ports	1 Oval Port +4 big Round Ports +2 Small Round Ports
Cable diameter	Oval Port:14~25mm Small Ports:8~17.5mm Big Ports:14~25mm
Fiber Splice Capacity	240 F
Tray Capacity	48
Tray Count	5
Installation	Aerial, wall, pole, manhole, pedestal etc.
Additional Mounting Accessories	Wall Mount & Pole Mount

TECHNICAL DRAWINGS

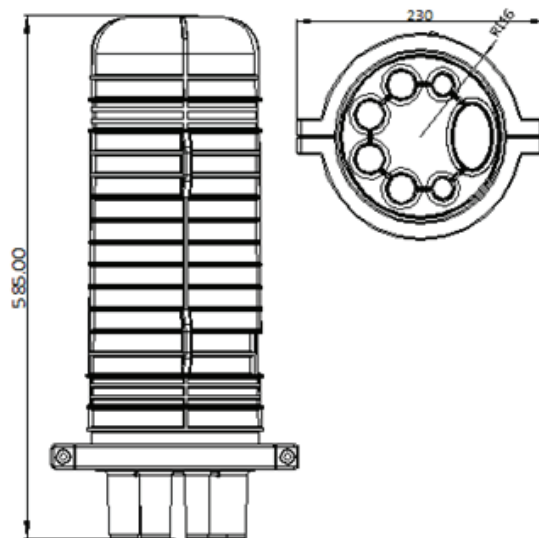

ORDERING INFORMATION

Description

**Datacom Dome Closure IP68 Rated 240F with Splice Tray
Heat Shrink Sealing.**

Part No.

DC-JCDM240F-HS