


UNIBOOT PATCH CORD

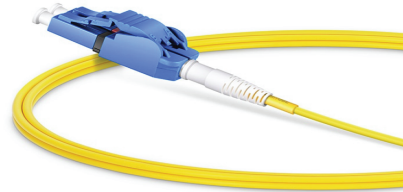

DESCRIPTION

Datacom Duplex LC Uniboot Duplex fiber optic patch cords are constructed with a 1.6mm / 2.0 mm 2-fiber round unitary cable available in low smoke zero halogen (LSZH) rated jacket materials to meet local compliances. LC Uniboot fiber optic patch cords are ideal for reducing cabling congestion in extremely high density patch fields. Patch cord is fully compliant with ANSI/TIA 568-C.2 ISO/IEC 11801 Class.TIA-604-10 (FOCIS-10).

Uni boot patch cords are available in OM4, OM3, and OS2 fiber types and in hybrid version with SC connectors. Connectors are available in UPC (ultra physical contact) and Angled Physical contact (APC).

APPLICATION

- Provide interconnect and cross-connect of applications in entrance facilities, telecommunication rooms data centers, at the desk and network applications to interconnect pre-terminated cassettes in main distribution, horizontal.

STANDARDS COMPLIANCE

- ANSI/TIA 568-C.2
- ISO/IEC 11801 Class.
- TIA-604-10 (FOCIS-10)
- Single Mode. ITUG 567 A2/OM3/OM4
- Cable jacket flame retardant rate: LSZH
- Materials are RoHS, REACH complied.

FEATURES

- Datacom SC to LC Uni-boot patch cords are designed to reduce the cable congestion at density patch panels and switches which in turn reduce the time it takes any routine MAC's (Moves, Adds and Changes) operations
- With a diameter of only 1.6 mm the single cord construction reduces cable consumption by as much as 60% compared to conventional figure '8' duplex cables

UNIBOOT PATCH CORD

PHYSICAL CHARACTERISTICS

Range of Mode	Single mode ITU G 657 A1
Cable Type	1.6mm/2mm uniboot
Connector Style	SC/LC
Polish or Ferrule Interface Type	APC/UPC
Cable Diameter	1.6mm/2mm
Strength Member	Aramid Yarn
Outer Jacket	LSZH
Jacket Colour(single mode:G657A1)	Yellow / Aqua
Insertion Loss	Random mated average $\leq 0.12\text{dB}$ Random mated for 97% $\leq 0.25\text{dB}$ Against references $\leq 0.15\text{dB}$
Fiber Extension	$(-)0.05\mu\text{m} < H < 0.05\mu\text{m}$
2.5mm Ferrule End-Face Radius	$6.5 < R < 9\text{mm}$
Apex Offset	0 to $40\mu\text{m}$
Angle (°)	7.7° to 8.3°
Increase in insertion loss after 500 mating	0.2dB Max

ENVIRONMENTAL PROPERTIES

Operating Temperature	-25° to 70°
Storage Temperature	-25° to 70°

ORDERING INFORMATION

Description

Datacom ITUG657 A1 Uniboot 2 fibre SC APC to LC/UPC LSZH 1.6mm jacket patch cord

Datacom ITUG657 A1 Uniboot 2 fibre LC APC to LC/APC LSZH 1.6mm jacket patch cord

Datacom OM4 Uniboot 2 fibre LC UPC to LC/UPC LSZH 1.6mm jacket patch cord

Datacom OM3 Uniboot 2 fibre LC UPC to LC/UPC LSZH 1.6mm jacket patch cord

Part No.

DC-PU092SC1LC2-'XX'

DC-PU092LC1LC1-'XX'

DC-PUM42LC2LC2-'XX'

DC-PUM32LC2LC2-'XX'

** Part Number Legends & variables

** DC- Datacom. P- Patch cord. U- uniboot. "09 = SM, M3= OM3, M4=OM4. M5= OM5"
SC= SC adapter. LC- LC adapter. 1 = APC, 2 = UPC. XX = Length in Meters.