


BASIC POWER DISTRIBUTION UNITS SINGLE PHASE (PDU)

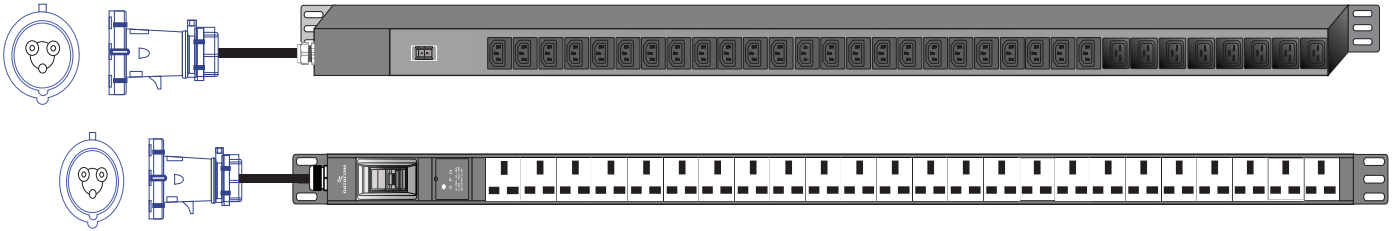

DESCRIPTION

DATACOM Basic PDUs provide cost effective, highly reliable and robust power distribution in a variety of power rating (13/16/32/63Amp), Phases (Single or Three Phase), input plug type (UK/IEC) and in various outlet configurations. DATACOM PDU feature up to 48 outlets and come standard with a bottom power feed 3-meter input power cord. They are capable of mounting vertically (0U) or horizontally (1U or 2U) in a data Centre/enterprise cabinet or rack using standard mounting buttons or included hardware.

Datacom Basic Series PDUs are comes with Horizontal or Vertical orientation. PDU receptacles can be custom configurable in various combinations, UK only, UK + IEC Or IEC C-13, IEC C-13 + C-19, IEC + NEMA, Or Shuko / IEC etc.

Datacom PDUs are built in high-quality materials and have passed all relevant international standards and meets all NEC requirements and installation guidelines for IT equipment.

FEATURES

- Mounting buttons: Allows tool-less mounting of rack PDUs for faster installations on vertical PDUs.
- Meets all NEC requirements and installation guidelines for IT equipment. Circuit Breakers: Protects Computing/ networking equipment for increased reliability by interrupting potentially hazardous circuit over-current conditions (without breakers are also available).
- Form Factor: Optimized form factor takes up less space for efficient rack space utilization.
- Outlet Density: Meets demands of densely packed IT equipment in rack or cabinet space.
- Operating Temperature: 60 °C ambient at full load for operational reliability.
- Multiple colour : Standard colour is black, however DATACOM can customize the colour against the demand.
- Multiple input plug : A full breadth offering to seamlessly interoperate with existing building power wiring schemes. options: UK / IEC C-14/ C-20, 60309

APPLICATION

- IT equipments such as servers, Switches and Routers.
- Multiple power outlets in Audio/Video System
- Security Systems such as CCTV,ACS,Public Address and General Alarm Systems,Master Clock System etc.

STANDARDS COMPLIANCE

- ROHS and REACH.
- CE.

BASIC POWER DISTRIBUTION UNITS SINGLE PHASE (PDU)

PDU PART NUMBER CONFIGURATOR

CONSTANT			VARIABLES										
1	2	3	4	5	6	7	8	9	10	11	12	13	14
			COO	PHASE	POWER	OUTLET - 1	QTY	OUTLET - 2	QTY	BREAKER		ORIENTATION	INLET SOCKET
DC	"_"	B	C-CHINA	1	13	C1-IEC C13		C2-IEC C19		P0-NO	"_"	V-VERTICAL	2=C20
			T-TURKEY	3	16	UK - UK				P1-1POLE		H-HORIZONTAL	9 = IEC 309
					32	SK - GERMAN				P3-3POLE			4 = IEC C14
					63	C2-IEC C19				S - Surge Protection			

OUTLET AND INLET SOCKET TYPES



IEC C-19



IEC C14 & C13



SHUKO



IEC 309 .16A / 32A



UK SOCKETS

** Examples

Description	Part No.
Datacom Basic PDU,16A 1U Horizontal Single Phase 10 Way-IEC C-13 Outlet, No Breaker,IEC60320 Input Socket, with 2m Power Cord	DC-BC116C110P0-H2
Datacom Basic PDU,32A 0U Vertical Single Phase 24Way-18x IEC C-13 + 6xC-19 Outlet with 32A/1P Breaker IEC 60309 Input Socket,3m Power Cord	DC-BC132C118C206P1-V9
Datacom PDU Vertical Mount, 32A, 3 Phase 24 Way18 x IEC C13+ 6 x IEC C19 outlet with (3 x 32A breakers), 5 Core,3 Meter Power Cord Terminated to IEC60309 3P+N+E Socket	DC-BC332C118C206P3-V9
Datacom Basic PDU,63Amp, 1Phase, 24 Way UK outlet Vertical with breaker, 3 Meter Power cord & Industrial Plug with SPD Module	DC-BC163UK24P1S-V9

** All Vertical PDU model Standard Power code comes with 3MTR