

BASIC POWER DISTRIBUTION UNIT (PDU), 3 PHASE



DESCRIPTION

DATACOM Basic Rack PDUs provide reliable, cost-effective power distribution in a variety of inputs (Single or Three Phase; Delta or WYE) and outlet configurations. DATACOM offers cost efficient PDU models with most popular configurations in the market. In addition, custom PDU configurations are also available on request for flexibility & specific user requirements. With build to order system, we produce & deliver exactly what customer needs. PDUs are capable of mounting vertically (0U) or horizontally. (1U or 2U) in a data center (1U or 2U) in a data center/enterprise cabinet or rack using standard mounting hardware compliances. Our dedicated PDU compliance team ensures conformance to safety and reliability standards in US, EMEA, APAC & ASEAN. Individually fused IEC Outlet or group in PDU helps to prevent an overload of the active equipment and avoiding short circuiting the entire IEC outlet PDU.

APPLICATION

- IT equipments such as servers, Switches and Routers.
- Multiple power outlets in Audio/Video System
- Security Systems such as CCTV, ACS, Public Address and General Alarm Systems, Master Clock System etc.

STANDARDS COMPLIANCE



- Our dedicated PDU compliance team ensures conformance to safety and reliability standards in US, EMEA, APAC & ASEAN

FEATURES

- 1U rack mountable
- High quality, lightweight aluminum Housing.
- Magnetic Circuit Breaker MCB
- Individually fused IEC Outlet or group in PDU helps to prevent an overload of the active equipment and avoiding short circuiting the entire IEC outlet PDU.
- Hydraulic magnetic circuit breaker
- Overload switch
- Designed to prevent accidental on / off operation
- Safety Regulatory : TUV / CE

BASIC POWER DISTRIBUTION UNIT (PDU), 3 PHASE

TECHNICAL DETAILS	
Output	18 X C13 Socket, 6 X C19 Socket for 32A
Output	24 X C13 Socket, 9 X C19 Socket for 63A
Input	380-415V AC 50/60 Hz - 5m 5x6 H05VV-F Cable with IEC60309 (3P+N+E)32A plug
Housing	1U Torsionally rigid Aluminium Anodized Profile with Earthing Connection on the Body
Maximum Power	43.500 W
Protection	3pcs 1x32A Type B with plastic housing and transparent protection cover
Housing Dimensions	W:67 x H:44,3 x L:1547mm
Fixation	Adjustable Metal Lateral Cover
Operating / Storage Temperature	0 - +45 °C / -25 - +65 °C

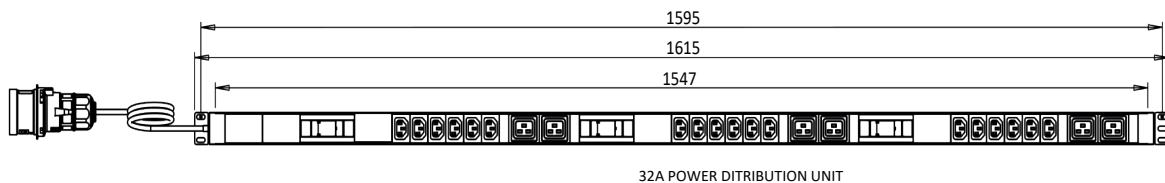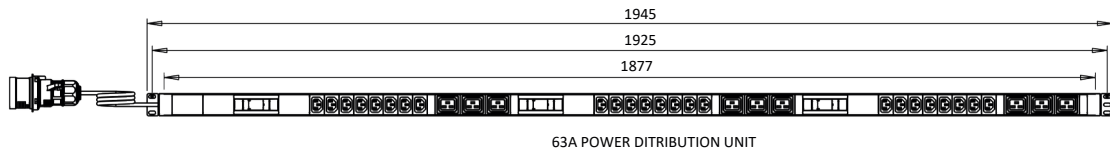

ORDERING INFORMATION

Description

DATAKOM PDU Vertical Mount, 32A, 3 Phase 24 Way 18 X IEC C13+ 6 X IEC C19 outlet with (3 X 32A breakers), Input power feed 5 meter terminated with IEC 309 3P+N+E Socket

Part No.

DC-BP332C118C206P35-V9

DATAKOM PDU Vertical Mount, 63A, 3 Phase 33 Way 24 X IEC C13+ 9 X IEC C19 outlet with breakers (3X 32A), Input power feed 5 meter terminated with IEC 309 3P+N+E Socket

DC-BP363C124C209P35-V9