



EXPERTS IN IOT METERING, TENANT BILLING, WIRELESS & REMOTE CONNECTIVITY PRODUCTS & SOLUTIONS



Our Brands



Meet ConnectME

01

Technology manufacturer

Technology manufacturer specializing in PCB boards and converters, with strong R&D capabilities for the design and manufacture of innovative metering products.

02

Smart Utility Metering & billing

Large Share in smart utility metering and billing solutions, including intelligent valves and communication gateways for accurate measurement, remote control, and efficient utility management.

03

Sustainable energy solutions

We deliver sustainable energy solutions that enable efficient energy generation, monitoring, and optimization, supporting reduced emissions and long-term operational efficiency.

04

Large presence in GCC market

Our Solution are trusted across 800+ buildings, connecting 500,000+ meters for 120+ customers across the GCC.

05

Protocol & Connectivity Expert

As protocol and connectivity experts, delivering seamless integration and reliable communication across diverse devices and systems



OUR MISSION & VISION

01

Mission

To deliver cyber-secure smart metering and Industrial IoT solutions across the GCC and beyond, improving efficiency, sustainability, and customer satisfaction through IoT and AI.

02

Vision

To become a globally recognized Industrial IoT and manufacturing brand, leading the GCC with cyber-secure, high-quality, and customer-centric solutions for smart utilities, cities, and sustainable operations.

03

Quality Standards

At ConnectME Manufacturing LLC, quality drives our design, manufacturing, and delivery, following ISO 9001, 14001, and 45001 standards (ISO 27001 in progress). We focus on continuous improvement and customer satisfaction to provide reliable, secure, and scalable smart metering and IoT solutions that deliver lasting value.

Certifications-ISO

Certificate

Awarded to:

CONNECTME TECHNOLOGY SOLUTIONS FZCO.
DSO-THUG-G-D-FLEX, G050E, Dubai Silicon Oasis, Dubai, United Arab Emirates.

The Environmental Management System has been assessed successfully and found to comply with the requirements of the international standard.

ISO 14001:2015

Scope of Certification

TRADING IN IOT, METERING, TENANT BILLING, WIRELESS & REMOTE CONNECTIVITY PRODUCTS & SOLUTIONS.

Certificate No:	8034599515	IAF Code:	29
Certificate Date:	08/12/2023	NACE Code:	4652
Expiry Date:	07/12/2026	1st Surveillance due before:	07/12/2024
Recertification Date:	07/09/2026	2nd Surveillance due before:	07/12/2025



CB-EMS-084



EUROPEAN QUALITY CERTIFICATION SERVICES

EUROPEAN QUALITY CERTIFICATION SERVICES
P.O. Box 129254, Tel.: +971 26450072
info@eqcs.com, www.eqcs.com
Abu Dhabi, United Arab Emirates

Certificate

Awarded to:

CONNECTME TECHNOLOGY SOLUTIONS FZCO.
DSO-THUG-G-D-FLEX, G050E, Dubai Silicon Oasis, Dubai, United Arab Emirates.

The Occupational Health & Safety Management System has been assessed successfully and found to comply with the requirements of the international standard.

ISO 45001:2018

Scope of Certification

TRADING IN IOT, METERING, TENANT BILLING, WIRELESS & REMOTE CONNECTIVITY PRODUCTS & SOLUTIONS.

Certificate No:	6629997376	IAF Code:	29
Certificate Date:	08/12/2023	NACE Code:	4652
Expiry Date:	07/12/2026	1st Surveillance due before:	07/12/2024
Recertification Date:	07/09/2026	2nd Surveillance due before:	07/12/2025



CB-OHSM5-084



EUROPEAN QUALITY CERTIFICATION SERVICES

EUROPEAN QUALITY CERTIFICATION SERVICES
P.O. Box 129254, Tel.: +971 26450072
info@eqcs.com, www.eqcs.com
Abu Dhabi, United Arab Emirates

Certificate

Awarded to:

CONNECTME TECHNOLOGY SOLUTIONS FZCO.
DSO-THUG-G-D-FLEX, G050E, Dubai Silicon Oasis, Dubai, United Arab Emirates.

The Quality Management System has been assessed successfully and found to comply with the requirements of the international standard.

ISO 9001:2015

Scope of Certification

TRADING IN IOT, METERING, TENANT BILLING, WIRELESS & REMOTE CONNECTIVITY PRODUCTS & SOLUTIONS.

Certificate No:	6994247560	IAF Code:	29
Certificate Date:	08/12/2023	NACE Code:	4652
Expiry Date:	07/12/2026	1st Surveillance due before:	07/12/2024
Recertification Date:	07/09/2026	2nd Surveillance due before:	07/12/2025



CB-QMS-084



EUROPEAN QUALITY CERTIFICATION SERVICES

EUROPEAN QUALITY CERTIFICATION SERVICES
P.O. Box 129254, Tel.: +971 26450072
info@eqcs.com, www.eqcs.com
Abu Dhabi, United Arab Emirates



Our Products



Smart Meters

Ultrasonic BTU Meters
Ultrasonic Water Meters
Electro-Magnetic Flow Meters
Clamp-On BTU and Flow Meters
Gas Meters



Smart Valves

Smart Valve Controller – Segregated
Smart compact Switch - Relay control
Smart Compact Valve
Integrated BTU Meter and Valve



Gateway and Connectivity

M-Bus Products
Converters
Gateways
Power Supplies
Remote Connectivity Solutions



Sensors and Actuators

Air Quality Sensors
Water Leak Detection Sensors






Software

Utility Billing
AMR and MDMS
Energy Monitoring
Valve Control Management
Maintenance Management Software



Our Products

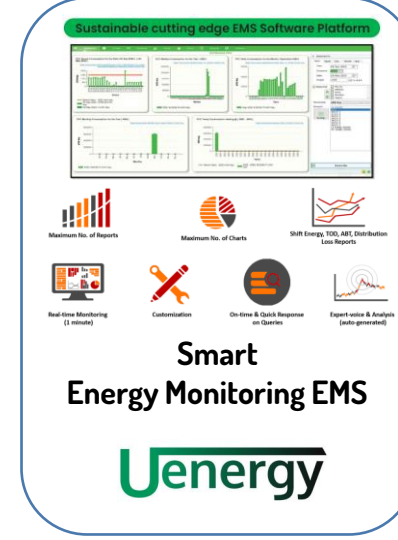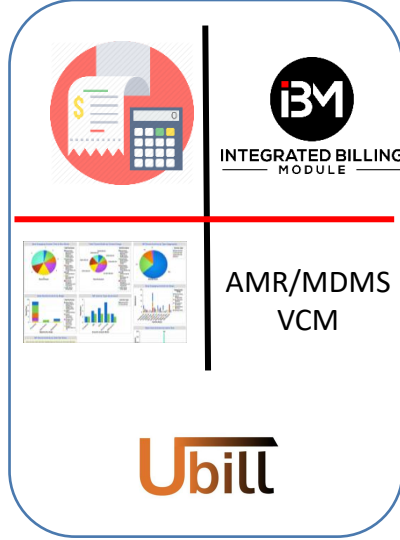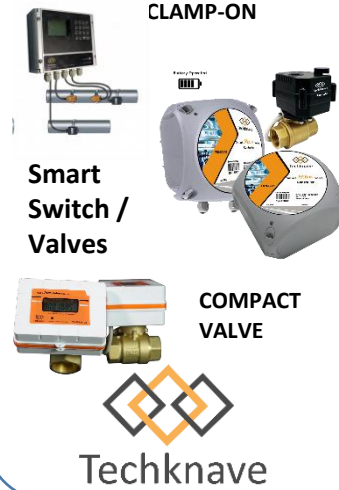

Distributor Products



Remote Connectivity
Tosi- Connect, Protect,
and Control



Sweden

Electromagnetic Flow &
Clamp on Meters.



GI Instruments
Québec Inc.

Canada


BTU Meters



01

Uflo U60 Advanced Series

- Uflo ultrasonic BTU Meter- U60 Advanced series
- Size : DN15 to DN40
- Temp Sensor : PT1000 Jumo sensors
- Battery Life : > 12 years
- Replaceable: Battery & Temp. Sensors
- MID certified

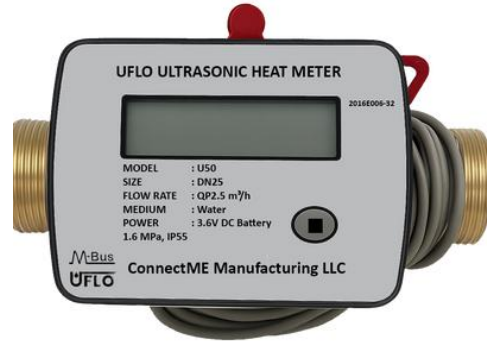

02

Uflo U50 Compact Series

- Uflo Ultrasonic Compact BTU Meter-U50 Compact Series
- Size : DN15 to DN40
- Protection : IP65 / IP68
- Battery Life : 10 Years



03

Uflo U50 Bulk Meters

- Uflo Ultrasonic buld BTU Meter- U50 Compact Series
- Size : DN50 to DN300
- Protection : IP65 / IP68
- Battery Life : 10 Years
- Communication: Mbus / RS485



03

BTU Meter With Smart Valve

- Uflo Ultrasonic buld BTU Meter with Smart Valve.
- Size : DN15 to DN40
- Protection : IP65 / IP67
- Battery Life : 6 Years
- Communication: Mbus / RS485
- Replaceable Battery
- Forced open/close Valve

Uflo U60 Advanced Series



Anti- Interference, Micro Power Consumption Technology.

Low Pressure Loss.

High Accuracy class & High Stability.

Horizontally or vertically mount, easily do it.

Heating /cooling Metering.

Built-in Battery, extremely low energy consumption, no need to replace battery during the meter lifelong period.

Smart alarm of low battery, temperature sensor error, short circuit, flow Sensor error.

Smart data error correcting technology , effective interference resistance, ensuring stable data.

Communication Interface - Mbus, Modbus RS-485, NB-IoT

Replaceable Batteries and detachable Temperature Sensors

Size DN15-DN40

MID certified

Uflo U50 Compact Series



Anti- Interference, Micro Power Consumption Technology.

Low Pressure Loss.

High Accuracy class & High Stability.

Horizontally or vertically mount, easily do it.

Heating /cooling Metering.

Built-in Battery, extremely low energy consumption, no need to replace battery during the meter lifelong period.

Smart alarm of low battery, temperature sensor error, short circuit, flow Sensor error.

Communication Interface - Mbus, WMBus. Modbus RS-485 & LoRaWAN

Size DN15-DN40

Uflo U50 Bulk Meters

Uflo



Anti- Interference, Micro Power Consumption Technology & Low-Pressure Loss.

Micro power consumption technology for long-term, low-energy operation.

Low pressure loss in the pipeline.

Can be mounted horizontally or vertically with ease.

Supports both heating and cooling energy metering.


Communication Interfaces: Mbus and RS-485 (LoRaWAN optional).

Robust protection (IP65 / IP68).

Available in sizes DN50 to DN300.

BTU Meter With Smart Valve

Uflo

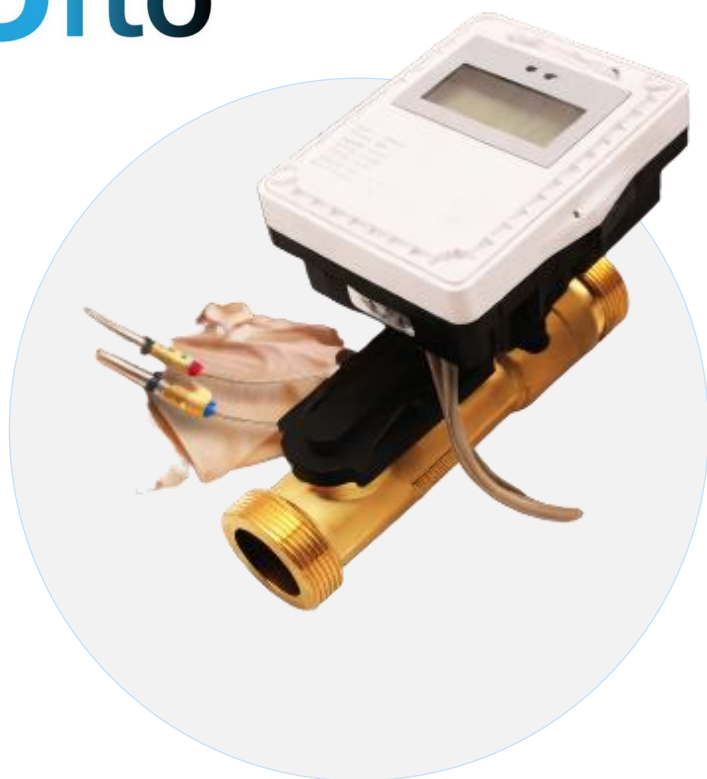

Products for heating metering, supporting multiple valve adjustment modes, regulation, control, and remote operation.

Consistent with conventional heat meters and directly replaceable.

Ultrasonic metering, no mechanical wear and tear, longer service life.

Accuracy level: Level 2

Range ratio: RS0/100/125/160

Communication interface: Optical/M-BUS/RS-485/LoRaWAN/NB-IoT/
Zigbee/wM BUS

Replaceable battery design

Communication Interface - Mbus, WMBus. Modbus RS-485 & LoRaWAN

Forced open/close valve

Water Meters



01

Uflo U40 Compact Series

- Size : DN15 to DN40
- Accuracy : Class 2
- Water Temperature Class : T30 /T50
- R Factor : R250 / R400



02

Uflo U40 Bulk Flow Meter

- Size : DN50 to DN500
- Accuracy : Class 2
- Water Temperature Class : T30 / T50



03

Uflo U70 Advanced Hot Water

- Size : DN15 to DN40
- Accuracy : Class 2
- Water Temperature Class : T30 / T50/T70



03

GI Instruments GIMA-B type Electromagnetic Flow meters-GIMA-B

- Accuracy : +/- 0.5%
- Size: DN6 to DN2000
- Liner : Rubber / PTFE /PFE
- Communication: Modbus RS485 / HART

03

GI instruments GIMA-H electromagnetic HEAT/BTU meters-GIMA-H

- Accuracy : 2%
- Size: DN15 to DN600
- Liner : Rubber / PTFE /PFE
- Communication: Modbus RS485 / HART
- IP rating: IP65 /IP68

03

GI instruments GIMA-H electromagnetic HEAT/BTU meters-GIMA-IB

- Accuracy : 2%
- Size: DN100 to DN3000
- Communication: Modbus RS485 / HART
- IP rating: IP65 /IP68



Uflo U40 Compact Series



Large R value up to 500:1 (Default R250).

Low Starting Flowrate (as low as 0.0015m³/h).

Leak & burst alarmSelf-Diagnosis: flow sensor fault,temperature sensor fault, the overflow, lowbattery alarm.

Accurate Flow measurement algorithm.

IR interface, compatible with IR handheld reader.

Power supply option Built in lithium battery (default) Optional DC7.5-24V external power supply in case of Rs485.

Bidirectional flow measurement.

Communication Interface - Mbus, WMBus, Modbus RS-485, LoRaWAN & NB-IOT.

Uflo U40 Bulk Flow Meter

Uflo



Double pipes measuring, high accuracy and reliability

Redundant: The meter can operate properly when there is blockage or fault with one of the two pipes.

Smart alarm of flow Sensor error, temperature sensor error, Short circuit, overload, low battery

High resolution 9 digits LCD display.

Two-way measurement of water flow: forward flow and reverse flow;

Pressure sensor optional, for measuring water supply pressure in the pipes network

Built-in 4G or NB-IoT communication mode available

Optical communication port interface supporting handheld infrared meter reading tool for on-site meter reading.

Uflo U70 Advanced Hot Water



Large dynamic range to 400:1

Integrated mechanical design with protection class of IP68, able to work in long term water immersion

Ultrasonic measuring technology with no mechanical moving parts and pressure loss.

Micro-power consumption technology battery powered

Low starting Flowrate

Protocol supports: NB-IOT, RS-485, M-Bus & RF

GI Instruments GIMA-B type Electromagnetic Flow meters- GIMA-B



GI Instruments
Québec Inc.

Pipe diameter range: 6 mm – 1000 mm

Minimum fluid conductivity: $\geq 3 \mu\text{S/cm}$

IP66 / NEMA 4X / JIS C 0920 waterproof enclosure

FM approved for hazardous area (Class I, Division 2)

Write-protect function with optional fast-response mode for batch applications

Automatic zero adjustment with 250% improved noise immunity

Backlit, rotatable display (up to 90°) for enhanced visibility

Wide power supply: 90–130 VAC, 180–250 VAC, or 24 VDC

Backlit, rotatable display (up to 90°) for enhanced visibility

EMC compliance as per EN 61326

Protocol supports: NB-IOT, RS-485, M-Bus & RF

GI instruments GIMA-H electromagnetic HEAT/BTU meters- GIMA-H



GI Instruments
Québec Inc.

Pipe diameter range: 6 mm – 1000 mm

Minimum fluid conductivity: $\geq 3 \mu\text{S/cm}$

IP66 / NEMA 4X / JIS C 0920 waterproof enclosure

FM approved for hazardous area (Class I, Division 2)

Write-protect function with optional fast-response mode for batch applications

Automatic zero adjustment with 250% improved noise immunity

Backlit, rotatable display (up to 90°) for enhanced visibility

Wide power supply: 90–130 VAC, 180–250 VAC, or 24 VDC

Backlit, rotatable display (up to 90°) for enhanced visibility

EMC compliance as per EN 61326

Protocol supports: NB-IOT, RS-485, M-Bus & RF

GI instruments GIMA-H electromagnetic HEAT/BTU meters- GIMA-IB



GI Instruments
Québec Inc.

Pipe diameter range: 6 mm – 1000 mm

Minimum fluid conductivity: $\geq 3 \mu\text{S/cm}$

IP66 / NEMA 4X / JIS C 0920 waterproof enclosure

FM approved for hazardous area (Class I, Division 2)

Write-protect function with optional fast-response mode for batch applications

Automatic zero adjustment with 250% improved noise immunity

Backlit, rotatable display (up to 90°) for enhanced visibility

Wide power supply: 90–130 VAC, 180–250 VAC, or 24 VDC

Backlit, rotatable display (up to 90°) for enhanced visibility

EMC compliance as per EN 61326

Protocol supports: NB-IOT, RS-485, M-Bus & RF

Clamp on & Insertion Type BTU/FLOW meter



Techknave Standard Clamp on BTU/Flow meter

01

- Techknave Standard Clampon Ultrasonic BTU /Flow meter - (TKN202B /F)
- Size: DN50 to DN2000
- Accuracy: +/- 1%
- Temp sensor: PT100
- Communication: RS485 / Mbus / BacNet IP / 4G



Techknave Enhanced Clamp-on BTU/Flow meter

02

- Techknave Enhanced Clampon Ultrasonic BTU /Flow meter (TKN204B /F)
- Size: DN50 to DN3000
- Accuracy: +/- 0.5%
- Temp sensor: PT1000
- Communication: RS485 / Mbus



Techknave Insertion BTU-Flow meter

03

- Techknave Insertion Ultrasonic BTU/Flow meter (TKN205B/F)
- Accuracy: +/- 2%
- Size : DN50 to DN6000
- Interface : RS485, MODBUS
- Power : Power supply DC 24V



Techknave Portable Flow meter

03

- Techknave Portable Ultrasonic Flow meter (TKN203F)
- Size : DN15 to DN1200
- Interface : RS485, MODBUS
- Power : Battery 12V (Rechargeable)

Techknave Standard Clamp on BTU/Flow meter



Measurement Accuracy ± 0.5 to 1%

Non-invasive with no pipe disturbance and no maintenance

Easy installations

Wide range ,pipe size from DN25mm to Dn6000mm and flow rate of 0.01 to 15m/s

Suitable for many common pipe materials

Suitable for many common pipe materials

Communication interface –Modbus RTU/TCP, BACNET MSTP/IP and MBus

Weather resistance enclosure –Ip65

Internal data logging

Protocol supports: NB-IOT,RS-485,M-Bus & RF

Techknave Standard Clamp on BTU/Flow meter



Measurement accuracy: $\pm 0.5\%$

Non-invasive with no pipe disturbance and no maintenance

Easy installations

Wide range: pipe size from DN50mm to DN2000mm and flow rate of 0.01 to 15m/s

Suitable for many common pipe materials

Suitable for many common pipe materials

Communication interface: Modbus RTU and MBus

Weather resistance enclosure –Ip65

4G / GPRS modem for remote monitoring

Connectivity to UBILL MACCLOUD server for Record & Analyze

Techknave Insertion BTU-Flow meter



Pipe Size Starting from DN50 to DN 6000 .

Techknave TKN 205 offers MODBUS TCP,BACNET /IP and MBus Communication interface.

GPRS/4G module available for remote monitoring and remote control through UENERGY cloud Server Platform.

Accuracy: +/- 2%

Communication interface: Interface : RS485, MODBUS

Connectivity to UBILL MACCLOUD server for Record & Analyze

Techknave Insertion BTU-Flow meter



Battery-operated, it's ideal for short-term measurements where permanent installation isn't required.

TKN2031 comes as a complete liquid measurement kit with portable transducers.

It features a handheld display with bright color and pushbutton interface.

Suitable for most common liquids and full-pipe measurements.

Compatible with a wide range of pipe sizes (DN15 to DN250) and materials including metal, plastic, and concrete.

Lightweight, easy to handle, with signal quality index for reliable measurements

Accuracy: $\pm 1\%$, with built-in flash memory and easy text file export.

GI Instruments Clamp on BTU-Flow meter



GI Instruments
Québec Inc.

High accuracy, especially for measuring low flow rates.

No moving parts, ensuring long service life without mechanical wear.

Minimal maintenance requirements and low operating costs.

Excellent dynamic response for precise and stable measurements.

Ideal for measuring non-conductive media.

Reliable alternative to magnetic flow meters for non-conductive liquids.

Low pressure drop, improving energy efficiency. Strong chemical compatibility with a wide range of fluids.

Gas Meters



01

GasKonnnect AMR & Solenoid Controller

- Gaskonnnect AMR & Solenoid Controller (TKN2801C)
- Pulse reader & Relay switch for solenoid control
- Communication: Mbus
- Power: Battery powered (16+ years)



02

GasKonnnect Pulse to M-Bus module

- Gaskonnnect Pulse Reader (TKN2801P)
- Pulse to Mbus module
- Communication: Mbus
- Power: Battery powered (16+ years)



03

GasKonnnect Smart Gas Meters

- Gaskonnnect Smart Gas Meters
- Size: G1.0 /G1.5/G2.5 (residential diphgram.....)
- Communication : M-Bus or RS485 MODBUS
- Power Supply : Power by M-Bus cable

GasKonnnect AMR & Solenoid Controller



Automatically read Gas Flow and volume data

Integrated battery with life expectancy of 10+ years

Operating temperature ranges -5 ° C to +60°C

Real time clock with historical data logging options

Data storing options incase of power failure/ Battery failure

2 Digital inputs configurable (Pulse Read / standard DI)

1 Relay output with NO/NC

GasKonnnect Pulse to M-Bus module



Automatically read Gas Flow and volume data

Integrated battery with life expectancy of 10+ years

Operating temperature ranges -5 ° C to +60°C

Real time clock with historical data logging options

Data storing options incase of power failure/ Battery failure

2 Digital inputs configurable (Pulse Read / standard DI)

GasKonnnect Smart Gas Meters



Supports M-Bus or RS-485 communication with long-distance transmission.

Enables real-time meter reading for accurate monitoring.

Allows remote valve control for convenient operation.

Supports scheduled/timed meter data uploading.

Lowers pressure loss through efficient valve design.

Resistant to external electric and magnetic interference.

Display types include register display, LCD, or combination.

Offers single or double display options for flexibility.


Powered directly by M-Bus, no external power supply required.

Smart Control Valve - Segregated

01

Smart Valve & Switch

Segregated Version:
The valve and controller are fully independent, providing maximum flexibility, safety, and easy maintenance. The valve isolates flow while the controller operates remotely, enabling modular installation, seamless servicing, and smarter system management.

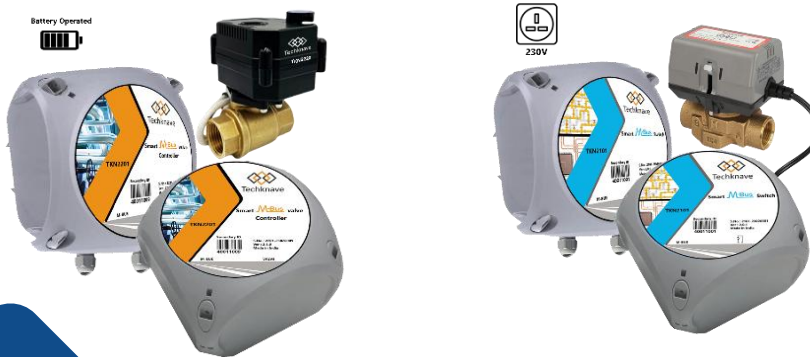

02

Compact Smart Valve

Integrated Version:
The valve and controller are combined into a single unit, providing coordinated operation, simplified setup, and streamlined control. Designed for applications requiring efficient, all-in-one management of flow and control.



Smart M-Bus Valve Controller-Segregated



Shut-off Valve make installation bundled with any brand sub meters

Valve control (ON / OFF commands via M-Bus / WmBus/ Lorawan / NBIOT)

Control & Monitor thru Mobile App

Tampering alert, Valve Feedback

Realtime Valve status monitoring

Extensive Cloud base / On Premise control software Application

Battery operated with ultra-low consumption (7 & 16 Years Life Span)

Industrial grade (PN16, IP67, fluid up to 100° c)

UBILL IBM billing software compatible

Compliant with all gateways

Valve size from DN15 (1/2") to DN32 (1 1/4")

Suitable for Potable/Chilled/Hot water (-0° c to 100° c)

Smart Compact Switch (Relay Control)



Shut-off Valve make installation bundled with any brand sub meters

External powered – Operated through NO/NC contact from Controller

Compliant with all MBUS Masters

Industrial grade (PN20, IP67, fluid up to 100° c)

Realtime Valve status monitoring

Valve control (ON / OFF commands via MBUS / WMBUS / LORAWAN / NBIOT)

Control & Monitor thru Mobile App

Extensive Cloud base / On Premise control software Application

Suitable for Potable/Chilled/Hot water (-0° c to 100° c)

UBILL IBM billing software compatible

Tampering Alert & Valve Feedback.

Smart M-Bus Valve Compact



NETWORK operated Shut-off Valve make installation bundled with any

Battery operated with ultra-low consumption (7 & 16 Years Life Span)

Valve size from DN15 (1/2") to DN40 (1 1/2")

Compliant with all MBUS Masters

Industrial grade (PN16, IP68, fluid up to 100° c)

Realtime Valve status monitoring

Control & Monitor thru Mobile App

Valve control (ON / OFF commands via MBUS / WMBUS / LORAWAN / NBIOT)

Extensive Cloud base / On Premise control software Application

UBILL IBM billing software compatible

Valve Feedback.

Gateway and Connectivity.



01

M-Bus Level Convertor

U2601 M-Bus Level Converter connects M-Bus meter networks to Billing/AMR systems via RS485, with optional TCP/IP (U2601T-TCP), supporting up to 125 or 250 slave devices..

02

M-Bus Master

M-Bus Level Converter is dedicated to convert M-Bus signal to RS232/RS485/TCP-IP and vice versa. Up to 250 M-Bus devices can be connected to M-Bus Level Converter.

03

Edge Module

Edge Module collects data from multiple protocols via RS232/RS485 and securely transmits it to a server over HTTPS, with configurable polling, retries, and communication settings

04

Cloud Connection 4G Modem Modbus gateway

Provides cloud connectivity via 4G modem with Modbus gateway integration.





TOSI -Connect, Protect, and Control Your Critical Infrastructure from Anywhere

Tosi is your fastest way to connect, protect, and control your OT network and physical infrastructure from any location. Built on a simple idea: securing and managing critical infrastructure should be easy, affordable, and fast. Founded in Finland in 2011 and launched globally in 2011, Tosi now secures OT networks across 150+ countries with unmatched speed and simplicity.



SECURE CONNECTIVITY & CONTROL

NETWORK SECURITY & COMPLIANCE

NETWORK MONITORING & ANALYTICS

ASSET MANAGEMENT



Remote Connectivity Solutions- TOSI



"Connect power, internet, and your devices. Check boxes, hit save. Done. No certifications, no command lines, no complex VPN configurations, no static IPs. Support your global installed base without dispatching technicians"

Deploy secure gateways in minutes, not weeks—with 75% fewer site visits TOSI Lock eliminates complexity with industrial-grade protection that's operational in minutes with zero-configuration setup.

Essential connectivity for simple deployments-TOSI 175

Compact operations for smaller sites-TOSI 350

Enterprise-scale for complex deployments and high performance-TOSI 610



01

Oil & GAS

Energy operators trust Tosi to simplify operations, reduce costs, and ensure TSA-compliant OT security across remote sites.

02

Waste & Water Management

Water facilities and municipalities rely on Tosi to modernize infrastructure, prevent ransomware, and enable secure remote monitoring.

03

Industrial Automation

Industrial automation companies choose Tosi to prevent downtime, enable remote support, and secure systems with OT connectivity that speaks your PLC.

04

Building Automation

Facility managers and integrators choose Tosi to secure building controls, separate BAS from IT, and prevent downtime—keeping you in control.



Sensors and Actuators



01


Air Quality Sensors

LoRaWAN-enabled air quality sensors monitor pollutants like PM2.5, CO, and NO₂ in real-time, transmitting data over long distances with low power. This allows scalable, cost-effective environmental monitoring for smart cities and industrial areas.


02

Water Leak Detection Sensors

LoRa-enabled water leak sensors provide real-time monitoring for pipelines, tanks, and plumbing. Using low-power LoRaWAN technology, they instantly detect leaks and send alerts for early damage prevention and remote oversight.

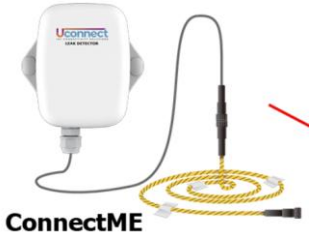


Maintenance Management Software

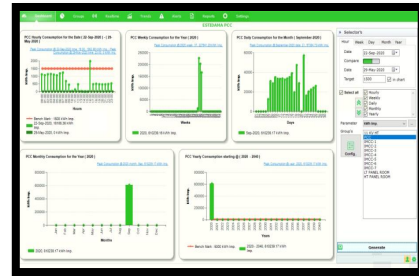

(ESTIDAMA COMPLAINEE)



Understanding Software Structure

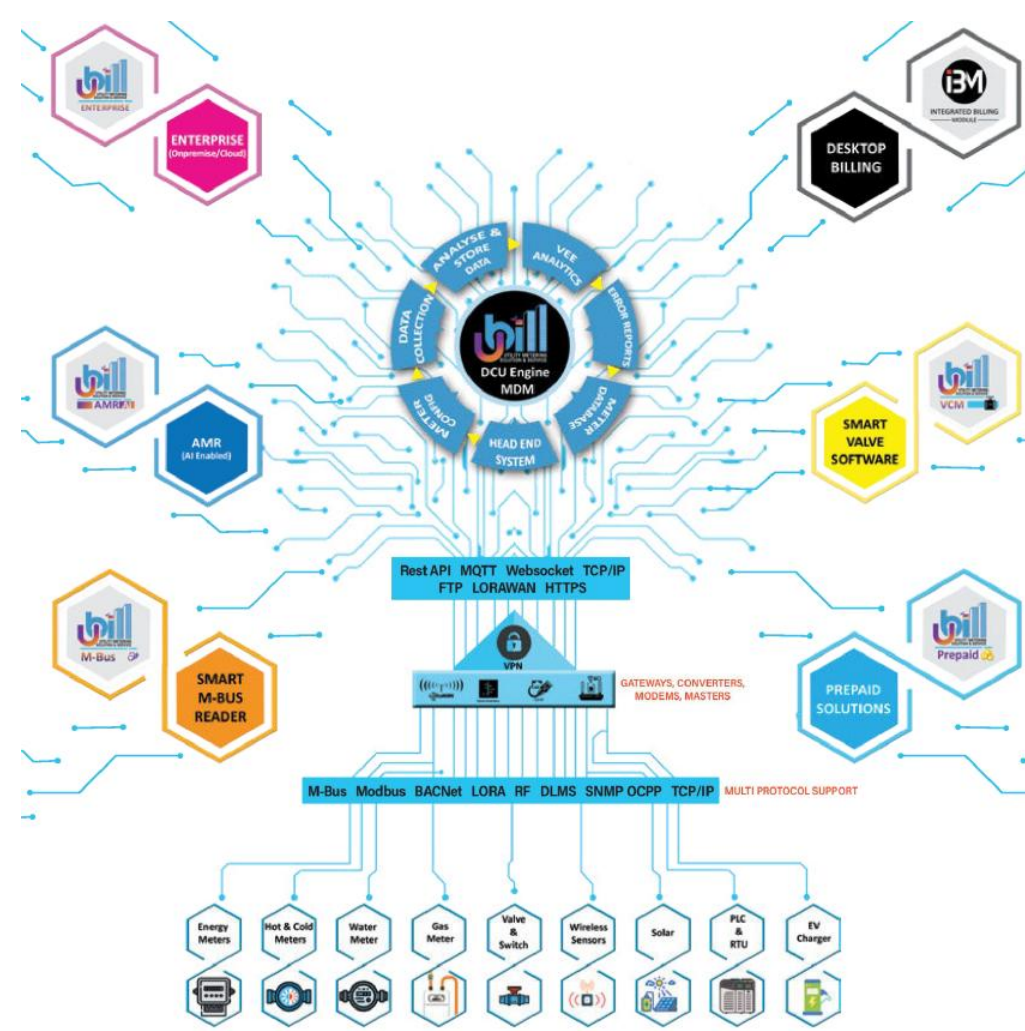

UBILL – IBM
DESKTOP

UBILL –
MBUS
READER

UBILL – AMR
DESKTOP

UBILL –
PREPAID
SOLUTION

UBILL –
ENTERPRISE
SERVER



UBILL – VALVE
CONTROL
MGMT



UTILITY BILLING – INTEGRATED BILLING MODULE (IBM) - Standalone

UTILITY BILLING AS MANAGED SERVICE

CENTRALISED MDMS – METER DATA MANAGEMENT SERVICE

CONNECTED BUILDINGS – AUTOMATED METER READINGS (AMR)

PREPAID BILLING SERVICES

End to End solutions of Metering & Billing

Our one stop billing solutions offer headache free to

- PROPERTY MANAGEMENT COMPANIES
- COMMUNITY MANAGEMENT
- OWNERS ASSOCIATION
- DEVELOPERS
- WATER DISTRIBUTION COMPANIES

Our one stop billing solutions offer headache free to

- Customer Management
- Meter management
- Automated Meter Reading
- Bill generation
- Receipts & collection management
- Track, control, monitor & recording of Billing data
- Monthly MIS reports / Account Management
- Pre-paid billing management
- Integration API to finance ERP - Oracle / SAP / AX-dynamics ...

Overall Schematic



Customer Registration Process

Disconnection Process

Owner Registration Process


Collection Process

Renewal Process





Move out Process

Data Validation & Invoice Issuance




Final Bill Issuance

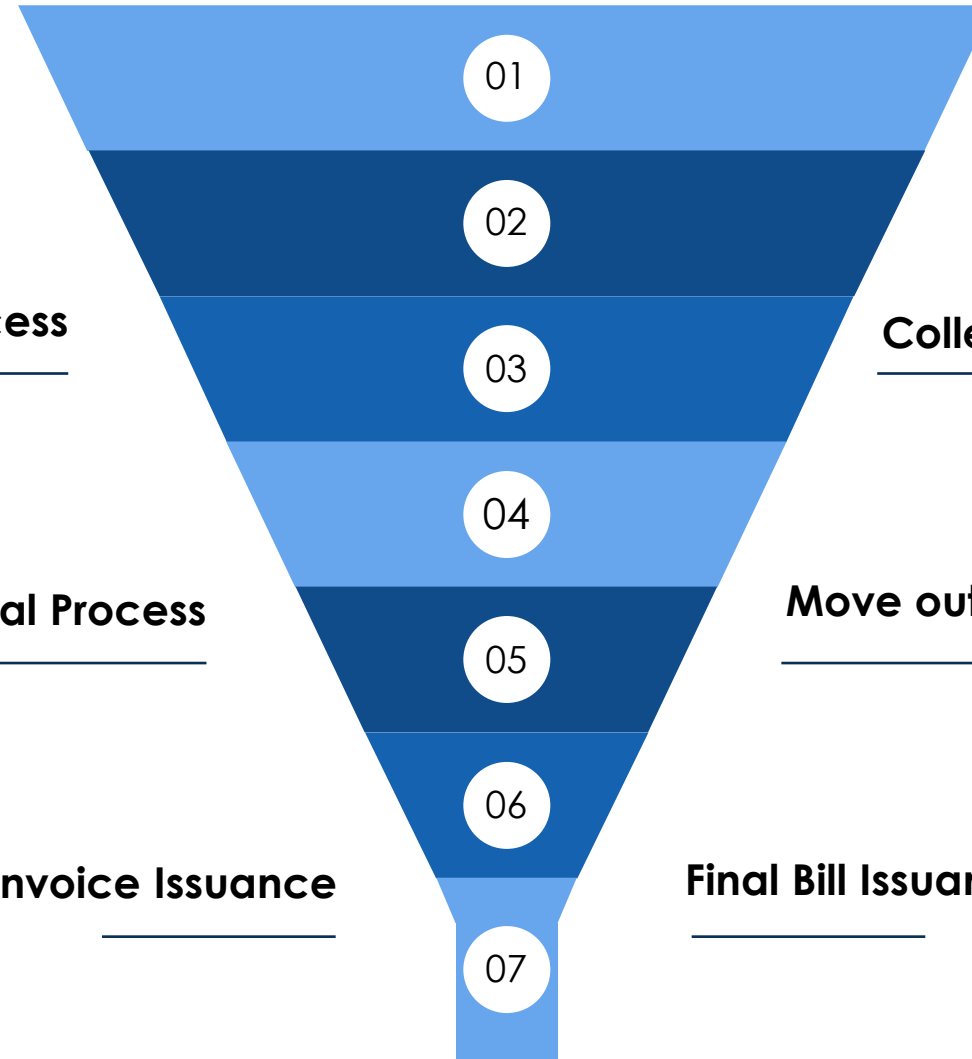

Software Dashboards

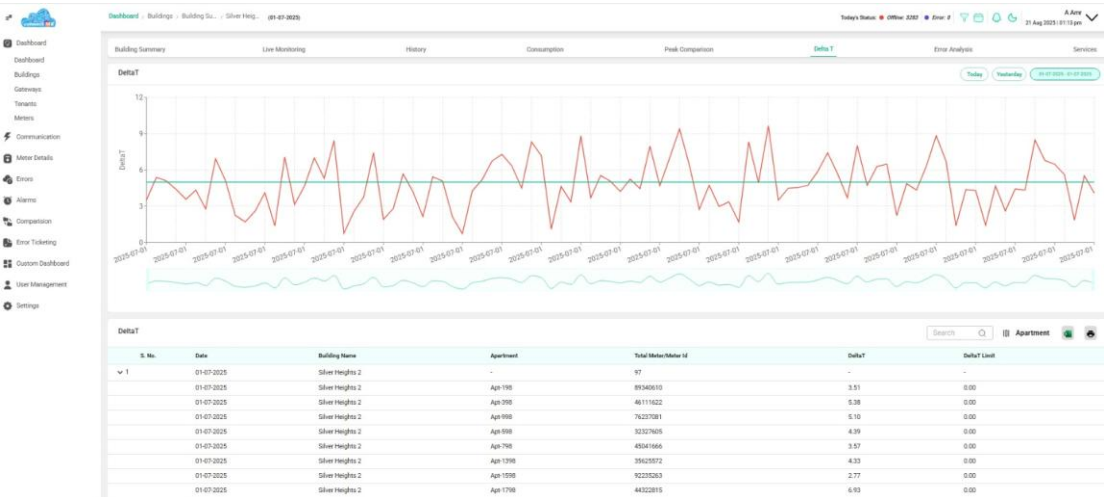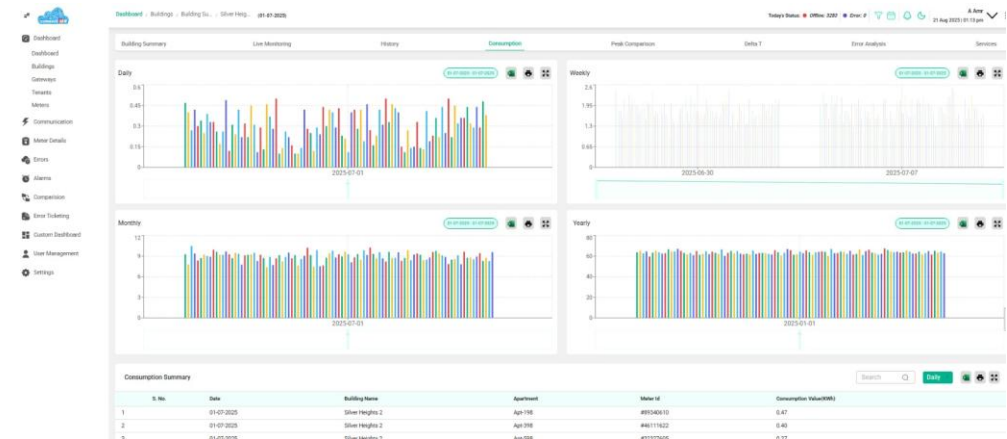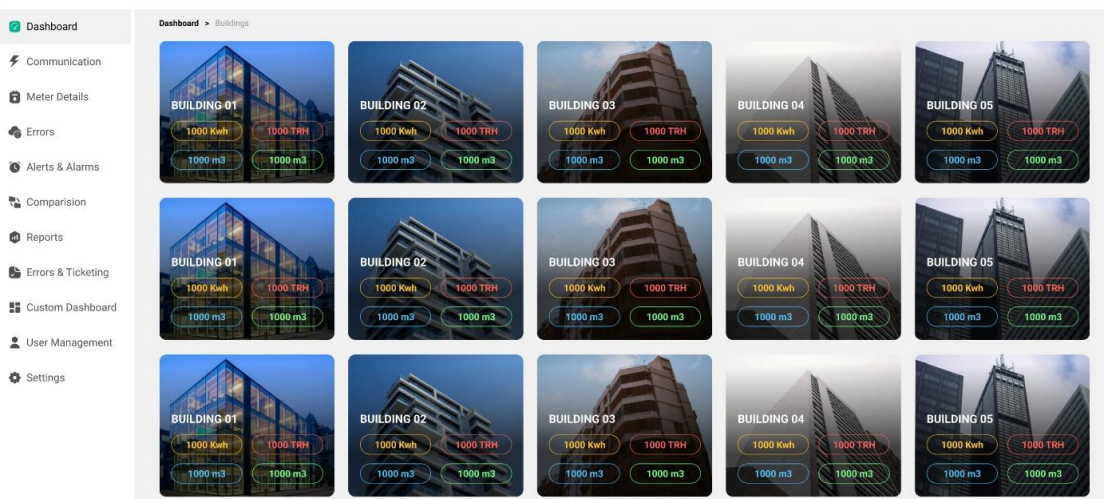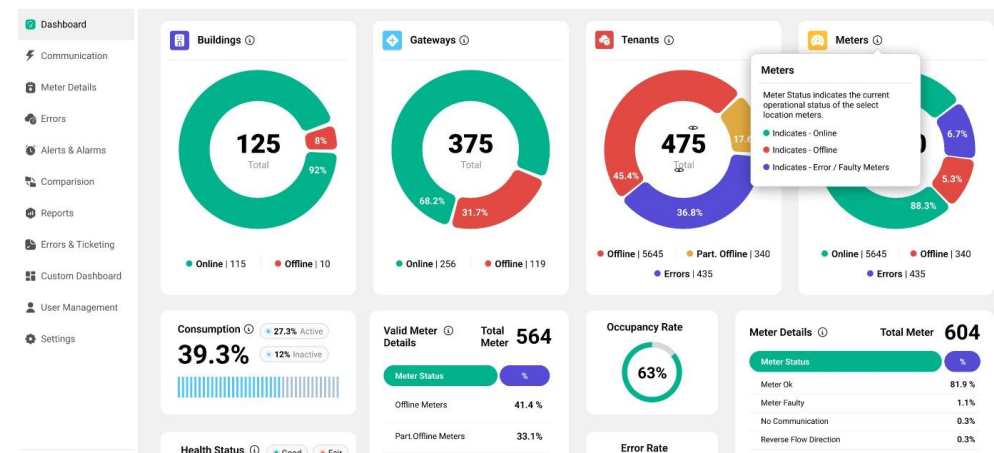

Software Dashboards

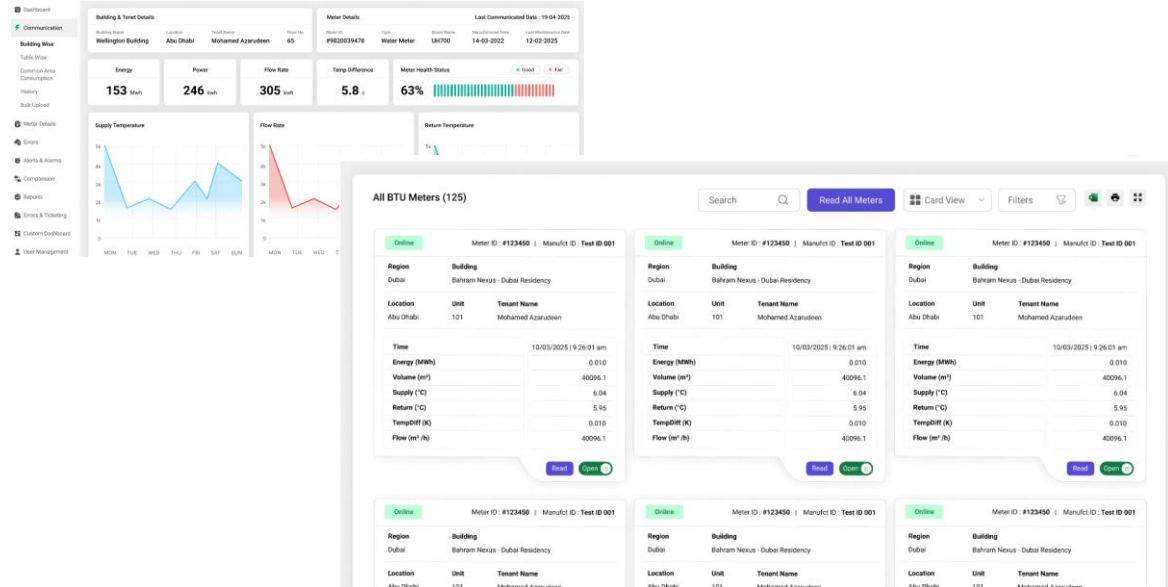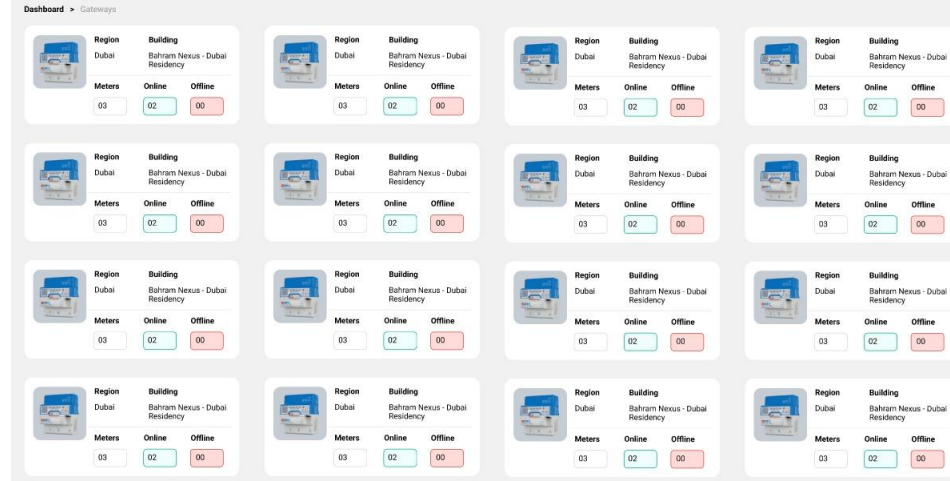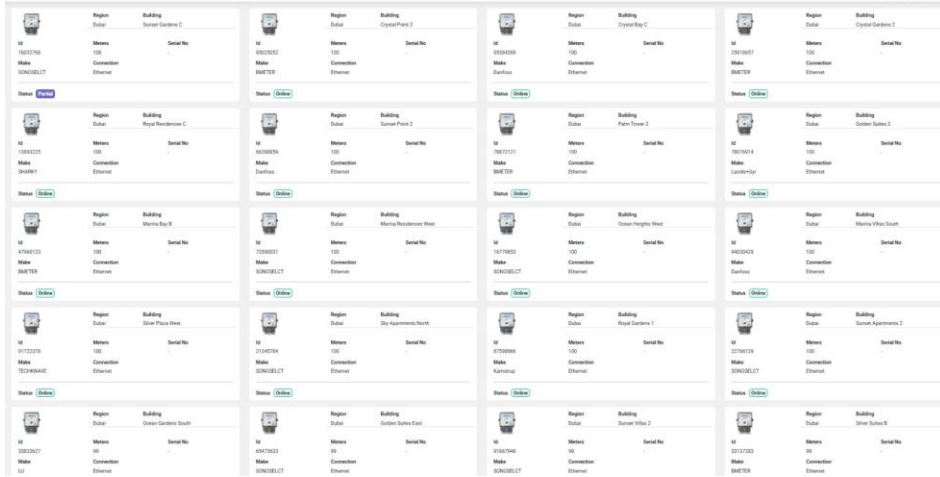

What is Smart EMS?



Insights

Customer/User can control their energy consumption through continuous monitoring of energy flow with the help of dedicated EMS Software – SMART EMS

Monitors different areas which consumes more Energy – so that Customer can take preventive and precautionary measures

SMART EMS – Collect, Store and Analyze the data collected from different monitoring devices to manage the electrical loads



Success Factors

01

Feeder-wise Energy Visibility

Feeder-wise energy data providing clear visibility for effective monitoring and analysis.

02

Energy Optimization & Future Planning

Enables monitoring and optimization of electrical parameters for cost savings and future planning via the MAC GRID system.

03

Customizable & Integrated On-Premise Solution

Fully customizable on-premises solution, tailored to customer needs and compatible with any third-party meter.


04

Flexible, Field-Programmable Architecture

Supports field programmability with easy data backup and restoration for flexible, reliable operation.



Software Dashboards



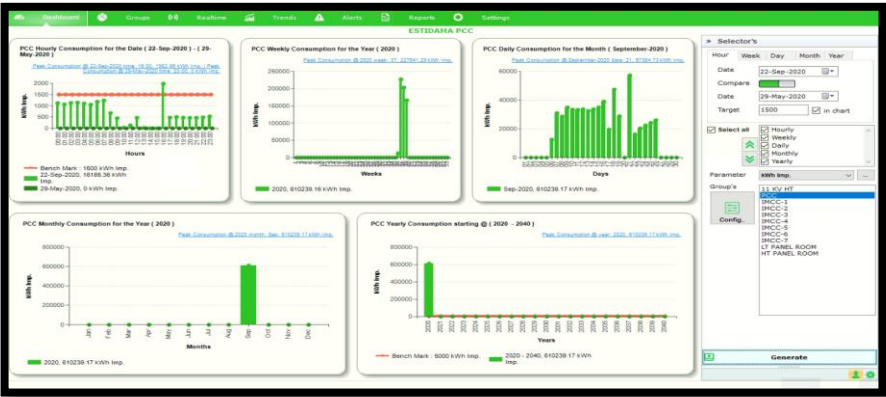


Device List			Export	Filter Data
List of Devices with Connection Status				
NAME	TYPE	STATUS		
51663627	BTU Meter	Connected		
51663628	BTU Meter	Connected		
51663630	BTU Meter	Connected		
51679317	BTU Meter	Connected		
51679318	BTU Meter	Connected		
51771884	BTU Meter	Connected		
			1	2 3 97 98


User Logs		More info
Your Recent Logs		
TIME	ACTION	
25/10/2022 9:38 PM	Login	
24/10/2022 11:18 PM	Login	
19/10/2022 4:41 PM	Logout	
19/10/2022 10:46 AM	Logout	
22/10/2022 1:13 PM	Login	
		1 First 1 Last 1

Latest User Logs				More info
NAME	TIME	ACTION	STATUS	
Admin	25/10/2022	Login	Success	
Centrium T...	25/10/2022	Login	Success	
				1 First 1 Last 1

System Info	
Subscription	BTU Meter Plan
Expiration	Your current plan expires in 280 days
Total Connected Devices	585
Device Slot Left	Remaining slots

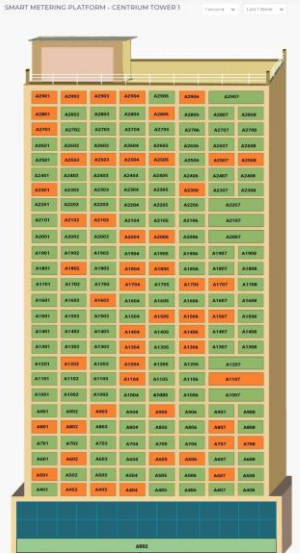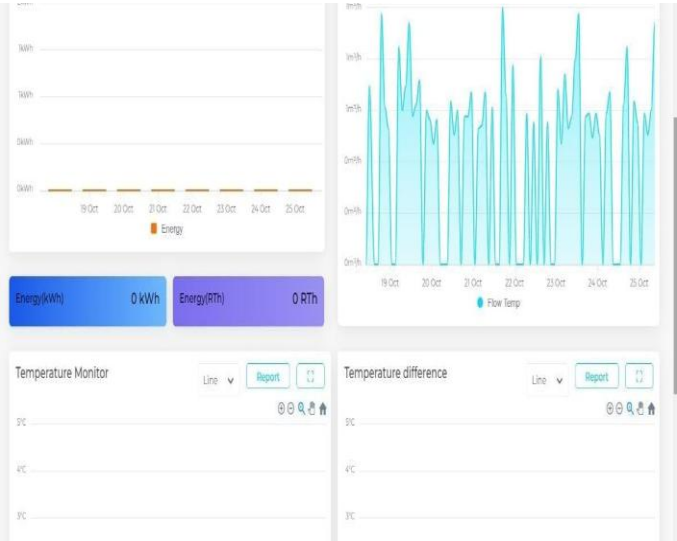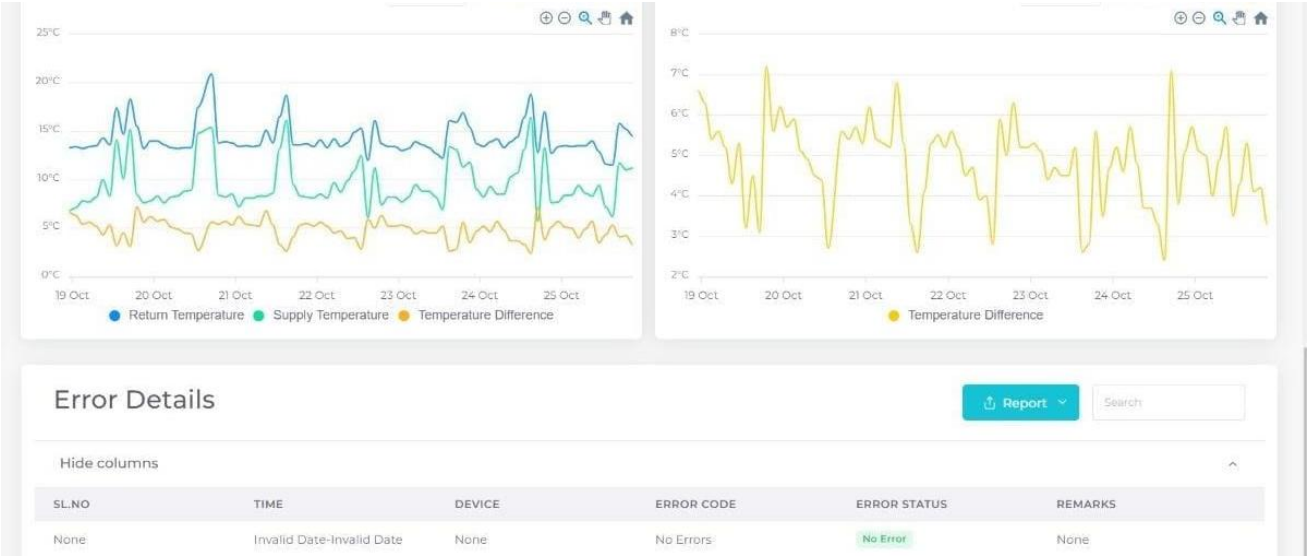

Software Dashboards

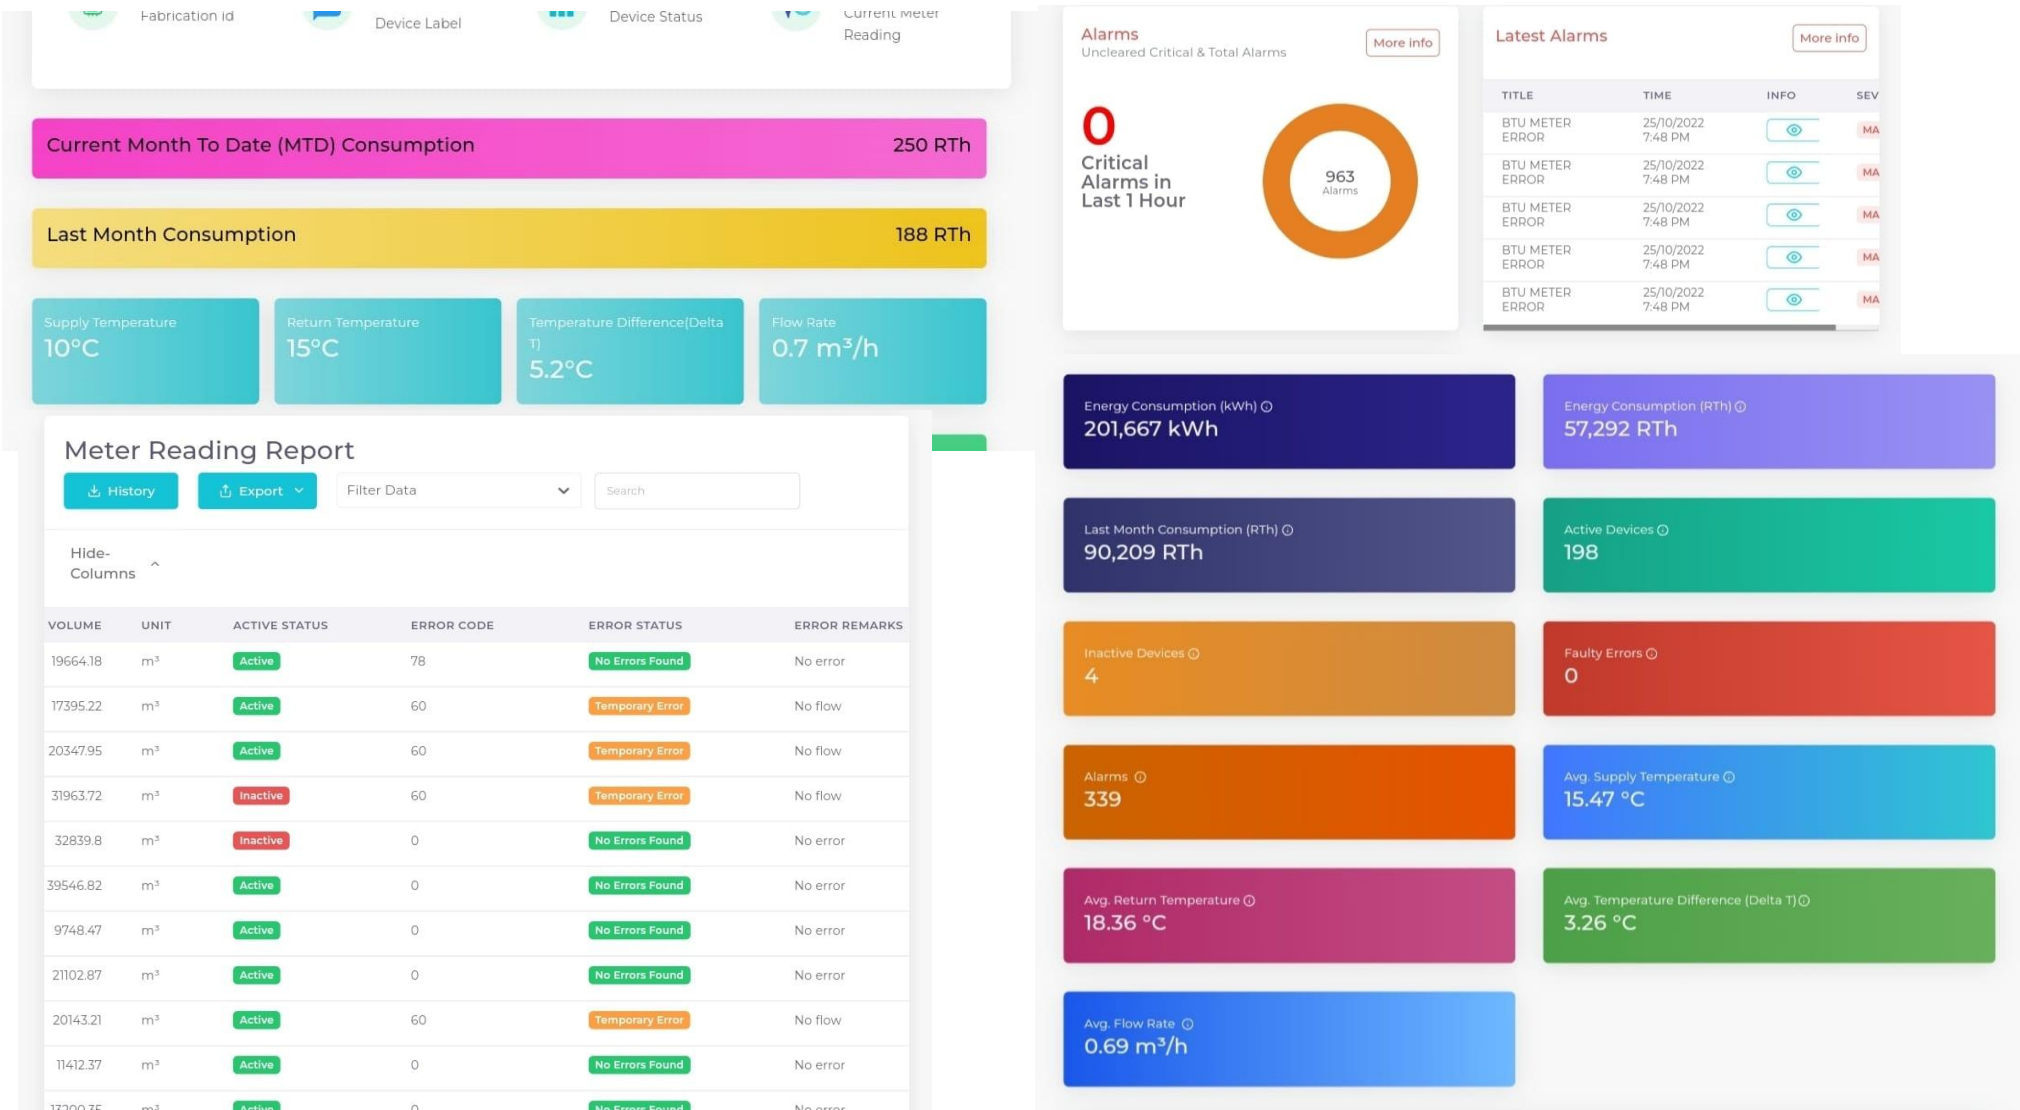

Key Customers



End Users & Integrators



Reference Projects



THE PALM TOWER

Multibrands Mbus meters integration to IBM software and Meter data report customization as per Nakheel requirement



FIVE PALM

MBUS BTU, hot water meter, cold water meters data integration to IBM Software for data analysis and billing. Customized bill formats and tariff calculations.



FIVE LUXE, JBR

MBUS BTU meters, Hot water meters data integration to IBM Software for data analysis and billing.



MIRDIF Mall, Dubai

Shops MBUS BTU meters data integration to IBM Software for data analysis and billing.

Reference Projects



MBR CITY, DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.



ELITE DOWNTOWN, DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.



SINGLE BUSINESS TOWER, DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.



A Tower, DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.

Reference Projects



EMAAR SUNSET , DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.



VIDA HOTEL, DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.



ELITE DOWNTOWN, DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.



ISLE, EMAAR BEACHFRONT, DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.

Reference Projects



BURJ ROYAL, DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.



THE WAVES, DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.



STELLA MARIES, DUBAI

MBUS BTU meters data integration to IBM Software for data analysis and billing.



MIDTOWN

Dubai Production City, Dubai | Residential



BELLA ROSE

Dubai Science Park, Dubai | Residential

Thank You



Our regional operations
UAE QATAR SAUDI CANADA



Address

Warehouse-7, Al Qaseer Warehouse
Ras Al Khor Ind. Area-2, Dubai - UAE.



Email Address

info@connectme.biz



Contact Number

Tel: +971 4 2348480

