




Double Fire Cabinet

- Meteory cabinets are designed in accordance with BSEN671-1 standard.
- The cabinet has two inlet holes (upper & lower) for water feeding pipes sealed with polymer or rubber seals. The cabinet door hinges enabling it to swing up to 180°, corrosion resistant type snap-in hinges, European made.
- Meteory steel fire cabinet using high quality steel is suitable for use in both areas outdoors & indoors, as in hospitals, hotels, restaurants, schools, offices, sports areas, cinemas, resorts, malls, airports, assembly rooms, warehouse, auto repair shops, apartment buildings,...etc.

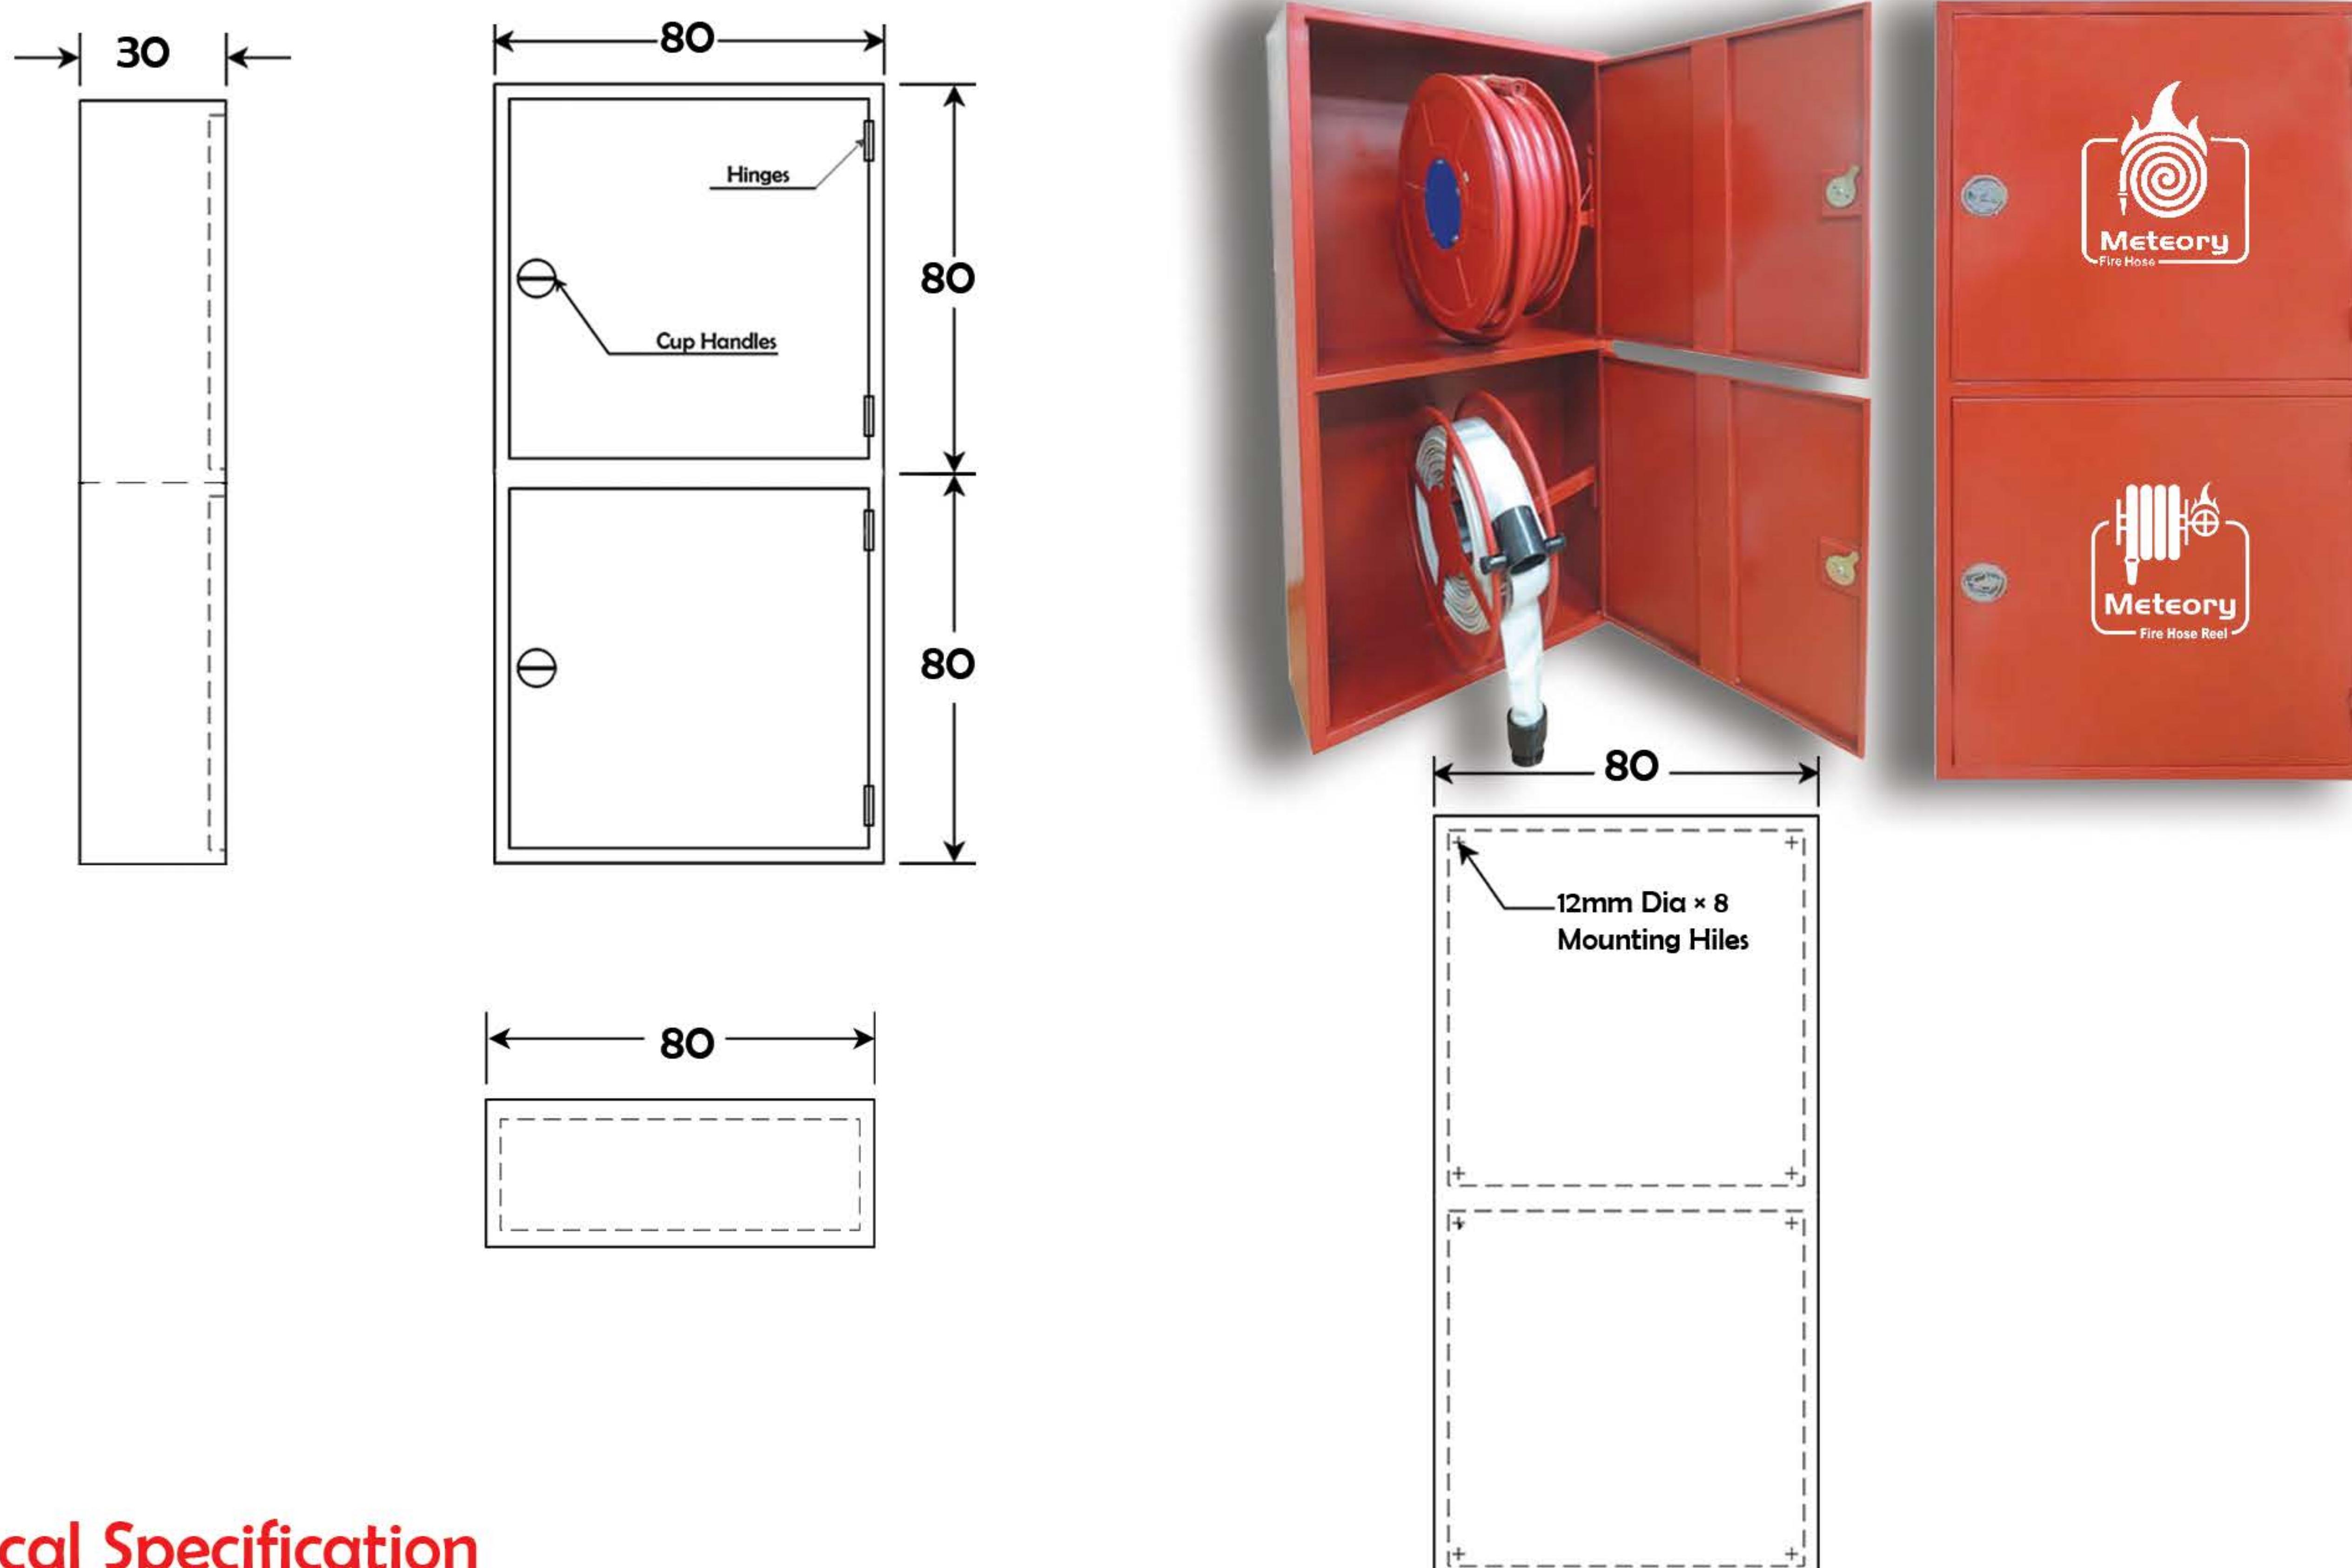

Technical Specification

| | |
|------------------------------|--|
| Cabinet Type | Standard |
| Cabinet Dimensions(HxWxD) cm | 160 x 80x 30 or ...etc |
| Cabinet Material | Steel according to DIN EN 10130/ES 1110 |
| Opening Door | up to 180° - right (standard) or left (option) |
| Cabinet Steel Thickness | 1.5 mm or ...etc |
| Door Hinges | Corrosion resistant snap-in hinges. |
| Cabinet Paint Finish | Electrostatic Painted, RAL3000 |

visit us

