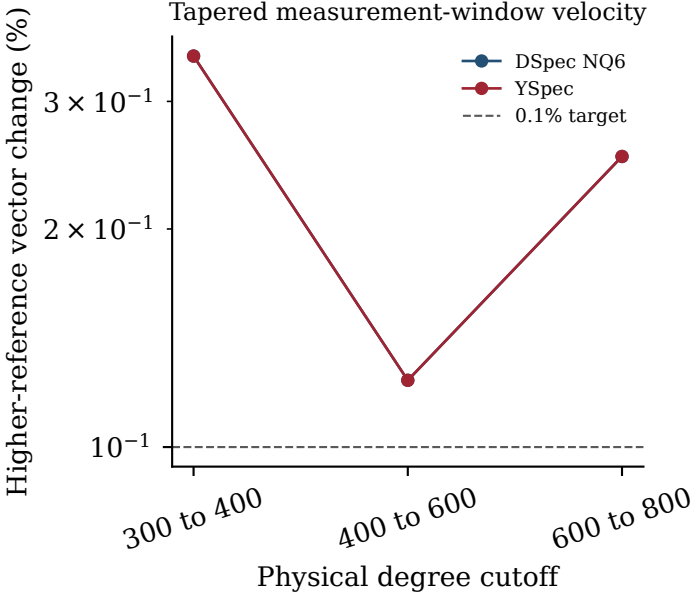
Tapered measurement-window velocity
Higher-reference vector change (%)
3×10^{-1}
2×10^{-1}
10^{-1}
DSpec NQ6
YSpec
0.1% target
300 to 400
400 to 600
600 to 800
Physical degree cutoff

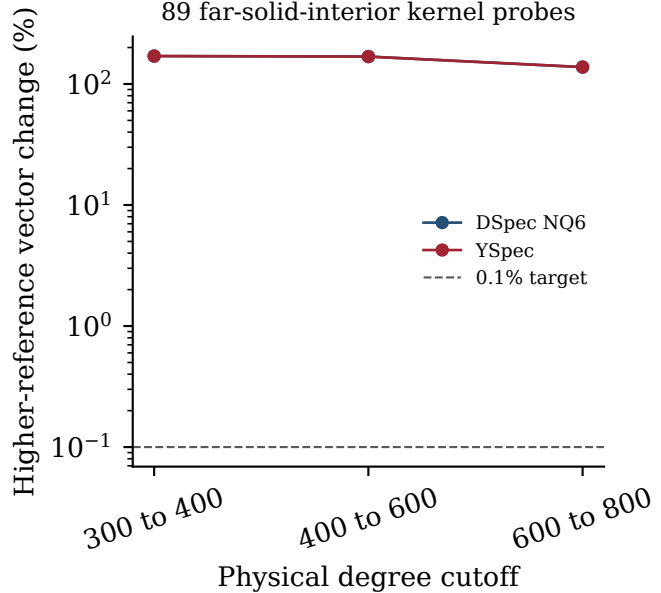
89 far-solid-interior kernel probes
Higher-reference vector change (%)
10^{2}
10^{1}
10^{0}
10^{-1}
DSpec NQ6
YSpec
0.1% target
300 to 400
400 to 600
600 to 800
Physical degree cutoff