



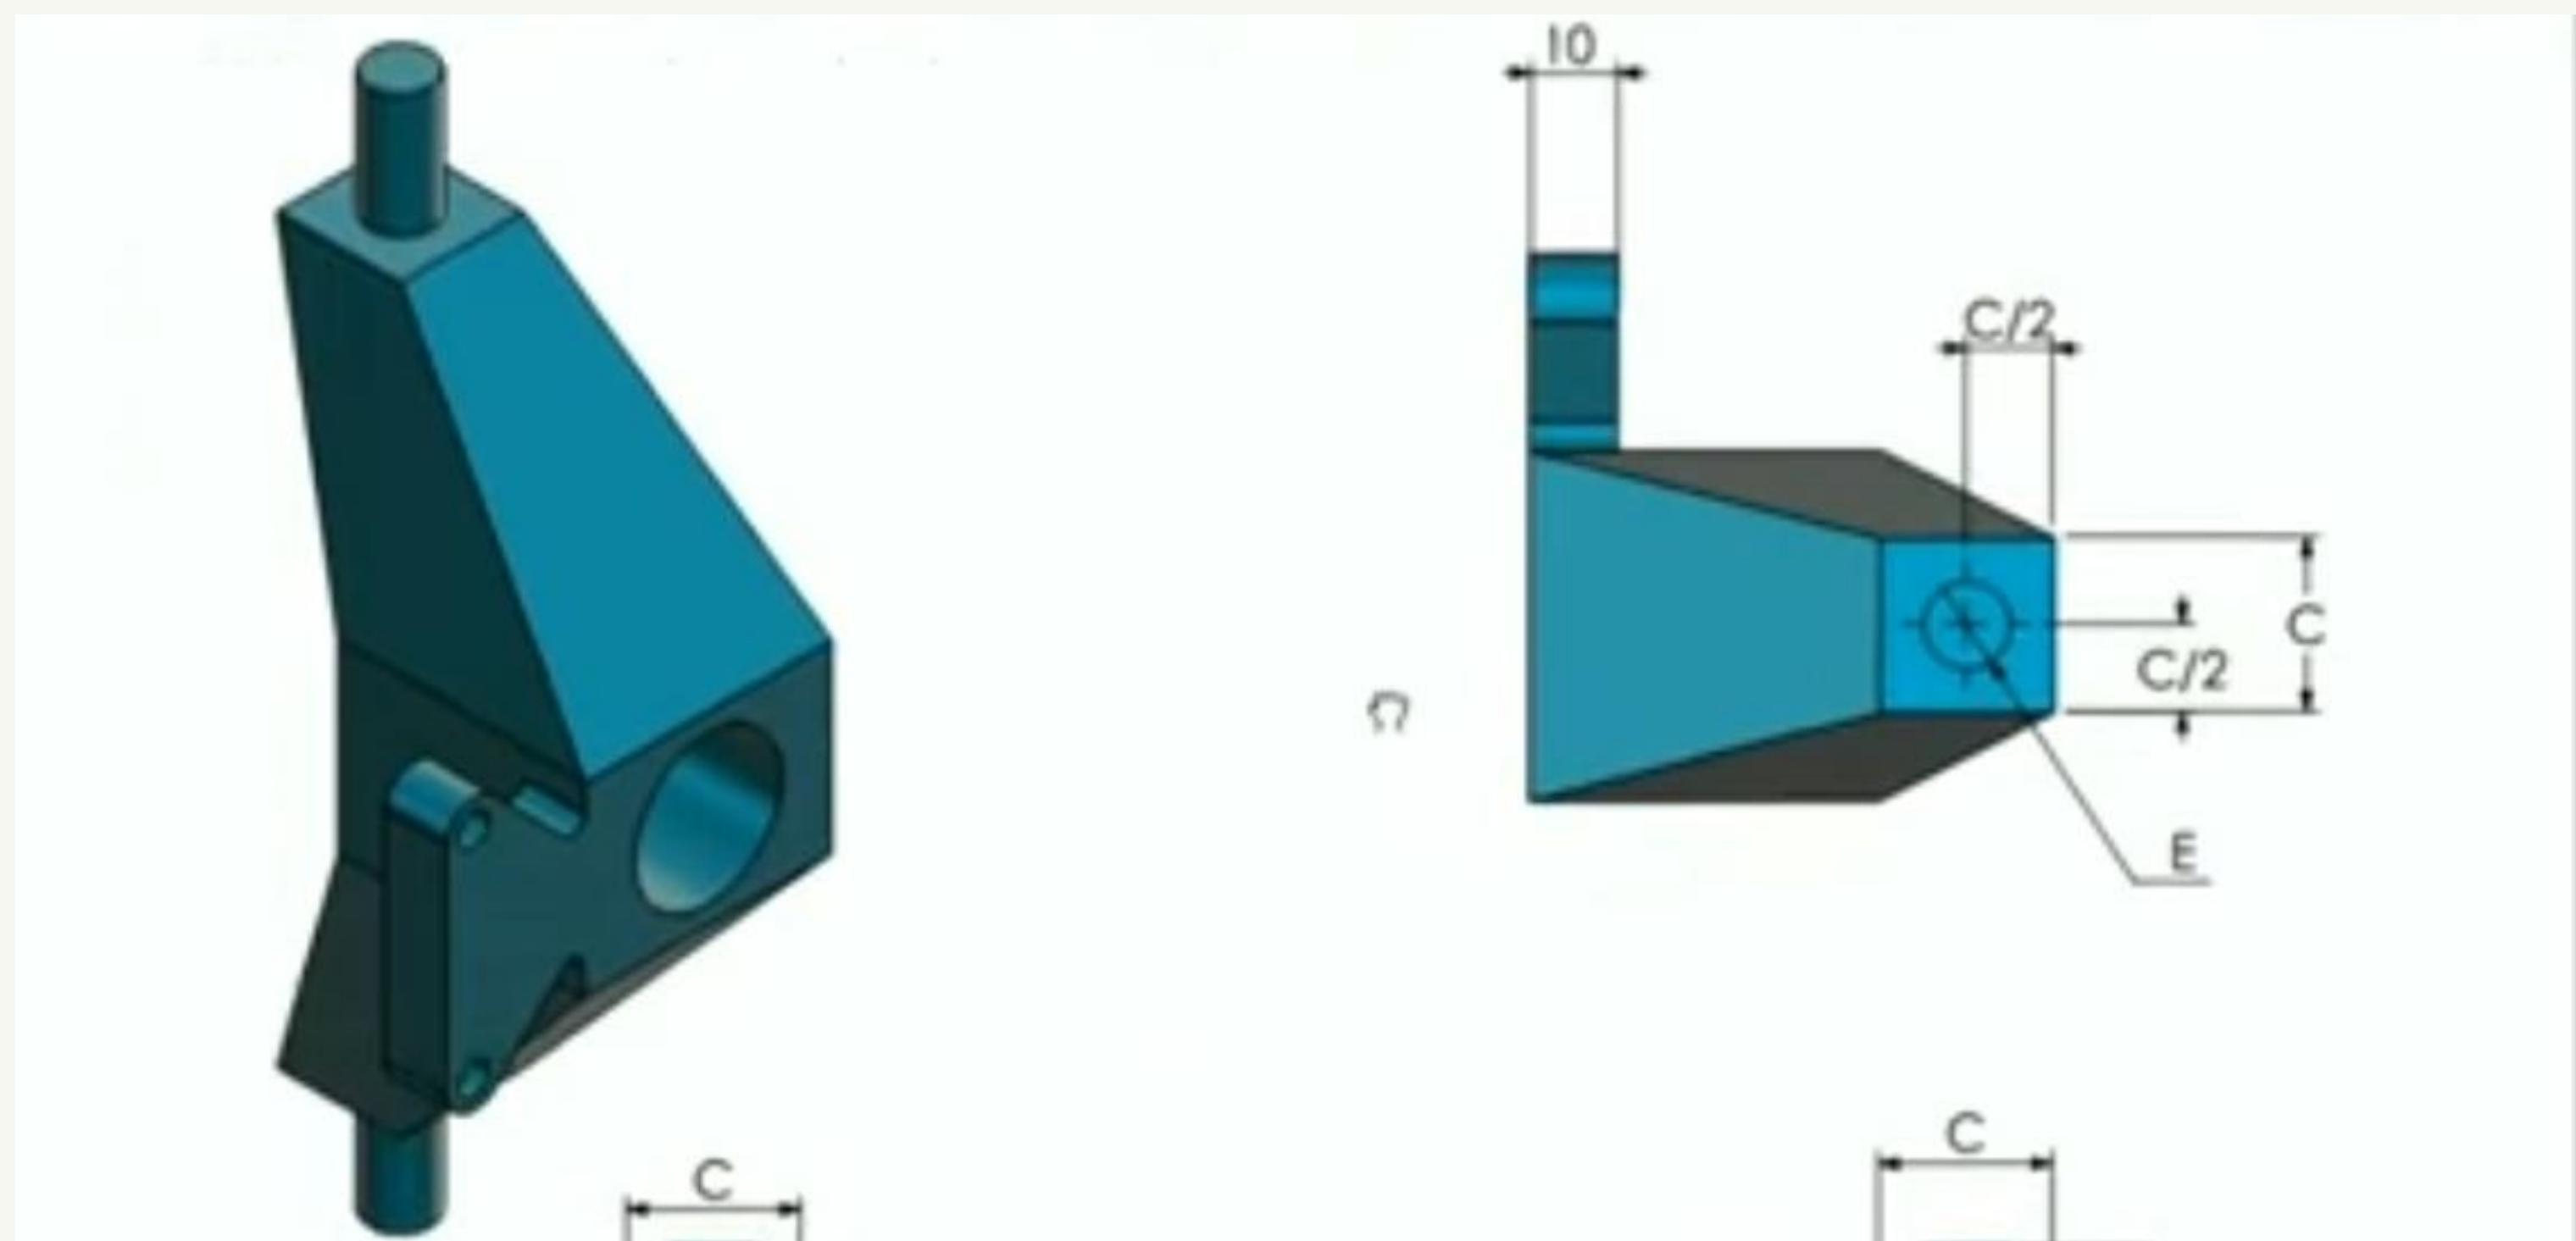

⚠ plan
à 60

→ note pas en
fonction de variable
globale
=> à changer si B ≠ 120

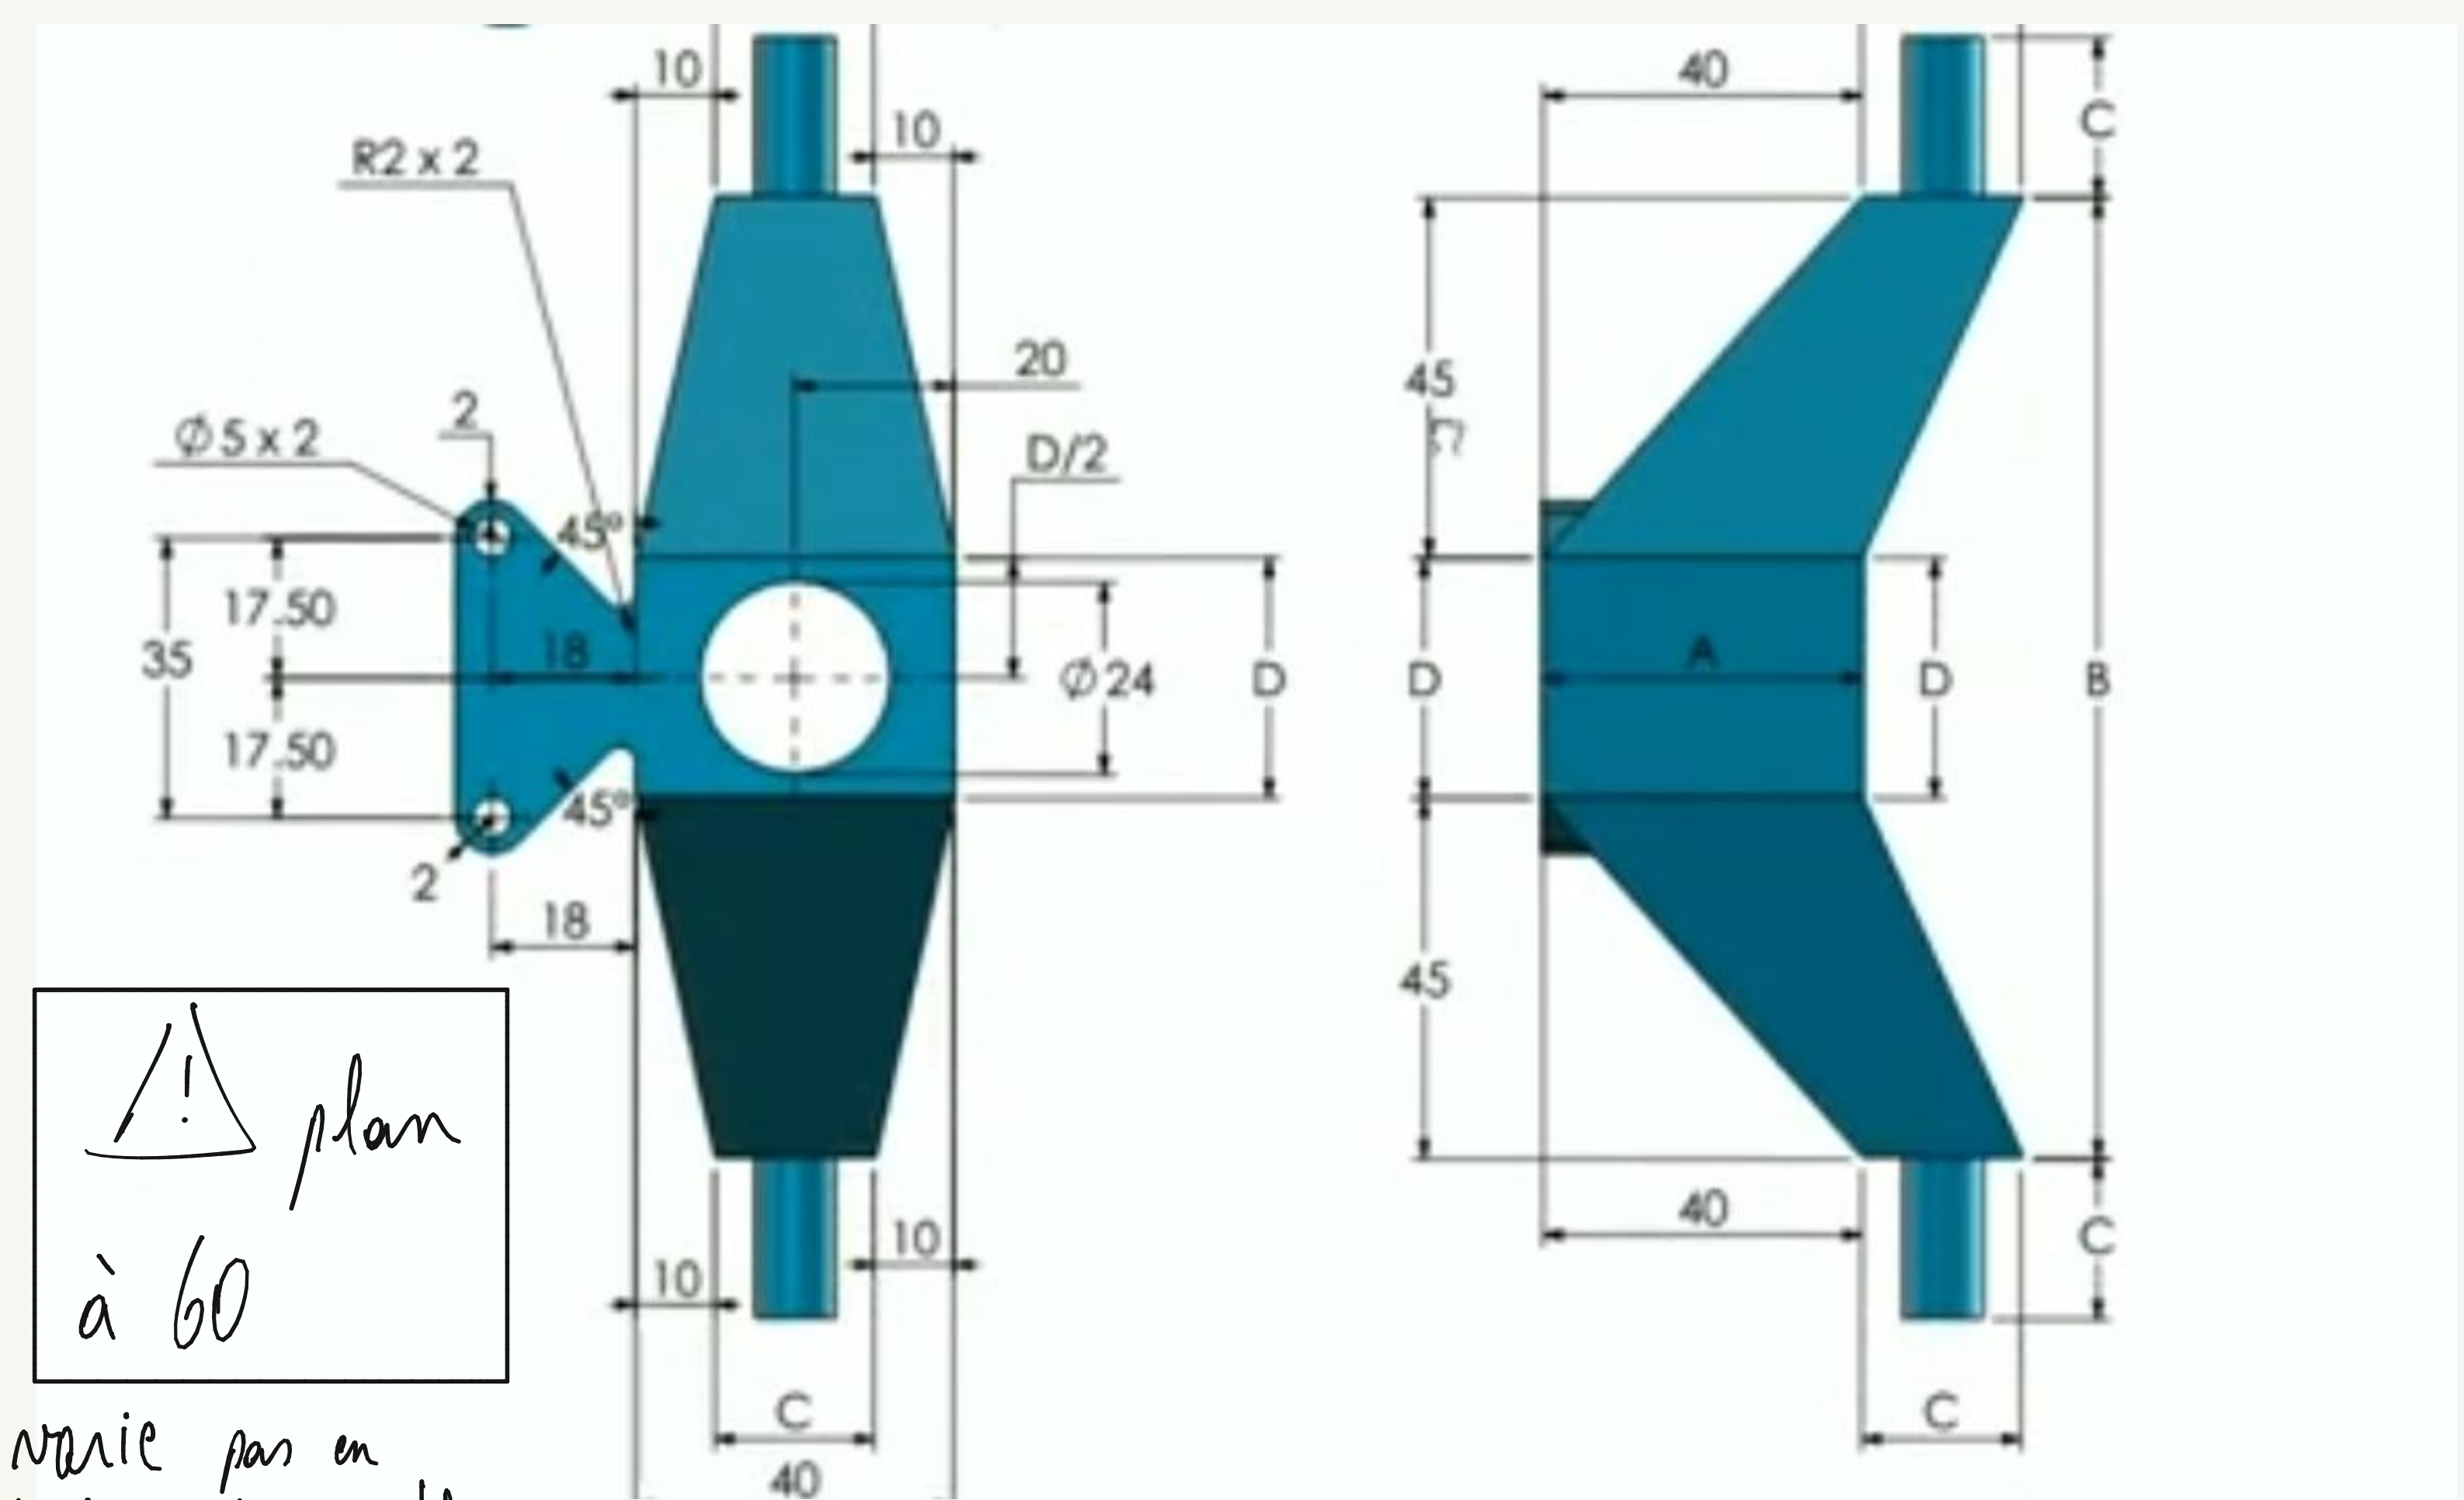

Unit system: MMGS (millimeter, gram, second)
 Decimal places: 2
 Part origin: Arbitrary
 Material: Cast Alloy Steel
 Density = 7300 kg/m³
 All holes through all unless shown otherwise

-Use the following parameters and equations which correspond to the dimensions labeled in the images:


A = 40 mm
 B = 120 mm
 C = 20 mm
 D = B/4
 E = C/2

(To save the most time, make use of linked dimensional values and equations.)
 (Save each part after every question in a different file, so you can review your work)

-Measure the mass of the part.
 What is the mass of the part (grams)?

a. 923.18
 b. 904.86
 c. 955.12
 d. 897.21

- Question 13: Make the following changes to the part from Question 12.
- Note: Part is symmetrical across the horizontal line passing through the center bore
- Note: Modified dimensions are indicated with inspection bubbles, new dimensions are not.
- Read following questions before modeling.

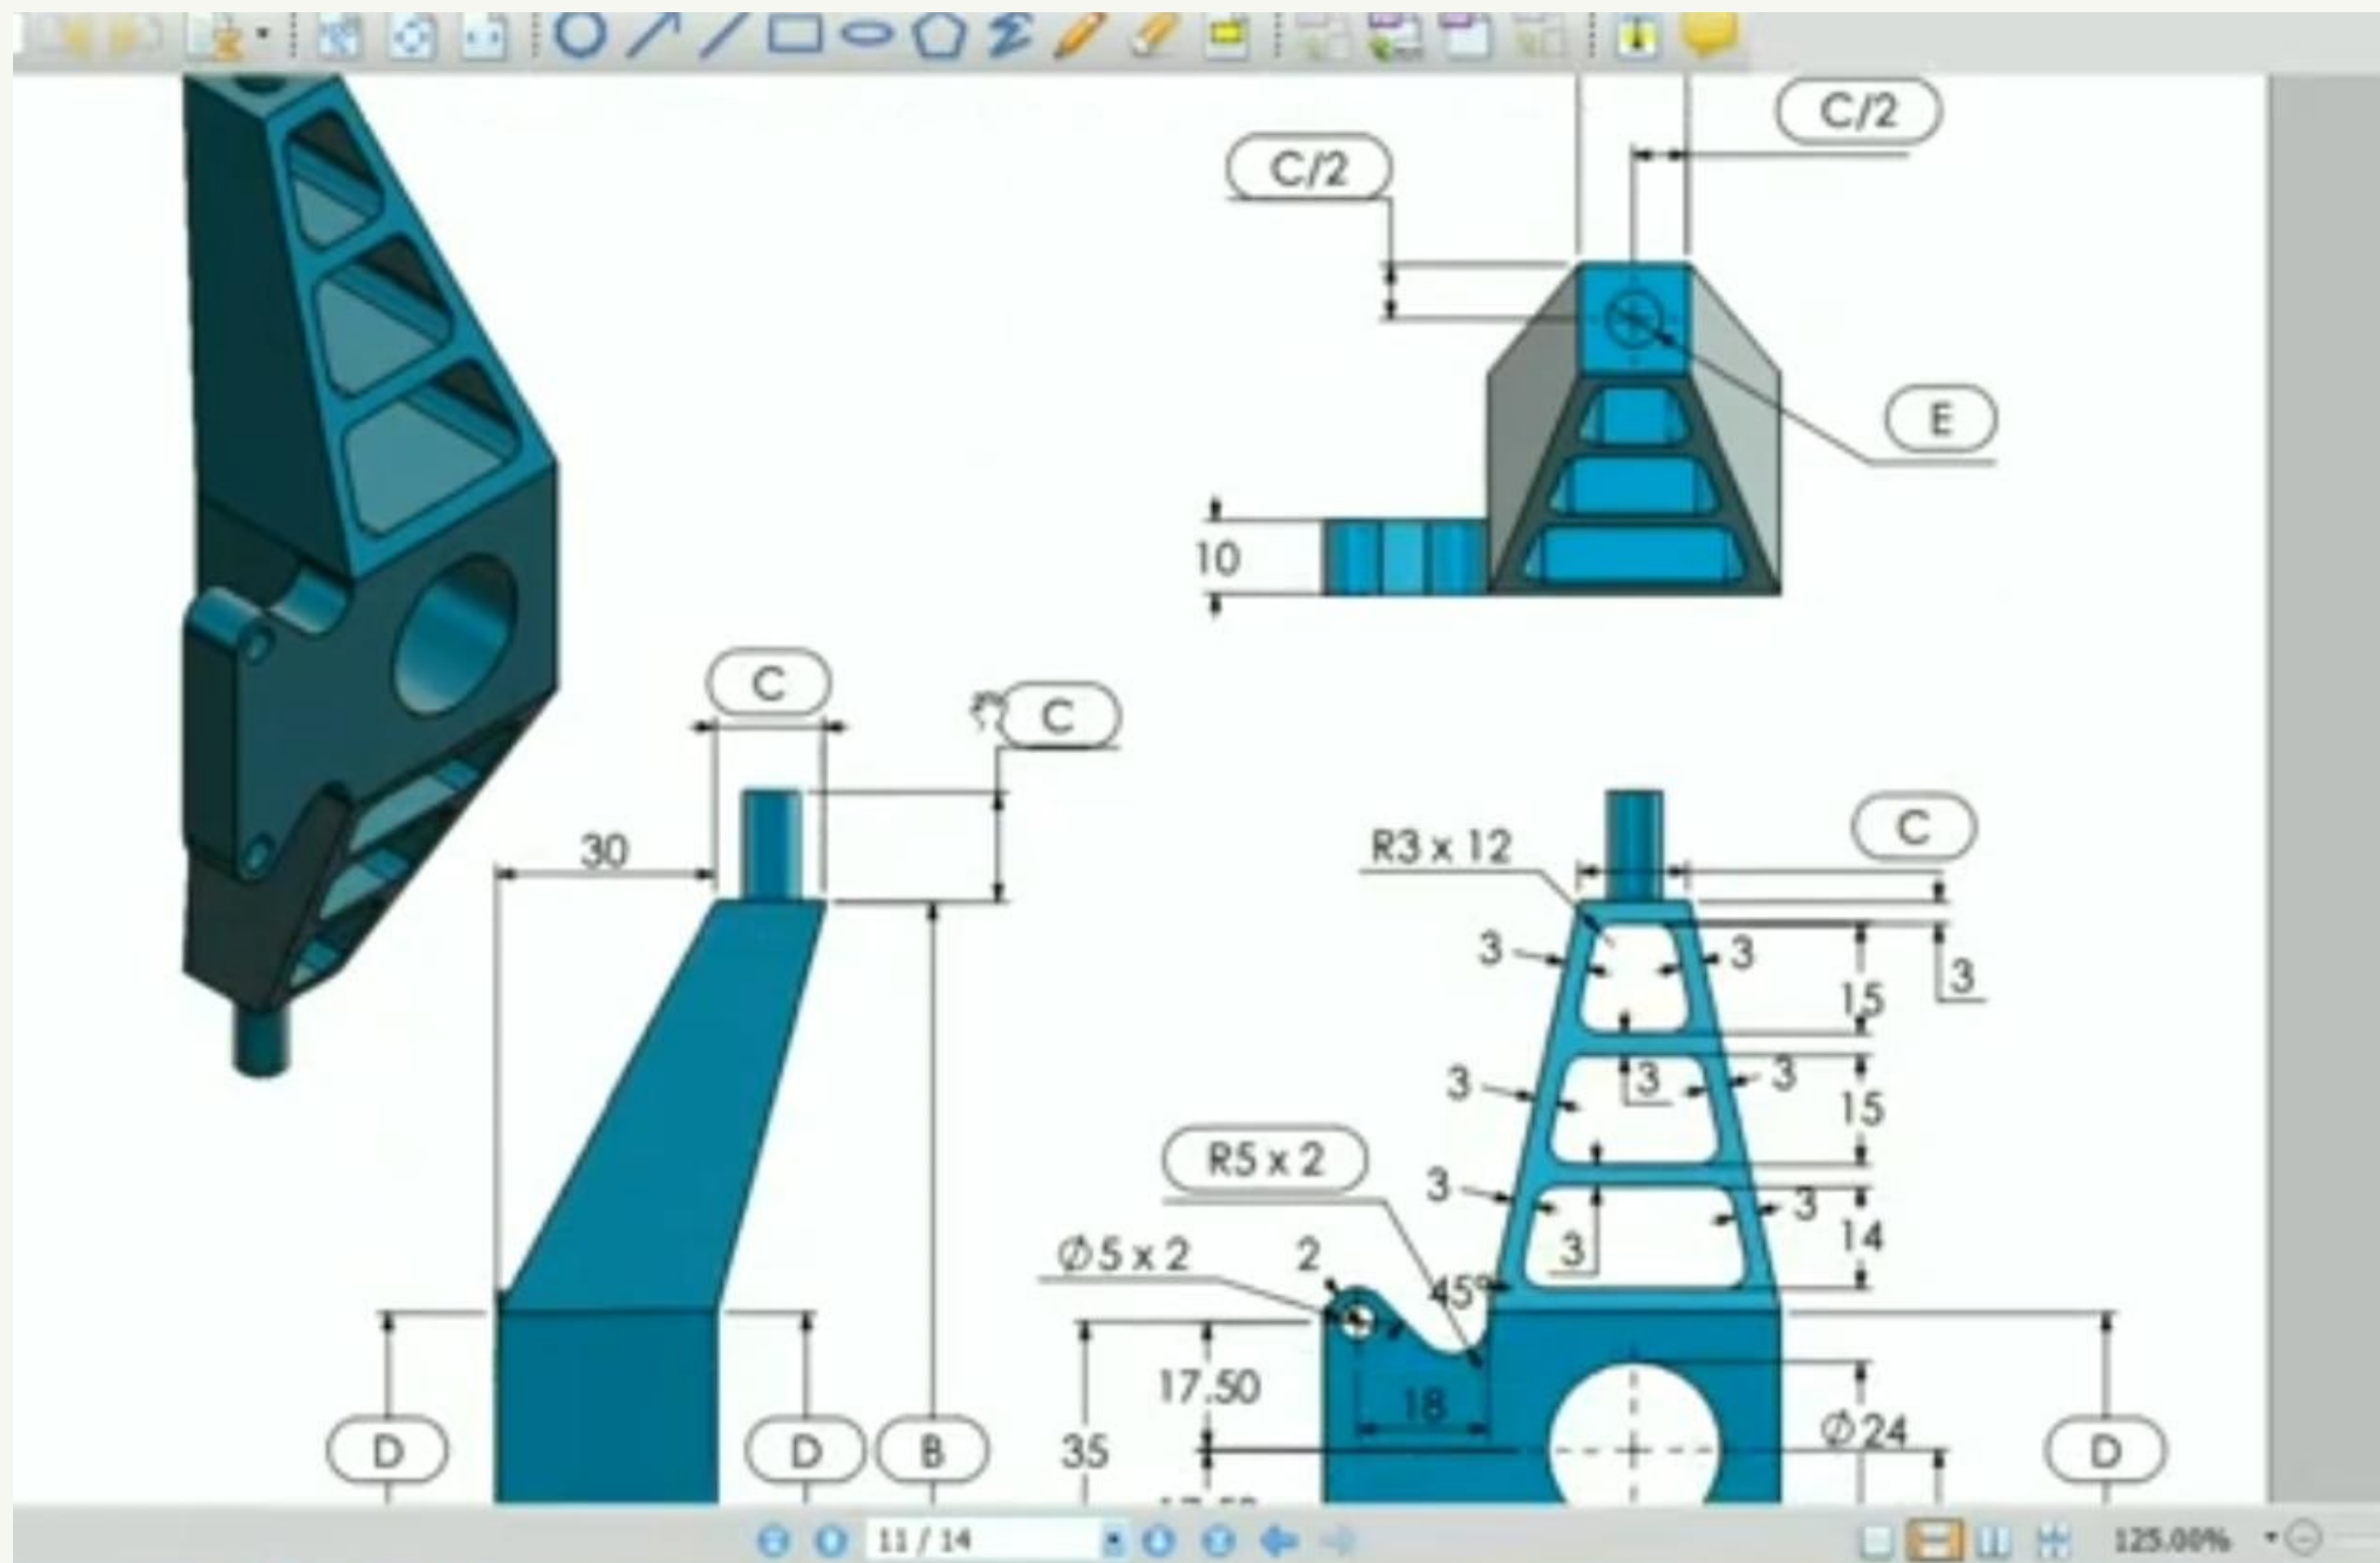

$A = 30 \text{ mm}$
 $B = 150 \text{ mm}$
 $C = 15 \text{ mm}$
 $D = B/4$
 $E = C/2$

(To save the most time, make use of linked dimensional values and equations.)
 (Save each part after every question in a different file, so you can review your work)

-Measure the mass of the part.

What is the mass of the part (grams)? 512,06 g