


What is the overall mass of the part in grams?

- a) 1205
b) 1280
c) 144
d) 1108

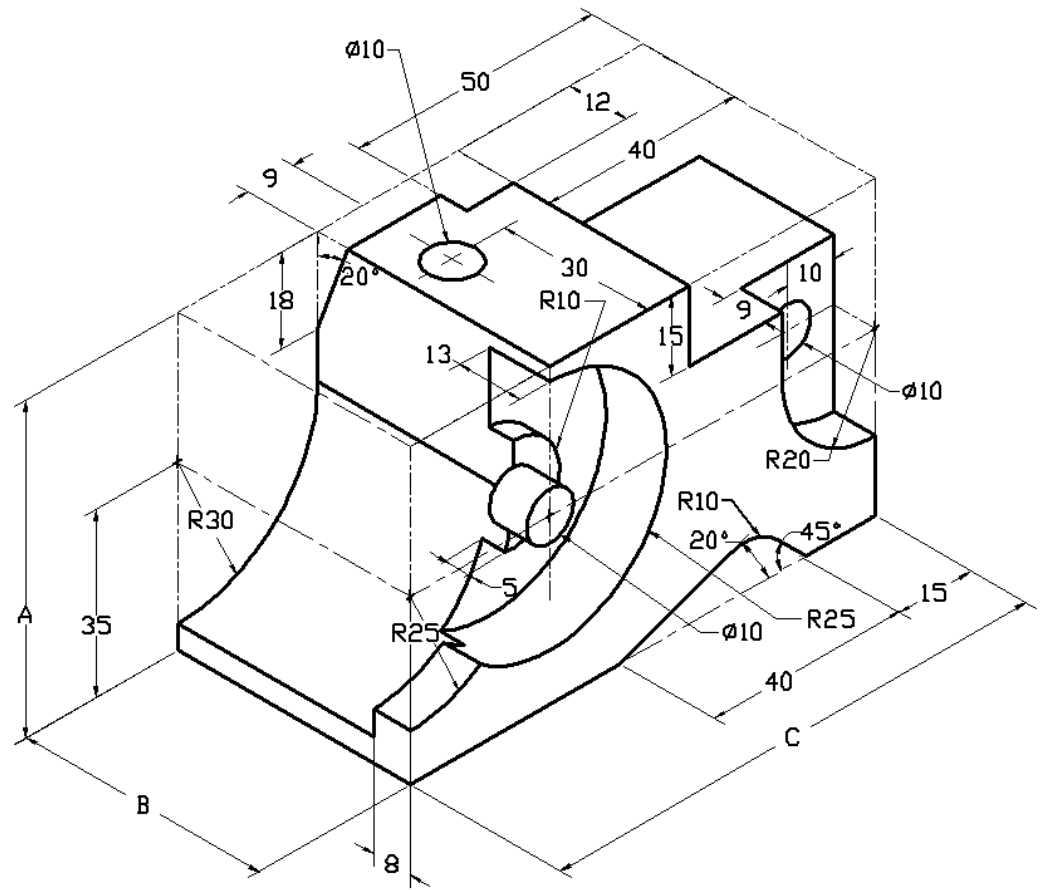


Question 2.

COSMOSXPress allows changes to mesh settings. Which of the following statements is not True?

- a) A fine mesh setting produces more accurate results than a course mesh.
- b) A coarse mesh setting produces less accurate results than a fine mesh.
- c) A fine mesh setting can be applied to a specific face instead of the entire model.
- d) All of the above

Question 3.

To create drawing view, 'B' it is necessary to sketch a spline (as shown) on drawing view 'A' and insert which SolidWorks view type?

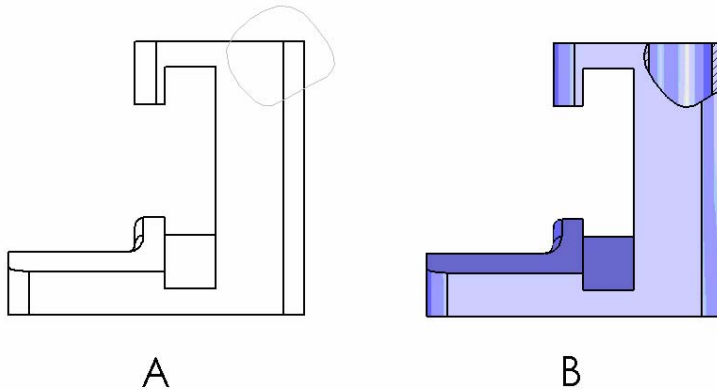


- a) Brokenout Section
- b) Aligned Section
- c) Section
- d) Detail

Question 4.

Build this assembly
in SolidWorks.

It contains 3
machined brackets
and 2 pins.

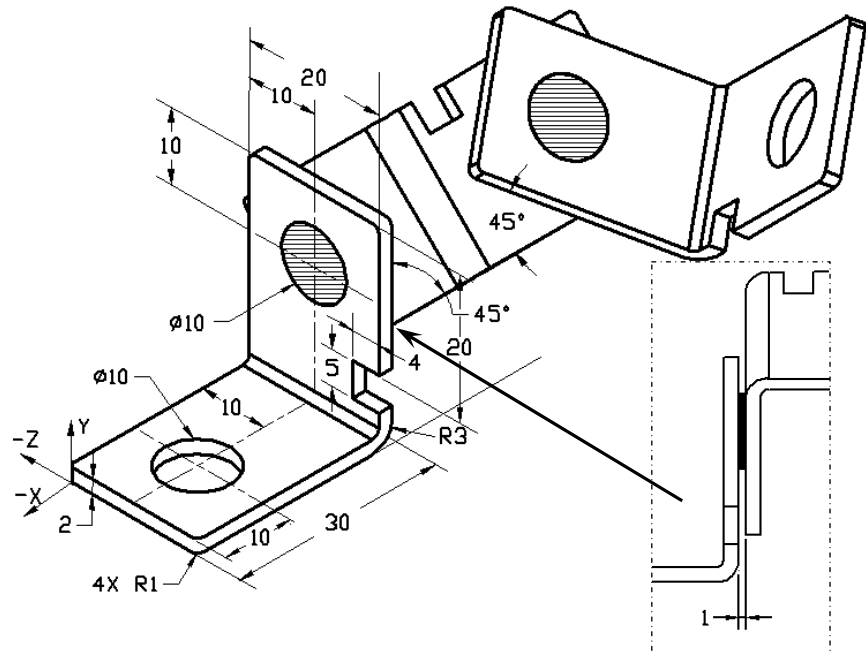

Brackets: 2mm

thickness, and equal size (holes through-all). Material: 6061 Alloy, Density = 0.0027g/mm³. The top edge of the notch is located 20 mm from the top edge of the MachinedBracket.

Pins: 5 mm length and equal in diameter, Material: Titanium, Density = 0.0046g/mm³. Pins are mated concentric to bracket holes (no clearance). Pin end faces are coincident to bracket outer faces. There is a 1 mm gap between the brackets. Brackets are positioned with equal angle mates (45 degrees).

Unit system: MMGS (millimeter, gram, second)

Decimal places: 2

Assembly origin: As shown.

What is the center of mass of the assembly?

- a) X=-11.05 Y=24.08 Z=-40.19
- b) X=-11.05 Y=-24.08 Z=40.19
- c) X= 40.24 Y=24.33 Z=20.75
- d) X= 20.75 Y=24.33 Z=40.24

Question 5.


Build this assembly in SolidWorks. It contains 3 components: Base, Yoke, Adjusting Pin. Apply the MMGS unit system.

Material: 1060 Alloy for all components. Density = 0.0027g/mm^3

Base: The distance between the front face of the Base and the front face of the Yoke = 60mm.

Yoke: The Yoke fits inside the left and right square channels of the Base component, (no clearance). The top face of the Yoke contains a $\varnothing 12\text{mm}$ through-all hole.

AdjustingPin: The bottom face of the AdjustingPin head is located 40 mm from the top face of the Yoke component. The AdjustingPin component contains a $\varnothing 5\text{mm}$ through all hole.

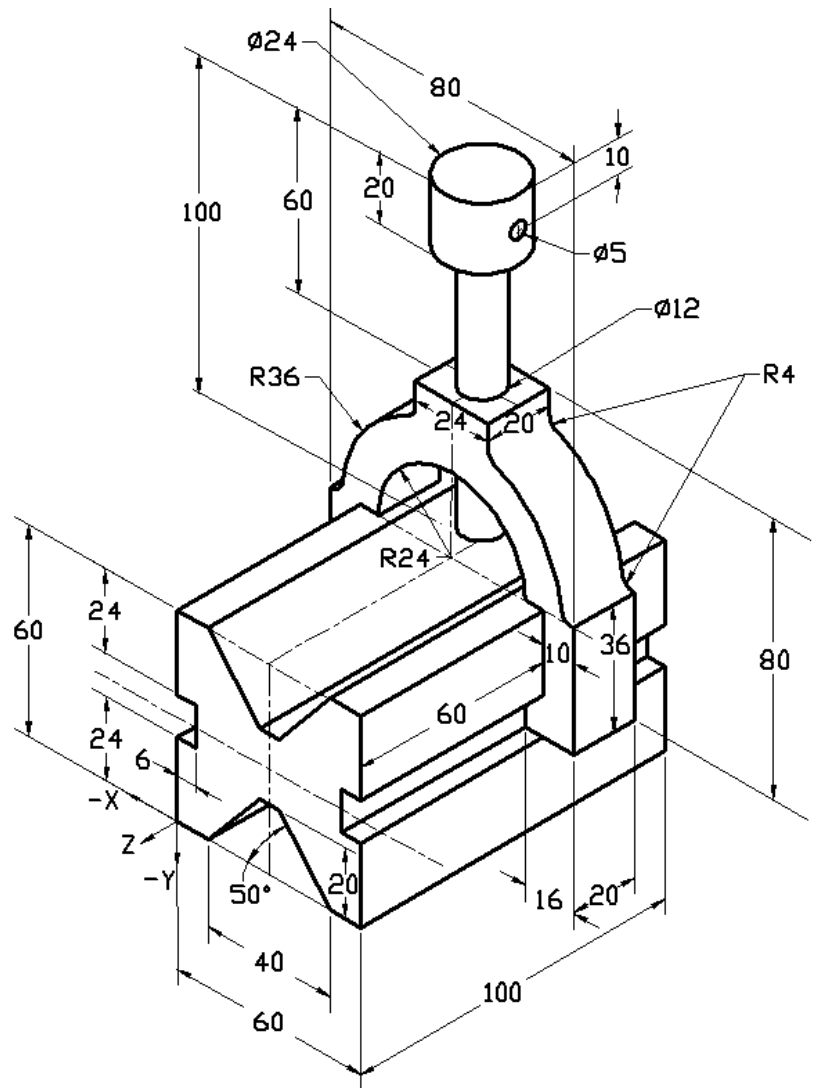

What is the center of mass of the assembly with respect to the illustrated coordinate system?

- a) $X=-30.00$ $Y=-40.16$ $Z=-40.16$
- b) $X=30.00$ $Y=40.16$ $Z=-43.82$
- c) $X= -30.00$ $Y=-40.16$ $Z=50.20$
- d) $X= 30.00$ $Y=40.16$ $Z=-53.82$

Question 6.

Build this part in
SolidWorks.

Material: 6061

Alloy. Density =
0.0027g/mm³

Unit system:

MMGS

(millimeter, gram,
second)


Decimal places: 2.

Part origin:

Arbitrary

A = 100.

All holes through
all, unless otherwise specified

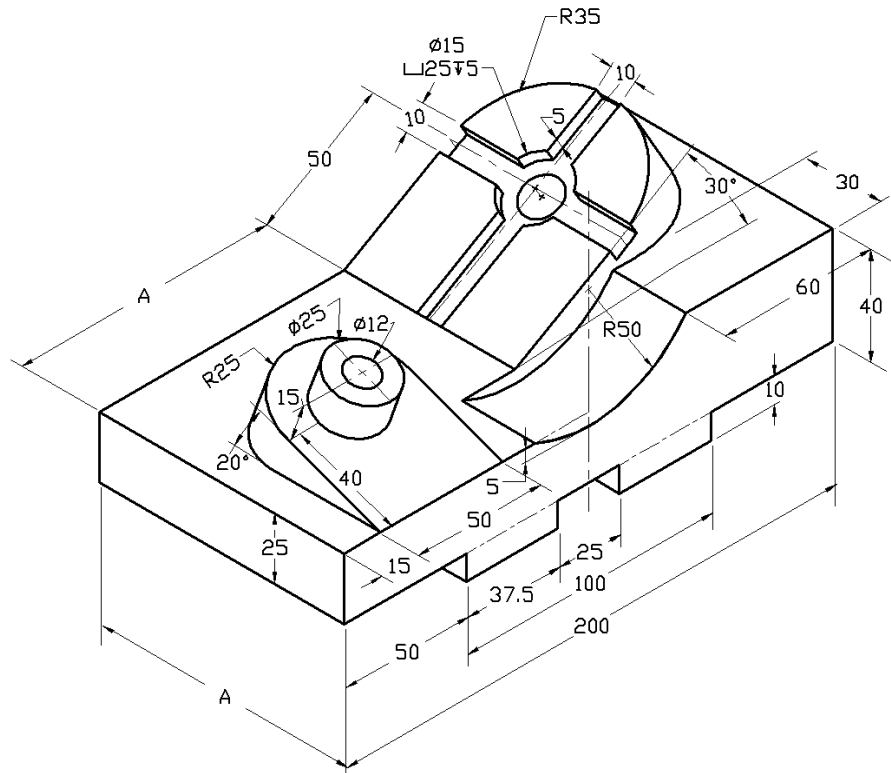

What is the overall mass of the part in grams?

- a) 2040.57
- b) 2004.57
- c) 102.63
- d) 1561.23

For further preparation, please complete the SolidWorks tutorials, located in SolidWorks under the Help Menu, before taking the CSWA Exam. Review the "About the CSWA Exam" document located at www.solidworks.com/cswa.

Good Luck,

Certification Program Manager, SolidWorks Corporation

Correct answers:

1. b
2. c
3. a
4. c
5. d
6. a