


1 LIGHTING FLOOR PLAN

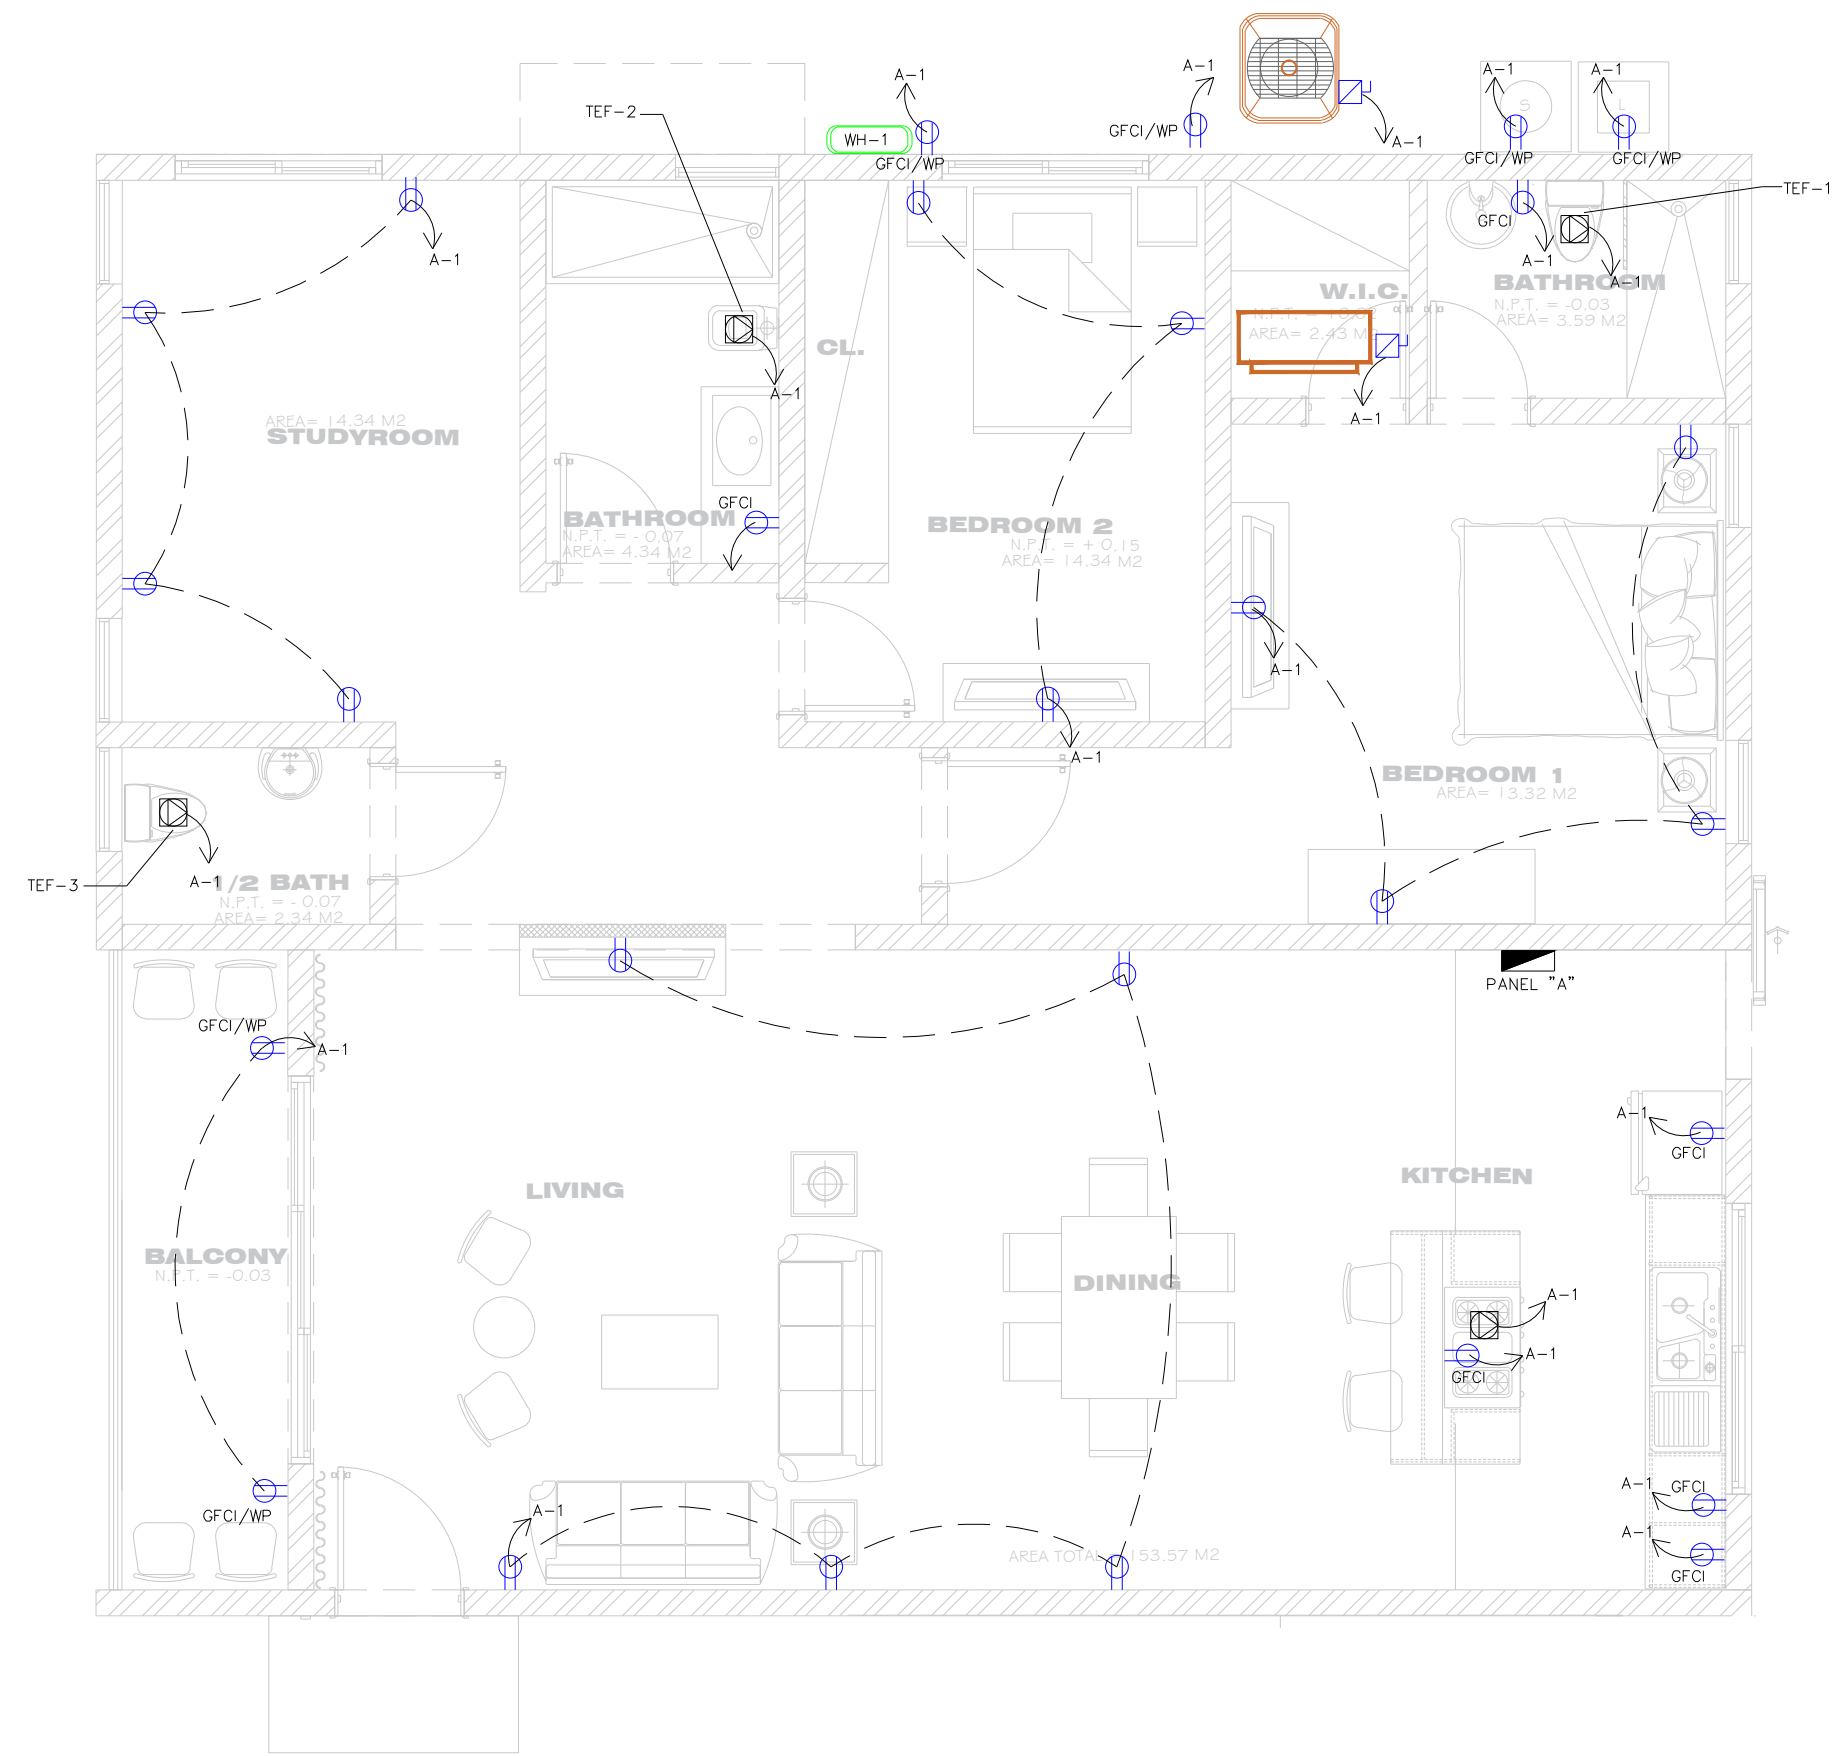

2 POWER FLOOR PLAN

EQUIPMENT LEGENDS	
	RECESSED DOWN LIGHT
	ENTRANCE DOWN LIGHT
	PENDANT LIGHT
	VANITY LIGHT
	4' SUSPENDED LINEAR LIGHT
	SEMI FLUSH LIGHTING FIXTURE
	LED STRIP LIGHTING FIXTURE
	WALL LIGHTING FIXTURE
	ELECTRICAL CABLE
	OCCUPANCY SENSOR
	SMOKE DETECTOR
	CARBON MONOXIDE SENSOR
	125 VOLT, 2 POLE, 3 WIRE, 20 AMP DUPLEX RECEPTACLE
	240 VOLT, 2 POLE, 3 WIRE, 20 AMP SINGLE RECEPTACLE
	DATA OUTLETS
	JUNCTION AND/OR PULL BOX
	MOTOR
	EXHAUST FAN
	DISCONNECT SWITCH (FUSED); COORDINATE FUSE SIZE WITH MECHANICAL
	ELECTRICAL PANEL
RECEPTACLE SUBSCRIPTS:	
"2"	INDICATES CIRCUIT NUMBER
"GFCI"	INDICATES RECEPTACLE EQUIPPED WITH INTEGRAL GROUND FAULT CIRCUIT INTERRUPTER
"AFCI"	ARC-FAULT CIRCUIT INTERRUPTER
"WP"	INDICATES WATERPROOF
"IG"	INSULATED GROUND
"C"	COMPUTER
	INDICATES TYPICAL SWITCH
	INDICATES DIMMER SWITCH
	4-WAY DIMMER SWITCH
	3-WAY DIMMER SWITCH
	2-WAY DIMMER SWITCH
	BATCH-FAN TIMER SWITCH