




Interface
Interface.SchDoc

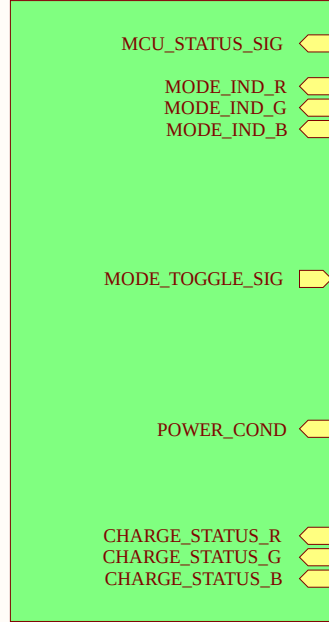


Analog Input Conditioning
Analog Input Conditioning.SchDoc

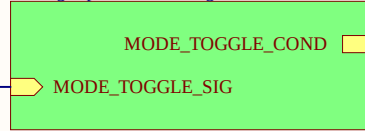


Power
Power.SchDoc

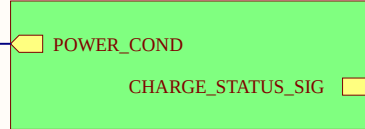

Haptic Drivers
Haptic Drivers.SchDoc

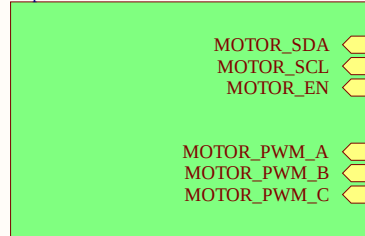


MCU-io
MCU-io.SchDoc

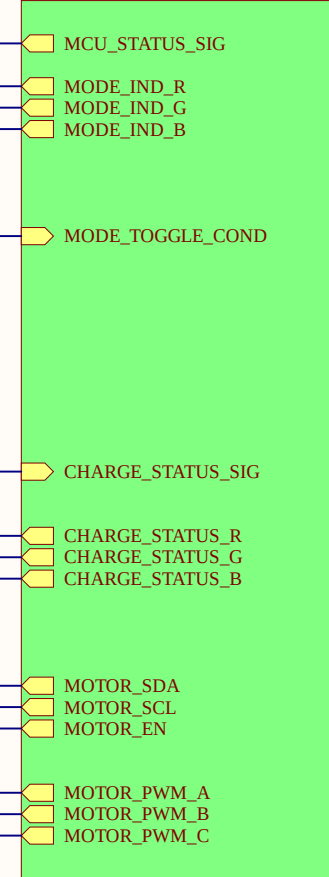


MCU-power
MCU-power.SchDoc



Title		
Size	Number	Revision
A		
Date:	9/22/2026	Sheet of
File:	C:\Users\...\Main.SchDoc	Drawn By:

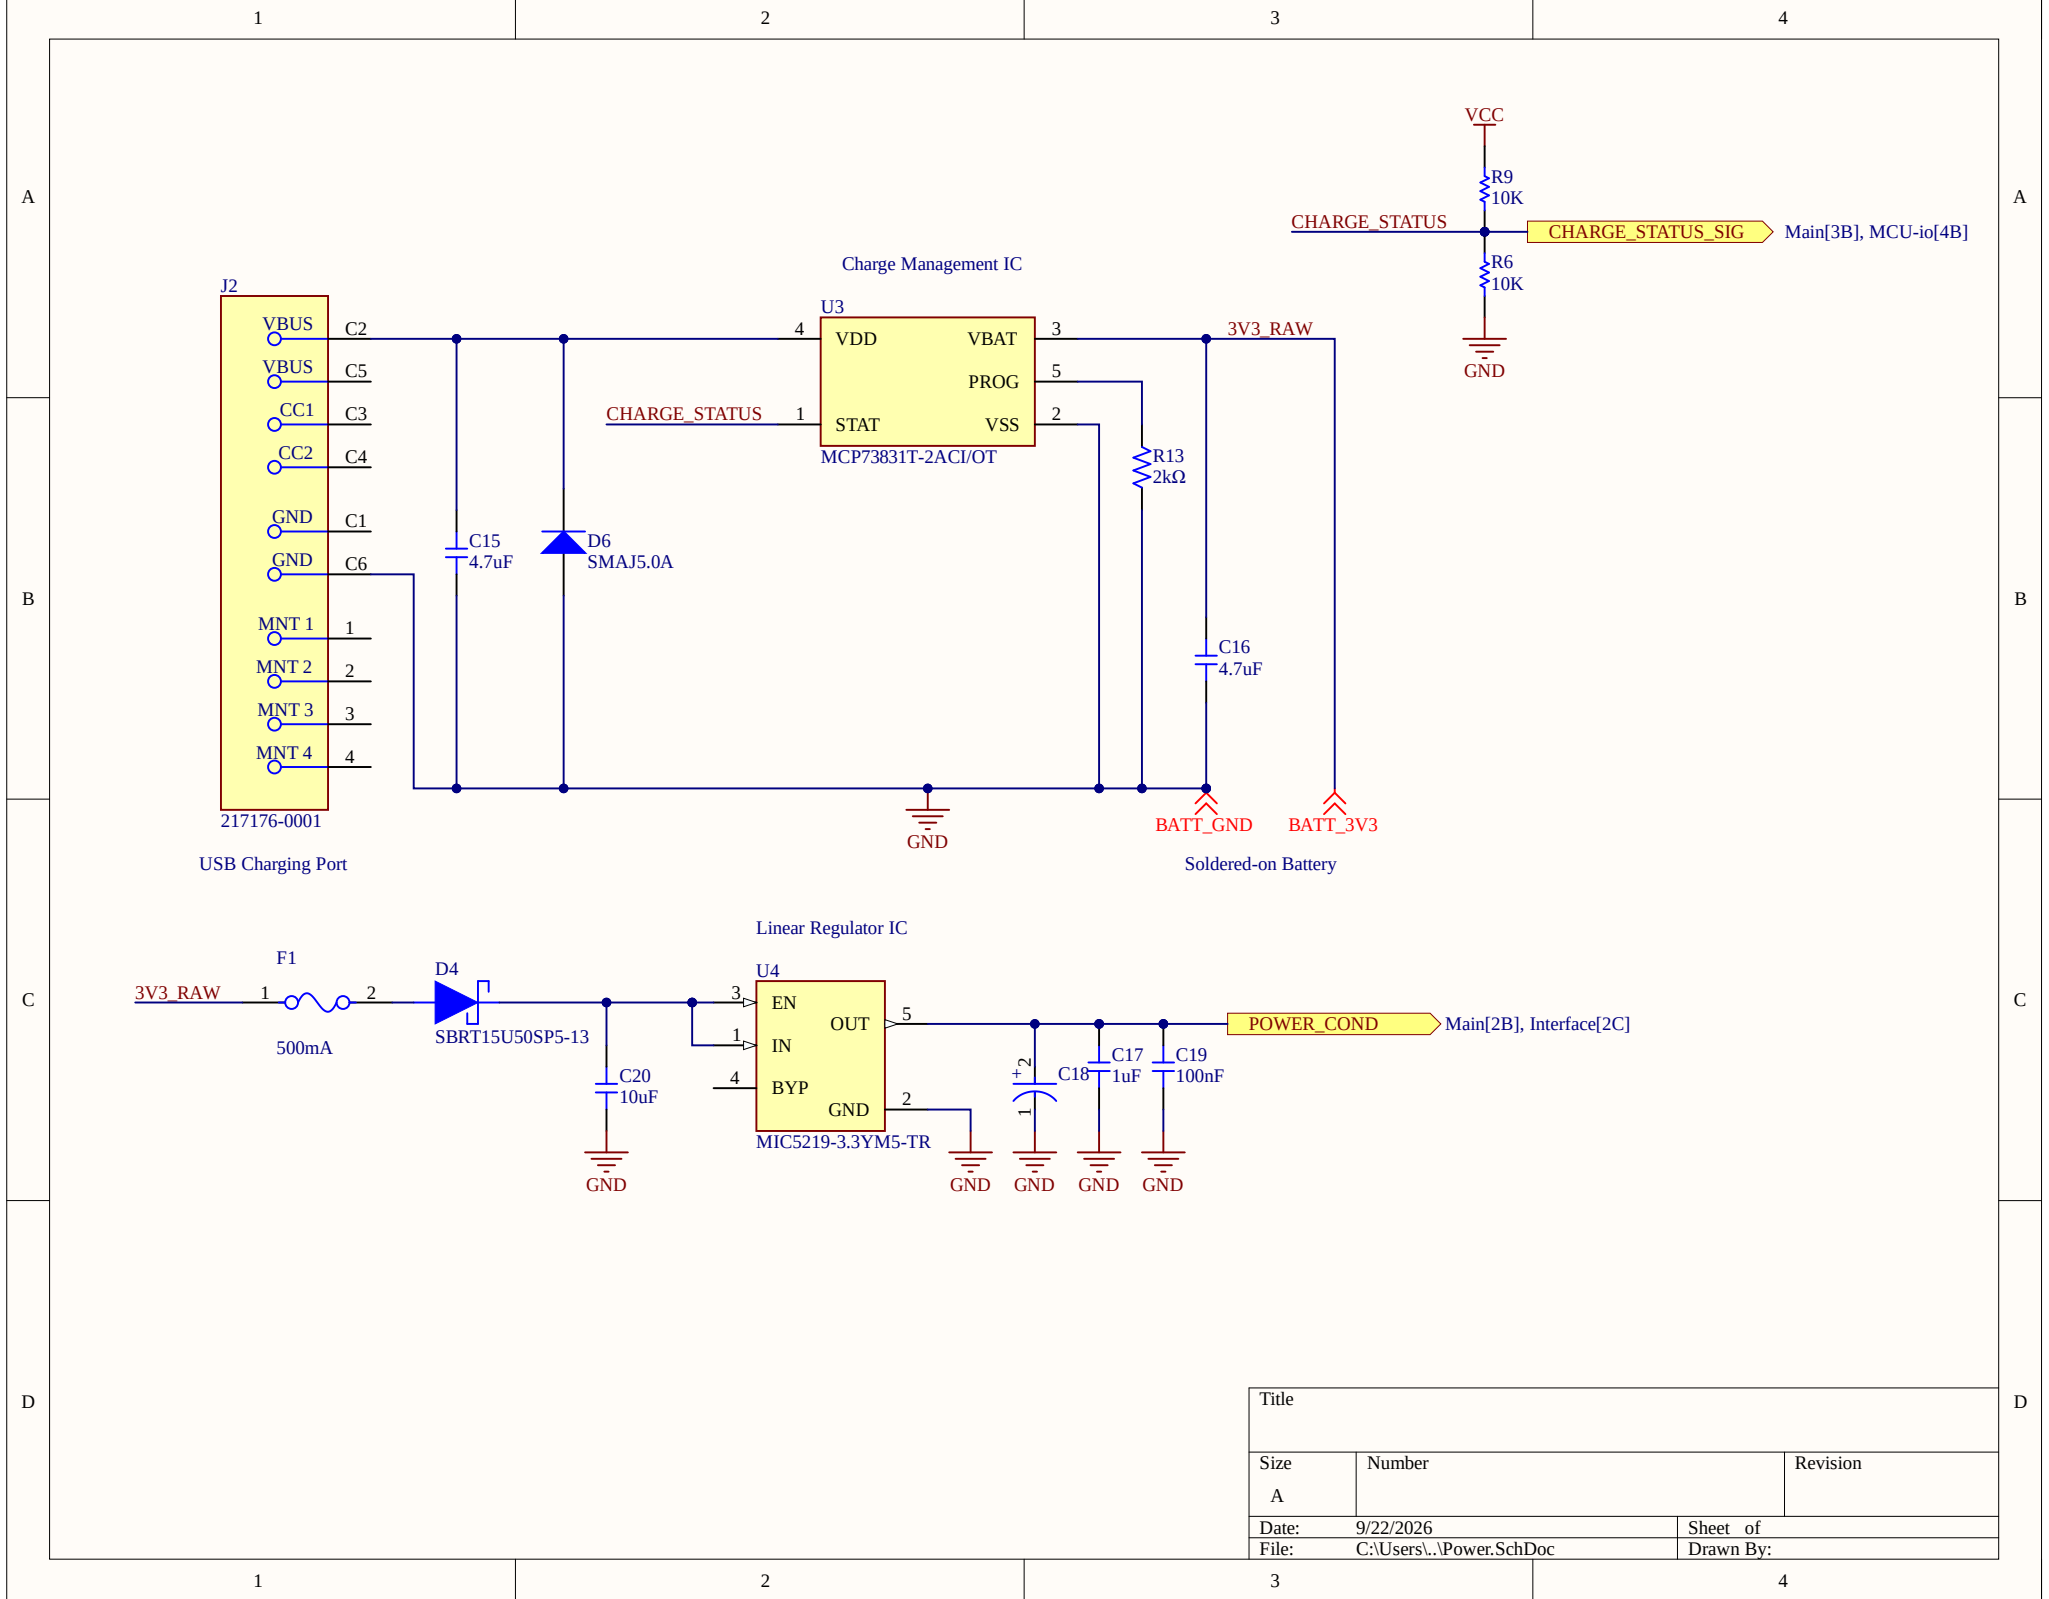

Title		
Size	Number	Revision
A		
Date:	9/22/2026	Sheet of
File:	C:\Users\...\Power.SchDoc	Drawn By:

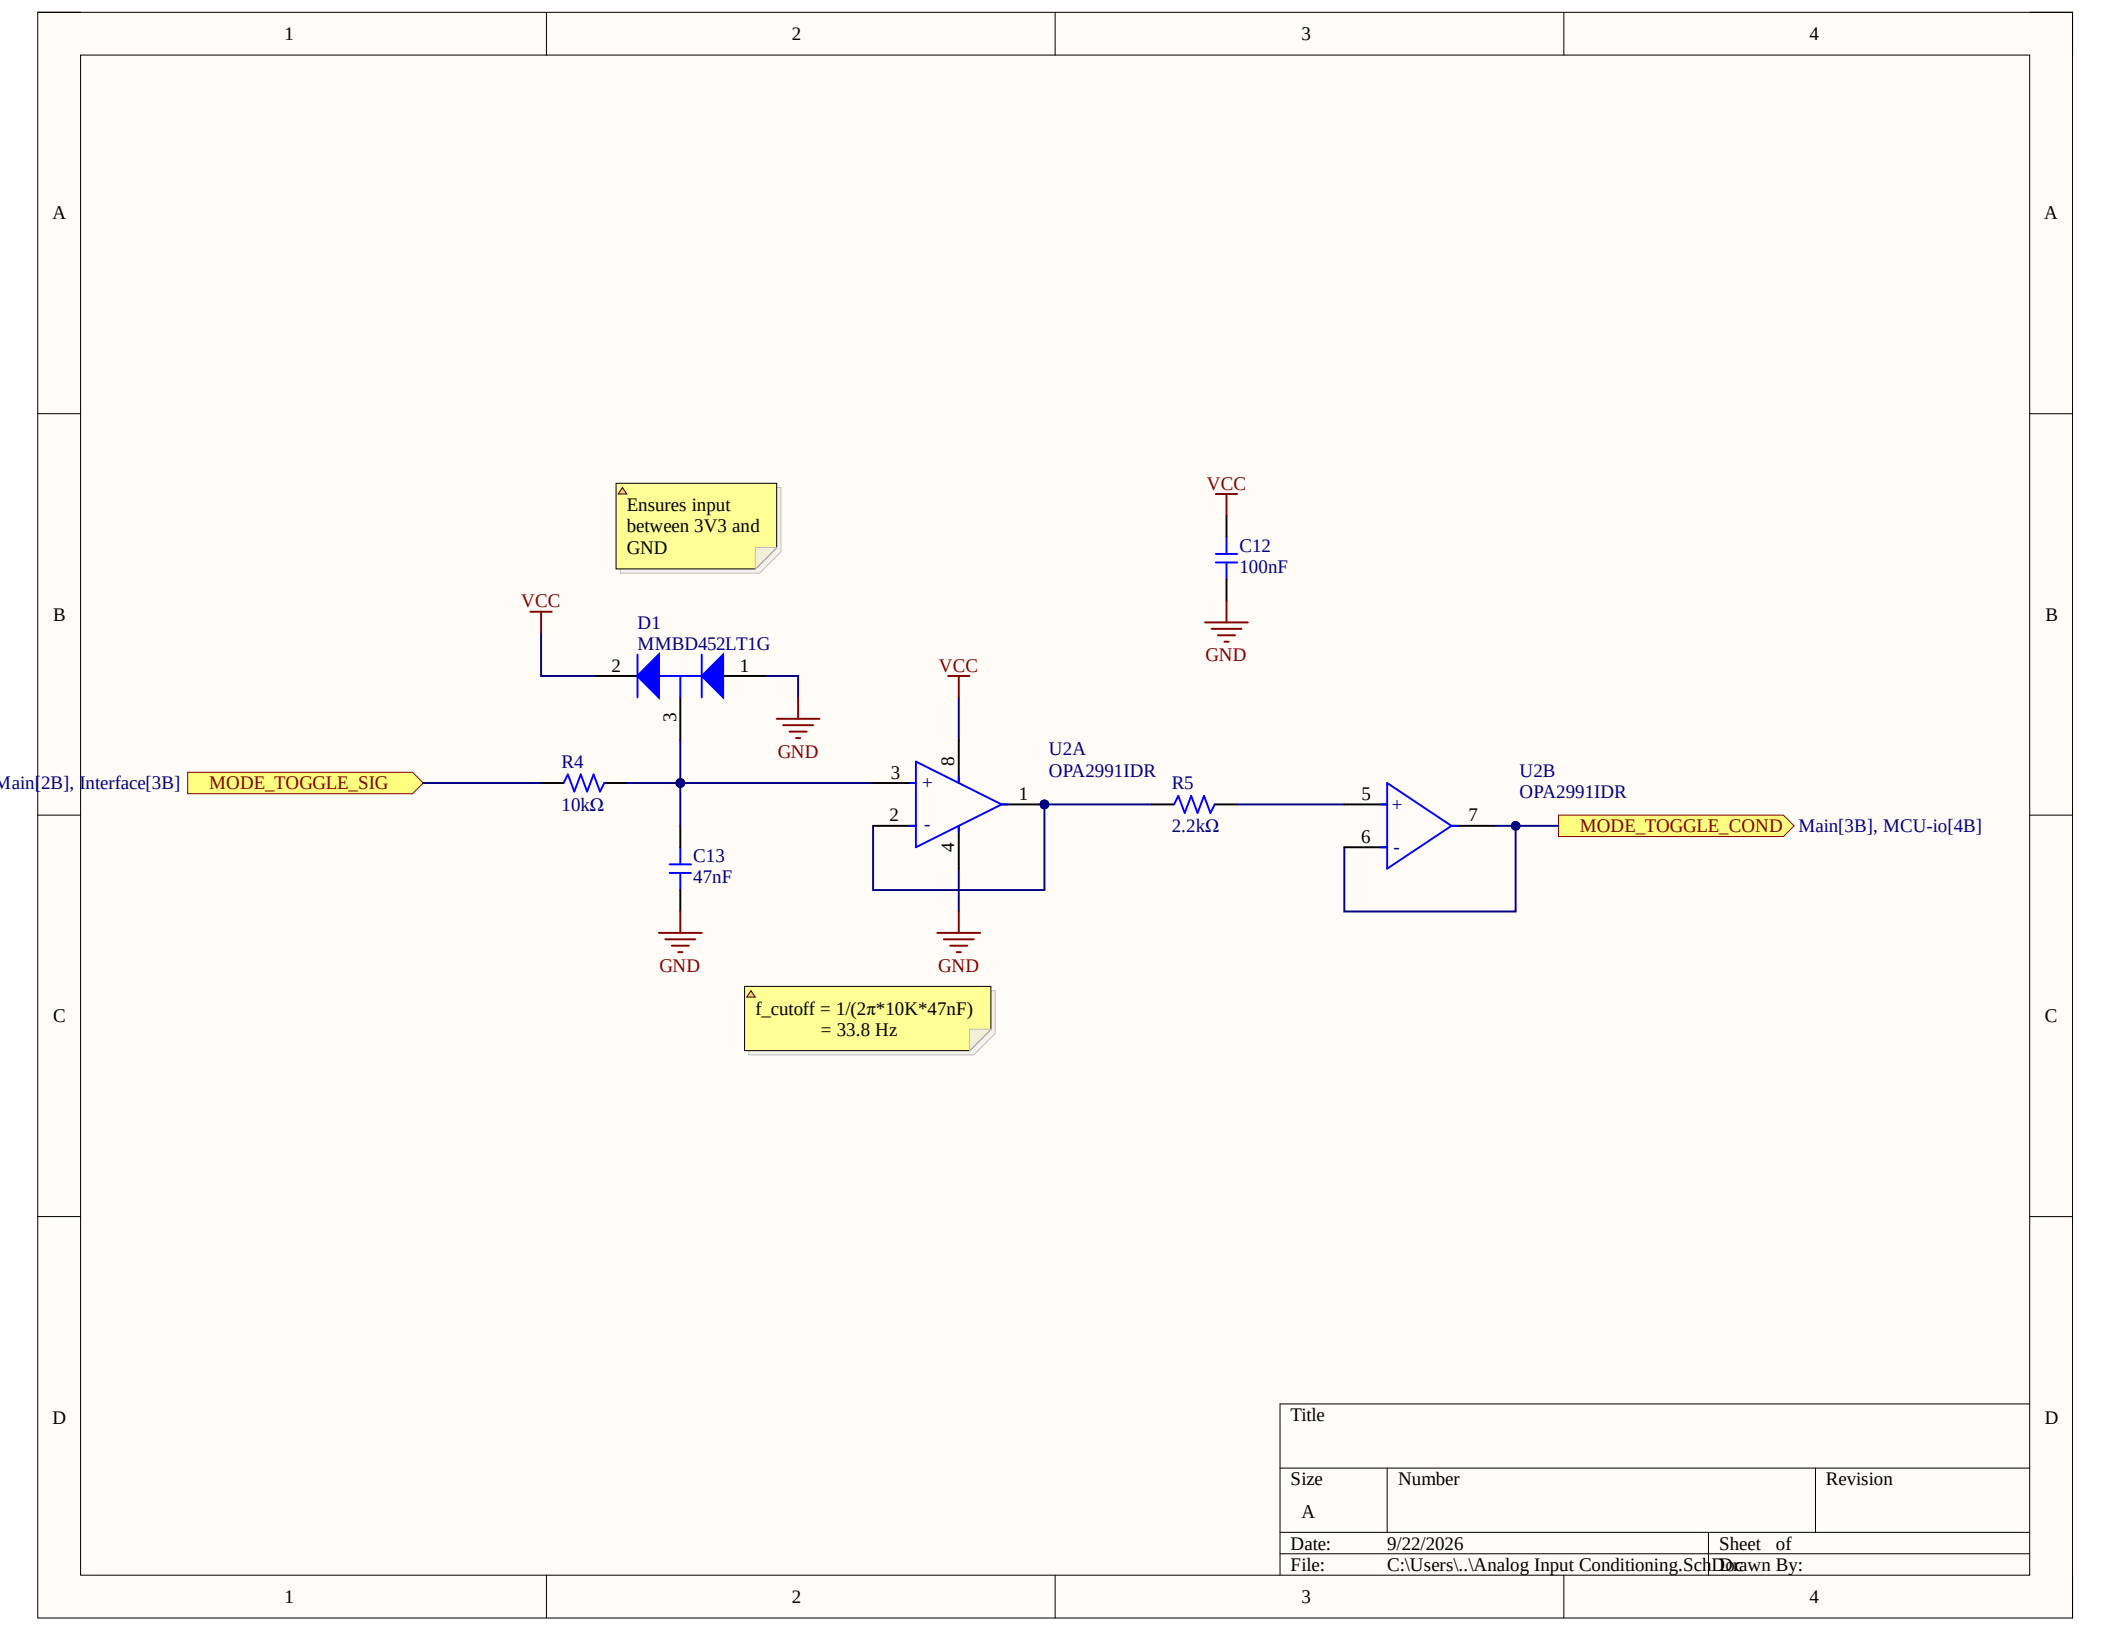

A

A

B


B

C

C


D

D

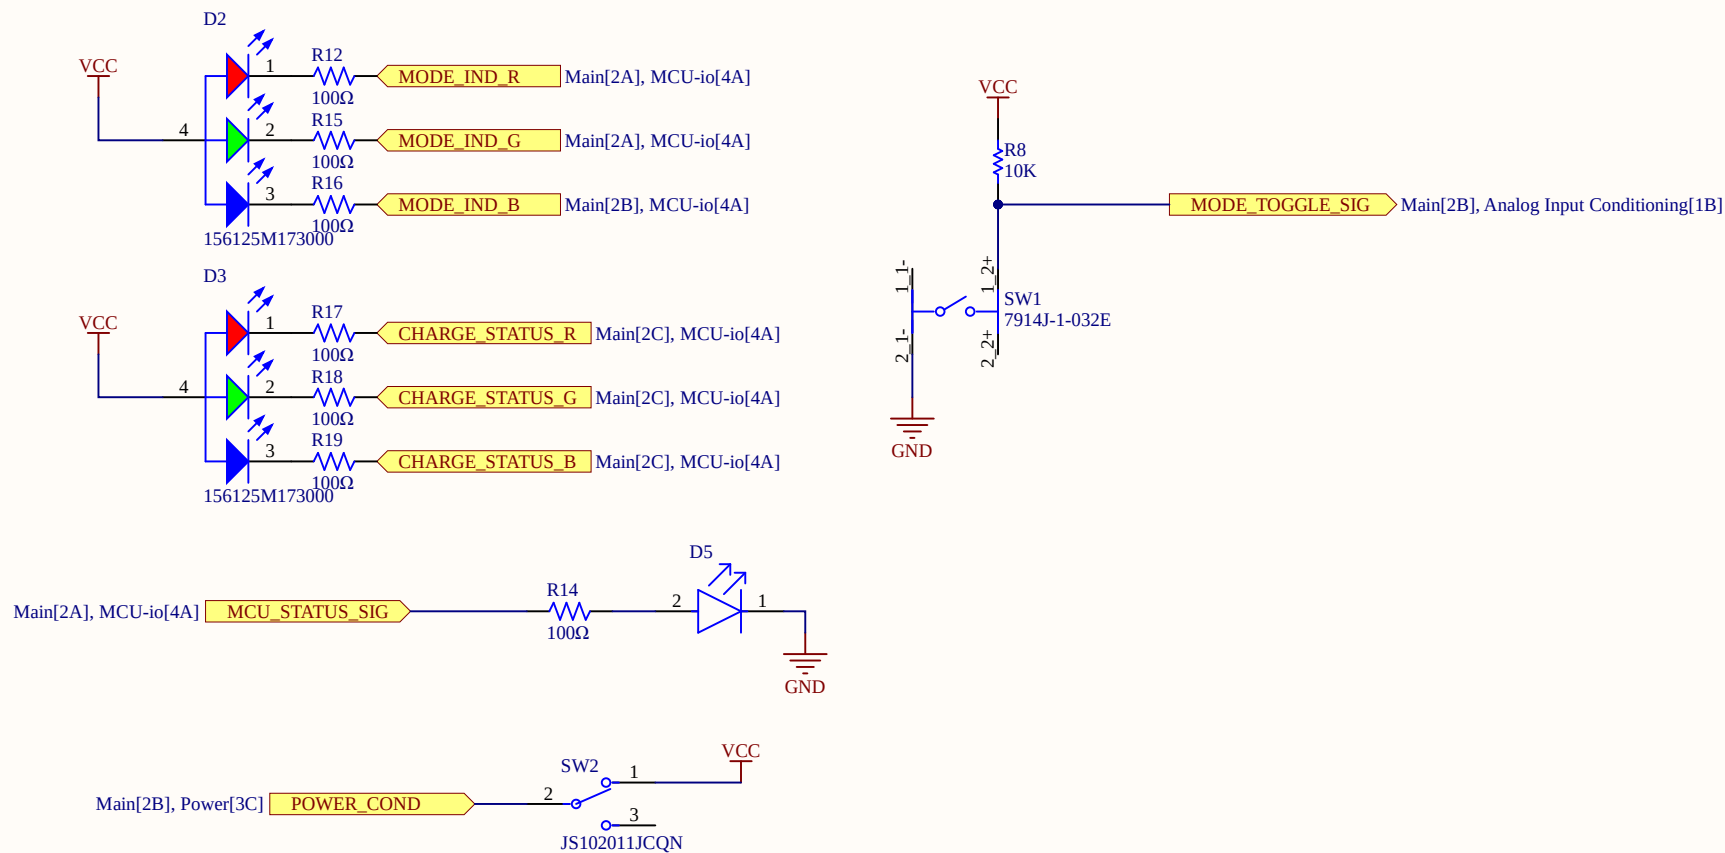



Title		
Size	Number	Revision
A		
Date:	9/22/2026	Sheet of
File:	C:\Users\...\Interface.SchDoc	Drawn By:

A

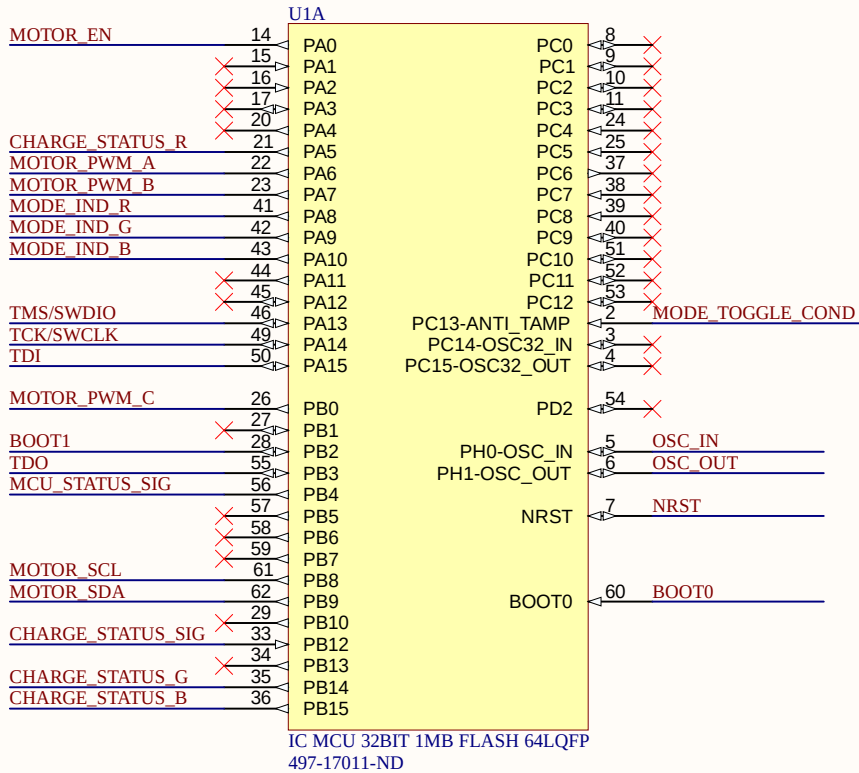

A TMS/SWDIO, TCK/SWCLK, TDI for JTAG


B

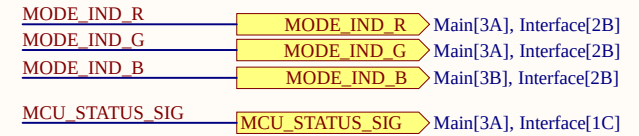

Indicator LEDs/Status




Mode Toggle Signal

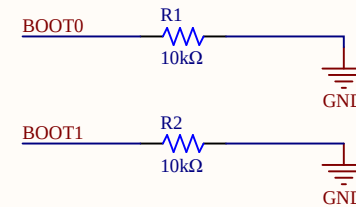

Boot Selection


STM32F413RGT6

C


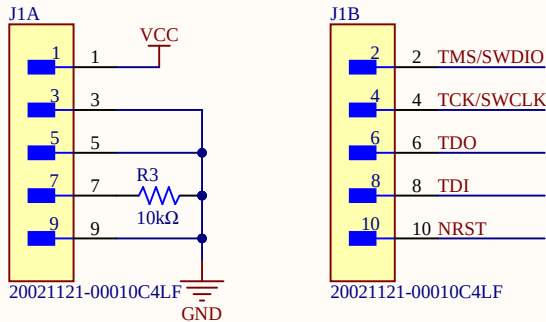


JTAG Debugging


Note: STM32 has internal JTAG pullups

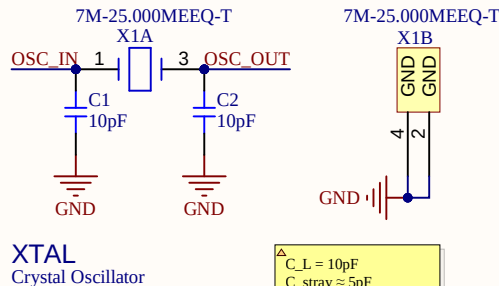


C_L = 10pF
 C_{stray} ≈ 5pF
 thus, C1 = C2 = 10pF

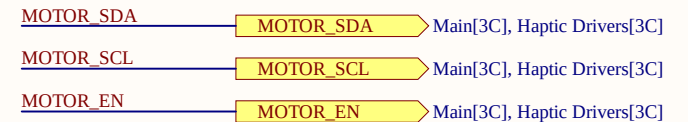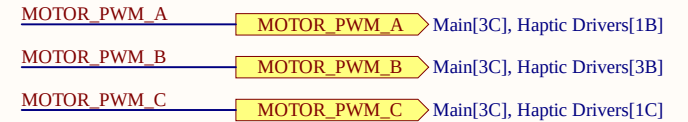


D

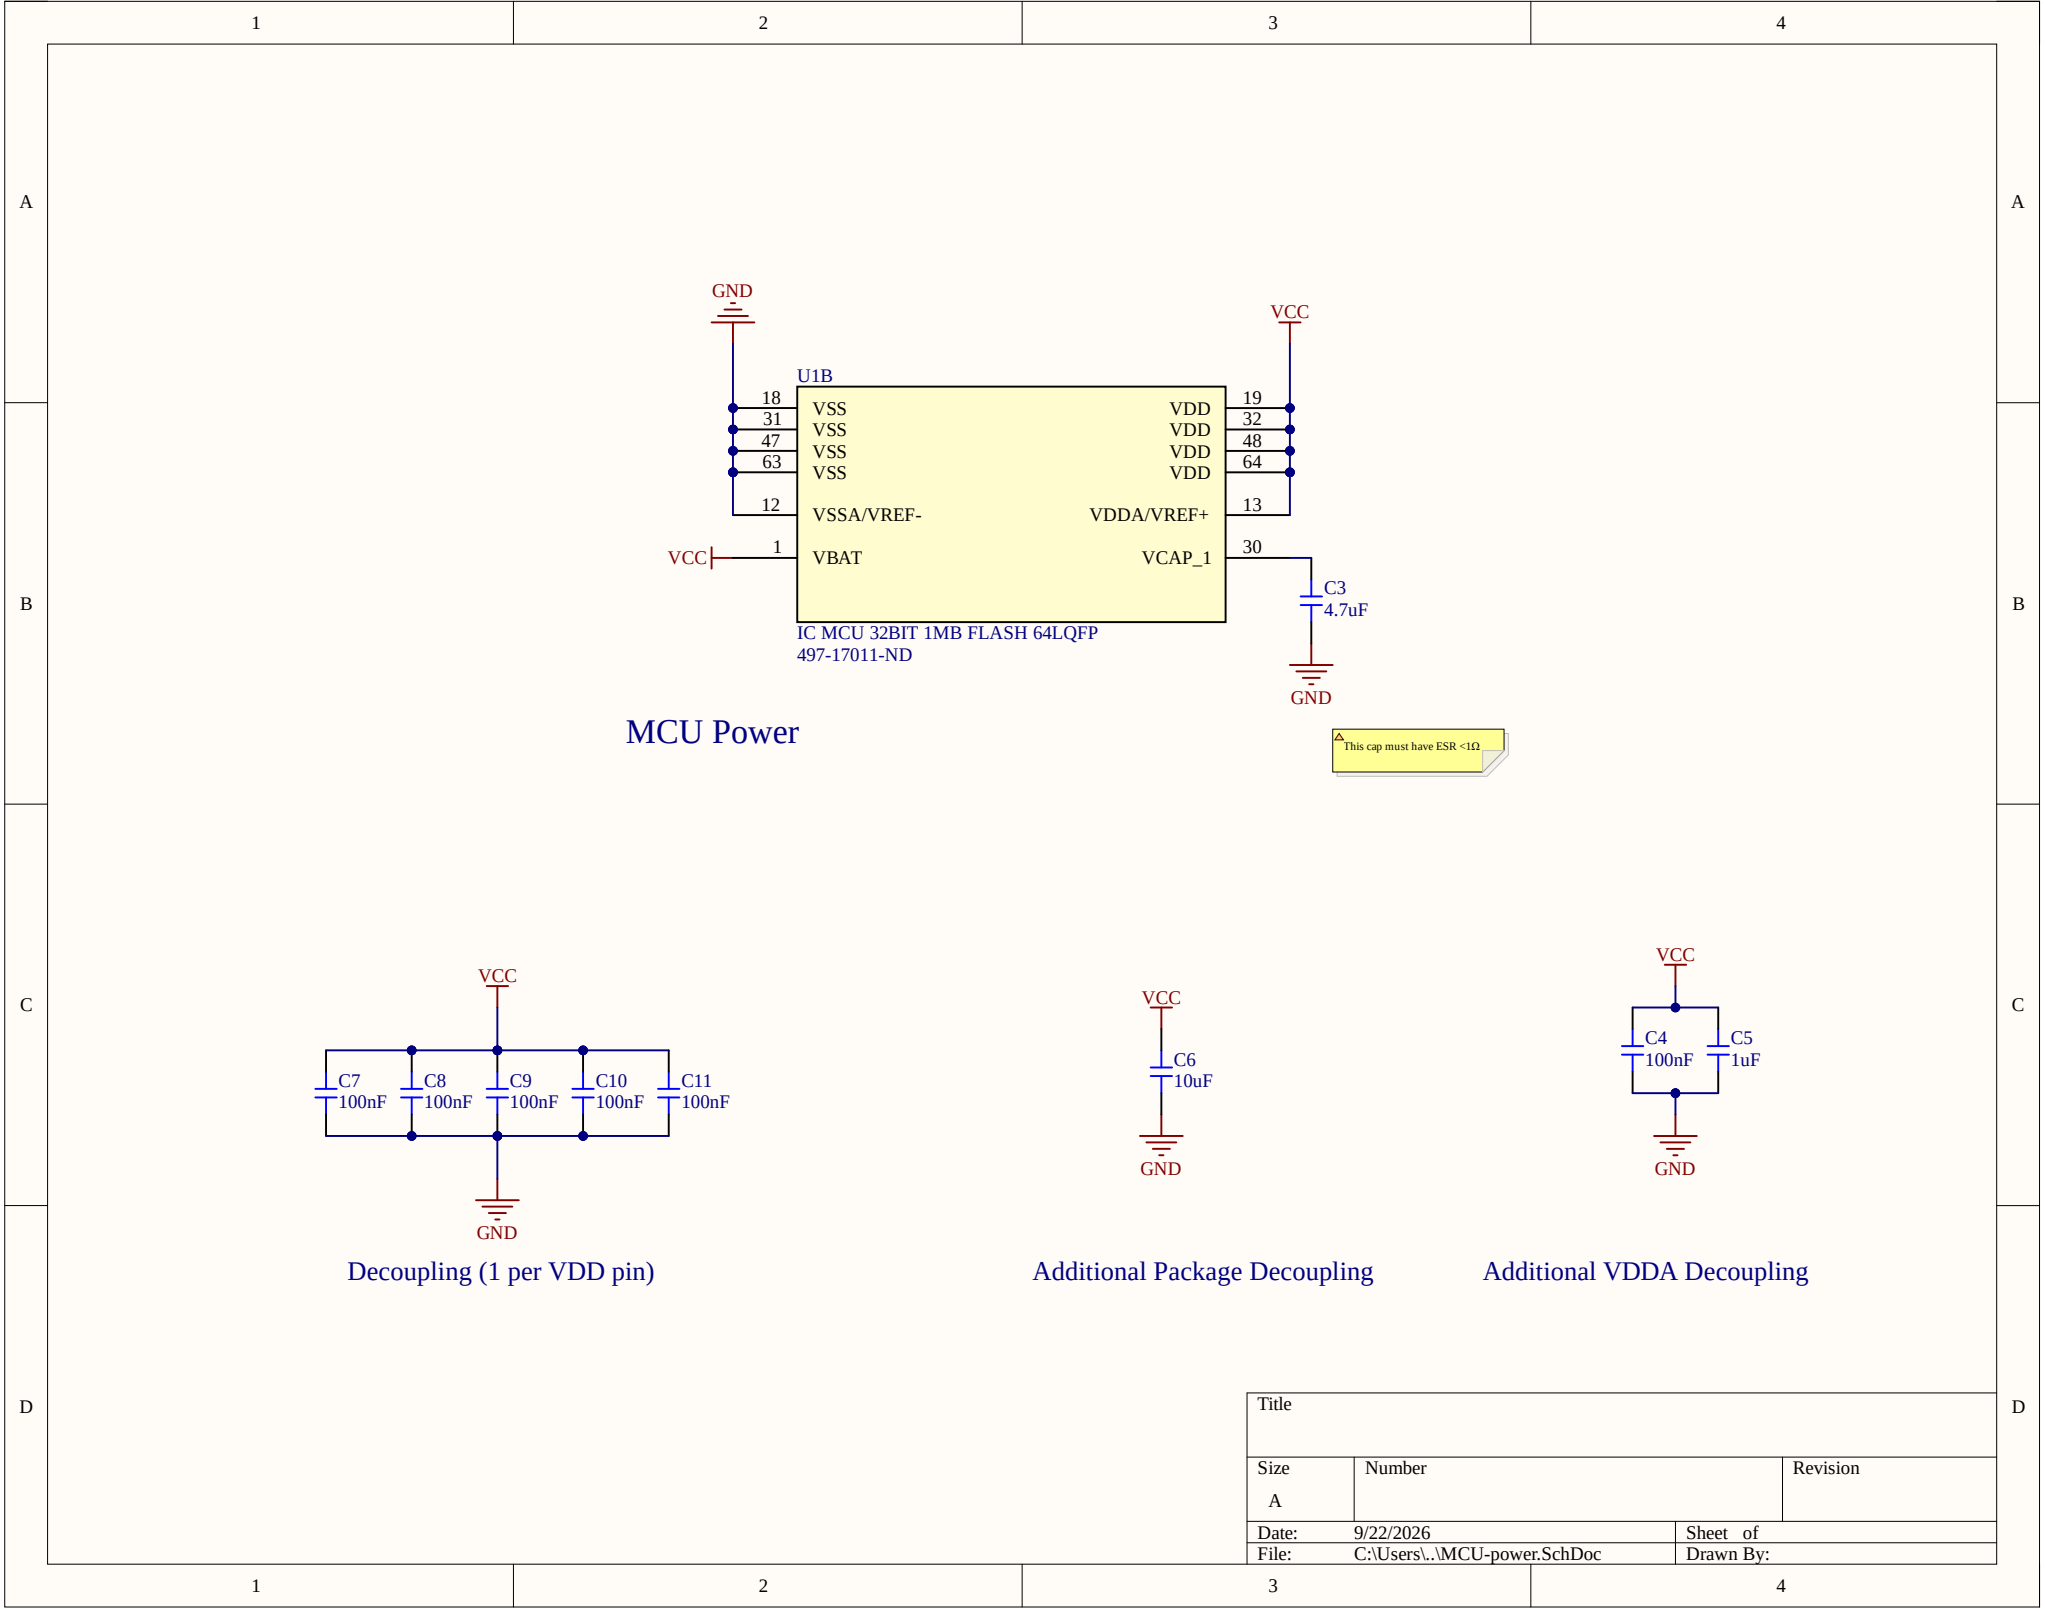

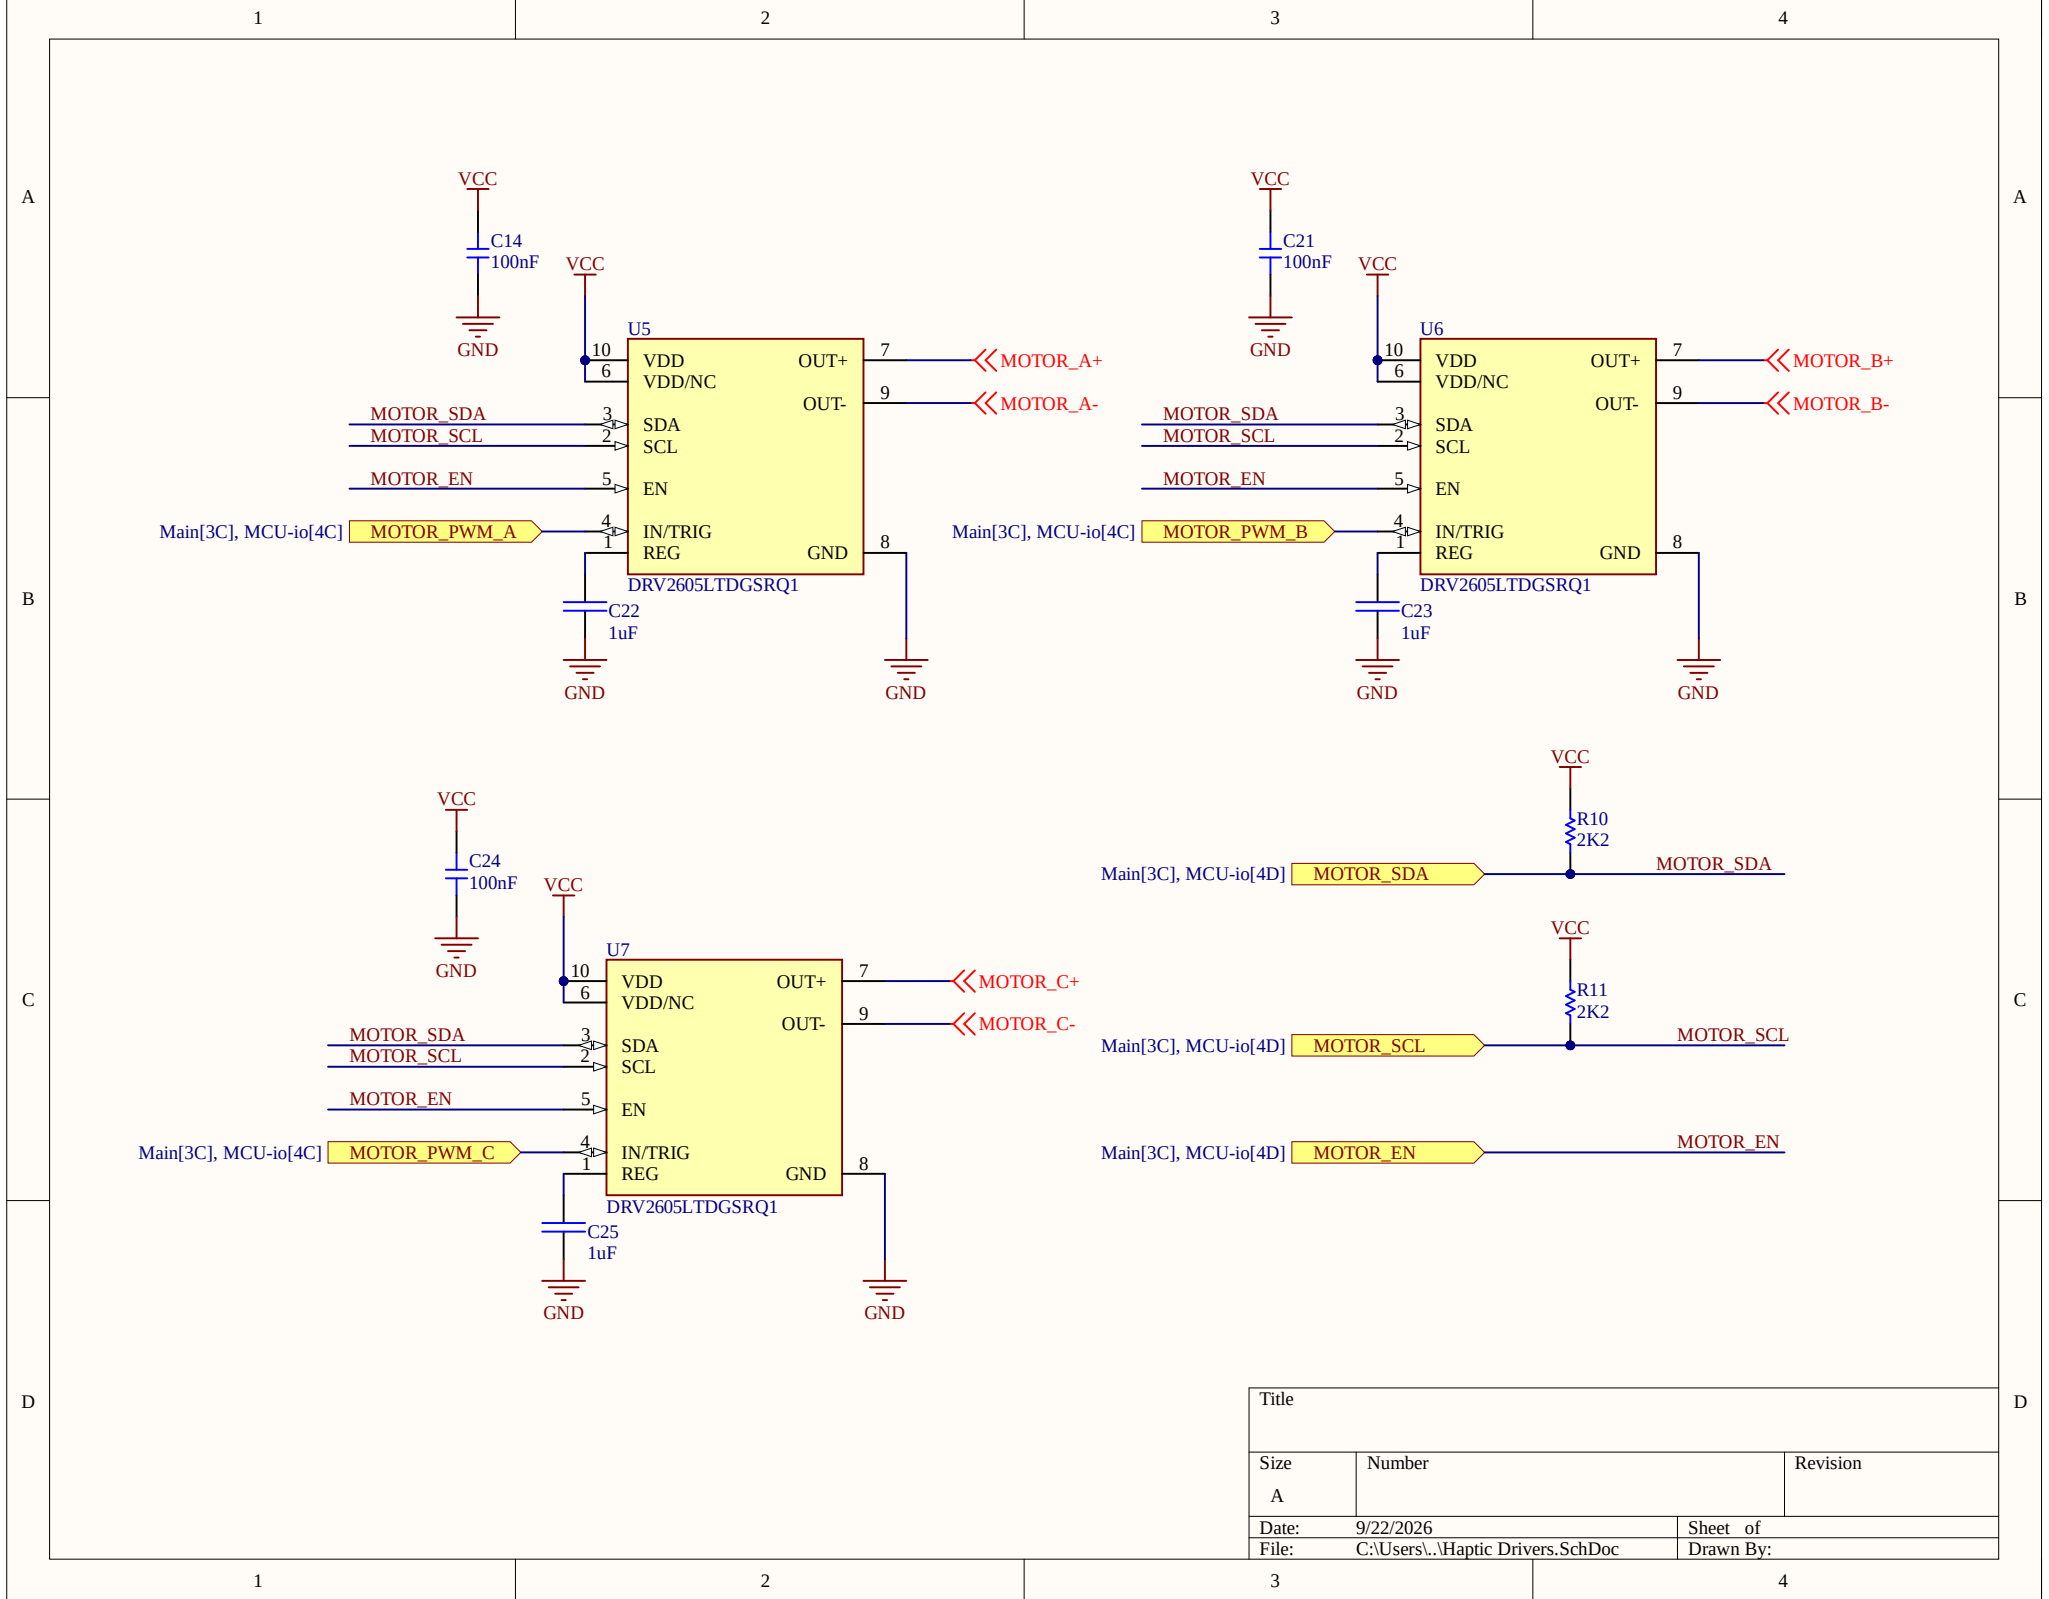

Title			
Size	Number		Revision
A	9/22/2026		Sheet of
File: C:\Users\...\Haptic Drivers.SchDoc		Drawn By:	

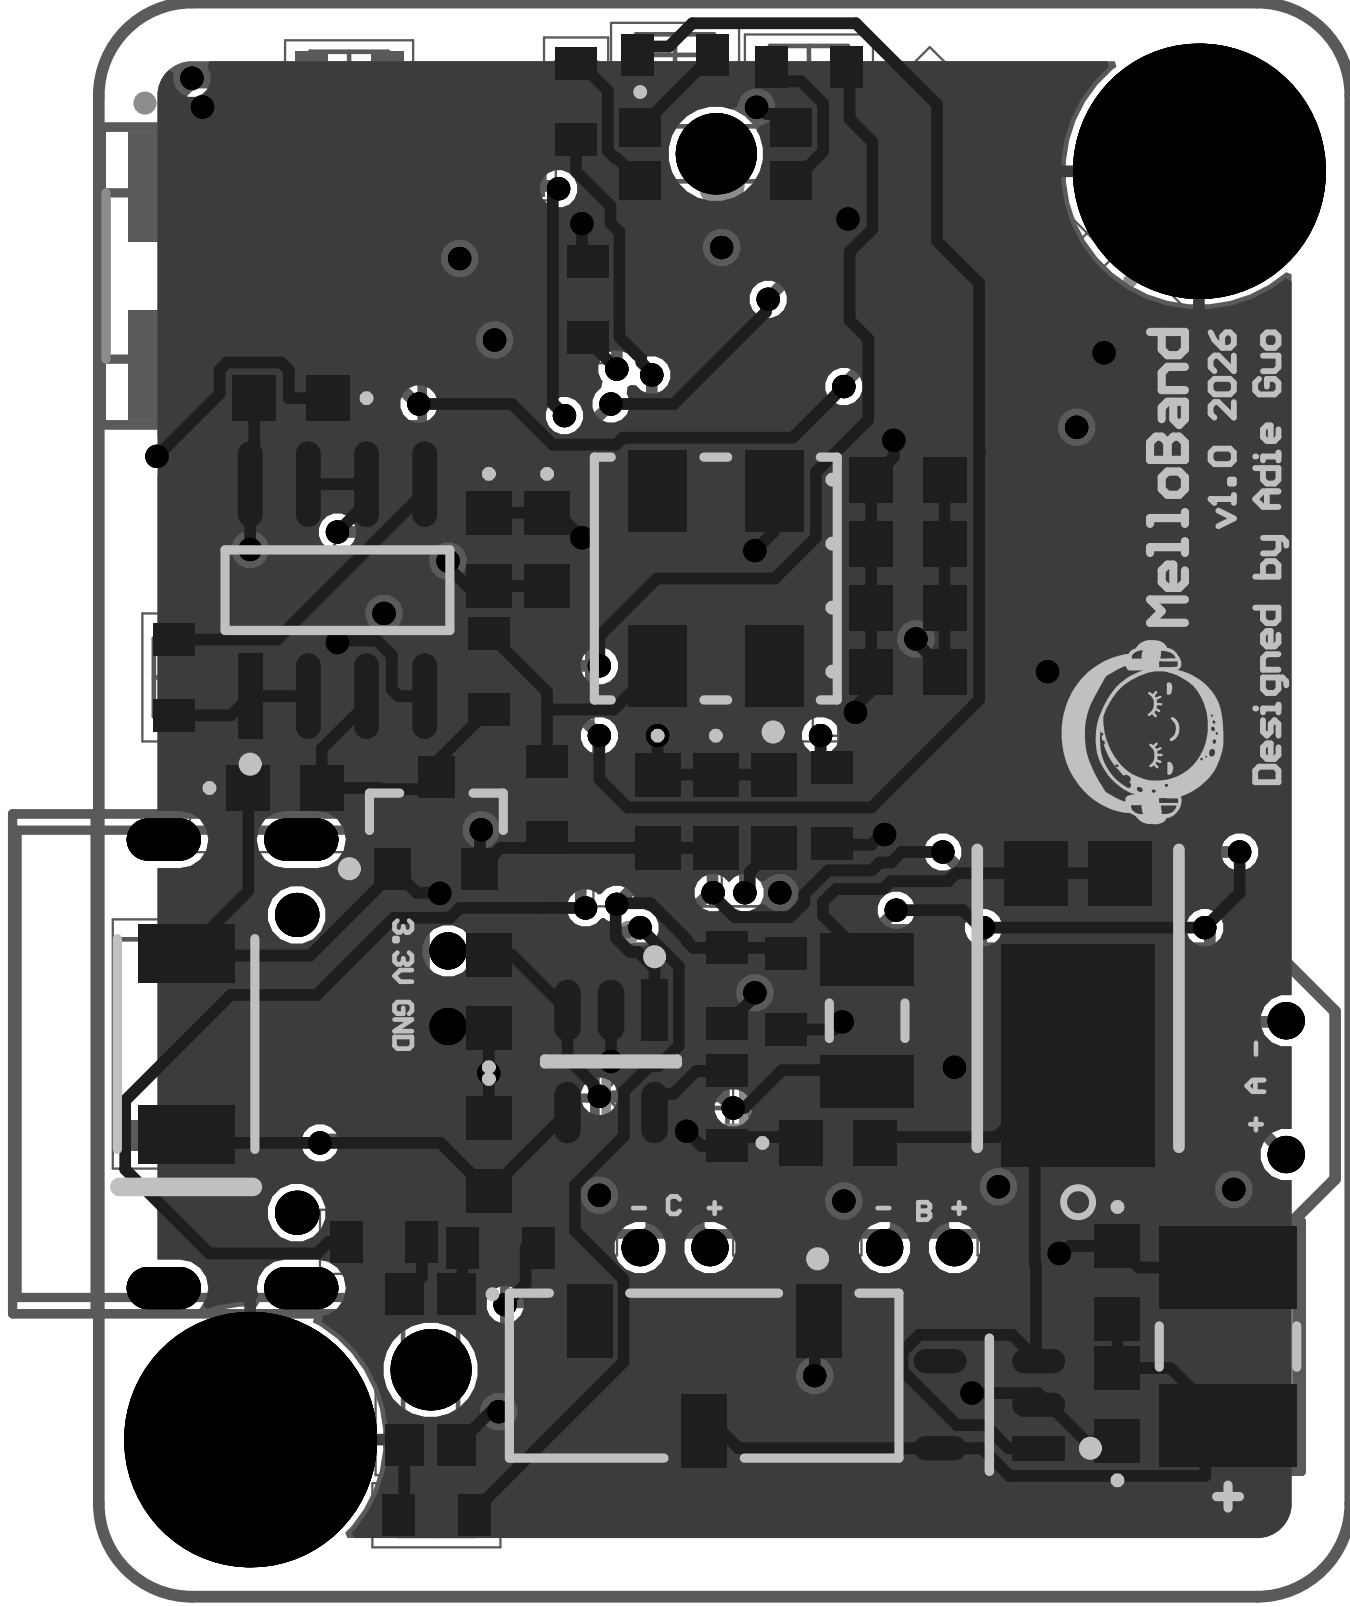

MelloBand

v1.0 2026

Designed by Adie Guo

3.3V GND

- C +

- B +

+ A -

Board Stack Report