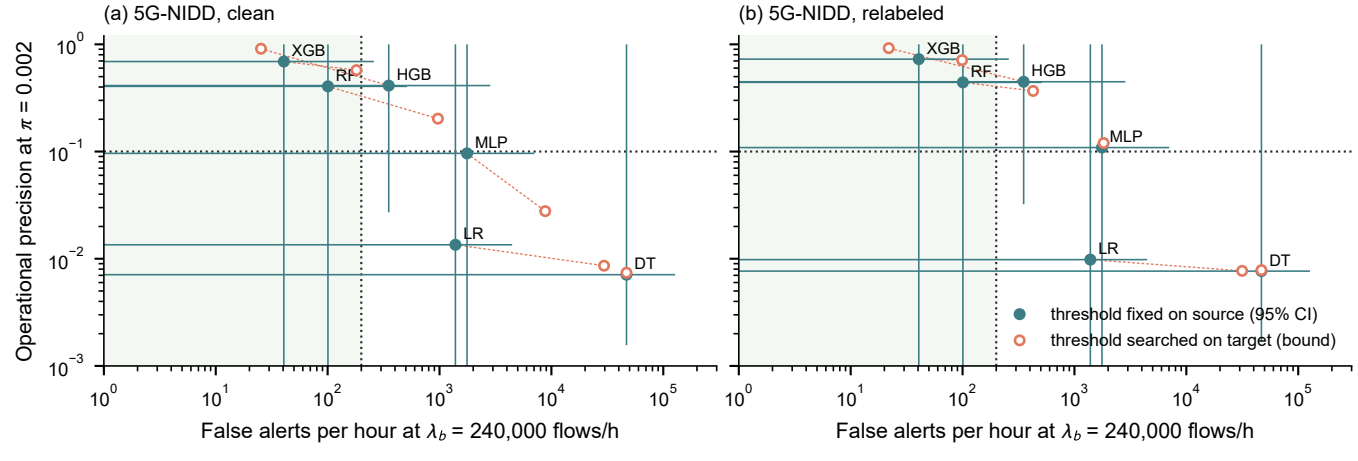
(a) 5G-NIDD, clean
(b) 5G-NIDD, relabeled
Operational precision at π = 0.002
10^0
10^{-1}
10^{-2}
10^{-3}
XGB
RF
HGB
MLP
LR
DT
10^0
10^1
10^2
10^3
10^4
10^5
False alerts per hour at λ_b = 240,000 flows/h
threshold fixed on source (95% CI)
threshold searched on target (bound)