ESTWING®

STRIKING TOOLS



www.estwing-sledgehammers.com

ESTWING®

ESTWING is a leading manufacturer of the world's most durable, and comfortable striking tools. The brand is synonymous with quality, durability & ergonomics. Its innovative designs continue to create the most revolutionary and long-lasting tools in the market. Started in 1923, the ESTWING family of products is the choice for Professional Tradesmen and Do-It-Yourself enthusiasts.

Continuing with the philosophy of offering the best, ESTWING proudly introduces the "BIG BOY" of Hammers – the Sledge Hammer. By far the largest single selling hammer model, the Sledge Hammer is an essential tool for all major trades.

The Sledge Hammer Series includes the broadest and most complete offering in the marketplace today.

3 HANDLE OPTIONS for all applications

	1	2	3
			
	INDESTRUCTIBLE HANDLE SERIES	**FIBERGLASS HANDLE SERIES**	**HICKORY WOOD HANDLE SERIES**
VIBRATION ABSORPTION	★★★	★★★★	★★★★★
OVERSTRIKE PROTECTION	★★★★★	★★★★	★★★

Star rating scale: 3 stars (★★★) – good; 4 stars (★★★★) – very good; 5 stars (★★★★★) – excellent

INDESTRUCTIBLE HANDLE SERIES



Touted as the "World's Strongest Hammer", this premium handle comes with patented Indestructible® technology. The hammer is designed with spring steel bars to ensure the head will never dislodge from the handle.

Keeping user safety as the top priority, the hammer includes the following features:

TRADEMARK ESTWING BLUE COLOR HEAD
With head size & length identifier

DROP FORGED HEAD
With induction hardened (50-55 HRC) striking ends

SPRING STEEL BARS
9/32" (7.1 mm) dia. spring steel bars resist overstrike without breaking



STEEL LOCKING PLATE
Locks head to the handle eliminating loosening or dislodging

VULCANIZED RUBBER HANDLE
Absorbs impact & vibration, reducing user fatigue
Protects user in the event of striking an electrical wire
Made from special grade of ozone resistant rubber for use in tough outside environments
Handles on most head sizes weigh more than the head, allowing user to apply double the torque on any struck surface

STEEL REINFORCED LANYARD HOLE

WORLD'S STRONGEST SLEDGE HAMMER

Tested for both direct & overstrikes at a strike rate of 80 blows/minute

36,000 strikes & no deformation

SLEDGE HAMMERS

- Indestructible handle made up of spring steel bars
- Forged hammer head hardened 50-55 HRC
- Used for heavy demolition work, Fracturing Stone & Concrete, Driving in Fence Posts, Rebar, Railroads, Bending & Shaping metals

ANSI | **BS 876** For material, hardness & performance | **SANS 387:2014**



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH	SPRING STEEL BARS
ESH-624X	62202	6lb/2.7kg	24"/600mm	6
ESH-630X	62203	6lb/2.7kg	30"/750mm	6
ESH-636X	62204	6lb/2.7kg	36"/900mm	6
ESH-824X	62205	8lb/3.6kg	24"/600mm	6
ESH-830X	62206	8lb/3.6kg	30"/750mm	6
ESH-836X	62207	8lb/3.6kg	36"/900mm	6
ESH-1030X	62208	10lb/4.5kg	30"/750mm	6
ESH-1036X	62209	10lb/4.5kg	36"/900mm	6
ESH-1230X	62210	12lb/5.5kg	30"/750mm	6
ESH-1236X	62211	12lb/5.5kg	36"/900mm	6
ESH-1430X	62212	14lb/6.3kg	30"/750mm	6
ESH-1436X	62213	14lb/6.3kg	36"/900mm	6
ESH-2036X	62217	20lb/9.1kg	36"/900mm	6

SLEDGE HAMMERS - SOFT FACE

- Indestructible handle made up of spring steel bars
- Forged hammer head is induction hardened and then tempered to 30-35 HRC. Soft head prevents damage to struck work pieces
- Used in Construction, Agriculture, Automotive, Overground Mining, Railroad and in maintenance of cutting tools



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH	SPRING STEEL BARS
ESH/SF-624X	62232	6lb/2.7kg	24"/600mm	6
ESH/SF-630X	62233	6lb/2.7kg	30"/750mm	6
ESH/SF-636X	62234	6lb/2.7kg	36"/900mm	6
ESH/SF-824X	62235	8lb/3.6kg	24"/600mm	6
ESH/SF-830X	62236	8lb/3.6kg	30"/750mm	6
ESH/SF-836X	62237	8lb/3.6kg	36"/900mm	6
ESH/SF-1030X	62238	10lb/4.5kg	30"/750mm	6
ESH/SF-1036X	62239	10lb/4.5kg	36"/900mm	6
ESH/SF-1230X	62240	12lb/5.5kg	30"/750mm	6
ESH/SF-1236X	62241	12lb/5.5kg	36"/900mm	6
ESH/SF-1430X	62242	14lb/6.3kg	30"/750mm	6
ESH/SF-1436X	62243	14lb/6.3kg	36"/900mm	6
ESH/SF-2036X	62247	20lb/9.1kg	36"/900mm	6

CLUB HAMMERS

- Indestructible handle made up of 4 spring steel bars
- Forged hammer head hardened 50-55 HRC
- Used for demolition work, Driving in stakes, Metal Forming, Setting bolts etc

CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH	SPRING STEEL BARS
ECH-212X	62280	2.5lb/1.1kg	12"/300mm	4
ECH-412X	62281	4lb/1.8kg	12"/300mm	4
ECH-416X	62282	4lb/1.8kg	16"/400mm	4

INVINCIBLE
because they are
INDESTRUCTIBLE



SLEDGE HAMMERS - COPPER

- Indestructible handle made up of spring steel bars
- Hammer head forged from 99.9% pure Copper for spark free use
- Copper head resists sparking & reduces marring of struck surfaces
- Used in Underground Mining and Metal Forming applications



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH	SPRING STEEL BARS
ESH-412X/CU	62270	4lb/1.8kg	12"/300mm	4
ESH-416X/CU	62271	4lb/1.8kg	16"/400mm	4

SLEDGE HAMMERS - BRASS

- Indestructible handle made up of spring steel bars
- Drop forged brass head
- Absorbs impact and reduces damage to struck surface
- Used in Oil Rigs, Gas industry, Automotive applications



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH	SPRING STEEL BARS
ESH-212X/BR	62260	2.5lb/1.1kg	12"/300mm	4
ESH-412X/BR	62261	4lb/1.8kg	12"/300mm	4
ESH-416X/BR	62262	4lb/1.8kg	16"/400mm	4
ESH-630X/BR	62263	6lb/2.7kg	30"/750mm	6

SPECIALTY HAMMERS

TIRE BEAD BREAK HAMMERS

- Indestructible handle made up of spring steel bars
- Tire & Wheel service hammer used for separating tires from wheel rims
- Hammer head features a Bead breaking Wedge to penetrate the tire bead, Top Hook used as a wheel tipper and a Sledge Edge with a hook to drag tire into position



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH	SPRING STEEL BARS
ETH-520X	62295	5lb/2.2kg	20"/500mm	4
ETH-1032X	62296	10lb/4.5kg	32"/800mm	6

MACHINIST HAMMERS

- Indestructible handle made up of spring steel bars
- Forged hammer head hardened 50-55 HRC
- Used primarily for metalworking applications such as: Riveting, Forging, Shaping & Flattening of Metals, Embossing, Removal of Dents etc




CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH	SPRING STEEL BARS
EMH-0313X	62290	0.66lb/0.3kg	13"/330mm	2
EMH-0513X	62291	1.1lb/0.5kg	13"/330mm	2
EMH-0814X	62292	1.8lb/0.8kg	14"/350mm	2
EMH-114X	62293	2.2lb/1kg	14"/350mm	2

FIBERGLASS HANDLE SERIES

This industrial grade hammer is designed as an ultra-robust, reliable & safe tool.

Dual injection handle infused with over 70% Fiberglass for unmatched strength & durability. Two handed grip position & textured rubber ensures comfortable & secure grip.



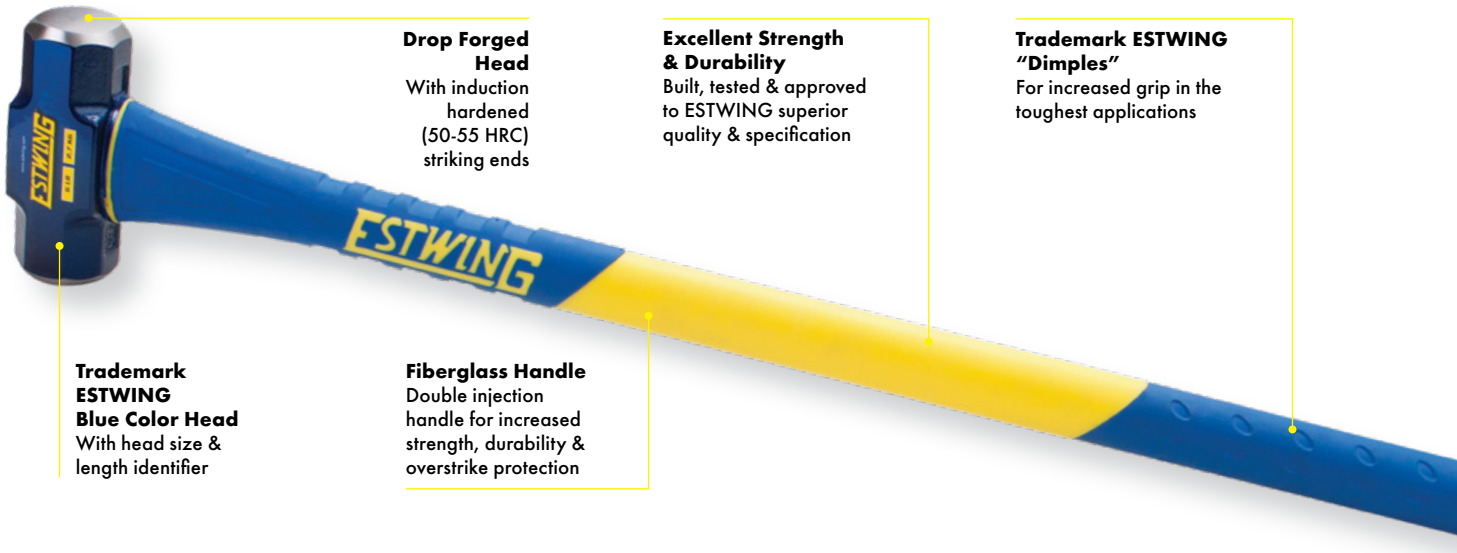

Drop Forged Head
With induction hardened (50-55 HRC) striking ends

Excellent Strength & Durability
Built, tested & approved to ESTWING superior quality & specification

Trademark ESTWING "Dimples"
For increased grip in the toughest applications

Trademark ESTWING Blue Color Head
With head size & length identifier

Fiberglass Handle
Double injection handle for increased strength, durability & overstrike protection

Always ready for some HEAVYDUTYSTRIKING...



SLEDGE HAMMERS

- Forged hammer head hardened 50-55 HRC
- Used for heavy demolition work, Fracturing Stone & Concrete, Driving in Fence Posts, Rebar, Railroads, Bending & Shaping Metals

ANSI | **BS 876** For material, hardness & performance | **SANS 387:2014**



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
**ESH-216F	62400	2.5lb/1.1kg	16"/400mm
*ESH-416F	62401	4lb/1.8kg	16"/400mm
ESH-636F	62402	6lb/2.7kg	36"/900mm
ESH-736F	62409	7lb/3.2kg	36"/900mm
ESH-836F	62403	8lb/3.6kg	36"/900mm
ESH-1036F	62404	10lb/4.5kg	36"/900mm
ESH-1236F	62405	12lb/5.5kg	36"/900mm
ESH-1436F	62406	14lb/6.3kg	36"/900mm
ESH-1636F	62407	16lb/7.3kg	36"/900mm

SLEDGE HAMMERS - SOFT FACE

- Forged hammer head is induction hardened and then tempered to 30 HRC. Soft head prevents damage to struck work pieces
- Used in Construction, Agriculture, Automotive, Overground Mining, Railroad and in maintenance of cutting tools



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
ESH/SF-216F	62420	2.5lb/1.1kg	16"/400mm
ESH/SF-416F	62421	4lb/1.8kg	16"/400mm
ESH/SF-636F	62422	6lb/2.7kg	36"/900mm
ESH/SF-836F	62423	8lb/3.6kg	36"/900mm
ESH/SF-1036F	62424	10lb/4.5kg	36"/900mm
ESH/SF-1236F	62425	12lb/5.5kg	36"/900mm
ESH/SF-1436F	62426	14lb/6.3kg	36"/900mm
ESH/SF-1636F	62427	16lb/7.3kg	36"/900mm

*Not available in USA & Canada
*Also available as a set with Axe (EKIT-2F) refer page no. 13

DEMOLITION HAMMERS

Superior design supersedes ASTM test requirements

- Manufactured using specially formulated chrome steel
- Each head is carefully forged to prevent crack formation over time
- Forged head is carefully hardened and tempered to 50-55 HRC
- Dual injection moulded fiberglass handle with TPR is designed for fatigue free use

ANSI | **BS 876** For material, hardness & performance | **SANS 387:2014**



8 lb



10 lb

10 lb. hammer head are specially forged into a unique shape with a wedged demolition face to maximize destructive force and wide flat face for improved strike accuracy

CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
ESHD-836F	62335	8lb/3.6kg	36"/900mm
ESHD-1036F	62336	10lb/4.5kg	36"/900mm

HICKORY WOOD HANDLE SERIES

Manufactured using the strongest & premium Made in U.S.A. hickory, this series is designed to reduce user fatigue, lower vibration and improve efficiency. Tested rigorously for design & durability, this Sledge Hammer is built to last!





Trademark ESTWING Blue Color Head
With head size & length identifier

Excellent Strength & Durability
Built, tested & approved to ESTWING superior quality & specification

Drop Forged Head
With induction hardened (50-55 HRC) striking ends

Hickory Handle
Made in USA handle. The strongest hickory available in the market



SLEDGE HAMMERS

- Forged hammer head hardened 50-55 HRC
- Used for heavy demolition work, Fracturing Stone & Concrete, Driving in Fenceposts, Rebar, Railroads, Bending & Shaping metals

ANSI | **BS 876** For material, hardness & performance | **SANS 387:2014**



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
ESH-216W	62300	2.5lb/1.1kg	16”/400mm
ESH-416W	62301	4lb/1.8kg	16”/400mm
ESH-630W	62302	6lb/2.7kg	30”/750mm
ESH-636W	62303	6lb/2.7kg	36”/900mm
ESH-830W	62304	8lb/3.6kg	30”/750mm
ESH-836W	62305	8lb/3.6kg	36”/900mm
ESH-1036W	62306	10lb/4.5kg	36”/900mm
ESH-1236W	62307	12lb/5.5kg	36”/900mm
ESH-1436W	62308	14lb/6.3kg	36”/900mm
ESH-1636W	62309	16lb/7.3kg	36”/900mm

SLEDGE HAMMERS - SOFT FACE

- Forged hammer head is induction hardened and then tempered to 30 HRC. Soft head prevents damage to struck work pieces
- Used in Construction, Agriculture, Automotive, Overground Mining, Railroad and in maintenance of cutting tools



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
ESH/SF-216W	62320	2.5lb/1.1kg	16”/400mm
ESH/SF-416W	62321	4lb/1.8kg	16”/400mm
ESH/SF-630W	62322	6lb/2.7kg	30”/750mm
ESH/SF-636W	62323	6lb/2.7kg	36”/900mm
ESH/SF-830W	62324	8lb/3.6kg	30”/750mm
ESH/SF-836W	62325	8lb/3.6kg	36”/900mm
ESH/SF-1036W	62326	10lb/4.5kg	36”/900mm
ESH/SF-1236W	62327	12lb/5.5kg	36”/900mm
ESH/SF-1436W	62328	14lb/6.3kg	36”/900mm
ESH/SF-1636W	62329	16lb/7.3kg	36”/900mm



DRILLING HAMMERS

- For day-to-day demands of professional contractors
- Fully forged head is induction hardened 50-55 HRC and tempered for maximum strength and durability
- Duly machined and polished faces are beveled to prevent chipping
- Used for striking cold chisels, concrete chisels, brick bolsters, drive in stakes, rebar into the ground, break through concrete floors with ease

ANSI | **BS 876** For material, hardness & performance



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
EDH-211W	62317	2lb/0.9kg	11"/280mm
EDH-311W	62316	3lb/1.3kg	11"/280mm

ENGINEER'S HAMMERS

- Fully forged head is induction hardened 50-55 HRC and tempered for maximum strength and durability
- Duly machined and polished faces are beveled to prevent chipping
- Preferred choice of construction contractors, geologists for tile & drywall, demolition & setting brick & tile.

ANSI | **BS 876** For material, hardness & performance



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
EEH-214W	62312	2.5lb/1.1kg	14"/350mm
EEH-414W	62313	4lb/1.8kg	14"/350mm

BLACKSMITH'S HAMMERS

- Fully forged head is induction hardened 50-55 HRC and tempered for maximum strength and durability
- Duly machined and polished faces are beveled to prevent chipping
- Cross peen end for driving small nails & working in hard to reach places
- Used by metalworkers, welders, contractors, tradesmen & serious DIY'ers for light metalworking & shaping jobs

ANSI | **BS 876** For material, hardness & performance



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
EBH-214W	62315	2.5lb/1.1kg	14"/350mm
EBH-414W	62314	4lb/1.8kg	14"/350mm



COPPER & HIDE MALLET

COPPER & HIDE MALLETS HICKORY WOOD HANDLE

- Multi-purpose hammer useful for striking surfaces that could get damaged by steel head hammers
- Forged steel head fitted with 2 screw-in replaceable faces
  1. Hide face made from water buffalo hide: absorbs impact and transfers force to the object without leaving a mark. Ideal where a heavy blow is required in a relatively small striking area
  2. Copper face provides a firm positive blow without any risk of marring the surface of highly finished expensive components
- 100% genuine high density Hickory Wood handle is lightweight and contoured for comfortable grip
- Used for light engineering jobs, assembly & fittings in automotive workshops and in leather industry







Easily screw-in replaceable heads

CAT NR.	ORD NR.	FACE DIA.	OVERALL LENGTH
EMLTT/CH-25W	62900	1"/25mm	11"/280mm
EMLTT/CH-38W	62901	1-1/2"/38mm	11"/280mm
EMLTT/CH-45W	62900	1-3/4"/44mm	12"/300mm

AXES & MAULS

MAULS WITH FIBERGLASS HANDLE


- Forged head hardened upto 50-55 HRC
- Special head design generates greater force for splitting big logs of wood
- Dual Injection Fiberglass Handles with over 70% fiberglass
- Used for Cutting Lumber, Chopping Fire Wood, Trimming Cutting, Splitting and Shaping of woods
- Comes with protective cover for safe storage



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
EML-436F	62372	4.5 lb/2kg	36"/900mm
EML-636F	62373	6 lb/2.7kg	36"/900mm
EML-836F	62374	8 lb/3.6kg	36"/900mm

MAULS WITH HICKORY WOOD HANDLE

- Forged head hardened upto 50-55 HRC
- 100% Genuine high density hickory wood handle is lightweight and contoured for comfortable grip
- Used for Cutting Lumber, Chopping Fire Wood, Trimming Cutting, Splitting and Shaping of woods
- Comes with protective cover for safe storage

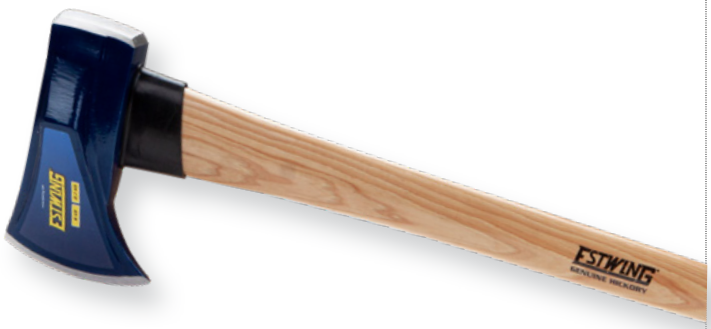

CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
EML-436W	62442	4.5 lb/2kg	36"/900mm
EML-636W	62443	6 lb/2.7kg	36"/900mm
EML-836W	62444	8 lb/3.6kg	36"/900mm

AXES WITH FIBERGLASS HANDLE

- Forged head hardened upto 50-55 HRC
- Dual Injection Fiberglass Handles with over 70% fiberglass
- Lanyard Hole at handle for easy storage
- Used for Cutting Lumber, Chopping Fire Wood, Trimming Cutting, Splitting and Shaping of woods.
- Comes with protective cover for safe storage



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
EAX-114F	62440	1.25 lb/0.5kg	14"/350mm
EAX-436F	62441	4 lb/1.8kg	36"/900mm

AXES WITH HICKORY WOOD HANDLE

- Forged head hardened upto 50-55 HRC
- 100% Genuine high density hickory wood handle is lightweight and contoured for comfortable grip
- Used for Cutting Lumber, Chopping Fire Wood, Trimming Cutting, Splitting and Shaping of woods
- Comes with protective cover for safe storage



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
EAX-114W	62370	1.25 lb/0.5kg	14"/350mm
EAX-436W	62371	4 lb/1.8kg	36"/900mm

AXE SHARPENER

- Ceramic roller wheels sharpen both sides of the blade saving time and effort
- Non slip pads on base for stability while sharpening
- Smart design with an easy to open compartment to clean out the shavings
- Safety guard protects fingers while sharpening
- Suitable for both right and left-handed users





CAT NR.	ORD NR.
EAX/SPR	62385

AXE WITH INDESTRUCTIBLE HANDLE

- Forged head hardened upto 50-55 HRC
- Indestructible handle made up of 2 spring steel bars
- Lanyard hole at handle for easy storage
- Used for chopping wood and knocking out chips
- Comes with protective cover for safe storage





CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
EAX-114X	62380	1.25 lb/0.5kg	14"/350mm

AXE KIT: AXE WITH SHARPENER

KIT INCLUDES

CONSTITUENTS	DESCRIPTION	HEAD WEIGHT	OVERALL LENGTH
EAX-114X	Axe with Indestructible Handle	1.25 lb/0.5kg	14"/350mm
EAX/SPR	Axe Sharpener	-	-



CAT NR.	ORD NR.
EAX-114X/SPR	62381

POWER DUO - 2PC KIT

KIT INCLUDES

CONSTITUENTS	DESCRIPTION	HEAD WEIGHT	OVERALL LENGTH
ESH-416F	Sledge Hammer with Fiberglass Handle	4lb/1.8kg	16"/400mm
EAX-114F	Axe with Fiberglass Handle	1.25lb/0.5kg	14"/300mm



CAT NR.	ORD NR.
EKIT-2F	62480

PICKS, MATTOCKS & PULASKI

PICK MATTOCK FIBERGLASS HANDLE

- Drop forged head is heat treated and tempered for long lasting durability
- Head features a pick end for driving through hard surfaces and mattock end for use as a hoe in tough soil. Ideal for hoeing in tight quarters or rocky soil
- 36" double injected fiberglass handle
- Heads available as spare



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
Pick Mattock			
EMT/P-236F	62561	2.5 lb/1.1kg	36"/900mm
EMT/P-536F	62560	5 lb/2.2kg	36"/900mm
Head only			
EMT/P-2	62581	2.5 lb/1.1kg	-
EMT/P-5	62580	5 lb/2.2kg	-

RAILROAD PICK FIBERGLASS HANDLE

- Drop forged head is heat treated and tempered for long lasting durability
- Double ended head:
  1. Pointed Pick blade on one side: Useful for deep penetration to loosen soil, especially clay soil or compacted soil
  2. Narrow Edge Pick blade on the other: Also called Square Pick point is used for cutting and digging
- 36" double injected fiberglass handle
- Head available as spare



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
Railroad Pick			
EMT/R-536F	62562	5 lb/2.2kg	36"/900mm
Head only			
EMT/R-5	62582	5 lb/2.2kg	-



CUTTER MATTOCK FIBERGLASS HANDLE

- Drop forged head is heat treated and tempered for long lasting durability
- Double ended head:
  1. Axe type vertical blade end: used to cut roots and remove stumps
  2. Adze type horizontal blade end: used for deep digging and pulling soil towards the user
- 36" double injected fiberglass handle
- Head available as spare



CAT NR.	ORD NR.	HEAD WEIGHT	OVERALL LENGTH
Cutter Mattock			
EMT/C-536F	62563	5 lb/2.2kg	36"/900mm
Head only			
EMT/C-5	62583	5 lb/2.2kg	--

PULASKI FIBERGLASS HANDLE

- Forged head hardened upto 45-60 HRC for long lasting durability
- Double ended head:
  1. Sharp cutting edge is used for cutting wood & roots, clearing ground & cutting back foliage
  2. Digging end/Mattock blade is used for digging ditches & holes, prying branches, breaking up soil or sod, carving or smoothening of wood, cut away roots or shrubs and creating fire breaks etc.
- 36" double injected fiberglass handle



CAT NR.	HEAD WEIGHT	OVERALL LENGTH
EPAX-336F	3.5 lb./1.58 kg	36"/900 mm



BARS

ROLL HEAD PRY BARS

- Manufactured from Chrome Alloy Steel these are fully hardened and tempered.
- Specifically designed for heavy prying & fulcrum prying especially in automotive applications with the tapered end used for aligning applications.



CAT NR.	ORD NR.	LENGTH	STOCK SIZE
EPB-12	62450	12"/300mm	7/16" /11mm
EPB-16	62451	16"/400mm	9/16" /14mm
EPB-18	62456	18"/450mm	9/16" /14mm
EPB-20	62452	20"/500mm	11/16" /17mm

CAT/ALIGNING BARS

- Heavy duty round section bars forged from chrome alloy steel.
- Body is fully hardened to resist any bending.
- The prying end is on one side with lining up on the other.



CAT NR.	ORD NR.	LENGTH	STOCK SIZE
ECB-18	62470	18"/450mm	5/8" /16mm
ECB-24	62471	24"/600mm	3/4" /19mm
ECB-30	62472	30"/750mm	7/8" /22mm
ECB-36	62473	36"/900mm	7/8" /22mm

SAN ANGELO BAR

- Heavy duty 1" carbon steel bar with heat treated 50 HRC ends for higher durability
- Pointed tip on one end for breaking top soil and a flat tip on the opposite end for digging
- Used for breaking up concrete and stone, prying heavy material, digging into difficult soil to cut tree roots and obstacles, breaking up rocks, clay and concrete. It can also used for moving heavy objects around the yard



CAT NR.	ORD NR.	OVERALL LENGTH	WEIGHT
ESAB-72	62460	72"/1829mm	17 lbs./7.73kg

POST HOLE DIGGING BAR

- Heavy Duty 1" round steel bar for higher strength in the toughest of jobs
- Carbon steel bar with heat treated ends upto 50 HRC for higher durability and toughness over time
- Post Hole Digger has a 2-3/8" (60mm) mushroom head at one end and beveled chisel edge at the other
- Ideal tool for fence post work, for digging holes, breaking up clay and cutting through tree roots




CAT NR.	ORD NR.	OVERALL LENGTH	WEIGHT
EPHD-69	62461	69"/1750mm	16 lbs./7.25kg

G-BAR HEAVY DUTY WRECKING BARS


- Heavy Duty Wrecking Bar for the professional user
- Manufactured from high quality forged alloy steel
- I Section steel bar, fully hardened & tempered for added strength and durability. Will withstand heavy loads without deformation
- Low profile claw fits securely under the work-piece giving larger prying power
- Wide & thin profile of claw permits easy insertion under the surface
- Large bar to claw angle for 2X leverage and convenient use near work surface




V slot in the claw for pulling out nails



Regular wrecking bar claw angle prevents use near flat surfaces



Larger bar-to-claw for 2X leverage & convenient use near surface

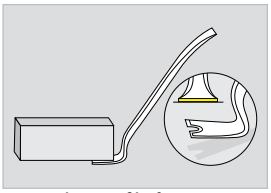

Low & thin profile for easy fitment under the surface

CAT NR.	ORD NR.	LENGTH	SECTION
EGBR-14	62462	14″/356 mm	7/16″ × 13/16″ / 11 mm × 21 mm
EGBR-24	62463	24″/610 mm	5/8″ × 1-3/16″ / 16 mm × 30 mm
EGBR-36	62464	36″/914 mm	5/8″ × 1-3/16″ / 16 mm × 30 mm
EGBR-48	62465	48″/1220 mm	5/8″ × 1-3/16″ / 16 mm × 30 mm

CONSTRUCTION BARS HEAVY DUTY

- Forged Chrome Steel blade welded to a tubular steel bar
- Blade hardened 35-45 HRC
- Extra-long bar provides higher leverage reducing effort in heavy-duty prying applications & demolition work
- Powder coated body for increased resistance to corrosion
- Used to pull, lift, scrape and wedge metal, wood & stone with less effort



EHDPR-46

EHDPR-56

CAT NR.	ORD NR.	LENGTH	BLADE WIDTH	BLADE THICKNESS	HANDLE CROSS SECTION	WEIGHT
EHDPR-46	62453	46″/1170 mm	3.35″/85 mm	0.27″/7 mm	1-1/2″ × 1″ × 0.078″ / 38 mm × 25 mm × 2 mm	6.86 lbs/3.1 kg
EHDPR-56	62454	56″/1425 mm	3″/76 mm	1/2″/13 mm	2″ × 1″ × 1/8″ / 51 mm × 25 mm × 3 mm	13.65 lbs/6.2 kg

WRECKING BAR

- Heavy-duty wrecking bar designed for maximum leverage in prying and wrecking applications
- High-leverage head and long handle make nail, panelling, and trim removal effortless
- Heat-treated forged steel head resists heavy loads without deformation, ensuring durability
- 90-degree recessed head design allows easy insertion under tight spaces
- Flat zone on the head aids in driving underneath nails and materials for smooth removal
- Ergonomic TPR grip for increased user comfort
- Ideal for window and door room trim, moulding, prying and baseboard works



CAT NR.	ORD NR.	OVERALL LENGTH
EWBR/16	62455	16"/410 mm

TAMPERS

TAMPERS

- Packing and levelling jobs made easier!
- Heavy-Duty and durable construction for industrial, residential and commercial applications
- Strong steel base with ribs is fully welded to a steel handle
- Corrosion resistant powder coated finish
- Steel handle with ergonomic cushion grip for non-slip and fatigue free working
- Designed to apply pressure for levelling ground, flattening and smoothing soil, gravel, asphalt clay etc.







Steel base with ribs is fully welded to a steel handle

CAT NR.	ORD NR.	BASE (B)	HANDLE LENGTH (L)
ETM/0808S	62490	8" × 8"	45"/1143mm
ETM/1010S	62491	10" × 10"	45"/1143mm

NOTES

Groz Engineering Tools Pvt. Ltd.
Groz Net Industries

Village Kherki Daula, NH-8
Gurugram -122004, Haryana, INDIA

TEL	+91.124.282.7700 / 221.4050
FAX	+91.124.2827986
FAX (USA)	+1.509.271.7848
CUSTOMER SERVICE	1.800.305.1394
E-MAIL	estwing@groz-tools.com
URL	www.estwing-sledgehammers.com

GROZ Engineering Tools Pvt. Ltd.
GROZ is the global licensing partner with Estwing Manufacturing Co. for manufacture and sale of a comprehensive range of Striking Tools

The GROZ name, GROZ logo and the ◇ mark are trademarks of Groz Engineering Tools Pvt. Ltd., India

Whilst every effort has been made to ensure accuracy of information given in this catalogue at the time of going to print. August 2025, our policy of continuous improvement determines the right to change specifications without notice. Customers must ensure that goods are suitable for the purpose intended.

© 2025 Estwing Manufacturing, Inc. All Rights Reserved.
Estwing and the Estwing logo are registered trademarks of Estwing Manufacturing, Inc.