FLUID HANDLING

GROZ

CC-07

FLUID HANDLING

GROZ

CC-07

OUR STORY

2 MILLION
SQUARE FEET
MANUFACTURING AREA

07
PLANTS

INDIA'S LARGEST TOOLS MANUFACTURER

SALES NETWORK **85** **COUNTRIES**

4000
WORKFORCE

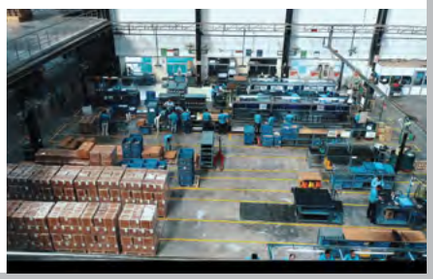

GROZ

Quality Assurance Statement

The satisfaction of all customers is the fundamental principle of the GROZ corporate philosophy

GROZ stands committed to the quality of its products and service with the assurance of complete back-up support

With a wide range of products, prompt service and vast experience, GROZ remains dedicated to the customer

GROZ

INSIDE

1 GREASING EQUIPMENT AND ACCESSORIES



Lever Grease Guns - Heavy Duty 8
Lever Grease Gun High Pressure / High Volume 10
Lever Grease Gun - Dual Piston 12
Lever Grease Gun - Professional 13
Lever Grease Guns – Standard 14
Lever Grease Guns - Super Value 16
Lever Grease Gun - Supa-Lite 18
Lever Grease Gun - "V" Series 19
Lever Grease Gun - Japanese Style 20
Lever Oil Gun 21
Lever Grease Guns - Clear Tube 22
Dual Grease Gun - Pistol/ Lever Handle 24
Spin-On Grease Gun 26
Cartridge Adaptor -Threaded 27
Double Lever Grease Gun 28
Pistol Grip Grease Gun - Professional 29
Pistol Grip Grease Gun - High Pressure/ High Volume 30
Pistol Grip Grease Guns 32
Clear Tube Pistol Grip Grease Guns 34
Pistol Grip Grease Gun - Dual Discharge 36
Pistol Grip Grease Gun - "Vario" 37
Pistol Grip Grease Guns - All Weather 38
Pistol Grip Grease Gun - V Series 40
Pistol Grease Gun - Supa-Lite 41
Mini Grease Gun - Push Type 42
Mini Pistol Grip Grease Gun - Deluxe 43
Grease Tube Dispenser 44
Mini Pistol Grease Gun - Popular 45
Mini Lever Grease Gun 45
Push Type Grease Guns 46
Quick Grease Filler Gun 46
Air Operated Grease Gun - High Power 47
Air Operated Grease Guns 48
Air Operated Grease Gun - Dual Mode 50
USB Rechargeable Battery Grease Gun 51
Battery Powered Grease Gun 52
Quick Lock Grease Couplers 55
Quick Connect Grease Coupler - Super Grip 56
Hydraulic Couplers - Standard 57
Hydraulic Couplers - Professional 57
Hydraulic Couplers - Slim Line 58
Hydraulic Couplers - Machined Jaw 58
Hydraulic Couplers - Heavy Duty 59
Hydraulic Coupler - AIR-O 59
Hydraulic Coupler - 90° 60
Hydraulic Coupler - 360° 60
Slim Swivel Coupler - 360° 61
Button Head Couplers 62
Grease Injector Needles 63
Needle Nose Dispensers 63
Seal Off Dispenser 64
Professional Grade Grease 64
Grease Gun Holders 66
Grease Gun Holder - Heavy Duty 66
Grease Gun Holder - Magnetic 67
Grease Gun Hoses 68
Grease Gun Hoses – Heavy Duty 70
Grease Gun Extension - Flexible/Rigid 72
Grease Gun Steel Extensions 72
Air Release Valves 73
Bulk Loader / Filler Nipples 73
Grease Feeders 74
Grease Fittings 76
Grease Fitting Sets 80
Greasing Adaptors & Elbows 84
Grease Fitting Thread Tester 84
Grease Fitting Unblocker 85
Grease Fitting Installers - "Drive Fit" 85
Easy Out Tools 86
Grease Fitting Caps 86
Quick Connect Adaptors 87
Grease Gun Swivel 92
Quick Disconnect Adaptor 92
Hand Bearing Packer 93
Steel Bearing Packers - Deluxe 93
Ezee Lube Kit 94
Greasing Accessory Kit - Premium 95
Greasing Accessory Kit - Standard 96
Air Operated Grease Ratio Pumps High Volume 97
Air Operated Grease Ratio Pumps 50:1 99
Air Operated Grease Ratio Pumps 60:1 100
Grease Pump Kits 102
Grease Control Valves – Professional 109
Grease Control Valves – Booster 110
Grease Control Valve - Heavy Duty 111
Grease Control Valve - Booster Aluminium Body 111
Grease Control Valves – Metered 112
Grease Swivels High Pressure 113
Grease Pump - Heavy Duty 114
Bucket Greaser with Quick Lock Coupler 115
Bucket Greasers 116
Grease Pumps - Foot Operated 118
Scoop & Swipe Set 119
Portable Greasing System 120
Grease Filler Pumps 121
Grease Filler Pump - High Pressure 122
Follower Plates 123
Bulk Fill Follower Plate 124
Female Loader Adaptors 124

II OILING EQUIPMENT AND ACCESSORIES

Lever Action Oil Pumps 126
Lever Action Antifreeze Pumps 128
Vertical Lift Pump 129
Oil Lube Dispensers 130
Front Action Drum Pump 132
Steel Safety Pumps 133
Rotary Drum Pumps 134
Rotary Drum Pump - Professional 135
Quart / Litre Stroke Pump 136
Ezee Flow Pump 137
Ezee Flow Pump - Premium 138
Ezee Flow Oil & Fuel Pump 139
Ezee Flow Multi-Fluid Pump 140
Oil Bottle Pump 141
Drip Pans 142
Bung Nuts 142
Suction Tubes 143
Air Operated Transfer Pump 144
Air Operated Oil Ratio Pump - 6.5:1 145
Air Operated Oil Ratio Pumps - 1:1 146
Air Operated Oil Ratio Pumps - 3:1 147
Air Operated Oil Ratio Pumps - 5:1 148
Air Operated Stainless Steel Ratio Pump - 3:1 149
Oil Pump Kits 150
Electric Oil Drum Pumps 160
Electric Oil Pumps 162
Air Operated Double Diaphragm Pumps 164
Oil Control Guns 166
Electronic Oil Meters - Professional 168
Oil Meters - Mechanical 169
Electronic Oil Control Gun - Professional 170
Mechanical Oil Control Gun 172
Electronic Preset Oil Control Gun 174
Oil Control Gun Accessories 175
Air Operated Oil Pump Accessories 176
Oil Spigots 177
Suction Guns 178
Transfer Guns 179
Oil Cans 180
Precision Oiler 182
Measuring Jugs 183
Oil Cans - Squeeze Bottle 184
Flexible Spout Measures 184
Flexible Spout Measures - 5 Pc Set 185
Flexible & Rigid Spouts 186
Flexible Dispensing Spout 186
Measuring Funnels 187
Conical Funnels 188
Conical Funnel Set - 4 Pieces 188
Super Quick Fill Funnel 189
Radiator / Big Mouth Funnels 190
Multi-purpose Funnel 191
Quick Fill Funnel 192
Extra Long Reach Funnel 193
Multipurpose Funnel Set- 3 Pieces 194
Tractor Funnel 195
Flexible Funnel 196
Flexible Funnel - Extra Large 196
Smart Funnels 197
Universal Oil Funnel 198

III METAL HOSE REELS



Hose Reels - Grease, Oil, Air/Water 200
Air / Water Hose Reel 202

IV WASTE OIL HANDLING

Electric Waste Oil Pumps 204
Fluid Extractor Pump 205
Brake Bleeder & Vacuum Tester Kit 206
Dual Vacuum & Pressure Hand Pump Kit 207
Air Operated Double Diaphragm Pumps 208
Waste Oil Evacuation Kits 209
Waste Oil Drain - Pressurized 210
Waste Oil Drains 211
Plastic Truck Drain 212
Low Profile Truck Drain 214
Drain Pans 216
Drain Pan - 'V' Series 217
Drain Container 217
Drain Container - Heavy Duty 218

V FUEL HANDLING

Electric Fuel Pumps - Heavy Duty 220
Electric Fuel Pump - High Flow 222
Electric Fuel Pumps - Continuous Duty 223
Electric Fuel Pump Continuous Duty High Flow 224
Open Bowser AC Diesel Refilling System 225
Mini Bowser Diesel Refilling System 226
Electric Diesel Pumps 228
Electric Diesel Pumps - V Series 230

Electric Diesel Pump - Heavy Duty 231
Electric Oil & Fuel Pumps 232
Lever Action Fuel Pump 234
Rotary Booster Pump 3:1 235
Industrial Rotary Drum Pumps 236
Fuel Transfer Pump - Double Diaphragm 238
DEF Pumps - Electric 239
DEF Transfer Systems 240
DEF Transfer Pumps - Electric 242
Electric DEF Pumps - Stainless Steel 244
Submersible Diesel Pump 245
Electric Drum/ IBC Pumps 246
Air Operated DEF Pumps 248
Electric Drum Pump 249
Plastic Lever Pump 250
Vertical Lift Pump - 316 Stainless Steel 251
Safety Pumps - 316 Stainless Steel 252
Rotary Drum Pump - Stainless Steel 254
Plastic Lever Pump - Value 255
Plastic Rotary Pumps 256
Chemical Pumps - Nylon 258
Chemical Pump - Polypropylene 259
Battery Transfer Pump 260
Fuel Transfer Pump - Battery Operated 261
DEF Pump - Battery Operated 262
Rechargeable DEF Pump 263
Siphon Pumps 264
Siphon Pumps- Portable 265
Transfer Pumps 266
Brass Transfer Pumps 268
Diaphragm / Bilge Pump 269
Quart/ Gallon Fluid Pump 270
Tyre Sealant Pump 271
Adhesive Can 271
Caulking Gun 272
Mechanical Fuel Meters 273
Mechanical Fuel Meter In-line 274
Mechanical Diesel Meters 275
Mechanical Fuel Meter - Oval Gear 276
Digital Fuel Meter - Oval Gear 277
Digital Fuel Meter In-line 278
Digital Fuel Meter - Professional 279
Digital DEF Meter - Professional 280
Stainless Steel Fuel Nozzle Swivel 281
Dual Plane Fuel Nozzle Swivel 281
Fuel Control Nozzles - Manual 282
Fuel Control Nozzles - Automatic 284
Auto Shut-Off Safety Fuel Nozzles 286
Fuel Control Nozzles Automatic - V Series 287
DEF Control Nozzle - Manual 288
DEF Control Nozzle - Automatic 289
Fuel Filters 290
Fuel Filters - Spin on Cartridge 294
Filter Wrench 295
Breakaway Valve 295
Anti-static Fuel Hose & Kits 296
Non Grounded Fuel Hoses 296

NEW ADDITIONS

LOOK OUT FOR **NEW!** THROUGHOUT THE CATALOGUE

Grease Tube Dispenser

44

USB Rechargeable Battery Grease Gun

51

Battery Powered Grease Gun

52

Professional Grade Grease

64

VI DRUM HANDLING

4 Wheel Drum Dolly	298
Band Dollies	299
Drum Trolleys - Heavy Duty	300
Drum Cart - Heavy Duty	302
Drum Trolley	303
Drum Trolley - Heavy Duty	303
Drum Trolley - Low Profile	304
Drum Trolley - Adjustable	304
Drum Cradles	305
Drum Bung Converters	306
Drum Wrench	306
Drum Faucets / Taps With Bucket Hanger	307
Drum Faucets / Taps	308
Drum Faucet/ Tap - Food Grade	308
Drum Level Indicator	309

VII AIR HANDLING



Air Regulators	311
Air Filters	312
Air Filters - Metal Bowl	313
Coalescing Filters / Mist Separators	314
Air Lubricators	316
Air Lubricators - Metal Bowl	317
Filter-Regulator Combination	318
Filter-Regulator Combination - Metal Bowl	319
Filter Regulator & Lubricator - 2 piece	320
Filter Regulator & Lubricator - 2 Piece Metal Bowl	322
Filter Regulator & Lubricator - 3 Piece	324
Filter Regulator & Lubricator -3 Piece Metal Bowl	326
Precision Regulators	328
Safety Lockout Valves	329
Filter Regulator & Lubricator Accessories	330
Automatic Line Drain	334
Auto Drain Valve External	334
Air Hose Reel	335
Air Blow Guns - Professional	336
Air Blow Gun - Standard	338
6 Pc Interchangeable Air Blow Gun Kit	339
7 Pc Air Blow Gun Kit - Professional	340
Metal Body Safety Air Blow Gun	341
Metal Air Blow Gun	342
Metal Body Lever Air Blow Gun Extended Reach	343
Metal Body Lever Air Blow Gun Kits	344
Metal Body Lever Air Blow Guns with built-in venturi	346
Air Couplers & Plugs	348
360° Swivel Air Plug	350
Universal Z-Swivel Adaptor	350
Air Line Accessories - Air Line Fittings	351
Tyre Pressure Gauge	351
Tyre Pressure Gauge - Pen Style	352
Tyre Inflator Gauge - Cars	353
Tyre Inflator Gauge - Trucks	354
Tyre Pressure Gauge - Pocket Sized	355
Coolant Mixers	356

Grease Gun Holder Magnetic

67

Grease Pump Heavy Duty

114

Bucket Greaser with Quick Lock Coupler

115

Ezee Flow Pumps

139-141

Flexible Spout Measures

185

Flexible Dispensing Spout

186

Funnels

189-196

Air / Water Hose Reels

202

Fluid Extractor Pump

205

Brake Bleeder & Vacuum Tester Kit

206-207

Waste Oil Drain

211

Drain Pan 'V' Series

217

Drain Container Heavy Duty

218

Electric Fuel Pump Continuous Duty High Flow

224

Open Bowser AC Diesel Refilling System

2[illegible]

Electric Diesel Pump V Series

230

Electric DEF Transfer Pumps

242

Plastic Lever Pump

250

Fuel Transfer Pump Battery Operated

261

Siphon Pumps Portable

265

Transfer Pumps

266

Quart/ Gallon Fluid Pump

270

Adhesive Can

271

Caulking Gun

272

Fuel Meters

274-278

Fuel Control Nozzles Automatic - V Series

287

Drum Trolley

303

Metal Body Lever Air Blow Gun Extended Reach

343

360° Swivel Air Plug

350

Universal Z-Swivel Adaptor

350

Tyre Pressure Gauge

352/355

01

GREASING EQUIPMENT AND ACCESSORIES

- GREASE GUNS & ACCESSORIES
- GREASE PUMPS - MANUAL & PNEUMATIC
- GREASE PUMP ACCESSORIES
- GREASE PUMP KITS

01 Lever Grease Guns Heavy Duty



Top of the line grease gun for heavy industrial applications

Built Tough
- Barrel with 0.049" (1.2 mm) wall thickness
- Heavy duty follower spring
- High tolerance CNC machined, aluminium die cast head
- Rolled threads for quick & easy re-loading

Variable Stroke
Convenient greasing even in tight spaces with limited movement of handle

Available in 2 choices
a. 6" (150 mm) steel extension & coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 10,000 PSI	UPTO 690 BAR
DELIVERS	UPTO 1 OZ. / 28 STROKES	UPTO 1 GM / STROKE

FILLING OPTIONS



Aluminium die cast head with bulk loader and air bleeder valve

VARIANTS

G1-HD

∅ 2-1/4" (57.15 mm)

Use with 14 oz. (400 gms) grease cartridge/500cc bulk grease

G4-HD

∅ 63.5 mm

Use with 450gms grease cartridge **popular in Australia & New Zealand**

G10-HD

∅ 2-1/4" (57.15 mm)

High capacity gun
Use with 14 oz. (400 gm) grease cartridge/ 24 oz. (750cc) bulk grease

G18-HD

∅ 2-11/32" (59.7 MM)

Extra large grease gun
Use with 600 gms grease cartridge **popular in Italy**

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
6" (150 MM) STEEL EXTENSION & COUPLER		12" (300 MM) FLEXIBLE HOSE & COUPLER						
★G1R/HD/B	42700	G1F/HD/B	42720	14	400	500	1/8" BSPT	16
★G1R/HD/M	42701	G1F/HD/M	42721	14	400	500	M10 × 1	16
★G1R/HD/N	42702	G1F/HD/N	42722	14	400	500	1/8" NPT	16
★G4R/HD/B	42780	G4F/HD/B	42785	-	450	650	1/8" BSPT	16
G10R/HD/B	42750	G10F/HD/B	42760	14	400	750	1/8" BSPT	10
G10R/HD/M	42751	G10F/HD/M	42761	14	400	750	M10 × 1	10
G10R/HD/N	42752	G10F/HD/N	42762	14	400	750	1/8" NPT	10
◆G18R/HD/M	42753	◆G18F/HD/M	42763	-	600	700	M10 × 1	10

★ Best Seller ◆ New

02 Lever Grease Gun High Pressure/High Volume

Patented design: Switch over from High Pressure to High Volume by the slide of a button

Built Tough
- Barrel with 0.049" (1.2mm) wall thickness
- Heavy duty follower spring
- High tolerance CNC machined aluminium die cast head fitted with bulk loader that doubles as an air bleeder
- Non-slip textured powder coated finish for extended working life

Dual Operating Modes
Choose between High Pressure and High Volume setting by the slide of a button

Dual Discharge Ports
Front and top port for convenient greasing on inaccessible fittings

Available in 2 choices
a. 6" (150mm) steel extension & coupler
b. 12" (300mm) x 0.43" (11 mm) high pressure hose and coupler

FILLING OPTIONS



HIGH PRESSURE MODE

Gun achieves max. working pressure in a few strokes making it useful to open jammed/ clogged fittings in cold weather conditions



SPECIFICATIONS

HIGH PRESSURE MODE		
DEVELOPS	UPTO 12,000 PSI	UPTO 830 BAR
DELIVERS	UPTO 1 OZ. / 47 STROKES	UPTO 0.6 GM / STROKE

HIGH VOLUME MODE

With an **output upto 3X** of a regular Grease Gun, this gun reduces greasing time saving time and cost.



SPECIFICATIONS

HIGH VOLUME MODE		
DELIVERS	UPTO 1 OZ. / 10 STROKES	UPTO 3.2 GM / STROKE
DEVELOPS	UPTO 2,000 PSI	UPTO 130 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	THREADS	BOX QTY.
STEEL EXTENSION & COUPLER		FLEXIBLE HOSE & COUPLER			
G200R/B	42340	G200F-HP/B	42350	1/8" BSPT	10
G200R/M	42341	G200F-HP/M	42351	M10 × 1	10
G200R/N	42342	G200F-HP/N	42352	1/8" NPT	10

03 Lever Grease Gun Dual Piston

G2



The high output greasing solution for applications requiring voluminous and frequent greasing

Built Tough
- Dual piston design 3X output of grease per stroke
- Barrel with 0.049" (1.2 mm) wall thickness
- Heavy duty follower spring
- High tolerance CNC machined Aluminium die-cast head with air release valve
- Rolled threads for quick and easy reloading

Reduce Greasing Time To One-Third
Dual piston mechanism results in triple output per stroke reducing greasing time to one-third

No Loss of Prime
Dual inlet of grease ensures that gun does not lose prime

Convenience of Use
Even in extreme cold weather conditions

Available in 2 choices
a. 6" (150 mm) bent steel extension and coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

3X ADVANTAGE
Reduce Greasing Time To One-Third!

SPECIFICATIONS

DEVELOPS	UPTO 6,000 PSI	UPTO 413 BAR
DELIVERS	UPTO 1 OZ. / 12 STROKES	UPTO 2.4 GM / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY		BULK CAPACITY	THREADS	BOX QTY.
				(OZ)	(GMS)	(CM^3)		
STEEL EXTENSION & COUPLER		FLEXIBLE HOSE & COUPLER						
G2R/B	42630	G2F/B	42640	14	400	500	1/8" BSPT	16
G2R/M	42631	G2F/M	42641	14	400	500	M10 × 1	16
G2R/N	42632	G2F/N	42642	14	400	500	1/8" NPT	16

FILLING OPTIONS

04 Lever Grease Gun Professional

G8

Professional model - ideal for automotive applications

Built Tough
- Barrel with 0.049" (1.2 mm) wall thickness
- Heavy duty follower spring
- CNC machined aluminium die cast head
- Rolled threads for quick & easy reloading

Variable Stroke
Convenient greasing even in tight spaces with limited movement of handle

Available in 2 choices
a. 6" (150 mm) steel extension & coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 8,000 PSI	UPTO 550 BAR
DELIVERS	UPTO 1 OZ. / 28 STROKES	UPTO 1 GM / STROKE

FILLING OPTIONS





ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
6" (150 MM) STEEL EXTENSION & COUPLER		12" (300 MM) FLEXIBLE HOSE & COUPLER						
G8R/BL/B	42607	G8F/BL/B	42623	14	400	500	1/8" BSPT	16
G8R/BL/M	42608	★G8F/BL/M	42624	14	400	500	M10 × 1	16
G8R/BL/N	42609	G8F/BL/N	42625	14	400	500	1/8" NPT	16

★ Best Seller

05 Lever Grease Guns Standard



Hard working entry level grease gun, designed for general lubrication & daily maintenance jobs

Head with single vent hole fitted with a block nut

Air release achieved through half turn of head assembly

Available in 2 choices

a. 6" (150 mm) steel extension & coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 6,000 PSI	UPTO 413 BAR
DELIVERS	UPTO 1 OZ. / 28 STROKES	UPTO 1 GM / STROKE

FILLING OPTIONS

VARIANTS

G1-STD		∅ 2-1/4" (57.15 mm)	Powder coated steel head Use with 14oz. (400 gm) grease cartridge or 500cc bulk grease
G1-DC		∅ 2-1/4" (57.15 mm)	Aluminium die cast head Use with 14 oz. (400 gm) grease cartridge or 500cc bulk grease
G23		∅ 2-1/4" (57.15 mm)	Powder coated Aluminium die cast head & heavy duty lever handle Use with 14 oz. (400 gms) grease cartridge or 500 cc bulk grease

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
6" (150 MM) STEEL EXTENSION & COUPLER		12" (300 MM) FLEXIBLE HOSE & COUPLER						
STEEL HEAD								
G1R/STD/B	42400	G1F/STD/B	42420	14	400	500	1/8" BSPT	16
G1R/STD/M	42401	G1F/STD/M	42421	14	400	500	M10 × 1	16
★ G1R/STD/N	42402	G1F/STD/N	42422	14	400	500	1/8" NPT	16
ALUMINUM DIE CAST HEAD								
G1R/STD/DC/B	42450	G1F/STD/DC/B	42470	14	400	500	1/8" BSPT	16
★ G1R/STD/DC/M	42451	★ G1F/STD/DC/M	42471	14	400	500	M10 × 1	16
★ G1R/STD/DC/N	42452	G1F/STD/DC/N	42472	14	400	500	1/8" NPT	16
POWDER COATED ALUMINUM DIE CAST HEAD								
G23R/B	42430	G23F/B	42440	14	400	500	1/8" BSPT	10
G23R/M	42431	G23F/M	42441	14	400	500	M10 × 1	10
★ G23R/N	42432	G23F/N	42442	14	400	500	1/8" NPT	10

★ Best Seller

06 Lever Grease Guns Super Value



Most popular grease gun for general purpose lubrication in automotive, agricultural & industrial applications

Drop-resistant steel head fitted with bulk loader valve

Air release either through the bulk loader or half turn of head assembly

Available in 2 choices

a. 6" (150 mm) steel extension & coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 6,000 PSI	UPTO 413 BAR
DELIVERS	UPTO 1 OZ. / 28 STROKES	UPTO 1 GM / STROKE

FILLING OPTIONS

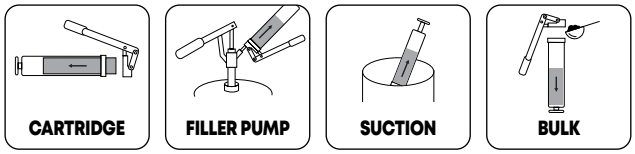

VARIANTS

G1

∅ 2-1/4" (57.15 mm)

Use with 14 oz. (400 gms) grease cartridge/500cc bulk grease

G4

∅ 63.5 mm

Use with 450 gms grease cartridge **popular in Australia & New Zealand**

G10

∅ 2-1/4" (57.15 mm)

High capacity gun

Use with 14 oz. (400 gm) grease cartridge / 24 oz. (750cc) bulk grease

G11

∅ 2-1/4" (57.15 mm)

Extra long & high capacity grease gun

Use with 14 oz. (400 gms) grease cartridge / 35 oz. (1000 cc bulk grease)

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
6" (150 MM) STEEL EXTENSION & COUPLER		12" (300 MM) FLEXIBLE HOSE & COUPLER						
★G1R/SLV/ B	42500	G1F/SLV/B	42520	14	400	500	1/8" BSPT	16
★G1R/SLV/M	42501	G1F/SLV/M	42521	14	400	500	M10 × 1	16
G1R/SLV/N	42502	G1F/SLV/N	42522	14	400	500	1/8" NPT	16
★G4R/B	42580	G4F/B	42585	-	450	650	1/8" BSPT	16
G10R/B	42590	G10F/B	42595	14	400	750	1/8" BSPT	10
★G10R/M	42591	G10F/M	42596	14	400	750	M10 × 1	10
G11R/B	42560	G11F/B	42565	14	400	1000	1/8" BSPT	10
G11R/M	42561	G11F/M	42566	14	400	1000	M10 × 1	10

★ Best Seller

07 Lever Grease Gun Supa-Lite

G1HD-AL

10,000 PSI

1 GM / STROKE

25% LIGHTER THAN STEEL GUNS

"SUPA-LITE" lightweight aluminium grease gun designed for fatigue free & comfortable everyday greasing in automotive, fleet, industrial, farm & construction applications

Barrel made from lightweight yet strong aircraft grade 0.063" (1.6 mm) thick aluminium

Aluminium die cast head with bulk loader & air bleeder valve

Variable Stroke
Convenient greasing even in tight spaces with limited movement of handle

Available in 2 choices

a. 6" (150 mm) steel extension & coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 10,000 PSI	UPTO 690 BAR
DELIVERS	UPTO 1 OZ. / 28 STROKES	UPTO 1 GM / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
6" (150 MM) STEEL EXTENSION & COUPLER		12" (300 MM) FLEXIBLE HOSE & COUPLER						
G1R/HD/AL/BL/B	42723	G1F/HD/AL/BL/B	42726	14	400	500	1/8" BSPT	16
G1R/HD/AL/BL/M	42724	G1F/HD/AL/BL/M	42727	14	400	500	M10 × 1	16
G1R/HD/AL/BL/N	42725	G1F/HD/AL/BL/N	42728	14	400	500	1/8" NPT	16

FILLING OPTIONS



08 Lever Grease Gun 'V' Series

V1



Ideal combination of superior quality and value price

Aluminium die cast head fitted with automatic air bleeder valve

Black powder coated finish

Available in 2 choices

a. 6" (150 mm) steel extension & coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 6,000 PSI	UPTO 413 BAR
DELIVERS	UPTO 1 OZ. / 28 STROKES	UPTO 1 GM / STROKE

FILLING OPTIONS



ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
6" (150 MM) STEEL EXTENSION & COUPLER		12" (300 MM) FLEXIBLE HOSE & COUPLER						
★V1R/BL/B	42912	V1F/BL/B	42926	14	400	500	1/8" BSPT	16
★V1R/BL/M	42913	V1F/BL/M	42927	14	400	500	M10 × 1	16
V1R/BL/N	42914	V1F/BL/N	42928	14	400	500	1/8" NPT	16

★ Best Seller

09 Lever Grease Gun Japanese Style

G81



Professional Lever Gun for use in construction, agricultural and industrial applications

Built Tough

- Barrel with 0.049" (1.2 mm) wall thickness
- High tolerance CNC machined head with threaded port for use with JIABARA style grease cartridges popular in Japan
- Heavy duty follower spring
- Chain style follower handle
- Large rolled threads for fast & easy reloading

Complete with

6" (150 mm) steel extension & coupler

SPECIFICATIONS

DEVELOPS	UPTO 8,000 PSI	UPTO 550 BAR
DELIVERS	UPTO 0.9 GM / STROKE	

FILLING OPTIONS



ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
G81R/B	42790	14	400	600	1/8" BSPT	10

10 Lever Oil Gun

G19



Heavy duty Oil Gun

Handles flow-able greases and light oils without any leakage and mess. Also useful for pumping glue in water proofing and other construction applications

Built Tough

- High tolerance aluminium die cast head
- High quality CDW barrel, machined seam for leak proof performance
- Follower designed to work both with oils and grease

Variable Stroke

For convenient usage even in tight spaces with limited movement of handle

Available in 2 choices

a. 6" (150 mm) steel extension & coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 10,000 PSI	UPTO 690 BAR
DELIVERS	UPTO 1 OZ. / 28 STROKES	UPTO 1 GM / STROKE

FILLING OPTIONS

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
6" (150 MM) STEEL EXTENSION & COUPLER		12" (300 MM) FLEXIBLE HOSE & COUPLER						
G19R/B	42740	G19F/B	42745	14	400	500	1/8" BSPT	12
G19R/M	42741	G19F/M	42746	14	400	500	M10 × 1	12
G19R/N	42742	G19F/N	42747	14	400	500	1/8" NPT	12

11 Lever Grease Guns Clear Tube



Unique concept & design for quick and clear grease identification eliminating the risk of cross contamination or mixing of incompatible greases

Tough, impact and drop resistant polycarbonate tube with aluminium die cast adaptors

High tolerance aluminium die cast head with bulk loader & air bleeder valve

Variable Stroke
Convenient greasing even in tight spaces with limited movement of handle

Complete with 6" (150 mm) steel extension & coupler

SPECIFICATIONS

DEVELOPS	UPTO 10,000 PSI	UPTO 690 BAR
DELIVERS	UPTO 1 OZ. / 28 STROKES	UPTO 1 GM / STROKE

Quick identification, eliminating the risk of mixing incompatible or unspecified greases

FILLING OPTIONS

VARIANTS

G1	G4	BRL/G1-CL	BRL/G4-CL
∅ 2-1/4" (57.15 mm)	∅ 63.5 mm	∅ 2-1/4" (57.15 mm)	∅ 63.5 mm
	Popular in Australia & New Zealand	Replacement clear tube barrel only 14 oz. (400 gms)	Replacement clear tube barrel only 450 gms

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
G1R/HD/B-CL	46900	14	400	500	1/8" BSPT	16
G1R/HD/M-CL	46901	14	400	500	M10 × 1	16
G1R/HD/N-CL	46902	14	400	500	1/8" NPT	16
G4R/HD/B-CL	46903	-	450	650	1/8" BSPT	16
BARREL ONLY						
BRL/G1-CL	46990	14 oz. (400 gms) replacement for clear tube barrel only			2.2806" × 16 UNF	20
BRL/G4-CL	46991	450 gms replacement for clear tube barrel only			2.5" × 16 UNF	20

WARNING

Designed for use with grease only:
Do not use with: ESTER based Greases, Synthetic Greases such as Aeroshell 33 Grease, Aeroshell 7 Grease, Skydrol Products etc. These have an adverse effect on the clear polycarbonate tube & can cause fogging, cracking & fracturing of the tube.

12 Dual Grease Gun Pistol/Lever Handle

Convenience of a pistol grip with power of a lever handle

2 Way Operating Telescopic Handle
Press lever to switch between
Pistol type: ideal for use in confined spaces
Lever type: for high pressure & high volume application

Dual Discharge Ports
Front and top port for convenient greasing on inaccessible fittings

Multifunction Grease Gun
Integrated high volume – high pressure adjustable mechanism shift between high volume & high pressure greasing

1. Lift the button to unlock
2. Slide to change mode
3. Press button to lock back in position

Built Tough

- Aluminum die cast head fitted with bulk loader & air bleeder valve
- Barrel with 0.049" (1.2 mm) wall thickness
- Heavy duty follower spring
- Non-slip comfortable vinyl grip
- Rolled threads for quick & easy re-loading

Suitable for use with NLGI 1, 2, 3 greases

Comes complete with hydraulic coupler professional, 6" (150mm) bent steel extension, 18" (450 mm) x 0.33" (8.5 mm) flexible hose

Aluminum die cast head fitted with bulk loader & air bleeder valve

Pull button & slide to change mode between High Pressure/High Volume

∅ 2-1/4" (57.15 mm)

FILLING OPTIONS



VARIANTS

G77	G78
	NEW!
Use with 14 oz. (400 gms) grease cartridge/500cc bulk grease	Use with 450gms grease cartridge **Popular in Australia & New Zealand**

Press lever & pull down to convert into lever gun

Press lever & slide up to convert into pistol gun

PISTOL MODE

HIGH PRESSURE MODE



SPECIFICATIONS

HIGH PRESSURE MODE		
PRESSURE	4,500 PSI	310 BAR
DELIVERS	UPTO 1 OZ. / 44 STROKES	UPTO 0.65 GM / STROKE

LEVER MODE

HIGH PRESSURE MODE

HIGH VOLUME MODE

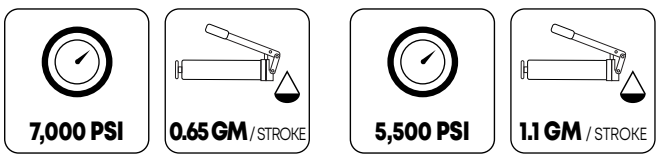

SPECIFICATIONS

HIGH PRESSURE MODE		
PRESSURE	7,000 PSI	483 BAR
DELIVERS	UPTO 1 OZ. / 44 STROKES	UPTO 0.65 GM / STROKE
HIGH VOLUME MODE		
PRESSURE	5,500 PSI	380 BAR
DELIVERS	1 OZ / 26 STROKES	1.1 GM / STROKE

Do Not Miss **G78** for use with 450 gms grease cartridges. Popular in Australia & New Zealand

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY		BULK CAPACITY	THREADS	BOX QTY.
		(OZ.)	(GMS)	(CM^3)		
G77RF-18/B	42380	14	400	500	1/8" BSPT	10
G77RF-18/M	42381	14	400	500	M10 x 1	10
G77RF-18/N	42382	14	400	500	1/8" NPT	10
◆ G78RF-18/B	42390	-	450	650	1/8" BSPT	10

◆ New

13 Spin - On Grease Guns

Special spin-on grease gun for quick, effortless high pressure greasing applications

Spin-On cartridge works on special "vacuum technology" that ensures full utilization of grease in the cartridge and eliminates priming issues associated with conventional grease guns

Fast & easy reloading without unscrewing the head

No air pockets, hence no air bleeding required

Robust high tolerance aluminium die cast head

Minimal wearing parts give it a long life

Non slip Textured powder coated finish for extended service life, way more than zinc plated grease guns

Threaded port for screwing 400 gms cartridge

CONVENIENT & TIME SAVING

Remove screw cap & screw-in the cartridge... Spin-on grease gun is ready to use

No priming needed

EFFORTLESS

Cartridge loading with one hand leaving the other hand free for other jobs

MONEY SAVING

Easy to monitor available grease quantity in the cartridge

Easily refillable cartridge - No need to buy a new cartridge every time

NO MESS/ NO WASTAGE

Keeps grease off the users hands & clothes

Complete quantity of grease in cartridge used up

No wasted grease

No cleanliness/ safety hazards

VARIANTS

LEVER GREASE GUNS - G48	PISTOL GREASE GUNS - G48P



SPECIFICATIONS

DEVELOPS	6,000 PSI	413 BAR
DELIVERS	UPTO 0.9 GM / STROKE	



SPECIFICATIONS

DEVELOPS	5,000 PSI	345 BAR
DELIVERS	UPTO 0.5 GM / STROKE	

ORDERING INFORMATION

CAT NR.	ORD NR.	ACCESSORIES	THREADS	BOX QTY.
LEVER GREASE GUNS				
G48R/B	42808	6" (150 mm) steel extension & coupler	1/8" BSPT	20
G48R/M	42809	6" (150 mm) steel extension & coupler	M10×1	20
G48F/B	42797	12" (300 mm) x 0.33" (8.5 mm) flexible hose & coupler	1/8" BSPT	20
G48F/M	42804	12" (300 mm) x 0.33" (8.5 mm) flexible hose & coupler	M10×1	20
PISTOL GREASE GUNS				
G48PR/B	42810	4" (100 mm) steel extension & coupler	1/8" BSPT	20
G48PR/M	42811	4" (100 mm) steel extension & coupler	M10×1	20
G48PF/B	42798	12" (300 mm) x 0.33" (8.5 mm) flexible hose & coupler	1/8" BSPT	20
G48PF/M	42812	12" (300 mm) x 0.33" (8.5 mm) flexible hose & coupler	M10×1	20
G48PF-HP/B	42813	12" (300 mm) x 0.425" (11 mm) heavy duty hose & coupler	1/8" BSPT	20
G48PF-HP/M	42814	12" (300 mm) x 0.425" (11 mm) heavy duty hose & coupler	M10×1	20

14 Cartridge Adaptor Threaded

Polypropylene greasing adaptor for threaded cartridges

Converts a standard grease gun to a SPIN-ON style gun

Fits onto grease gun head making it compatible with 400 gms threaded grease cartridge

Thread the Adaptor into the head

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
ADP/CTG/LS	46970	10

15 Double Lever Grease Gun

G83



Double Lever gun for quick and effortless high pressure greasing applications

Screw-in cartridge works on special '**Vacuum Technology**' that ensures:

1. Full utilization of grease in the cartridge
2. Eliminates priming issues usually associated with conventional grease guns

Seal guards at both ends of the cartridge create vacuum that pulls out grease emptying the cartridge completely

Robust high tolerance aluminium die cast head
Minimal wearing parts give it a long life

No connections hence no potential leaks or contamination issues

Complete with
12" (300 mm) × 0.425" (11 mm) heavy duty hose & coupler

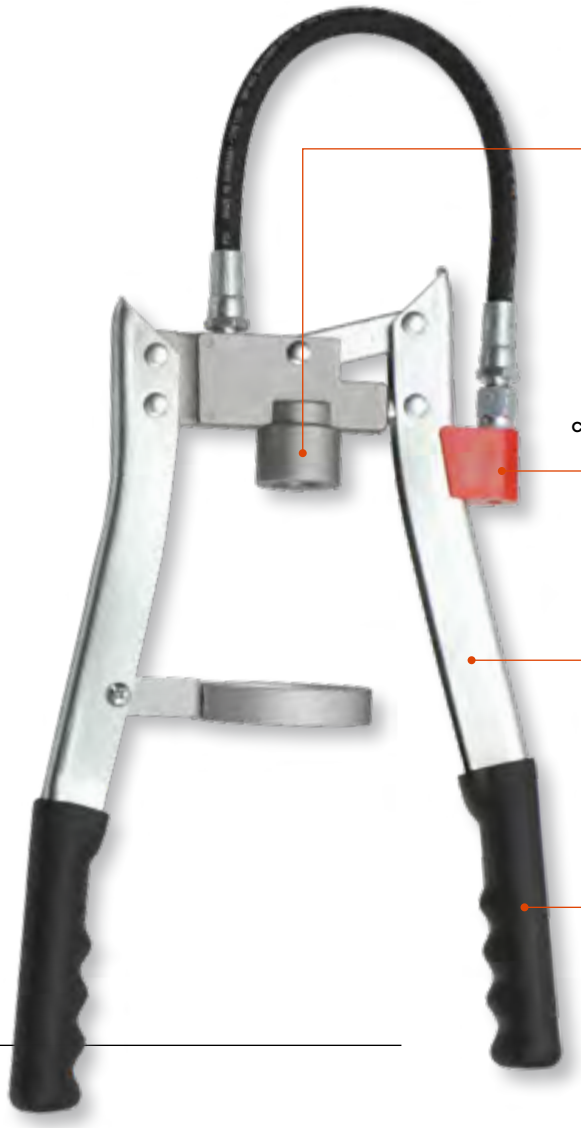

SPECIFICATIONS

DEVELOPS	UPTO 7,500 PSI	UPTO 517 BAR
DELIVERS	UPTO 1 OZ. / 35 STROKES	UPTO 0.8 GM / STROKE

VARIANTS

G83F-HP
For use with 500 gms threaded grease cartridges

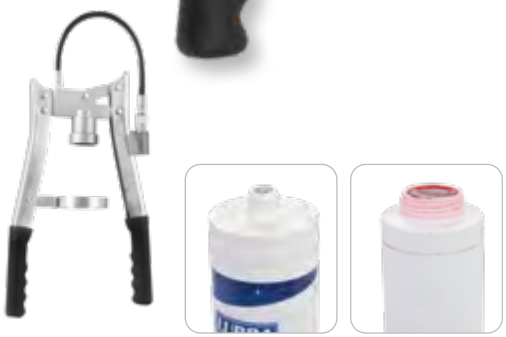

G83F-HP/MTO
For use with both 500 gms and 400 gms threaded grease cartridges

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY (GMS)	THREADS	BOX QTY.
G83F-HP/B	42795	500	1/8" BSPT	10
G83F-HP/M	42796	500	M10 × 1	10
G83F-HP/MTO/B	42799	400 & 500	1/8" BSPT	10

FILLING OPTIONS



16 Pistol Grip Grease Gun Professional

G32



Lifetime product with patented feather touch design - maximum output with minimal effort

Variable Stroke
Unique variable stroke feature allows gun to reach increased pressure from short strokes and high greasing volumes from full strokes

Built Tough
- Barrel with 0.049" (1.2 mm) wall thickness
- Heavy duty follower spring
- High tolerance CNC machined, aluminium die cast head
- Rolled threads for quick & easy re-loading

High Output
Upto 1-1/2 times more grease stroke than other pistol grip guns

High Pressure
Develops upto 7500 PSI (517 BAR), not found in commonly sold pistol grip grease guns

Complete with
9" (225 mm) × 0.425" (11 mm) high pressure flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 7,500 PSI	UPTO 517 BAR
DELIVERS	UPTO 1 OZ. / 40 STROKES	UPTO 0.68 GM / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
G32F-HP9/B	43061	14	400	500	1/8" BSPT	16
G32F-HP9/M	43062	14	400	500	M10 × 1	16
★G32F-HP9/N	43063	14	400	500	1/8" NPT	16

★ Best Seller

FILLING OPTIONS



17 Pistol Grease Gun
High Pressure / High Volume

Patented design: Switch over from High Pressure to High Grease Volume with the simple slide of a button

Built Tough
Barrel with 0.049"(1.2mm) wall thickness
Heavy duty follower spring
High tolerance CNC machined Aluminium die cast head fitted with bulk loader that doubles as an air bleeder
Non-slip textured powder coated finish for extended working life

Dual Operating Modes
Choose between High Pressure and High Volume setting by simple slide of a button
a. **High Pressure Setting**
b. **High Volume Setting**

Dual Discharge Ports
Front and top port for convenient greasing on inaccessible fittings

Choice of
4" (100mm) steel extension & coupler
18"(450mm) x 0.43" (11 mm) high pressure hose and coupler

FILLING OPTIONS



HIGH PRESSURE MODE

Gun achieves max. working pressure in a few strokes making it useful to open jammed/ clogged fittings conveniently even in very cold weather conditions



SPECIFICATIONS

HIGH PRESSURE MODE		
DEVELOPS	UPTO 10,000 PSI	UPTO 690 BAR
DELIVERS	UPTO 1 OZ. / 70 STROKES	UPTO 0.4 GM / STROKE

HIGH VOLUME MODE

With an output upto 3X of a regular Grease Gun, this gun reduces greasing time saving time and cost.



SPECIFICATIONS

HIGH VOLUME MODE		
DELIVERS	UPTO 1 OZ. / 22 STROKES	UPTO 1.3 GM / STROKE
DEVELOPS	UPTO 2,000 PSI	UPTO 130 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	THREADS	BOX QTY.
STEEL EXTENSION & COUPLER		FLEXIBLE HOSE & COUPLER			
G500R/B	42360	G500F-HP18/B	42370	1/8" BSPT	10
G500R/M	42361	G500F-HP18/M	42371	M10 × 1	10
G500R/N	42362	G500F-HP18/N	42372	1/8" NPT	10

18 Pistol Grip Grease Guns

Most popular One Hand Operated Grease Gun

Designed for use in confined spaces where access to grease nipple is restricted

Built Tough

- Barrel with 0.049" (1.2 mm) wall thickness
- Heavy duty follower spring
- High tolerance CNC machined head
- Rolled threads for quick & easy re-loading

Super strong pistol grip handle designed to prevent 'pinching'

Available in 2 choices

a. 4" (100 mm) steel extension & coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 5,000 PSI	UPTO 345 BAR
DELIVERS	UPTO 0.70 OZ. / 40 STROKES	UPTO 0.50 GM / STROKE

FILLING OPTIONS



*Only G5-PRO

VARIANTS

G5		∅ 2-1/4" (57.15 mm)	Use with 14 oz. (400 gms) grease cartridge/500cc bulk fill
G4-PST		∅ 63.5 mm	Use with 450 gms grease cartridge **popular in Australia & New Zealand**
G5-PRO		∅ 2-1/4" (57.15 mm)	**Professional Model:** Head fitted with bulk loader & air bleeder valve. Vinyl grip on movable handle Use with 14 oz. (400 gms) grease cartridge/500cc bulk fill

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
4" (100 MM) STEEL EXTENSION & COUPLER		12" (300 MM) FLEXIBLE HOSE & COUPLER						
G5R/B	43000	G5F/B	43020	14	400	500	1/8" BSPT	16
G5R/M	43001	G5F/M	43021	14	400	500	M10 × 1	16
★G5R/N	43002	★G5F/N	43022	14	400	500	1/8" NPT	16
★G4R/PST/B	43080	★G4F/PST/B	43085	-	450	650	1/8" BSPT	16
G5R/PRO/B	43050	G5F/PRO/B	43070	14	400	500	1/8" BSPT	16
G5R/PRO/M	43051	G5F/PRO/M	43071	14	400	500	M10 × 1	16
G5R/PRO/N	43052	★G5F/PRO/N	43072	14	400	500	1/8" NPT	16

★ Best Seller

19 Pistol Grip Grease Guns Clear Tube



Unique concept & design for quick and clear grease identification eliminating the risk of cross contamination or mixing of incompatible greases

Tough, impact and drop resistant polycarbonate tube with aluminium die cast adaptors

High tolerance aluminium die cast head with steel block nut

Super strong pistol grip handle designed to prevent pinching of fingers

Complete with
4" (100 mm) steel extension & coupler,
12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

Barrel available as spare also

SPECIFICATIONS

DEVELOPS	UPTO 5,000 PSI	UPTO 345 BAR
DELIVERS	UPTO 0.70 OZ. / 40 STROKES	UPTO 0.50 GM / STROKE

Quick identification eliminating the risk of mixing incompatible or unspecified greases

FILLING OPTIONS

VARIANTS

G5-CL	G4PST-CL	BRL/G1-CL	BRL/G4-CL
∅ 2-1/4" (57.15 mm)	∅ 63.5 mm	∅ 2-1/4" (57.15 mm)	∅ 63.5 mm
Use with 14 oz. (400 gms) grease cartridge/500cc bulk fill	Popular in Australia & New Zealand	Replacement clear tube barrel only 14 oz. (400 gms)	Replacement clear tube barrel only 450 gms

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
GREASE GUN						
G5RF/B-CL	46920	14	400	500	1/8" BSPT	16
G5RF/M-CL	46921	14	400	500	M10 × 1	16
G5RF/N-CL	46922	14	400	500	1/8" NPT	16
G4RF/PST/B-CL	46923	-	450	650	1/8" BSPT	16
BARREL ONLY						
BRL/G1-CL	46990	Replacement clear tube barrel only 14 oz. (400 gms)			2.2806" × 16 UNF	20
BRL/G4-CL	46991	Replacement clear tube barrel only 450 gms			2.5" × 16 UNF	20

WARNING

Designed for use with grease only: Do not use with: ESTER based Greases, Synthetic Greases such as Aeroshell 33 Grease, Aeroshell 7 Grease, Skydrol Products etc. These have an adverse effect on the clear polycarbonate tube & can cause fogging, cracking & fracturing of the tube.

20 Pistol Grip Grease Gun Dual Discharge

G31



One hand operated Grease Gun with dual discharge ports - front and top

Heavy duty aluminium die cast head with one hand operated pistol handle

Dual discharge ports

- **Top Port:** Used mainly with flexible hoses for greasing inaccessible fillings
- **Front Port:** Used mainly with rigid steel extension

Handle designed to prevent fingers from "pinching"

High visibility plated finish

Complete with
4" (100 mm) steel extension and
12" (300 mm × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 5,000 PSI	UPTO 345 BAR
DELIVERS	UPTO 0.70 OZ. / 40 STROKES	UPTO 0.50 GM / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY		BULK CAPACITY	THREADS	BOX QTY.
		(OZ.)	(GMS)	(CM^3)		
G31RF/B	43015	14	400	500	1/8" BSPT	16
G31RF/M	43016	14	400	500	M10 × 1	16
★G31RF/N	43017	14	400	500	1/8" NPT	16

★ Best Seller

FILLING OPTIONS

21 Pistol Grip Grease Gun 'Vario'

G55
G65



Ergonomic One Hand Operated Grease Gun

Unique Adjustable Mechanism
Easy shift between high volume and high pressure greasing, especially useful in cold conditions. High volume setting for faster greasing

Built Tough
- Barrel with 0.049" (1.2 mm) wall thickness
- CNC machined aluminium die cast head with drop resistant pistol assembly
- Solid 0.43" (11 mm) dia. piston for higher grease discharge per stroke

Suitable for use with NLGI 1, 2, 3 greases

Complete with
12" (300 mm) × 0.425" (11 mm) heavy duty hose & coupler

UNIQUE ADJUSTABLE MECHANISM
HIGH PRESSURE / HIGH VOLUME

SPECIFICATIONS

DEVELOPS	UPTO 5,000 PSI	UPTO 345 BAR
DELIVERS	UPTO 0.70 OZ. / 40 STROKES	UPTO 0.50 GM / STROKE

VARIANTS

G55

∅ 2-1/4" (57.15 mm)

Use with 14 oz. (400 gms) grease cartridge / 500cc bulk fill

G65

∅ 63.5 mm

Use with 450 gms grease cartridge popular in Australia & New Zealand

FILLING OPTIONS



ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
G55F-HP/B	43095	14	400	500	1/8" BSPT	16
G55F-HP/M	43096	14	400	500	M10 × 1	16
G55F-HP/N	43098	14	400	500	1/8" NPT	16
★G65F-HP/B	43088	-	450	650	1/8" BSPT	16

★ Best Seller

22 Pistol Grip Grease Guns All Weather

7,000 PSI

All weather grease gun designed for convenient use even in very cold weather conditions

Built Tough

- Barrel with 0.049" (1.2 mm) wall thickness
- Heavy duty follower spring
- CNC machined aluminium die cast head with bulk loader valve that double as an air bleeder
- Rolled threads for quick & easy re-loading
- Heavy duty plunger spring keeps grease compressed and free of air pockets

Venturi Mechanism coupled with a large grease inlet helps retain prime

Also available with: **Unique Adjustable Mechanism** that switches between high pressure and high volume easily. High volume for faster greasing & high pressure for use in very cold weather conditions

Grease Gun Head: Large grease inlet with venturi mechanism

FILLING OPTIONS



VARIANTS

G70		∅ 2-1/4" (57.15 mm)	Use with 14 oz. (400 gms) grease cartridge / 500cc bulk fill With double lipped follower for ease of use with cartridge or bulk grease without changeover Comes with 18" (450mm) × 0.425" (11mm) high pressure grease hose &coupler
G80		∅ 2-1/4" (57.15 mm)	**Adjustable Mechanism** Use with 14 oz. (400 gms) grease cartridge / 500cc bulk fill Comes with 12" (300mm) × 0.425" (11mm) high pressure grease hose & coupler
G85		∅ 63.5 mm	**Adjustable Mechanism** Use with 450 gms. grease cartridge Comes with 12" (300mm) × 0.425" (11 mm) high pressure grease hose & coupler

G70

G80

UNIQUE ADJUSTABLE MECHANISM HIGH PRESSURE / HIGH VOLUME

SPECIFICATIONS

DEVELOPS	UPTO 7,000 PSI	UPTO 483 BAR
DELIVERS	UPTO 1 OZ. / 40 STROKES	UPTO 0.68 GM / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY		BULK CAPACITY	THREADS	BOX QTY.
		(OZ.)	(GMS)	(CM^3)		
G70F-HP18/B	43040	14	400	500	1/8" BSPT	16
G70F-HP18/M	43041	14	400	500	M10 × 1	16
★G70F-HP18/N	43042	14	400	500	1/8" NPT	16

★ Best Seller

SPECIFICATIONS

DEVELOPS	UPTO 6,000 PSI	UPTO 413 BAR
DELIVERS	UPTO 1.30 OZ. / 40 STROKES	UPTO 0.90 GM / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY		BULK CAPACITY	THREADS	BOX QTY.
		(OZ.)	(GMS)	(CM^3)		
G80F-HP/B	43045	14	400	500	1/8" BSPT	10
★G80F-HP/M	43046	14	400	500	M10 × 1	10
★G80F-HP/N	43047	14	400	500	1/8" NPT	10
G85F-HP/B	43048	-	450	650	1/8" BSPT	10

★ Best Seller

23 Pistol Grip Grease Gun 'V' Series

V5



Ideal combination of superior quality & value price

Aluminium die cast head fitted with automatic air bleeder valve

Black powder coated finish

Available in 2 choices

a. 4" (100 mm) steel extension & coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 5,000 PSI	UPTO 345 BAR
DELIVERS	UPTO 0.70 OZ. / 40 STROKES	UPTO 0.50 GM / STROKE

FILLING OPTIONS

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
4" (100 MM) STEEL EXTENSION & COUPLER		12" (300 MM) FLEXIBLE HOSE & COUPLER						
V5R/BL/B	42954	V5F/BL/B	42973	14	400	500	1/8" BSPT	16
V5R/BL/M	42955	V5F/BL/M	42974	14	400	500	M10 × 1	16
V5R/BL/N	42956	V5F/BL/N	42975	14	400	500	1/8" NPT	16

24 Pistol Grip Grease Gun Supa-Lite

G31-AL



25% LIGHTER THAN STEEL GUNS

"SUPA-LITE" lightweight aluminium grease guns

Designed for fatigue free & comfortable everyday greasing in automotive, fleet, industrial, farm & construction applications

Barrel made from lightweight yet strong aircraft grade 0.063" (1.6 mm) thick aluminium

Aluminium die cast head fitted with steel block nut

Super strong pistol grip handle designed to prevent 'pinching'

Dual Discharge Ports
Front & top port make greasing on inaccessible fitting very convenient

Available in 2 choices
a. 4" (100 mm) steel extension & coupler
b. 18" (450 mm) × 0.33" (8.5 mm) flexible hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 5,000 PSI	UPTO 345 BAR
DELIVERS	UPTO 0.70 OZ. / 40 STROKES	UPTO 0.50 GM / STROKE

FILLING OPTIONS

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
4" (100 MM) STEEL EXTENSION & COUPLER		18" (450 MM) FLEXIBLE HOSE & COUPLER						
G31R/AL/BL/B	43064	G31F-18/AL/BL/B	43067	14	400	500	1/8" BSPT	16
G31R/AL/BL/M	43065	G31F-18/AL/BL/M	43068	14	400	500	M10 × 1	16
G31R/AL/BL/N	43066	G31F-18/AL/BL/N	43069	14	400	500	1/8" NPT	16

25 Mini Grease Gun Push Type

G3P
G3P-CL



Push type grease guns to lubricate hammer mechanism in wrenches with flush type grease fittings, air tools , lawn mowers, ATV, RV's etc.

Small tip opening ensures precise & correct lubricants

Die cast aluminium head with 2 threaded pockets to hold spare needle nozzles

Compatible with most flush type fittings

Includes needle nozzles with size:

1. 0.028" (0.7 mm)
2. 0.039" (1.0 mm)
3. 0.055" (1.4 mm)

G3P

Check out our 3 oz. (85 gms) Grease Cartridges on Page 64

SPECIFICATIONS

DEVELOPS	UPTO 1,000 PSI	UPTO 69 BAR
DELIVERS	UPTO 1 OZ. / 95 STROKES	UPTO 0.3 GM / STROKE

VARIANTS

G3P	G3P/SPL1
	NEW!
BULK	 CARTRIDGE

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY	BOX QTY.
G3P	43105	85 gms bulk	36
◆ G3P/SPL1	43107	3 oz. (85 gms) cartridge	36

◆ New

26 Mini Pistol Grease Gun Deluxe

G16



One hand pistol grip grease gun with convenient pull type operating mechanism

Designed for use with 3 oz./85 gms grease cartridge

Complete with 4" (100 mm) steel extension and coupler

SPECIFICATIONS

DEVELOPS	UPTO 3,500 PSI	UPTO 240 BAR
DELIVERS	UPTO 0.60 OZ. / 40 STROKES	UPTO 0.40 GM / STROKE

VARIANTS

G-16		Powder coated steel barrel for regular greasing applications
G-16/ZN		Zinc plated steel barrel
G-16/MR		Aluminium barrel with Stainless steel (SS-304) handle, end cap and connecting link. **For marine applications**

FILLING OPTION



ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
★G-16/B	43250	1/8" BSPT	30
G-16/M	43251	M10 × 1	30
G-16/N	43252	1/8" NPT	30
G-16/ZN/B	43260	1/8" BSPT	30
G-16/ZN/M	43261	M10 × 1	30
★G-16/ZN/N	43262	1/8" NPT	30
G-16/MR/B	43240	1/8" BSPT	30
G-16/MR/M	43241	M10 × 1	30
G-16/MR/N	43242	1/8" NPT	30

★ Best Seller

27 Grease Tube Dispenser

G5P

NEW!

Single hand operated grease gun for precise greasing in narrow spaces.

Precision milled metal parts with spring operated pumping system

Comes with 2 applicators:
- Fine applicator: for fine line greasing
- Coarse applicator: for thick greasing

Ideal for lubricating
- Pedals
- Hubs
- Bottom brackets
- Headsets
- Impact Wrenches etc.

Also available with 3.5 oz. (85 gm) multipurpose grease with PTFE

G5P

G5P/GRS/3.5T/CT/2G

SPECIFICATIONS

DELIVERS	UPTO 0.5 OZ. / 57 STROKES	UPTO 0.25 GM / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE THREAD	INCLUDES	BOX QTY.
G5P/M1.5	43140	M15 x 1.5		10
G5P/M2	43141	M15 x 2		
G5P/U	43142	9/16" - 18 UNF		
G5P/JB	43145	M15 x 2.5		
G5P/GRS/3.5T/CT/CG	43143	M15 x 1.5		10
GRS/3.5T/CT/2G	72506	Spare grease cartridge		

COARSE APPLICATOR	FINE APPLICATOR

28 Mini Pistol Grease Gun Popular

G15

Low cost, compact tool box size grease gun, perfect for hard to reach jobs

One hand pistol grip gun with push type operating mechanism

Aluminum die cast head with textured powder coated finish for non-slip grip

Complete with 4" (100 mm) steel extension & coupler

Check out our 3 oz. (85 gms) Grease Cartridges on Page 64

1.42"
(36 mm)

SPECIFICATIONS

DEVELOPS	UPTO 3,000 PSI	UPTO 207 BAR
DELIVERS	UPTO 0.60 OZ. / 40 STROKES	UPTO 0.40 GM / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY		THREADS	BOX QTY.
		(OZ.)	(GMS)		
G-15/B	43200	3	85	1/8" BSPT	30
G-15/M	43201	3	85	M10 × 1	30
★G-15/N	43202	3	85	1/8" NPT	30

★ Best Seller

FILLING OPTION



29 Mini Lever Grease Gun

G14

Compact tool box size gun

Aluminum die cast head with textured powder coated finish for non-slip grip

Complete with 6" (150 mm) steel extension & coupler

Check out our 3 oz. (85 gms) Grease Cartridges on Page 64

9-1/4"
(235 mm)

1.42"
(36 mm)

SPECIFICATIONS

DEVELOPS	UPTO 6,000 PSI	UPTO 413 BAR
DELIVERS	UPTO 0.80 OZ. / 40 STROKES	UPTO 0.55 GM / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY		THREADS	BOX QTY.
		(OZ.)	(GMS)		
G14R/B	43280	3	85	1/8" BSPT	30
G14R/M	43281	3	85	M10 × 1	30
G14R/N	43282	3	85	1/8" NPT	30

FILLING OPTION



30 Push Type Grease Guns

G6P
G7P

Compact toolbox size, ideal for greasing impact wrenches, lawn mowers, chain saws, trailers, ATV's, trucks etc

Push type mechanism for use with bulk grease only

Complete with Universal connector

Custom built options with pointed nozzles available on request

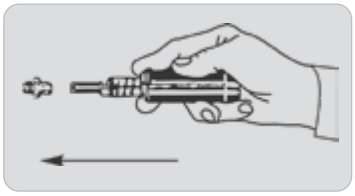

Align Push Gun straight with fitting

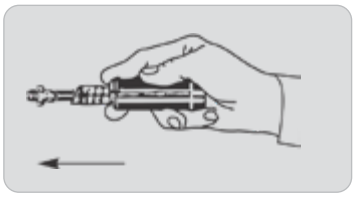

Push with palm of hand

ORDERING INFORMATION

CAT NR.	ORD NR.	BULK CAPACITY (CM³)	BOX QTY.
G6P	43100	30	50
★G7P	43101	125	50

★ Best Seller

FILLING OPTION

31 Quick Grease Filler Gun

SG-GR

NEW!

Filler gun for quick filling of high viscosity grease in cylinders of Central Lubrication System

Simple method for filling grease reservoirs, reduces the chance of contamination

Manufactured from high quality zinc plated steel

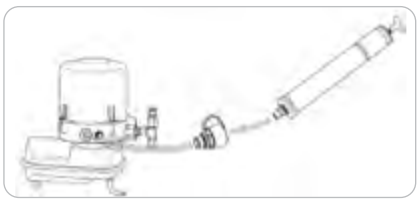

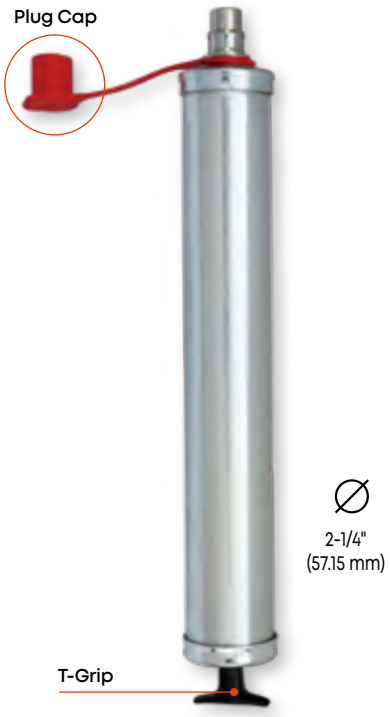

ORDERING INFORMATION

CAT NR.	ORD NR.	OVERALL LENGTH (INCH)	OVERALL LENGTH (MM)	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM³)	BOX QTY.
SG/GR/400TC	45262	14-27/32	377	14	400	700	10
SG/GR/30C	45263	12-3/64	306	14	400	550	10

32 Air Operated Grease Gun High Power

G64

Pressure Ratio 50:1

High power one shot air grease gun

Designed with grease cylinder on top for optimal balance

For use in factory maintenance, farm, fleet service or for use from vehicle air brake compressors

Available in 2 choices

a. 6" (150 mm) steel extension & coupler
b. 9" (225 mm) × 0.425" (11 mm) high pressure flexible hose & professional coupler

SPECIFICATIONS

DEVELOPS	UPTO 6,000 PSI	UPTO 413 BAR
DELIVERS	UPTO 1 OZ. / 40 SHOTS	UPTO 0.68 GM / SHOT
AIR OPERATING RANGE	40-120 PSI	3-8 BAR
PRESSURE RATIO	50:1	
AIR COMPRESSOR VOLUME	1 CFM @ 6 BAR	0.026 CBM @ 6 BAR
AIR INLET THREADING	1/4" (F)	

FILLING OPTIONS

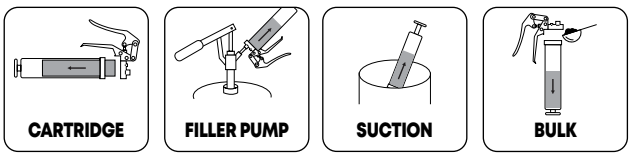

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	THREADS	BOX QTY.
6" (150 MM) STEEL EXTENSION & COUPLER		9" (225 MM) HIGH PRESSURE FLEXIBLE HOSE & COUPLER			
★G64R/B	43360	G64F-HP9/B	43370	1/8" BSPT	10
★G64R/M	43361	★G64F-HP9/M	43371	M10 × 1	10
G64R/N	43362	★G64F-HP9/N	43372	1/8" NPT	10

★ Best Seller

WARNING

Always use lubricator unit with air supply

33 Air Operated Grease Guns

Ideal for use in factory maintenance, agricultural applications, fleet service or for use on trucks connected to vehicle air brake compressors

Available in 2 versions

a. **Intermittent (PGG)**
Grease discharge with every press of trigger

b. **Automatic (AGG)**
Continuous grease discharge with the trigger pressed

Available in 2 choices

a. 6" (150 mm) steel extension & coupler
b. 12" (300 mm) × 0.33" (8.5 mm) flexible hose & coupler

Pressure Ratio 40:1

Heavy Duty aluminum die cast head with internal bore precision honed for rapid action. Fitted with bulk loader valve

Ergonomic pistol grip and acute angle design for ease of operation, especially in narrow spaces

Air Inlet threaded 1/4" (F). Each gun supplied with a male quick coupler fitting

SPECIFICATIONS

DEVELOPS	UPTO 4,800 PSI	UPTO 330 BAR
DELIVERS (PGG)	UPTO 1.30 OZ. /40 STROKES	UPTO 0.90 GM / SHOT
DELIVERS (AGG)	UPTO 14 OZ. / MINUTE	UPTO 400 GM / MINUTE
AIR OPERATING RANGE	40-120 PSI	3-8 BAR
PRESSURE RATIO	40:1	
AIR COMPRESSOR VOLUME	1 CFM @ 6 BAR	0.026 CBM @ 6 BAR
AIR INLET THREAD	1/4" (F)	

FILLING OPTIONS



WARNING

Always use lubricator unit with air supply

VARIANTS

INTERMITTENT (PGG)

PGG-1

∅ 2-1/4" (57.15 mm)

Intermittent action with grease discharge per shot

Use with 14 oz. (400 gms) grease cartridge or 500 cc bulk

4,800 PSI

PGG-4

∅ 63.5 mm

Intermittent action with grease discharge per shot

Use with 450 gms grease cartridge, popular in Australia & New Zealand

UPTO **0.9 GM** / SHOT

AUTOMATIC (AGG)

AGG-1

∅ 2-1/4" (57.15 mm)

Automatic action with continuous grease discharge

Use with 14 oz. (400 gms) grease cartridge or 500 cc bulk grease

4,800 PSI

AGG-4

∅ 63.5 MM

Automatic action with continuous grease discharge

Use with 450 gms grease cartridge, popular in Australia & New Zealand

UPTO **400 GM** / MIN.

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ.)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
6" (150 MM) STEEL EXTENSION & COUPLER		12" (300 MM) FLEXIBLE HOSE & COUPLER						
INTERMITTENT								
PGG/1R/B	43300	PGG/1F/B	43320	14	400	500	1/8" BSPT	12
PGG/1R/M	43301	PGG/1F/M	43321	14	400	500	M10 × 1	12
★PGG/1R/N	43302	PGG/1F/N	43322	14	400	500	1/8" NPT	12
PGG/4R/B	43380	PGG/4F/B	43385	-	450	650	1/8" BSPT	12
AUTOMATIC								
AGG/1R/B	43303	AGG/1F/B	43323	14	400	500	1/8" BSPT	12
AGG/1R/M	43304	AGG/1F/M	43324	14	400	500	M10 × 1	12
★AGG/1R/N	43305	AGG/1F/N	43325	14	400	500	1/8" NPT	12
AGG/4R/B	43381	AGG/4F/B	43389	-	450	650	1/8" BSPT	12

★ Best Seller

34 Air Operated Grease Gun Dual Mode

APGG

This 'ONE GUN' eliminates the need to have two separate guns

Patented Design
Fully automatic free outflow and single shot / grease discharge on demand in 'ONE GUN'

Dual Mode
Switch between continuous grease flow and single shot operation with the slide of a button

a. Continuous Mode

Slide backwards for Continuous Mode



b. Single Shot Mode

Press button for Single Shot operation



Built Tough
- Heavy duty Aluminium die cast head with precision honed internal bore
- Bulk loader doubles as an air bleeder
- Ergonomic pistol grip and acute angle design for balance and ease of use in narrow work spaces
- Powder coated barrel with clip for securing hose & coupler when not in use

Complete With
30" (760 mm) flexible grease hose & coupler

SPECIFICATIONS

DEVELOPS	UPTO 6,000 PSI	UPTO 413 BAR
DELIVERS (ONE SHOT MODE)	UPTO 1 OZ. /32 STROKES	UPTO 0.90 GM / STROKE
DELIVERS (CONTINUOUS MODE)	UPTO 400 GM / MINUTE	UPTO 14 OZ. / MINUTE
AIR OPERATING RANZGE	40 - 120 PSI	3 - 8 BAR
AIR COMPRESSOR VOLUME	1 CFM @ 6 BAR	0.026 CBM @ 6 BAR
AIR INLET THREAD	1/4"(F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	CARTRIDGE CAPACITY (OZ)	CARTRIDGE CAPACITY (GMS)	BULK CAPACITY (CM^3)	THREADS	BOX QTY.
APGG/1F-30/B	43364	14	400	500	1/8" BSPT	10
APGG/1F-30/M	43365	14	400	500	M10 X 1	10
APGG/1F-30/N	43366	14	400	500	1/8" NPT	10
APGG/4F-30/B	43367	-	450	650	1/8" BSPT	10

FILLING OPTIONS



35 USB Rechargeable Battery Grease Gun

RGG

NEW!

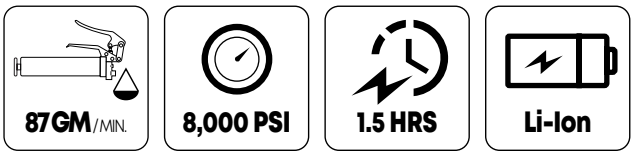

World's first battery grease gun with inbuilt battery

Pumps 3 times higher than manual grease guns

Robust aluminium die cast head fitted with air release valve

Barrel in premium powder coated finish

Inbuilt, lightweight & compact battery :

- **2000 mAh Lithium-Ion battery powers the 12V motor** Empties upto 7 (14oz./400gms) grease cartridges on full charge



- **Fast charging** of battery via Type-C charging cable

Designed for everyday maintenance jobs in garages, workshops & other applications

Inbuilt battery

Charging Cable Included

Complete with

- Grease Gun Assembly
- 30" (750 mm) High Pressure Hose with Spring Guard
- 3 Jaw Hydraulic Coupler



HOS/BG/30/N
Hose

HC/18/3/N
3 Jaw Coupler

Battery Inside
Built-in rechargeable
2000 mAh Lithium-Ion battery

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	CARTRIDGE CAPACITY		BULK CAPACITY	BOX QTY.
			(OZ.)	(GMS)	(CM3)	
RGG/12L	47380	Rechargeable grease gun	14	400	500	1
SPARE PARTS & ACCESSORIES						
HOS/BG/30/N	47256	30" (760 MM) Replacement hose				3
HC/18/3/N	43509	3 Jaw Coupler				500

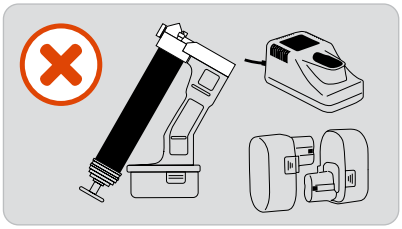

No more bulky grease guns and separate batteries

36 Battery Powered Grease Gun

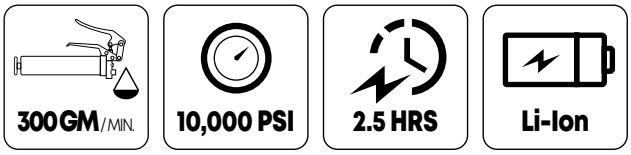

The new revolutionary Battery Powered Grease Gun

Powerful 20V high torque Motor

2 Speed Design
Easy switch between high pressure & high volume setting to match application

a. **High Pressure**
b. **High Volume**

4000 mAh Lithium Ion Battery
Fully charged battery dispenses upto 26 cartridges in free flow condition



Unmatched Safety
Automatic electric cut-off when pressure exceeds

- 10,000 PSI (690 BAR) on high pressure mode
- 5,000 PSI (345 BAR) on high volume mode

Available in multiple configurations:
Groz battery & charger for use with standard 14 oz. (400 gms) & 450 gms grease cartridges, 400 gms & 500 gms threaded cartridges or with battery adaptors to suit leading battery platforms

SPECIFICATIONS

HIGH PRESSURE MODE		
PRESSURE	UPTO 10,000 PSI	UPTO 690 BAR
DELIVERS	UPTO 3 OZ. / MINUTE	UPTO 85 GM / MINUTE
HIGH VOLUME MODE		
PRESSURE	UPTO 5,000 PSI	UPTO 345 BAR
DELIVERS	UPTO 10.5 OZ. / MINUTE	UPTO 300 GM / MINUTE

FILLING OPTIONS

Pre-set Grease Discharge
14 pre-set positions to control specific grease outflow. Eliminates the use of a Grease Meter

Rotate knob to set at pre-defined grease discharge

POSITION	MAX. GREASE DISPENSED	
	(OZ.)	(GMS)
1	0.02	0.61
2	0.04	1.30
3	0.05	1.70
4	0.09	2.8
5	0.10	3
6	0.13	3.9
7	0.15	4.4
8	0.18	5.2
9	0.21	6
10	0.22	6.4
15	0.28	8.2
20	0.45	13
25	0.57	16.3
50	1.1	32

NEW!

ONE GUN, ANY BATTERY

The all new GROZ Battery Adaptor allows the grease gun to be used with multi-brand batteries

*when using branded battery, use the same brand charger

ADP/RB/DMM/BGG

Compatible with

20V Dewalt battery
18V Milwaukee battery
14.4V & 18V series Metabo batteries

ADP/RB/PHMB/BGG

Compatible with

18-20V Panasonic battery
18-20V Hikoki battery
18-20V Makita battery
18-20V Bosch battery

ORDERING INFORMATION

CAT. NR.	ORD. NR.	GREASE GUN ASSEMBLY	HOSE WITH COUPLER	GROZ 4000mAh LI-ION BATTERY	GROZ BATTERY CHARGER	FOR USE WITH 500 GM THREADED CARTRIDGES	FOR USE WITH 400 GM THREADED CARTRIDGES	BATTERY ADAPTOR	
								DMM	PHMB
ONE LI-ION BATTERY									
BGG/20-4/L1/US	47660	✓	✓	✓	✓ US plug	-	-	-	
BGG/20-4/L1/EU	47661	✓	✓	✓	✓ EU plug	-	-	-	
*BGG/F/20-4/L1/EU	47662	✓	✓	✓	✓ EU plug	✓	-	-	
BGG/LS/20-4/L1/EU	47663	✓	✓	✓	✓ EU plug	-	✓	-	
BGG/20-4/L1/UK	47664	✓	✓	✓	✓ UK plug	-	-	-	
BGG/20-4/L1/AU	47665	✓	✓	✓	✓ AU plug	-	-	-	
TWO LI-ION BATTERIES									
BGG/20-4/L2/US	47640	✓	✓	✓	✓ US plug	-	-	-	
BGG/20-4/L2/EU	47641	✓	✓	✓	✓ EU plug	-	-	-	
BGG/F/20-4/L2/EU	47642	✓	✓	✓	✓ EU plug	✓	-	-	
BGG/LS/20-4/L2/EU	47643	✓	✓	✓	✓ EU plug	-	✓	-	
BGG/20-4/L2/UK	47644	✓	✓	✓	✓ UK plug	-	-	-	
BGG/20-4/L2/AU	47645	✓	✓	✓	✓ AU plug	-	-	-	
WITH BATTERY ADAPTOR									
BGG/20/DMM	47666	✓	✓	-	-	-	-	✓	
BGG/20/PHMB	47672	✓	✓	-	-	-	-	-	✓
*BGG/F/20/DMM	47667	✓	✓	-	-	✓	-	✓	
BGG/LS/20/DMM	47668	✓	✓	-	-	-	✓	✓	
*BGG/F/20/PHMB	47670	✓	✓	-	-	✓	-	-	✓
BGG/LS/20/PHMB	47671	✓	✓	-	-	-	✓	-	✓

*Supplied without barrel

CAT NR.	ORD NR.	DETAILS
SPARES		
RB/BGG/20-4L1	47680	GROZ Rechargeable Battery 4000mAh
BC/BGG/20-4L1/US	47681	CE &ETL certified battery charger. 110V/60Hz, 20V US Plug
BC/BGG/20-4L1/EU	47682	CE &ETL certified battery charger. 220V/50Hz, 20V EU Plug
BC/BGG/20-4L1/UK	47683	CE &ETL certified battery charger. 220V/50Hz, 20V UK Plug
BC/BGG/20-4L1/AU	47684	CE &ETL certified battery charger. 220V/50Hz, 20V AU Plug
HOS/BG/40/N	47365	40" (1000mm) replacement hose
ADP/RB/DMM/BGG	47685	Battery adaptor compatible with Dewalt, Milwaukee & Metabo batteries
ADP/RB/PHMB/BGG	47689	Battery adaptor compatible with Panasonic, Hikoki, Makita & Bosch batteries

Constituents come in a Blow Mould Case with Shoulder Strap

37 Quick Lock Grease Couplers

HC-21

8,000 PSI

The GROZ Quick Lock Grease Couplers are designed for convenient engagement & dis-engagement in high pressure conditions

The engagement system moves inside the steel wall when the thumb lever is actuated. This provides additional back support to the mechanism in high pressure applications

Robust Construction
1-1/2" times stronger coupler body is heat treated to withstand high pressures without deformation

Case hardened rollers hold the coupler in position when subjected to high pressure applications

SPECIFICATIONS

PRESSURE	UPTO 8,000 PSI	UPTO 550 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
REGULAR			
HC/21/B	43544	1/8" BSPT	50
HC/21/M	43545	M10 × 1	50
HC/21/N	43546	1/8" NPT	50
HC/21/BSP	43547	1/8" BSP	50
EXTRA LONG			
HC/21L/B	43553	1/8" BSPT	20
HC/21L/M	43554	M10 × 1	20
HC/21L/N	43543	1/8" NPT	20
90° ANGLED			
◆ HC/21/90/B	43860	1/8" BSPT	20
◆ HC/21/90/M	43861	M10 x 1	20
◆ HC/21/90/N	43862	1/8" NPT	20

◆ New

REGULAR
QUICK LOCK GREASE COUPLER
- For open, accessible fittings
- Best for workshops, factories, and standard maintenance applications

EXTRA LONG
QUICK LOCK GREASE COUPLER
- Useful for greasing deep & recessed grease fittings with limited reach
- Especially useful in harvesters, U-joints, PTO shafts, axles etc.

90° ANGLED
QUICK LOCK GREASE COUPLER

NEW!

- Right-angled design enables greasing in tight, hard to reach & confined spaces.
- Perfect for pivot joints, hydraulic linkages, and compact machinery

38 Quick Connect Grease Coupler Super Grip

HC-23

5,000 PSI

Compact & easy access coupler: works with a "Forward Push" mechanism both for engaging & dis-engaging

Groz Super Grip Quick Connect Grease Coupler takes the pain out of greasing & offers

1. Quick connection of coupler on grease fittings
2. Convenient dis-engagement of coupler under high pressure
3. Hands free usage: SUPER GRIP jaws hold firmly onto the grease fitting with no chance of grease leakage
4. No grease splash during coupler dis-engagement

Robust construction with heat treated Spring Steel jaws.

4 Jaws move inside the hardened body during engagement

Hardened coupler body offers back support to the jaws, ensuring no deformation/damage to jaws under high pressure.

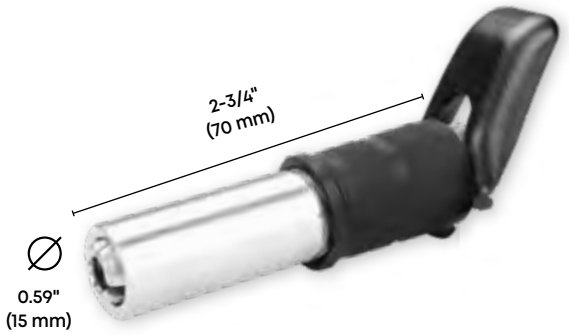

Convenient engagement & disengagement with a forward push

No more broken jaws
No more broken grease fittings
No more wastage
No more mess

SPECIFICATIONS

PRESSURE	UPTO 5,000 PSI	UPTO 345 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	THREAD	BOX QTY.
HC/23/4/B	43587	1/8" BSPT (F)	20
HC/23/4/M	43588	M10 × 1 (F)	20
HC/23/4/N	43589	1/8" NPT (F)	20

39 Hydraulic Couplers Standard

HC-11
HC-10

3,000 PSI

4 JAW

Narrow coupler design for use on fittings with limited access. Milled slot for easy tightening. Fully hardened spring steel jaws

Available with or without ball check

For hand operated grease gun only

∅ 0.59" (15 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	THREADS	BOX QTY.
WITH BALL CHECK		WITHOUT BALL CHECK			
HC/11/4/B	43510	HC/10/4/B	43516	1/8" BSPT	500
HC/11/4/M	43511	HC/10/4/M	43517	M10 × 1	500
★HC/11/4/N	43512	HC/10/4/N	43518	1/8" NPT	500

★ Best Seller

CAT NR.	ORD NR.	THREADS	BOX QTY.
SET - PACK OF 54			
HC/11/4/B/ST54	43581	1/8" BSPT	12
HC/11/4/M/ST54	43582	M10 × 1	12
HC/11/4/N/ST54	43583	1/8" NPT	12

40 Hydraulic Couplers Professional

HC-14
HC-18

6,000 PSI

Hardened coupler body withstands high pressure without deformation. Fully hardened spring steel jaws. Hexagonal nut for easy tightening

For hand operated grease gun only

∅ 0.59" (15 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CAT NR.	ORD NR.	CAT NR.	ORD NR.	THREADS	BOX QTY.
4 JAW COUPLERS		3 JAW COUPLERS		4 JAW COUPLERS		3 JAW COUPLERS			
WITH BALL CHECK				WITHOUT BALL CHECK					
★HC/14/4/B	43500	HC/14/3/B	43503	HC/18/4/B	43535	HC/18/3/B	43507	1/8" BSPT	500
HC/14/4/M	43501	HC/14/3/M	43504	HC/18/4/M	43536	HC/18/3/M	43508	M10 × 1	500
★HC/14/4/N	43502	★HC/14/3/N	43505	★HC/18/4/N	43537	HC/18/3/N	43509	1/8" NPT	500

★ Best Seller

CAT NR.	ORD NR.	THREADS	BOX QTY.
SET - PACK OF 54			
HC/14/4/B/ST54	43584	1/8" BSPT	12
HC/14/4/M/ST54	43585	M10 × 1	12
HC/14/4/N/ST54	43586	1/8" NPT	12

41 Hydraulic Coupler Slim Line

HC-19

Slimmest jaw type grease coupler

Ideal for use in confined spaces & fittings with narrow access

Hardened coupler body withstands high pressure without deformation. Fully hardened spring steel jaws. Coupler nut & body can be hand tightened for adjusting to variation in grease nipple sizes

For hand operated grease gun only

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
HC/19/3/B	43590	1/8" BSPT	500
HC/19/3/M	43591	M10 × 1	500
* HC/19/3/N	43592	1/8" NPT	500

* Best Seller

42 Hydraulic Coupler Machined Jaw

HC-24



Precision machined jaw coupler for high pressure greasing applications

Jaw machined from high tensile steel & assembled into the coupler as single unit. On usage jaws break away from a single unit into 4 pieces making a perfect fit on the grease nipple

Body & jaws heat treated to withstand high pressures without deformation

For hand operated grease gun only

ORDERING INFORMATION

CAT. NR.	ORD. NR.	THREADS	BOX QTY.
HC/24/4/B	43593	1/8" BSPT	500
* HC/24/4/M	43594	M10 × 1	500
HC/24/4/N	43598	1/8" NPT	500

* Best Seller

43 Hydraulic Coupler Heavy Duty

HC-12

10,000 PSI

BALL CHECK

Hardened coupler body with double wall thickness withstands high pressure without deformation. Fully hardened spring steel jaws. Hexagonal nut for easy tightening

For hand and air operated grease gun only

∅ 0.67" (17 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
4 JAW COUPLERS			
HC/12/4/B	43520	1/8" BSPT	500
HC/12/4/M	43521	M10 × 1	500
* HC/12/4/N	43522	1/8" NPT	500
3 JAW COUPLERS			
HC/12/3/B	43523	1/8" BSPT	500
HC/12/3/M	43524	M10 × 1	500
HC/12/3/N	43525	1/8" NPT	500

* Best Seller

44 Hydraulic Coupler Air-O

HC-P

7,500 PSI

3 JAW

BALL CHECK

Recommended for use with grease control valves

Hardened coupler body & all internal parts withstand high dynamic pressures without deformation. Fully hardened reversible spring steel jaws for extended service life. Hexagonal nut for easy tightening

100% pressure tested

∅ 0.67" (17 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
3 JAW COUPLERS			
HC/P/3/B	43540	1/8" BSPT	400
HC/P/3/M	43541	M10 × 1	400
* HC/P/3/N	43542	1/8" NPT	400

* Best Seller

45 Hydraulic Coupler 90°

HC-R

1,000 PSI

WITHOUT BALL CHECK

Designed for right angled discharge of grease

Very useful for greasing fittings with limited access or in low heights where a grease gun with regular coupler is difficult to use, such as on Chrysler models

Fits all standard grease guns

For hand operated grease gun only

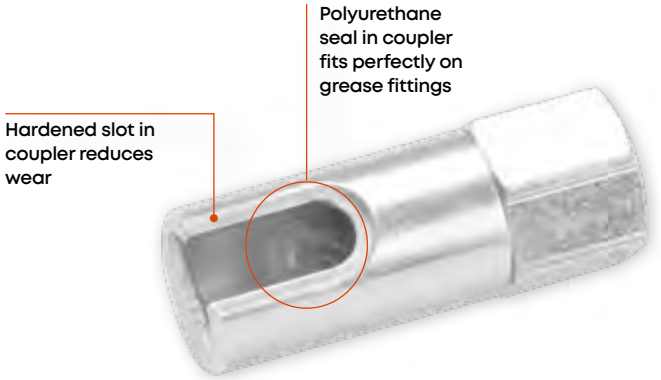

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
HC/R/01/B	43550	1/8" BSPT	500
HC/R/01/M	43551	M10 × 1	500
★HC/R/01/N	43552	1/8" NPT	500

★ Best Seller

Right angled coupler used for greasing the axle of a low height truck where access to the grease fittings is only through a side

46 Hydraulic Coupler 360°

HC-SW

7,000 PSI

3 JAW

BALL CHECK

An excellent coupler for effective lubrication of difficult & hard to reach grease fittings

Fully hardened jaws. Hardened coupler body & swivel joints withstand high-pressure applications without deformation

Spring loaded ball check valve helps retain pressure

For hand operated grease gun only

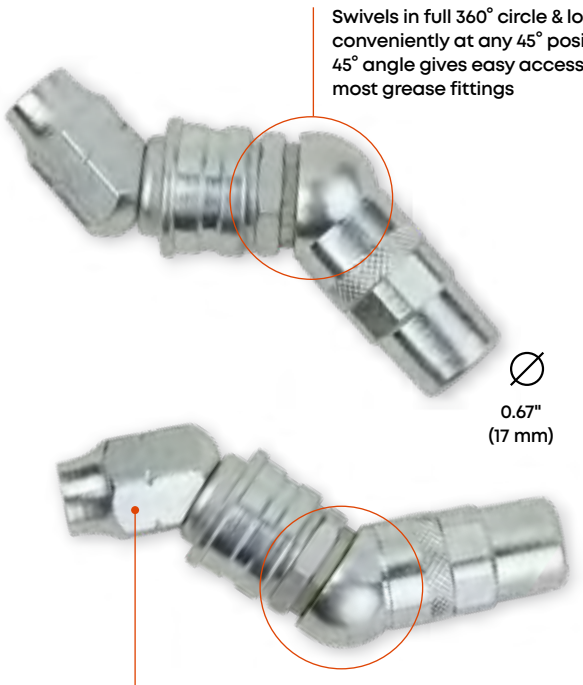

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
HC/SW/3/B	43560	1/8" BSPT	144
HC/SW/3/M	43561	M10 × 1	144
★HC/SW/3/N	43562	1/8" NPT	144

★ Best Seller

47 Slim Swivel Coupler 360°

HC-SW11

3,000 PSI | 4 JAW | BALL CHECK

Designed for convenient access into narrow, inaccessible greasing joints

Swivels in full 360° circle & locks conveniently at any 45° position. 45° angle gives easy access to most grease fittings

Spring steel jaws are fully hardened for extended service life

Spring loaded ball check valve helps retain pressure

Zinc plated finish

For hand operated grease gun only

SPECIFICATIONS

PRESSURE	UPTO 3,000 PSI	UPTO 207 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
HC/SW/11/4/B	43533	1/8" BSPT	10
HC/SW/11/4/M	43534	M10 x 1	10
HC/SW/11/4/N	43538	1/8" NPT	10

Convenient access into narrow, inaccessible greasing joints

48 Button Head Couplers

BHC-10 | HOC-1 | PCN-3 | PCN-1 | PCN-2

WITHOUT BALL CHECK

A range of couplers for use with button head grease fittings, found mostly on heavy machinery, agricultural or contractor's equipment

Zinc die cast construction

Metal seal for increased resistance to wear

For hand operated grease gun only

PCN-1
Fixed Push-On
5/8" (16 mm)
Button Head Fittings

3,000 PSI

BHC-10
Swivelling
5/8" (16 mm)
Button Head Fittings

3,000 PSI

PCN-3
Medium Duty
5/8" (16 mm)
Button Head Fittings

4,000 PSI

HOC-1
Fixed Hook-On
5/8" (16 mm)
Button Head Fittings

3,000 PSI

PCN-2
Heavy Duty
7/8" (22 mm)
Giant Button Head Fittings

4,000 PSI

ORDERING INFORMATION

CAT NR.	ORD NR.	FOR BUTTON HEAD FITTING SIZE		THREADS	BOX QTY.
		(INCH)	(MM)		
★BHC/10/B	43570	5/8	16	1/8" BSPT	200
BHC/10/N	43572	5/8	16	1/8" NPT	200
★HOC/1/B	43574	5/8	16	1/8" BSPT	250
HOC/1/M	43575	5/8	16	M10 × 1	250
HOC/1/N	43569	5/8	16	1/8" NPT	250

★ Best Seller

CAT NR.	ORD NR.	FOR BUTTON HEAD FITTING SIZE		THREADS	BOX QTY.
		(INCH)	(MM)		
PCN/1/B	43577	5/8	16	1/8" BSPT	250
PCN/1/M	43563	5/8	16	M10 × 1	250
PCN/1/N	43564	5/8	16	1/8" NPT	250
★PCN/3/B	43579	5/8	16	1/8" BSPT	250
★PCN/3/M	43565	5/8	16	M10 × 1	250
★PCN/3/N	43576	5/8	16	1/8" NPT	250
PCN/2/B	43578	7/8	22	1/8" BSPT	125
PCN/2/M	43566	7/8	22	M10 × 1	125
★PCN/2/N	43567	7/8	22	1/8" NPT	125

49 Grease Injector Needles

GIN

1,000 PSI

Used for lubrication in very tight spaces such as universal joints and sealed bearings. Equipped with grease fitting for quick connect operation

Available in two types
1. Standard
2. Safety version with aluminum holder for safe & easy handling

For hand operated grease gun only

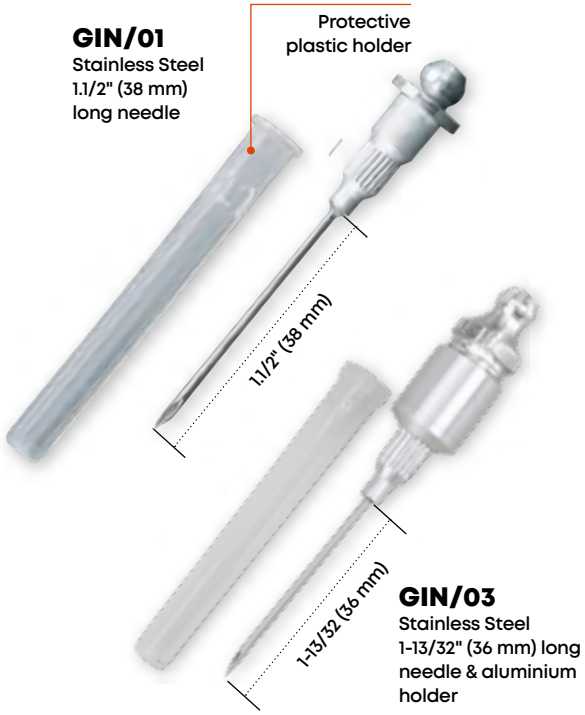

ORDERING INFORMATION

CAT NR.	ORD NR.	TYPE	NEEDLE LENGTH		NEEDLE THICKNESS (GAUGE)	BOX QTY.
			(INCH)	(MM)		
GIN/00	44879	Standard	1-1/2	38	16	1200
*GIN/01	44880	Standard	1-1/2	38	18	1200
GIN/02	44881	Standard	1-1/2	38	21	1200
GIN/03	44882	Safety	1-13/32	36	18	1200

* Best Seller

50 Needle Nose Dispensers

DNN

6,000 PSI

Used for dispensing a fine line of grease. Needle design allows easy access on hard to reach hydraulic type fittings in inaccessible areas. Can be directly attached to steel extensions or flexible hoses

For hand operated grease gun only

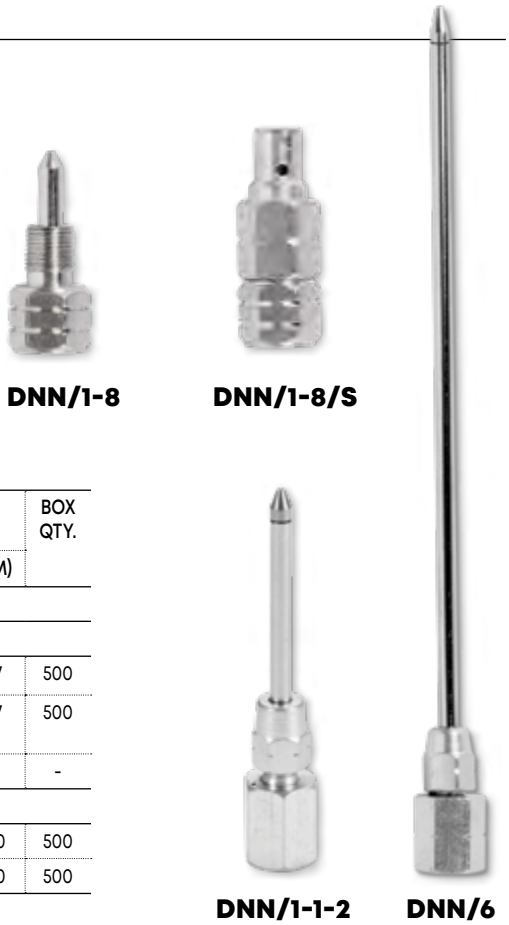

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	NEEDLE LENGTH		NEEDLE DIAMETER		TIP DIAMETER		BOX QTY.
				(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	
1/8" BSPT		1/8" NPT								
NEEDLE NOSE DISPENSERS										
DNN/1-8/B	44850	*DNN/1-8/N	44860	19/32	15	0.187	4.76	0.046	1.17	500
DNN/1-8/S/B (with shroud)	44853	-	-	19/32	15	0.187	4.76	0.046	1.17	500
S/DNN/1-8/B	44854	Replacement shroud only								-
NARROW NEEDLE NOSE DISPENSERS										
DNN/1-1-2/B	44851	*DNN/1-1-2/N	44861	1.1/2	38	0.156	3.96	0.051	1.30	500
DNN/6/B	44852	DNN/6/N	44862	6	150	0.156	3.96	0.051	1.30	500

* Best Seller

51 Seal Off Dispenser

Used for lubricating cars with grease plugs

Oil & grease resistant rubber tip

For hand operated grease gun only

Replacement tip available as spare

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
SOD/01/B	44870	1/8" BSPT	500
SOD/01/N	44871	1/8" NPT	500
TIP/SOD/01	44872	(Replacement Tip Only)	500

52 Professional Grade Grease

EP #2
GC-LB

GENERAL MULTI-PURPOSE EP GREASE

- Multi-purpose calcium complex grease with strong anti-wear properties for high-pressure applications in industrial, automotive & home usage
- Oxidation resistant formulation and corrosion protection properties extends equipment life

RECOMMENDED FOR

- Lubrication of wheel hub bearings, chassis and suspension of buses, trucks, and other transportation vehicles.
- All types of plain and anti-friction Ball and Roller Bearings and Bushings, Rack and Pinion, Gears, Linkages, Slides, Universal joints, Kingpins, Guides, Chains, Centralized lubrication systems, Electric motors, Pumps, EOT Cranes, Forklifts and other greasing applications.

14 OZ. (400 gms)

3 OZ. (85 gms)

DROP POINT
356°F / 180°C

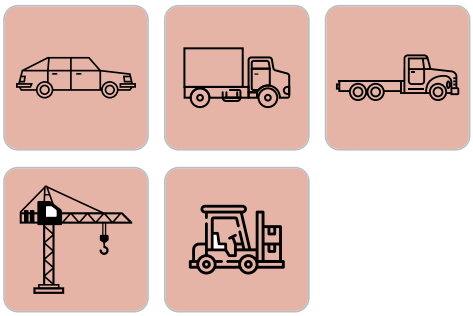

ORDERING INFORMATION

CAT NR.	ORD NR.	COLOR	THICKENER	WORKING TEMPERATURE RANGE		BOX QTY.
				°C	°F	
14 OZ. (400 GM)						
GRS/14C/CC/2G	70002	Red	Calcium Complex	-20 to 120	-4 to 250	40
GRS/14C/CS/2G	71502	Blue	Calcium Sulfonate Complex	-15 to 180	5 to 356	40
GRS/14C/PU/2G	72002	Green	Polyurea	-30 to 120	22 to 250	40
3 OZ. (85 GM)						
GRS/3C/CC/2G	70000	Red	Calcium Complex	-20 to 120	-4 to 250	40
GRS/3C/CS/2G	71500	Blue	Calcium Sulfonate Complex	-15 to 180	5 to 356	40
GRS/3C/PU/2G	72000	Green	Polyurea	-30 to 120	22 to 250	40

NEW!

MARINE EP GREASE

- Premium water resistant calcium sulfonate complex marine grease. Unique additives with special adhesive properties provide maximum lubrication even under most severe applications
- Timken OK load of 55 pounds

RECOMMENDED FOR

Chassis, wheels, plain and anti-friction bearings, fifth wheel plates, springs, trailers, open gears, pivot joints / shafts, outboard motor steering

DROP POINT
554°F / 290°C

14 OZ.
(400 gms)

3 OZ.
(85 gms)

HEAVY DUTY EP GREASE

- Long lasting Polyurea, washout-proof heavy-duty grease
- All temperature stable with outstanding film strength & strong adhesive properties makes it ideal for severe duty applications trucks, combines, construction equipment, lawn and ground equipment, & in industrial and automotive applications

RECOMMENDED FOR

High-speed bearings, axle bearings, and universal joints

DROP POINT
500°F / 260°C

14 OZ.
(400 gms)

3 OZ.
(85 gms)

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
SETS OF 3 PCS FOR 3 OZ. (85 GM) CARTRIDGES*			
GRS/3C/CC/2G/ST3	70400	3pc × Multi Purpose EP Grease (Red)	40
GRS/3C/CS/2G/ST3	71900	3pc × Marine EP Grease (Blue)	40
GRS/3C/PU/2G/ST3	72400	3pc × Heavy Duty EP Grease (Green)	40

*Can be customised in any configuration

53 Grease Gun Holder

GGH-01

Simple snap action clamps for safe storage of grease guns and suction guns

Manufactured from heavy gauge steel sheet with zinc plated finish

Mount on almost any surface

ORDERING INFORMATION

CAT NR.	ORD NR.	SUITABLE FOR	BOX QTY.
GGH/01	44840	2.1/4" (57.15 mm) on guns suitable for 14 oz. (400 gm) cartridge	180

54 Grease Gun Holder Heavy Duty

GGH-03

Heavy Duty Grease Gun holder, designed especially for use on farm & construction equipment, trailers, tractors & other automobiles in high vibration environment

Sturdy all steel construction with a 4 bolt design for convenient & secure mounting

Heavy Duty Spring

Suitable for use with

1. 14 oz. (400 gm) capacity grease guns with a 2-1/4" (57.15 mm) dia.
2. 450 gm capacity grease gun with a 63.5 mm dia. popular in Australia & New Zealand

ORDERING INFORMATION

CAT NR.	ORD NR.	SUITABLE FOR BARREL DIAMETER	BOX QTY.
GGH/03	44842	2.1/4" (57.15 mm) & 63.5 mm barrels	24

55 Grease Gun Holder Magnetic

GGH-M

NEODYMIUM MAGNETS

NEW!

Grease gun holder with powerful magnets on both sides

The back plate is equipped with powerful neodymium magnets that make it convenient to affix the holder to any metallic surface. Two magnets on the front panel hold the grease gun securely

The holder is designed for hand operated grease guns with barrel diameter upto 2-1/4" (57.15 mm)

Drip cup with magnets can also be affixed onto a metallic surface. The drip cup is a useful tool to arrest any grease drip, spillage or leakage in the work area especially in high temperature environments

Perfect for use in workshops, garages, manufacturing units, maintenance areas and inside trucks and vans

Magnetic Grease Gun Holder

Magnetic Drip Cup

MOUNTING OPTIONS

Magnet on back
Simply attach to any metallic surface

Wall Mounted
Holes to screw on the wall

Magnetic Drip Cup
Ensures no grease spillage

Fits barrel

∅ 2-1/4" (57.15 mm)



ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
GGH/M/01	44844	Magnetic Grease gun holder	10
DC/GGH/M/01	44941	Magnetic Drip Cup	10
GGH/M/01/DC	44942	Magnetic Grease gun holder with Magnetic Drip Cup	10

WARNING

Keep away from all electronic gadgets

56 Grease Gun Hoses

3,500 PSI

Grease flexible hoses allow greasing access to nipples with limited reach. Due to their flexible construction, these are used for greasing hard to reach grease fittings

Thermoplastic construction
- Inner diameter (d1): 0.14" (3.6 mm)
- Outer diameter (d2): 0.33" (8.5 mm)



Highly flexible with minimum bending radius of 1.57" (40 mm)

Zinc plated steel end connections with hydraulic crimping

For hand operated grease guns only

Also available
1. Hose fitted with spring guard
2. Hose fitted with professional 4 jaw coupler with ball check
3. Hose fitted with Swivel

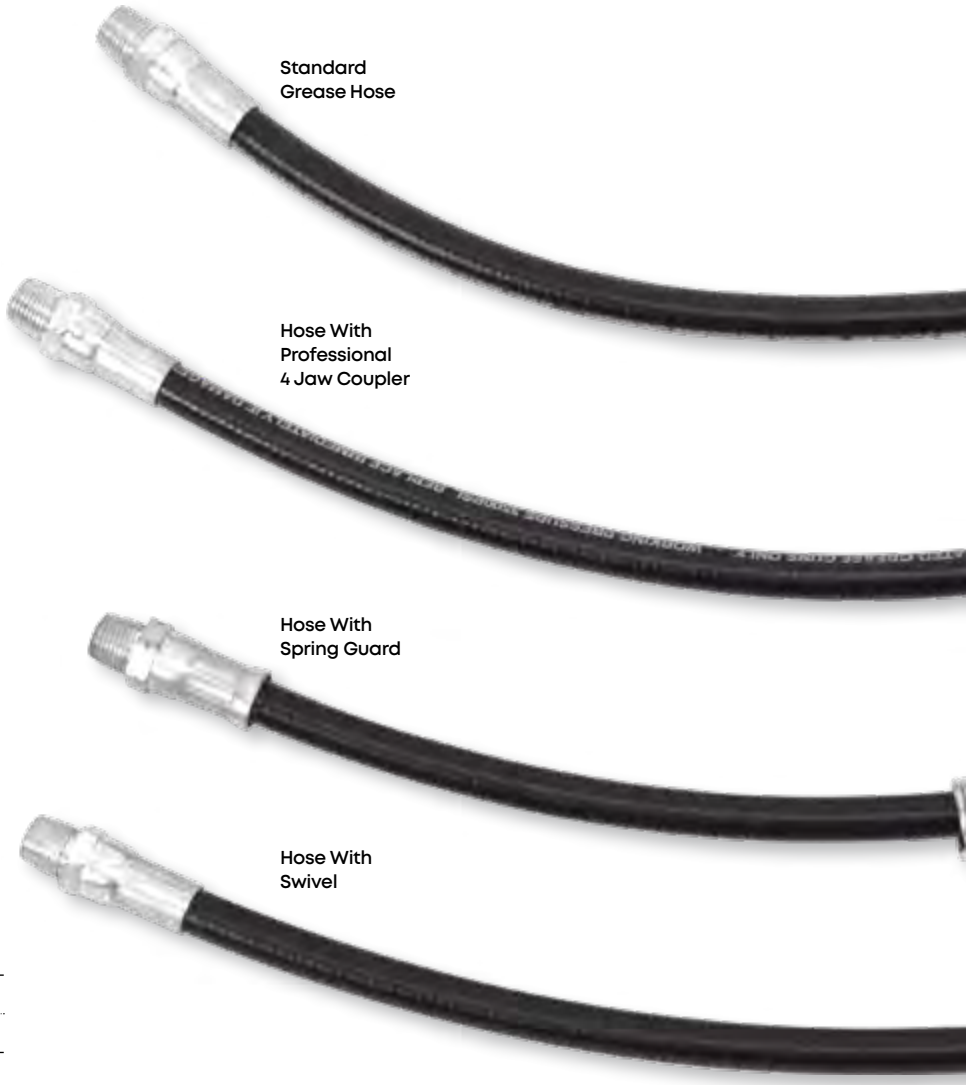

SPECIFICATIONS

WORKING PRESSURE	UPTO 3,500 PSI	UPTO 240 BAR
BURST PRESSURE	11,600 PSI	800 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CAT NR.	ORD NR.	LENGTH (END TO END)		BOX QTY.
						(INCH)	(MM)	
1/8" BSPT		M10 × 1		1/8" NPT				
STANDARD GREASE HOSE								
GHC-6/B	43600	GHC-6/M	43610	GHC-6/N	43620	6	150	1000
GHC-8/B	43601	GHC-8/M	43611	GHC-8/N	43621	8	200	500
GHC-9/B	43602	GHC-9/M	43612	GHC-9/N	43622	9	225	500
GHC-10/B	43603	GHC-10/M	43613	GHC-10/N	43623	10	250	300
★GHC-12/B	43604	GHC-12/M	43614	GHC-12/N	43624	12	300	300
★GHC-18/B	43605	GHC-18/M	43615	GHC-18/N	43625	18	450	200
GHC-20/B	43606	GHC-20/M	43616	GHC-20/N	43626	20	500	200

★ Best Seller

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH (END TO END)		THREADS	BOX QTY.
		(INCH)	(MM)		
HOSE WITH PROFESSIONAL 4 JAW COUPLER					
★GHC-12/HC/14/4/B	43630	12	300	1/8" BSPT	250
GHC-18/HC/14/4/B	43631	18	450	1/8" BSPT	250
★GHC-12/HC/14/4/M	43640	12	300	M10 × 1	250
GHC-18/HC/14/4/M	43641	18	450	M10 × 1	250
★GHC-12/HC/14/4/N	43650	12	300	1/8" NPT	250
★GHC-18/HC/14/4/N	43651	18	450	1/8" NPT	250

★ Best Seller

USEFUL TIPS!

Always buy a good quality hose. Accidents caused by poor quality hose can cause fatal injury

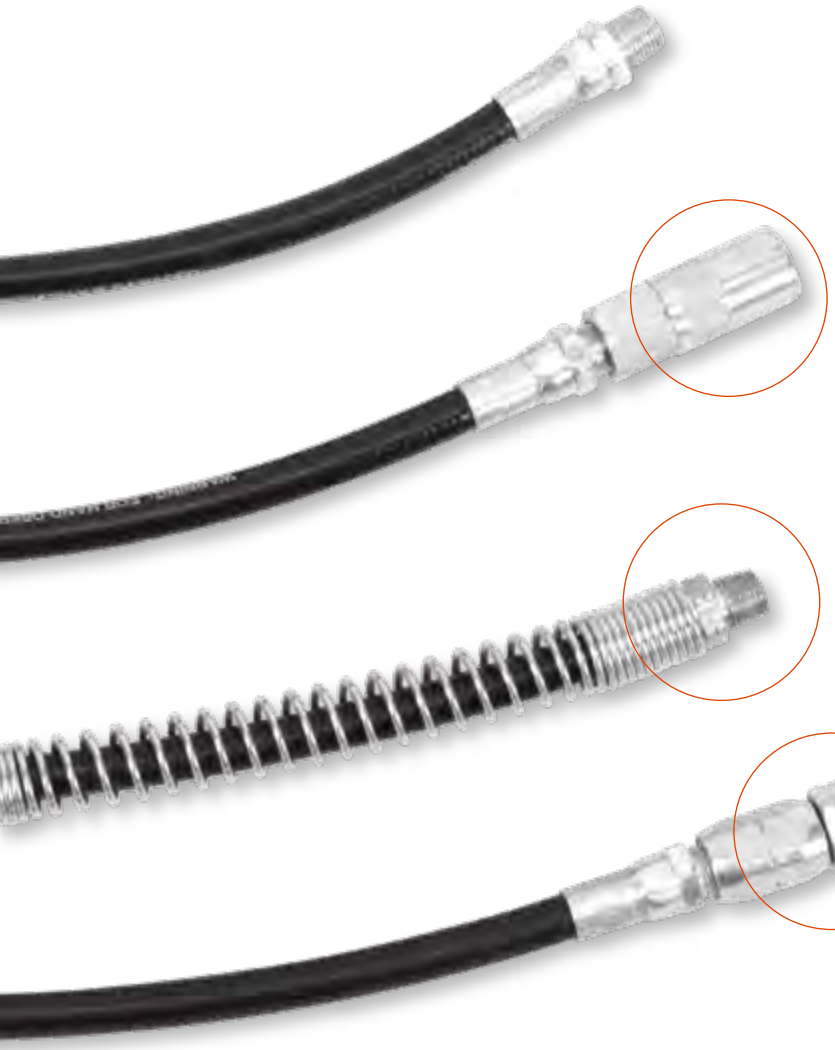

Hose fitted with Professional 4 Jaw Coupler with Ball Check

Hose fitted with heavy duty spring guard that imparts rigidity to the coupling end of the hose, allowing added safety & convenience in fit-ment

Hose fitted with swivel

Other lengths can be custom manufactured



WARNING

Never use beyond recommended working pressure

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH (END TO END)		THREADS	BOX QTY.
		(INCH)	(MM)		
HOSE WITH SPRING GUARD					
GHC-12/SPR/B	43660	12	300	1/8" BSPT	300
GHC-18/SPR/B	43661	18	450	1/8" BSPT	200
GHC-12/SPR/M	43670	12	300	M10 × 1	300
GHC-18/SPR/M	43671	18	450	M10 × 1	200
✶GHC-12/SPR/N	43680	12	300	1/8" NPT	300
✶GHC-18/SPR/N	43681	18	450	1/8" NPT	200

✶ Best Seller

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH (END TO END)		THREADS	BOX QTY.
		(INCH)	(MM)		
HOSE WITH SWIVEL					
GHC-12/SW/B	43685	12	300	1/8" BSPT	250
GHC-18/SW/B	43688	18	450	1/8" BSPT	250
GHC-12/SW/M	43686	12	300	M10 × 1	250
GHC-18/SW/M	43689	18	450	M10 × 1	250
GHC-12/SW/N	43687	12	300	1/8" NPT	250
GHC-18/SW/N	43690	18	450	1/8" NPT	250

57 Grease Gun Hoses Heavy Duty

5,800 PSI

Superior Construction – Inner tubing is polyamide with polyurethane sheathing, reinforced diagonally in highly tear resistant polyester

- Inner diameter (d1): 0.16" (4.1 mm)
- Outer diameter (d2): 0.425" (11 mm)



Large inner diameter makes them ideal for use in cold weather

Heavy duty zinc plated end connections hydraulically crimped to the hose

Rolled threads for extra strength

For hand & air operated grease guns

Also available
1. Hose fitted with heavy-duty spring guard. Used primarily with Grease Control Valves
2. Hose fitted with professional 4 jaw coupler with ball check

SPECIFICATIONS

WORKING PRESSURE	UPTO 5,800 PSI	UPTO 400 BAR
BURST PRESSURE	13,775 PSI	950 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH (END TO END)		THREADS	BOX QTY.
		(INCH)	(MM)		
STANDARD GREASE HOSE					
★GHC/HP-12/B	43700	12	300	1/8" BSPT	300
★GHC/HP-18/B	43701	18	450	1/8" BSPT	200
GHC/HP-20/B	43702	20	500	1/8" BSPT	200
★GHC/HP-12/M	43710	12	300	M10 × 1	300
★GHC/HP-18/M	43711	18	450	M10 × 1	200
★GHC/HP-20/M	43712	20	500	M10 × 1	200
GHC/HP-12/N	43720	12	300	1/8" NPT	300
★GHC/HP-18/N	43721	18	450	1/8" NPT	200
★GHC/HP-20/N	43722	20	500	1/8" NPT	200

★ Best Seller

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH (END TO END)		THREADS	BOX QTY.
		(INCH)	(MM)		
HOSE WITH PROFESSIONAL 4 JAW COUPLER					
★GHC/HP-12/HC/14/4/B	43730	12	300	1/8" BSPT	250
★GHC/HP-18/HC/14/4/B	43731	18	450	1/8" BSPT	250
★GHC/HP-12/HC/14/4/M	43740	12	300	M10 × 1	250
★GHC/HP-18/HC/14/4/M	43741	18	450	M10 × 1	250
★GHC/HP-12/HC/14/4/N	43750	12	300	1/8" NPT	250
★GHC/HP-18/HC/14/4/N	43751	18	450	1/8" NPT	250

★ Best Seller

USEFUL TIPS!

Always buy a good quality hose. Accidents caused by poor quality hose can cause fatal injury

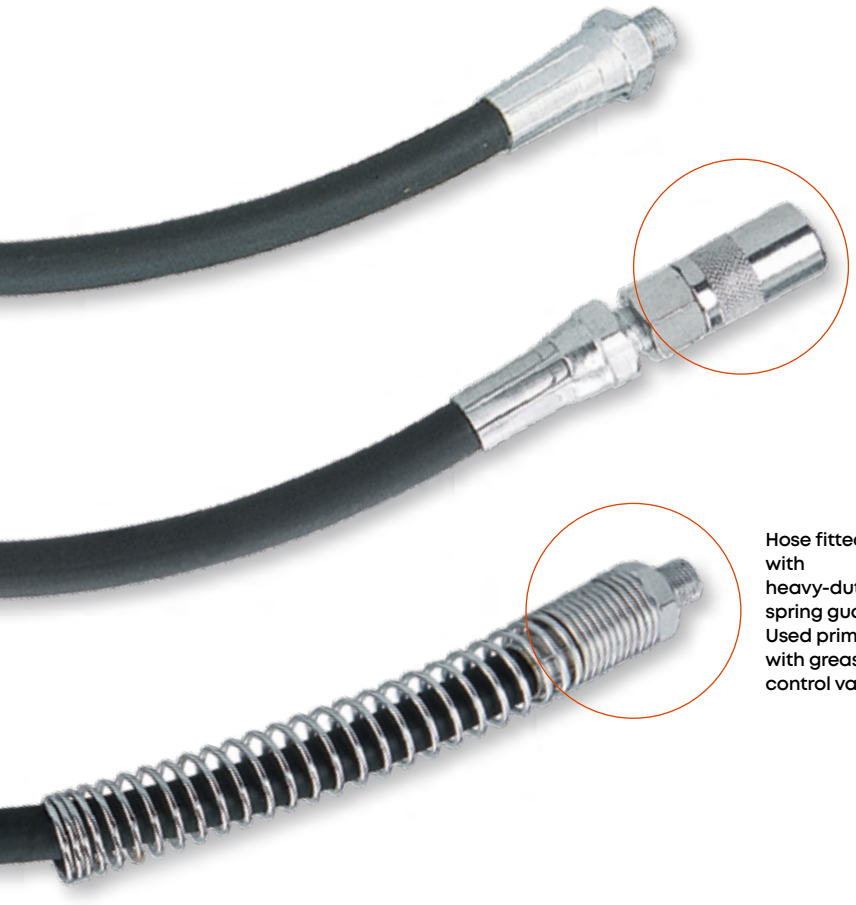

Hose fitted with Professional 4 Jaw Coupler with Ball Check

Hose fitted with heavy-duty spring guard. Used primarily with grease control valves



ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH (END TO END)		THREADS	BOX QTY.
		(INCH)	(MM)		
HOSE WITH SPRING GUARD					
GHC/HP-12/SPR/B	43760	12	300	1/8" BSPT	200
GHC/HP-18/SPR/B	43761	18	450	1/8" BSPT	200
GHC/HP-12/SPR/M	43770	12	300	M10 × 1	200
GHC/HP-18/SPR/M	43771	18	450	M10 × 1	200
* GHC/HP-12/SPR/N	43780	12	300	1/8" NPT	200
* GHC/HP-18/SPR/N	43781	18	450	1/8" NPT	200

* Best Seller

Other lengths can be custom manufactured

WARNING

Never use beyond recommended working pressure

58 Grease Gun Extension Flexible / Rigid

5,000 PSI

Grease Gun Extension with dual configuration
1. Rigid Steel extension 13" (330 mm) long
2. Flexible hose extension

Switch between the two by simply sliding the steel tube

Supplied complete with Grease Gun Coupler

Ideal for use with Grease Control valves

For hand & air operated grease guns

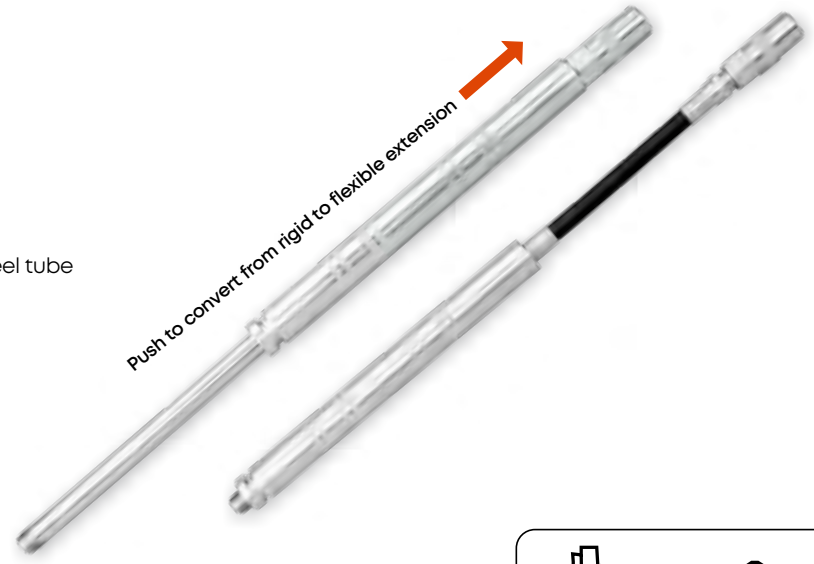

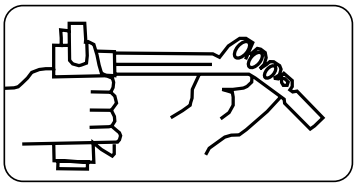

Switches with one hand

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
FRC/13/B	44810	1/8" BSPT	100
FRC/13/M	44811	M10 × 1	100
★ FRC/13/N	44812	1/8" NPT	100

★ Best Seller

59 Grease Gun Steel Extensions

6,000 PSI

Steel construction with bright zinc plated finish

High strength rolled threads on both ends

For hand operated grease guns only

Bent

Straight

ORDERING INFORMATION

CAT NR.	ORD. NR.	LENGTH (END TO END)		THREADS	BOX QTY.
		(INCH)	(MM)		
BENT					
GBP/6/B	44800	6	150	1/8" BSPT	500
GBP/6/M	44801	6	150	M10 × 1	500
GBP/6/N	44802	6	150	1/8" NPT	500
GBP/8/M	44804	8	200	M10 × 1	250
GBP/18/N	44809	18	450	1/8" NPT	100

CAT NR.	ORD. NR.	LENGTH (END TO END)		THREADS	BOX QTY.
		(INCH)	(MM)		
STRAIGHT					
GSP/4/B	44820	4	100	1/8" BSPT	500
GSP/4/M	44821	4	100	M10 × 1	500
GSP/4/N	44822	4	100	1/8" NPT	500
GSP/5/N	44823	5	125	1/8" NPT	500
GSP/6/B	44827	6	150	1/8" BSPT	500
GSP/6/N	44829	6	150	1/8" NPT	500
GSP/8/M	44817	8	200	M10 × 1	250

Note
Other lengths can be custom built on request

60 Air Bleeder Valves

ARV

Spare bleeder valves for grease guns

Available in manual & automatic versions

Vents air pockets in grease guns efficiently

Zinc plated finish

Manual Automatic



Press down to release trapped air in grease

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
MANUAL			
ARV/01/B	44839	1/8" BSPT'	10
ARV/01/M	44837	M10 × 1	10
ARV/01/N	44838	1/8" NPT	10
AUTOMATIC			
SA/ARV/G70/B	44897	1/8" BSPT	10
SA/ARV/G70/M	44898	M10 × 1	10
SA/ARV/G70/N	44899	1/8" NPT	10

61 Bulk Loaders/ Filler Nipples

Spare loader valves for bulk loading grease guns using filler pump

Built in ball check

Zinc plated finish

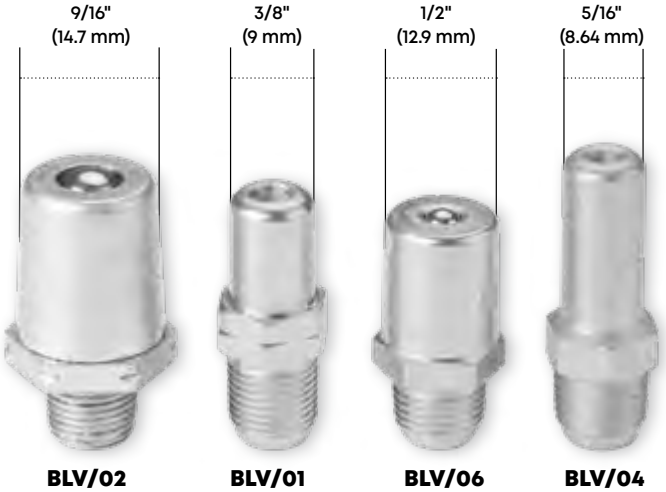

BLV/02 BLV/01 BLV/06 BLV/04

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CAT NR.	ORD NR.	TYPE	BOX QTY.
1/8" BSPT		M10 × 1		1/8" NPT			
BLV/01/B	44830	BLV/01/M	44833	BLV/04/N	44835	Straight	10
BLV/02/B	44831	-	-	BLV/02/N	44834	Tapered	10
-	-	-	-	BLV/06/N	44836	Tapered	10

Used on GROZ Grease Guns as standard

62 Grease Feeders

Grease Feeders are used to provide single point controlled lubrication for all types of bearing housings

Eliminate difficulties arising due to over or under greasing

Working on a spring compression mechanism, the design regulates grease discharge in proportion to changing spring pressure, thus maintaining constant discharge pressure of 1-2 PSI

1/8" (M) steel adaptor at the tail end fits directly onto bearing housings

Can be mounted in any position for easy visual inspection of grease levels

Assembled with medium duty spring, the light & heavy duty springs come as spares in the pack and can be easily interchanged depending upon application

Reusable: Can be refilled easily with immediate activation

Thread converters & angle adaptors available as spares

Remote Refill kit also available that permits remote filling of grease from distances up to 3 meters (10')

RECOMMENDED USE

For use with NLGI 0 to 4 non separating grease on any equipment that

- has anti friction, oscillating or roller bearings
- has shielded bearings with seals
- has bronze, olite or open bearings
- requires bearing flushing action

WARNING

Do not use with ESTER based greases, synthetic greases such as aeroshell 33 grease, aeroshell 7 grease, skydrol products etc. These have an adverse effect on polycarbonate & can cause fogging , cracking & fracturing

GFD/PP

DOME	Polycarbonate
BASE	Nylon
TEMPERATURE	-23°C to 121°C (-10°F to 250°F)
APPLICATION	Static Non Vibratory Conditions

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	BOWL CAPACITY		OPERATING CONDITION	OVERALL DIA.		OVERALL HEIGHT		BOX QTY.
				(OZ.)	(GMS)		(INCH)	(MM)	(INCH)	(MM)	
1/8" BSPT THREADS		1/8" NPT THREADS									
POLYCARBONATE BOWL & NYLON BASE											
GFD/PP/1/B	47700	GFD/PP/1/N	47720	1	28	Static	1-3/4	45	3-5/8	92	36
GFD/PP/2/B	47701	GFD/PP/2/N	47721	2	56	Static	2-3/8	60	4-5/8	117	36
GFD/PP/6/B	47702	GFD/PP/6/N	47722	6	170	Static	3	75	6	150	32
POLYCARBONATE BOWL & ALUMINIUM BASE											
GFD/PA/1/B	47703	GFD/PA/1/N	47723	1	28	Dynamic	1-3/4	45	3-5/8	92	36
★GFD/PA/2/B	47704	★GFD/PA/2/N	47724	2	56	Dynamic	2-3/8	60	4-5/8	117	36
★GFD/PA/6/B	47705	★GFD/PA/6/N	47725	6	170	Dynamic	3	75	6	150	32
POLYCARBONATE BOWL & NICKEL PLATED ALUMINIUM BASE											
GFD/PAN/1/B	47706	GFD/PAN/1/N	47726	1	28	Corrosive	1-3/4	45	3-5/8	92	36
GFD/PAN/2/B	47707	GFD/PAN/2/N	47727	2	56	Corrosive	2-3/8	60	4-5/8	117	36
GFD/PAN/6/B	47708	GFD/PAN/6/N	47728	6	170	Corrosive	3	75	6"	150	32
BOROSILICATE BOWL & ALUMINIUM BASE											
GFD/BA/4/B	47709	GFD/BA/4/N	47729	4	113	High Temperature / Nuclear Environments	3-1/4	82	7-1/8	181	10
REMOTE GREASE REFILL KIT											
GFD/RK/1	47790	3 m (10') Grease Hose with all fittings									20

★ **Best Seller**

GFD/PA

DOME	Polycarbonate
BASE	Die Cast Aluminium
TEMPERATURE	-23°C to 121°C (-10°F to 250°F)
APPLICATION	Dynamic applications involving vibration & shocks

GFD/PAN

DOME	Polycarbonate
BASE	Die Cast Aluminium with Nickel Plating
TEMPERATURE	-23°C to 121°C (-10°F to 250°F)
APPLICATION	Corrosive environment: Dynamic applications involving vibrations & shock: chemical plants, food industry etc.

GFD/BA

DOME	Tempered borosilicate with stainless steel cap
BASE	Aluminium
TEMPERATURE	-23°C to 232°C (-10°F to 450°F)
APPLICATION	Very high temperature applications: nuclear plants, steel mills, lumber drying kilns etc.

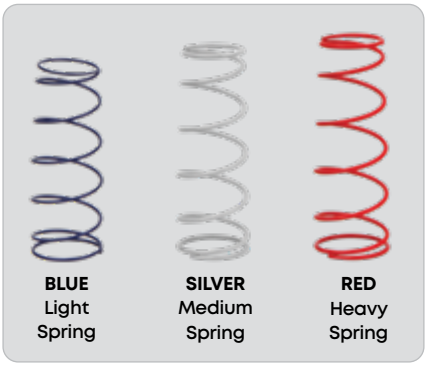

SPRING SELECTION GUIDE

OPERATING TEMPERATURE		NLGI GREASE TYPE				
FROM	TO	NO. 0	NO. 1	NO. 2	NO. 3	NO. 4
-23°C (-10°F)	4°C (40°F)	Blue	Silver	Red	-	-
4°C (40°F)	43°C (110°F)	Blue	Silver	Silver	Red	-
43°C (110°F)	93°C (200°F)	-	Blue	Silver	Silver	Red
93°C (200°F)	121°C (250°F)	-	-	Blue	Silver	Red

SIZE SELECTION GUIDE

BEARING SHAFT DIA.	UPTO 1-1/2" (38 MM)				1-1/2" (38 MM) & OVER			
OPERATING CONDITION	INTERMITTENT		CONTINUOUS		INTERMITTENT		CONTINUOUS	
CLASS OF BEARING	OPEN	SEALED	OPEN	SEALED	OPEN	SEALED	OPEN	SEALED
UNDER 1000 RPM	1 OZ.	1 OZ.	1 OZ.	1 OZ.	2 OZ.	2 OZ.	2 OZ.	2 OZ.
1000 TO 2500 RPM	1 OZ.	1 OZ.	1 OZ.	1 OZ.	2 OZ.	2 OZ.	6 OZ.	6 OZ.
OVER 2500 RPM	2 OZ.	1 OZ.	2 OZ.	2 OZ.	6 OZ.	6 OZ.	6 OZ.	6 OZ.

63 Grease Fittings

6,000 PSI

IATF 16949 approved manufacturing

Available in a range of materials: EN-1A steel, 303 Stainless Steel, Brass etc.

Heat treated to SAE J534 specification with hardness on greasing end to a minimum of 83 on Rockwell 15N scale with a case depth of 0.005" (0.13 mm) to 0.009" (0.23 mm)

Fittings with ball check use heat treated springs for increased life

Steel fittings are plated zinc with a plating thickness of 0.0002" (5 microns) conforming to SAE J534 specification & have a guaranteed salt spray life of over 72 hours to red rust

Fitting profile & dimensions are accurately controlled & conform to SAE, DIN, BS, JIS & IS standards

Plating conforms to relevant European standards

Also available 303 stainless steel fittings for marine applications

Available ready from stock in a large selection of popular types & sizes, with many more variations custom manufactured

SPECIFICATIONS

PRESSURE	UPTO 6,000 PSI	UPTO 413 BAR



1. STEEL FITTINGS

Grease Fittings Straight

Grease Fitting Angled - 30°

Grease Fitting Angled - 45°

Grease Fitting Angled - 65°

Grease Fitting Angled - 90°

Button Head Grease Fitting

Self Forming Threads

Drive Fittings

2. STAINLESS STEEL FITTINGS

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	DIMENSIONS (FOR GUIDANCE ONLY)				BOX QTY.
			EFFECTIVE THREAD LENGTH	SHANK LENGTH	OVERALL LENGTH	HEX SIZE	
1. STEEL FITTINGS							
METRIC							
6.0MM × 1.0MM TAPER THREADS							
✱GFT/6/1	46200	Straight	3.75 mm min.	5.5 mm max.	16.0 mm max.	7.0 mm	4000
✱GFT/6/1/45	46201	45°	4.5 mm min.	5.5 mm max.	21.0 mm max.	9.0 mm	2000
✱GFT/6/1/90	46202	90°	4.5 mm min.	5.5 mm max.	18.0 mm max.	9.0 mm	2000
GFT/6/1L	46219	Straight	3.75 mm min.	5.5 mm max.	28.8 mm max.	7.0 mm	2000
8.0 MM × 1.0 MM TAPER THREADS							
✱GFT/8/1	46220	Straight	5.5 mm min.	6.5 mm max.	16.0 mm max.	9.0 mm	4000
✱GFT/8/1/45	46222	45°	3.75 mm min.	5.5 mm max.	21.0 mm max.	9.0 mm	2000
✱GFT/8/1/90	46223	90°	3.75 mm min.	5.5 mm max.	18.0 mm max.	9.0 mm	2000
8.0 MM X 1.25 MM TAPER THREADS							
GFT/8/1.25	46221	Straight	3.75 mm min.	5.5 mm max.	17.0 mm max.	9.0 mm	4000
GFT/8/1.25/45	46224	45°	3.7 mm min.	5.5 mm max.	21.0 mm max.	9.0 mm	2000
GFT/8/1.25/90	46225	90°	3.7 mm min.	5.5 mm max.	18.0 mm max.	9.0 mm	2000
10.0 MM × 1 MM TAPER THREADS							
✱GFT/10/1	46230	Straight	3.75 mm min.	5.5 mm max.	16.0 mm max.	11.0 mm	4000
✱GFT/10/1/45	46231	45°	3.75 mm min.	5.5 mm max.	21.0 mm max.	11.0 mm	2000
✱GFT/10/1/90	46232	90°	3.75 mm min.	5.5 mm max.	18.0 mm max.	11.0 mm	2000
10.0 MM X 1.5 MM TAPER THREADS							
GFT/10/1.5	46240	Straight	3.75 mm min.	5.5 mm max.	18.0 mm max.	11.0 mm	4000
GFT/10/1.5/45	46241	45°	3.75 mm min.	5.5 mm max.	21.0 mm max.	11.0 mm	2000
GFT/10/1.5/90	46242	90°	3.75 mm min.	5.5 mm max.	18.0 mm max.	11.0 mm	2000
SAE-LT TAPER THREAD							
1/4" - 28 SAE-LT - TAPER THREAD							
✱GFT/1-4/28	46000	Straight	2.5 mm min.	4.6 mm	13.7 mm	5/16"	4000
GFT/1-4/28L	46002	Straight	5.1 mm min.	8.6 mm	17.3 mm	5/16"	4000
✱GFT/1-4/28/45	46003	45°	2.5 mm min.	5.1 mm	20.8 mm	3/8"	2000
GFT/1-4/28/65	46005	65°	2.5 mm min.	5.1 mm	18.5 mm	3/8"	2000
✱GFT/1-4/28/90	46006	90°	2.5 mm min.	5.1 mm	19.3 mm	3/8"	2000
BSPT PIPE THREADS							
1/8" × 28 BSPT - PIPE THREADS							
✱GFT/R/1-8/28	46113	Straight	3.75 mm	5.5 mm	16.0 mm max.	11.0 mm	4000
GFT/R/1-8/28L	46116	Straight	6.5 mm	8.0 mm	20.0 mm max.	11.0 mm	2000
✱GFT/R/1-8/28/45	46114	45°	3.75 mm	5.5 mm	21.0 mm max.	11.0 mm	2000
GFT/R/1-8/28/45L	46117	45°	6.5 mm	8.0 mm	26.3 mm	11.0 mm	2000
✱GFT/R/1-8/28/90	46115	90°	3.75 mm	5.5 mm	18.0 mm	11.0 mm	2000
GFT/R/1-8/28/90L	46118	90°	6.5 mm	8.0 mm	21.4 mm	11.0 mm	2000
1/4" × 19 BSPT - PIPE THREADS							
✱GFT/R/1-4/19	46103	Straight	4.2 mm	6.5 mm	17.5 mm	9/16"	2000
GFT/R/1-4/19/L	46106	Straight	9.2 mm	10.7 mm	23.5 mm	0.60"	2000
GFT/R/1-4/19/45	46104	45°	4.2 mm	6.5 mm	22.5 mm	9/16" or 14 mm	2000
GFT/R/1-4/19/90	46105	90°	4.2 mm	6.5 mm	22.0 mm	9/16" or 14 mm	2000

Grease Fittings (continued)

CAT NR.	ORD NR.	DESCRIPTION	DIMENSIONS (FOR GUIDANCE ONLY)				BOX QTY.
			EFFECTIVE THREAD LENGTH	SHANK LENGTH	OVERALL LENGTH	HEX SIZE	
NPT PIPE THREADS							
1/8" - 27 PIPE THREADS PTF - SPECIAL SHORT							
GFT/1-8/27S	46046	Straight	4.0 mm min.	5.95 mm	14.3 mm	7/16"	4000
*GFT/1-8/27	46035	Straight	4.6 mm min.	7.1 mm	16.8 mm	7/16"	4000
GFT/1-8/27L	46037	Straight	5.6 mm min.	19.3 mm	32.0 mm	7/16"	4000
GFT/1-8/27/30	46040	30°	5.6 mm min.	7.6 mm	22.9 mm	7/16"	2000
*GFT/1-8/27/45	46041	45°	5.6 mm min.	7.6 mm	21.8 mm	7/16"	2000
*GFT/1-8/27/65	46042	65°	5.6 mm min.	7.6 mm	21.8 mm	7/16"	2000
*GFT/1-8/27/90	46044	90°	5.6 mm min.	7.6 mm	21.3 mm	7/16"	2000
1/4" - 18 PIPE THREADS - SPECIAL EXTRA SHORT							
*GFT/1-4/18	46020	Straight	6.0 mm min.	10.7 mm	22.0 mm	9/16"	2000
GFT/1-4/18/45	46022	45°	5.75 mm min.	9.27 mm	29.74 mm	9/16"	2000
*GFT/1-4/18/65	46021	65°	5.6 mm min.	8.7 mm	24.6 mm	9/16"	2000
GFT/1-4/18/90	46023	90°	5.75 mm min.	9.27 mm	24.0 mm	9/16"	2000
PARALLEL THREADS							
UNF - PARALLEL THREADS							
GFT/1-4/28-UNF	46500	Straight 1/4"-28	2.5 mm min.	4.6 mm	15.0 mm	8.0 mm	4000
GFT/5-16/24-UNF	46501	Straight 5/16"-24	4.0 mm min.	6.35 mm	16.7 mm	7/16"	4000
GFT/3-8/24-UNF	46503	Straight 3/8"-24	4.4 mm min.	6.8 mm	16.7 mm	7/16"	4000
BSF - PARALLEL THREADS							
GFT/1-4/26-BSF	46520	Straight 1/4"-26	2.0 mm min.	4.6 mm	13.9 mm	7.0 mm	4000
GFT/5-16/22-BSF	46521	Straight 5/16"-22	2.5 mm min.	5.5 mm	15.0 mm	9.0 mm	4000
GFT/3-8/20-BSF	46522	Straight 3/8"-20	3.7 mm min.	5.5 mm	18.0 mm max.	11.0 mm	4000
SELF FORMING THREADS							
1/8" - 27 SPL. SELF FORMING THREADS							
GFT/1-8/27/SFT	46070	Straight	3.6 mm min.	6.1 mm	15.7 mm	7/16"	4000
GFT/1-8/27/45/SFT	46071	45°	2.8 mm min.	5.1 mm	19.8 mm	7/16"	2000
GFT/1-8/27/90/SFT	46072	90°	2.8 mm min.	5.1 mm	19.3 mm	7/16"	2000
1/4" - 28 SPL. SELF FORMING THREADS							
GFT/1-4/28/SFT	46030	Straight	2.5 mm min.	5.1 mm	14.0 mm	5/16"	4000
GFT/1-4/28/45/SFT	46031	45°	2.5 mm min.	4.8 mm	20.3 mm	3/8"	2000
GFT/1-4/28/90/SFT	46032	90°	2.5 mm min.	4.8 mm	19.3 mm	3/8"	2000
DRIVE FITTINGS							
DRIVE FITTINGS							
GFT/DF/3-16	46300	For 3/16" Drill	N.A	6.35 mm	13.1 mm	Dia. 5/16" (7.94 mm)	4000
*GFT/DF/1-4	46304	For 1/4" Drill	N.A	6.35 mm	13.9 mm	Dia. 11/32" (8.73 mm)	4000
GFT/DF/5-16	46302	For 5/16" Drill	N.A	6.35 mm	13.9 mm	Dia. 3/8" (9.53 mm)	4000
BUTTON HEAD GREASE FITTINGS							
PARALLEL THREADS							
GFT/BHC/1-4/19	46400	1/4" x 19 BSPF	7.0 mm min	10.7 mm	21.0 mm	15.24 mm	1000
GFT/BHC/1-8/28	46401	1/8" x 28 BSPF	4.0 mm min.	7.4 mm	15.3 mm	15.24 mm	1000
TAPER THREADS							
GFT/BHC/1-8/27	46420	1/8" - 27 PTF SAE spl. Short	4.76 mm min.	8.7 mm	19.0 mm	5/8"	1000
GFT/BHC/3-8/18	46421	3/8" - 18 NPTF	9.5 mm min.	12.3 mm	24.2 mm	3/4"	1000
GFT/BHC/1-4/18	46422	1/4" - 18 NPTF	6.75 mm min.	10.7 mm	21.0 mm	5/8"	1000

CAT NR.	ORD NR.	DESCRIPTION	DIMENSIONS (FOR GUIDANCE ONLY)				BOX QTY.
			EFFECTIVE THREAD LENGTH	SHANK LENGTH	OVERALL LENGTH	HEX SIZE	
2. STAINLESS STEEL FITTING							
STAINLESS STEEL GREASE FITTINGS							
1/4" - 28 SAE-LT TAPER THREAD							
GFT/SS/1-4/28	46600	Straight, 1/4" - 28 SAE LT	2.5 mm min.	4.6 mm	13.7 mm	5/16"	4000
GFT/SS/1-4/28/45	46601	45°, 1/4" - 28 SAE LT	2.5 mm min.	5.1 mm	20.8 mm	3/8"	2000
GFT/SS/1-4/28/90	46602	90°, 1/4" - 28 SAE LT	2.5 mm min.	5.1 mm	19.3 mm	3/8"	2000
1/8" - 27 PIPE THREAD PTF							
GFT/SS/1-8/27	46610	Straight, 1/8" - 27 PTF	4.6 mm min.	7.1 mm	16.8 mm	7/16"	4000
GFT/SS/1-8/27/45	46611	45°, 1/8" - 27 PTF	5.6 mm min.	7.6 mm	21.8 mm	7/16"	2000
GFT/SS/1-8/27/90	46612	90°, 1/8" - 27 PTF	5.6 mm min.	7.6 mm	21.3 mm	7/16"	2000
1/4" - 18 PIPE THREADS							
GFT/SS/1-4/18	46620	Straight, 1/4" - 18 PTF	6.0 mm min.	10.7 mm	22.0 mm	9/16"	1000
1/8" X 28 BSPT - TAPER THREADS							
GFT/SS/1-8/28	46640	Straight, 1/8" - 28 BSPT	3.75 mm min.	5.5 mm max.	16.0 mm max.	11.0 mm	4000
GFT/SS/1-8/28/45	46641	45°	3.75 mm min.	5.5 mm max.	21.0 mm max.	7/16"	2000
GFT/SS/1-8/28/90	46642	90°	3.75 mm min.	5.5 mm max.	18.0 mm max.		2000
6.0 MM X 1.0 MM TAPER THREADS							
GFT/SS/6/1	46630	Straight, M6 x 1	3.75 mm min.	5.5 mm max.	16.0 mm max.	7.0 mm	4000
GFT/SS/6/1/45	46631	45°	3.5 mm	5.5 mm	21.0 mm max.	23/64"	2000
GFT/SS/6/1/90	46632	90°	3.5 mm	5.5 mm	18.0 mm max.	23/64"	2000
8.0 MM X 1.0 MM TAPER THREADS							
GFT/SS/8/1	46633	Straight	3.5 mm	5.5 mm	16.0 mm max.	23/64"	4000
GFT/SS/8/1/45	46634	45°	3.5 mm	5.5 mm	21.0 mm max.	23/64"	2000
GFT/SS/8/1/90	46635	90°	3.5 mm	5.5 mm	18.0 mm	23/64"	2000
10.0 MM X 1.0 MM TAPER THREADS							
GFT/SS/10/1	46660	Straight	5.5 mm	6.5 mm	16 mm	7/16"	4000
GFT/SS/10/1/45	46661	45°	3.5 mm	5.5 mm	21.0 mm	7/16"	2000
GFT/SS/10/1/90	46662	90°	3.5 mm	5.5 mm	18.0 mm		2000

* Best Seller

64 Grease Fittings Sets

GFT-KIT

40 PCS - SAE

SAE grease fittings packed to a plastic box

THREAD SPEC.	STRAIGHT	45°	90°
1/8"-27 PTF	10	5	5
1/4"-28 SAE-LT	10	5	5

SS STAINLESS STEEL

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/KIT/SS/SAE-40	43982	25

50 PCS - BSPT

BSPT grease fittings packed to a plastic box

THREAD SPEC.	STRAIGHT	45°	90°
1/8"-28 BSPT	20	5	5
1/4"-19 BSPT	10	5	5

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
★ GFT/KIT/BSPT-50	43976	25

★ Best Seller

80 PCS - SAE

SAE grease fittings packed to a plastic box

THREAD SPEC.	STRAIGHT	45°	90°
1/8"-27 PTF	25	10	10
1/4"-28 SAE-LT	15	10	10

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
★ GFT/KIT/SAE-80	43972	25

★ Best Seller

100 PCS - SAE

SAE grease fittings & caps packed to a plastic box

THREAD SPEC.	STRAIGHT	45°	90°
1/8"-27 PTF	15	10	10
1/4"-28 SAE-LT	15	10	10
Grease Fitting Caps (Red) Extra Long	10		
Grease Fitting Caps (Yellow) Extra Long	10		
Grease Fitting Caps (Black) Extra Long	10		

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/GC/KIT/SAE-100	43980	25

110 PCS - SAE

SAE grease fittings packed to a plastic box

THREAD SPEC.	STRAIGHT	45°	90°
1/8"-27 PTF	30	15	15
1/4"-28 SAE-LT	20	15	15

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/KIT/SAE-110	43970	25

44 PCS - METRIC

Metric grease fittings packed to a plastic box

THREAD SPEC.	STRAIGHT	45°	90°
M6 × 1	10	6	6
M8 × 1	6		6
M10 × 1	10		

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
★ GFT/KIT/M-44	43981	25

★ Best Seller

80 PCS - METRIC

Metric grease fittings packed to a plastic box

THREAD SPEC.	STRAIGHT	90°
M6 × 1	20	10
M8 × 1	15	10
M10 × 1	15	10

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
★ GFT/KIT/M-80	43973	25

★ Best Seller

101 PCS - METRIC

Metric grease fittings & grease fitting tools packed to a plastic box

THREAD SPEC.	STRAIGHT	45°	90°
M6 × 1	30	5	10
M8 × 1	14		5
M10 × 1	20	5	10
ESO/1, Easy Out Tool (Small)		1	
ESO/2, Easy Out Tool (Large)		1	

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/ESO/KIT/M-101	43978	25

110 PCS - METRIC

Metric grease fittings packed to a plastic box

THREAD SPEC.	STRAIGHT	90°
M6 × 1	30	20
M8 × 1	20	10
M10 × 1	20	10

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/KIT/M-110	43971	25

110 PCS - METRIC

Metric grease fittings packed to a plastic box

THREAD SPEC.	STRAIGHT	45°	90°
M6 × 1	20	15	15
M8 × 1	10	10	10
M10 × 1	10	10	10

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/KIT/M-110A	43991	25

60 PCS - SAE

SAE grease fittings & couplers packed to a plastic box

THREAD SPEC.	STRAIGHT	45°	90°
1/8"-27 PTF	15	4	4
1/4"-28 SAE-LT	25	4	4
HC/14/4/N, Prof. 4 Jaw Coupler	1		
HC/12/4/N, HD 4 Jaw Coupler	1		
HC/R/01/N, 90° Coupler	1		
DNN/1-8/N, Needle Nose Dispenser	1		

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
KIT/GK/SAE-60	43984	25

60 PCS - METRIC

Metric grease fittings & couplers packed to a plastic box

THREAD SPEC.	STRAIGHT	90°
M6 × 1	20	4
M8 × 1	12	4
M10 × 1	12	4
HC/14/4/N, Prof. 4 Jaw Coupler	1	
HC/12/4/N, HD 4 Jaw Coupler	1	
HC/R/01/N, 90° Coupler	1	
DNN/1-8/N, Needle Nose Dispenser	1	

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
KIT/GK/M-60	43983	25

65 PCS - SAE

SAE grease fittings & assortments packed to a plastic box

THREAD SPEC.	STRAIGHT	45°	90°
1/8"-27 PTF	15	5	5
1/4"-28 SAE-LT	15	5	5
ESO/1, Easy Out Tool (Small)	1		
ESO/2, Easy Out Tool (Large)	1		
Grease Fitting Caps (Red) Extra Long	5		
Grease Fitting Caps (Yellow) Extra Long	5		
HC/14/4/N, Professional 4 Jaw Coupler	2		
THT/01, Grease Fitting Thread Tester	1		

Thread Tester

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/KIT/ULT/SAE-65	43985	25

100 PCS - METRIC

Metric grease fittings & caps packed to a plastic box

THREAD SPEC.	STRAIGHT	90°
M6 × 1	15	10
M8 × 1	15	5
M10 × 1	15	10
Grease Fitting Caps (Red) Extra Long	10	
Grease Fitting Caps (Yellow) Extra Long	10	
Grease Fitting Caps (Black) Extra Long	10	

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/GC/KIT/M-100	43979	25

101 PCS - SAE

SAE grease fittings & grease fitting tools packed to a plastic box

THREAD SPEC.	STRAIGHT	30°	45°	65°	90°
1/8"-27 PTF	22	5	10	10	10
1/4"-28 SAE-LT	22		10		10
ESO/1, Easy Out Tool (Small)	1				
ESO/2, Easy Out Tool (Large)	1				

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/ESO/KIT/SAE-101	43977	25

65 PCS - SAE+METRIC

Metric, SAE grease fittings & assortments packed to a plastic box

THREAD SPEC.	STRAIGHT	90°
1/8"-27 PTF	10	5
1/4"-28 SAE-LT	10	5
M6 × 1	10	
M8 × 1	10	
ESO/1, Easy Out Tool (Small)	1	
ESO/2, Easy Out Tool (Large)	1	
Grease Fitting Caps (Red) Extra Long	5	
Grease Fitting Caps (Yellow) Extra Long	5	
HC/14/4/N, Professional 4 Jaw Coupler	2	
THT/01, Grease Fitting Thread Tester	1	

Thread Tester

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/KIT/ULT/SM-65	43986	25

140 PCS - BSPT+UNF

UNF & BSPT grease fittings packed to a plastic box

THREAD SPEC.	STRAIGHT	90°
1/4"-28 UNF	40	20
5/16" -24 UNF	10	10
1/8" - 28BSPT	40	20

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/KIT/UNBS/140	43992	25

194 PCS - SAE

SAE grease fittings & assortments packed to a metal box

THREAD SPEC.	STRAIGHT	30°	45°	65°	90°
1/8" – 27 PTF	36	12	12	12	12
1/4" – 28 SAE	24	-	12	-	12
ESO/1, Easy Out Tool (Small)	1				
ESO/2, Easy Out Tool (Large)	1				
Grease Fitting Caps (Red) Standard	10				
Grease Fitting Caps (Green) Standard	10				
Grease Fitting Caps (Blue) Standard	10				
Grease Fitting Caps (Black) Standard	10				
Grease Fitting Caps (White) Standard	10				
Grease Fitting Caps (Yellow) Standard	10				

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/TW/ESO/KIT/SAE-194	43993	8

134 PCS - SAE

SAE grease fittings & assortments packed to a metal box

THREAD SPEC.	STRAIGHT	30°	45°	65°	90°
1/8" – 27 PTF	36	12	12	12	12
¼" – 28 SAE	24	-	12	-	12
ESO/1, Easy Out Tool (Small)	1				
ESO/2, Easy Out Tool (Large)	1				

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFT/TW/ESO/KIT/SAE-134	43994	8

65 Greasing Adaptors & Elbows

ADP

6,000 PSI

Very useful steel fittings used to adapt a threaded fitting to a different size opening thread

Steel construction with zinc plated finish for increased resistance to corrosion

SPECIFICATIONS

PRESSURE	UPTO 6,000 PSI	UPTO 413 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BODY	ANGLE	SHANK LENGTH (INCH)	OVERALL LENGTH (INCH)	BOX QTY.
ADAPTORS							
ADP/H/1-4F/1-8F	46800	1/8"-27 (F) × 1/4"-28 (F)	Hex	Straight	1/2	21/32	1000
ADP/H/1-4M/1-8F	46801	1/8"-27 (F) × 1/4"-28 (M)	Hex	Straight	1/2	7/8	1000
ADP/S/1-8M/1-8F	46802	1/8"-27 (F) × 1/8"-27 (M)	Square	Straight	1/2	7/8	1000
ELBOWS							
ADP/S/45/1-8M/1-8F	46803	1/8"-27 (F) × 1/8"-27 (M)	Square	45°	1/2	1	1000
ADP/R/45/1-4M/1-8F	46804	1/8"-27 (F) × 1/4"-28 (M)	Rounded	45°	1/4	13/16	1000
ADP/S/90/1-4M/1-8F	46805	1/8"-27 (F) × 1/4"-28 (M)	Square	90°	1/2	13/16	1000
ADP/S/90/1-8M/1-8F	46806	1/8"-27 (F) × 1/8"-27 (M)	Square	90°	1/2	1	1000

66 Grease Fitting Thread Tester

THT

Great tool box accessory to sort out mixed fittings

Aluminum construction with mounting holes

DESIGNED TO CHECK 21 MOST POPULAR THREAD TYPES:

THREAD TYPE	SIZE			
NPT	1/8"	1/4"	3/8"	
METRIC	M6 × 1	M6 × 0.75		
METRIC	M8 × 1	M8 × 1.25		
METRIC	M10 × 1	M10 × 1.5		
BSPT	1/8"	1/4"		
UNF/ANF	1/4"	5/16"	3/8"	
BSW	1/4"	5/16"	1/2"	3/8"
BSF	3/16"	1/4"	5/16"	

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
THT/01	44895	100

67 Grease Fitting Unblocker

GFU

Very useful tool to open clogged grease fittings and loosen hardened grease joints. Excellent for maintaining and protecting bearings, control arms, joints, king pins, etc.

All steel construction.

Designed to be tapped with a hammer to force a light viscosity oil through the tool into the coupler & finally into the grease joint, breaking up and removing dirt and debris

Built-In hand guard for added safety in use

Flexible hose attachment reaches fittings in difficult areas

Complete with grease coupler and 2 spare seals for replacing the piston seals as they wear out

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GFU/01	44894	60

68 Grease Fitting Installer 'Drive Fit'

FTS

FTA

Specialty tools for installing straight & angled drive-fit grease fittings into untapped holes

Steel construction in zinc plated finish

FTS/01

FTA/01

ORDERING INFORMATION

CAT NR.	ORD NR.	FITTING TYPE	BOX QTY.
FTS/01	44892	Straight	100
FTA/01	44893	Angled	100

69 Easy Out Tools

Handy, dual purpose tools for
- Removing worn and broken grease fittings
- Re-tapping holes for installing new grease fittings

Works both with straight & angled fittings

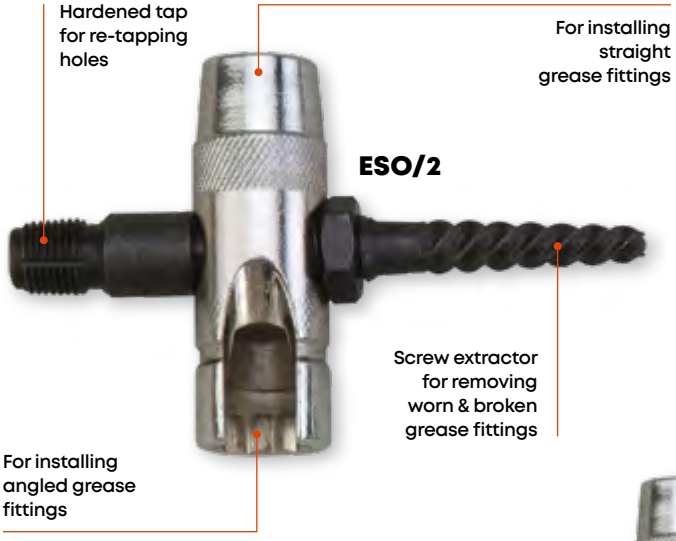

ORDERING INFORMATION

CAT NR.	ORD NR.	TYPE	OPENS FITTINGS WITH HEX SIZE	TAP RETHREADS	BOX QTY.
★ESO/1	44890	Small	5/16" & 3/8"	1/4" - 28	250
★ESO/2	44891	Large	3/8" & 7/16" (11 mm)	1/8" - 27	250

★ Best Seller

70 Greasing Fitting Caps

Plastic caps for grease fittings are an easy way to keep contaminants out.

Plastic caps are used to:
- Keep contaminants out
- Colour code greasing points based on type & frequency of greasing

Designed with an inbuilt collar, these are most convenient in use & fit directly onto the greasing end of the fitting

Made from a special plastic, these adjust to minor variations in fitting head diameter, as well as variations in temperature & practically fit all standard fittings designed for use with jaw type couplers

Available in a choice of 2 types:
1. Extra long
2. Standard

ORDERING INFORMATION

CAT NR.	ORD NR.	COLOUR	BOX QTY.
PACK OF 50			
CAP/GFT/BL/ST-50	46700	Black	500
CAP/GFT/RD/ST-50	46701	Red	500
CAP/GFT/YE/ST-50	46702	Yellow	500
CAP/GFT/BU/ST-50	46703	Blue	500
CAP/GFT/WH/ST-50	46704	White	500
CAP/GFT/GN/ST-50	46705	Green	500

EXTRA LONG

ESO

GFT-CAP

STANDARD

ORDERING INFORMATION

CAT NR.	ORD NR.	COLOUR	BOX QTY.
PACK OF 10			
CAP/SM/GFT/BL/ST10	46720	Black	500
CAP/SM/GFT/RD/ST10	46725	Red	500
CAP/SM/GFT/YE/ST10	46722	Yellow	500
CAP/SM/GFT/BU/ST10	46721	Blue	500
CAP/SM/GFT/WH/ST10	46723	White	500
CAP/SM/GFT/GN/ST10	46724	Green	500

71 Quick Connect Adaptors

QUICK CONNECTION SYSTEM

Quick Connect!
Connect or disconnect with a snap!
A simple and effective system that renders versatility to Grease Guns

Greasing in inaccessible, difficult to reach areas becomes very convenient with the use of any of the Quick Link accessories. No threads, no screwing or unscrewing, just snap on and use on sealed bearings, U-joints, high-pressure insert fittings and recessed fittings

Ready to use range is detailed in the following pages. Various other combinations, however can be devised based on specific application and need

The system is suitable for use with hand operated grease guns only

STEP 1
Retract sleeve of the quick connect system

STEP 2
Snap on the system by simply “Plugging On” the grease fitting to the coupler

STEP 3
Ensure that the quick connect system is secure

STEP 4
Release the sleeve of the quick connect system. The sleeve automatically slides over the coupler to encase it securely
To disconnect, simply reverse the operation

For hand operated grease gun only

Quick Connect Adaptors (Continued)

DNN/1-8/90/Q

1,000 PSI

Quick Connect Right Angled Needle Nose Dispenser

For dispensing a fine line of grease. The right angled design allows convenient access in shoulders & other confined areas

ORDERING INFORMATION

CAT NR.	ORD. NR.	BOX QTY.
DNN/1-8/90/Q	44913	100

HC/14/4/90/Q

6,000 PSI

Quick Connect Right Angled Grease Coupler

Right angle coupler fitted onto the quick disconnect adaptor. For quickly converting regular couplers for greasing fittings with limited access, in low height areas etc. Fits straight onto the grease gun coupler

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
HC/14/4/90/Q	44912	100

GIN/01/Q

1,000 PSI

Quick Connect Grease Injector Needle

Useful for lubricating in very tight spaces such as sealed bearings, universal joints etc. Comes complete with protective plastic holder

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GIN/01/Q	44914	100

RLA-01

1,000 PSI

Professional Recessed Lube Adaptor

For push on greasing of recessed fittings where obstructions would not permit the use of a regular hydraulic coupler

Tip
1/4" (6.35 mm)

Body Diameter
0.31" (8 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
RLA/01	44921	100

ALA-01

1,000 PSI

Professional 90° Angled Lube Adaptor

For greasing inaccessible grease fittings in shoulders and other confined areas

Greasing End Diameter
0.19" (4.9 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
ALA/01	44922	100

ANN-4

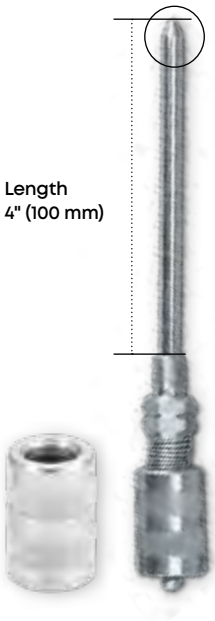

1,000 PSI

Needle Nose Adaptor

Useful for dispensing a fine line of grease through the needle nose in greasing hard to reach fittings on trucks, vans, and recreational vehicles

Supplied with a small and a large locking sleeve to fit all couplers

Tip
0.046" (1.17 mm)

Needle Diameter
1/4" (6.35 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
★ANN/4	44905	1/8" NPT	250

★ Best Seller

AQD

1,000 PSI

Needle Nose Adaptor

Useful for dispensing a fine line of grease through the needle nose for greasing hard to reach fittings on trucks, vans & recreational vehicles

Supplied with a small and a large locking sleeve to fit all couplers. Also available with protective shroud

Tip
0.046" (1.17 mm)

Needle Diameter
0.187" (4.76 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
AQD/11-16/B	44902	200
AQD/11-16/N	44903	200
AQD/11-16S/B (WITH SHROUD)	44904	200

ANN/1-1-2

1,000 PSI

Professional Narrow Needle Nose Adaptor

Designed for greasing flush or hard to reach hydraulic type fittings in inaccessible areas

Tip
0.059" (1.2 mm)

Needle Diameter
0.156" (3.96 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
★ANN/1-1-2	44920	100

★ Best Seller

Quick Connect Adaptors (Continued)

GBP/6/HC/14/4/Q

6,000 PSI

Coupler to Coupler Extension

6" (150 mm) angled delivery tube and 4 jaw professional coupler fitted onto the quick disconnect adaptor & serves as length extension

Fits straight onto the grease gun coupler.

Supplied with a small & large locking sleeve to fit all couplers

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GBP/6/HC/14/4/Q	44906	250

HC/SW/3/Q

6,000 PSI

Professional 360° Swivel Coupler

Useful for effective lubrication of difficult & hard to reach grease fittings. Coupler swivels in full 360° circle & can be locked at intervals of 45°

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
HC/SW/3/Q	44911	50

SOD/01/Q

1,000 PSI

Jaw type Coupler to Seal Off Dispenser

Seal Off Dispenser fitted onto the quick disconnect adaptor.

For converting regular couplers for lubricating automobiles with grease plugs etc.

Fits straight onto the grease gun coupler

Supplied with a small & large locking sleeve to fit all couplers

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
SOD/01/Q	44909	250

POC-1Q

3,000 PSI

Jaw Type Coupler to Button Head Coupler

Push on button head coupler fitted onto the quick disconnect adaptor.

Converting jaw type couplers to button head coupler for use on 5/8" (16 mm) button head grease fittings.

Fits straight onto the grease gun coupler

Supplied with a small & large locking sleeve to fit all couplers

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
POC/01/Q	44907	250

HC/R/01/Q

1,000 PSI

Regular Coupler to Right Angled Coupler

Right angle coupler fitted onto the quick disconnect adaptor

For converting regular couplers for greasing fittings with limited access, in low height areas etc.

Fits straight onto the grease gun coupler

Supplied with a small & large locking sleeve to fit all couplers

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
*HC/R/01/Q	44908	250

* Best Seller

GHC/GIN/Q

3,500 PSI

Quick Connect Grease Hose & Needle

Converts jaw type coupler to a grease injector needle for greasing in tight spaces eg. universal joints & sealed bearings

Hose enables access onto hard to reach fittings.

Supplied with a small & large locking sleeve to fit all couplers

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GHC/GIN/Q	44875	200

GHC-12/SPR/W/ADP

3,500 PSI

Quick Connect Hose

The Quick Connect Hose converts steel extension coupler assembly on grease guns to a flexible hose and allows the gun to be used for greasing hard to reach fittings.

Supplied with a small & large locking sleeve to fit all couplers

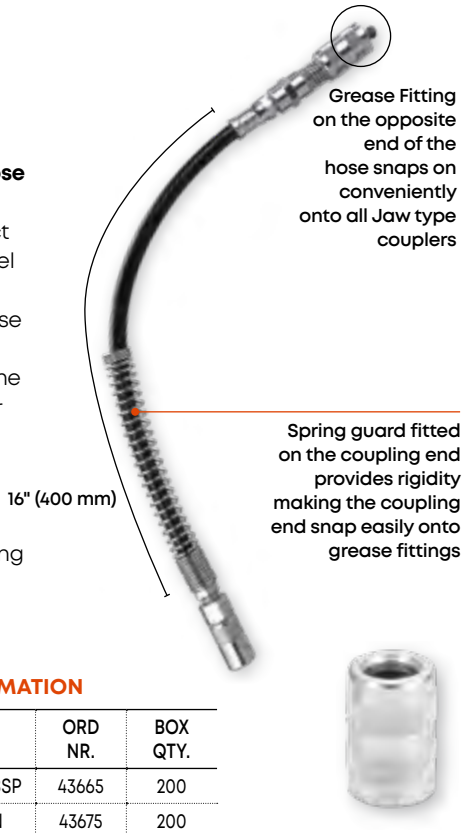

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GHC-12/SPR/W/ADP/BSP	43665	200
GHC-12/SPR/W/ADP/N	43675	200

HC-90Q

1,000 PSI

3 JAW

Quick Connect Coupler 90°

Coupler jaws fit perfectly on the grease fitting leaving hands free

3 jaw construction

Designed for 90° access, very useful for greasing fittings in low height vehicles, shoulders etc.

Fits all standard hand operated grease guns

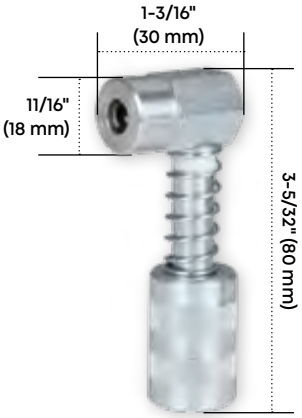

ORDERING INFORMATION

CAT NR.	ORD. NR.	BOX QTY.
HC/90/Q	44916	250

GROZ

72 Grease Gun Swivel

SWV

3,500 PSI

Grease Gun extension swivel threaded 1/8" Male × 1/8" Female

Female end of the swivel fits onto the Grease Gun extension & male end onto the Grease Gun coupler, enabling unrestricted movement without any bending, twisting or kink

All steel construction in plated finish

For hand operated grease gun only

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
SWV/1-8M/1-8F/B	44885	1/8" BSPT	500
SWV/1-8M/1-8F/M	44886	M10 × 1	500
SWV/1-8M/1-8F/N	44887	1/8" NPT	500

SPECIFICATIONS

PRESSURE	UPTO 3,500 PSI	UPTO 240 BAR

73 Quick Disconnect Adaptor

AQD

Adaptor with grease fitting on one end and male threads on the other

Threaded end can be screwed onto any dispenser with 1/8" female threads, thus allowing for quick connect greasing applications

Supplied with a small and large locking sleeve to fit most couplers

QUICK LINK

Supplied with a small & large locking sleeve to fit all couplers

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
AQD/11-16/UF/B	44900	1/8" BSPT	250
AQD/11-16/UF/N	44901	1/8" NPT	250

74 Hand Bearing Packer

BEP-10

Light-weight and handy, portable Bearing Packer

Mess and hassle free solution for quick removal of old grease and replacement with new grease

Designed for use on bearings with:
- Minimum dia. of 1-3/4" (45mm)
- Maximum dia. 3-1/2" (90 mm)

Place bearing on piston
Max. bearing dia. 3-1/2" (90mm)

Press the cap until the old grease is forced out and new grease shows on the bearing

Using the bearing packer
Simple hand press mechanism eliminates the need for any grease gun or pump to grease the bearing

Useful for greasing bearings in cars, boats, tractors, RV's etc

USEFUL TIPS!

Always use recommended grade of grease. Some grades of grease cannot handle temperature of wheel bearing applications

Do not use compressed air for cleaning the bearing prior to use with the bearing packer. This is unsafe and could damage the race

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
BEP/10	44940	25

75 Steel Bearing Packers Deluxe

BEP-01
BEP-625

Rugged steel Bearing Packers

Useful for greasing bearings in cars, boats, tractors, RV's etc

BEP-625
- Rapid action Bench Type Bearing Packer
- Non threaded top cone for fast placement of bearings
- Design incorporates grease nipple on the outer shaft, which easily adapts to the grease gun coupler
- Suited for bearings with a min. inner dia. of 1/2" (12 mm), to a max. outer dia. of 6" (150 mm) and height from 3/8" (10 mm) to 2" (50 mm)
- For use with standard grease guns

BEP-01
- Bearing Packer with threaded center post
- Design incorporates grease nipple at one end, which easily adapts to the grease gun coupler.
- Suited for bearings with a min. inner dia. of 1/2" (12 mm), to a max. outer dia. of 5" (125 mm) and height from 1/4" (6 mm) to 2" (50 mm)
- For use with standard grease guns

BEP-625

BEP-01

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
BEP/01	44845	30
BEP/625	44847	12

76 Ezee Lube Kit

GAK

QUICK LINK

The Ezee-Lube kit comprises of a range of quick connect lube accessories. Useful for even the most difficult greasing jobs.

The constituents convert any grease gun fitted with jaw type coupler into special application greasing. This helps in effective lubrication of grease plugs, sealed bearings, push on greasing of recessed fittings or fittings in shoulders, low height areas or an extension for reaching those “deep” places

KIT CONSTITUENTS

RLA/01
Recessed
Lube Adaptor
(Quick Connect)

GIN/01
1-1/2" × 18 gauge
Grease Injector
Needle
(Quick Connect)

ALA/01
90° Angled
Lube Adaptor
(Quick Connect)

ANN/1-1-2
1-1/2" (38 mm)
Narrow Needle
Nose Adaptor
(Quick Connect)

SOD/01/Q
Seal Off
Dispenser
(Quick Connect)

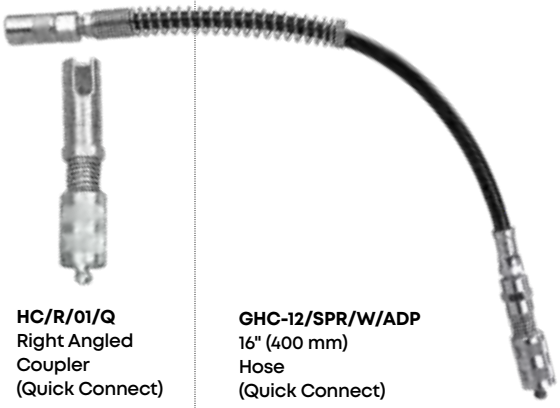

HC/R/01/Q
Right Angled
Coupler
(Quick Connect)

GHC-12/SPR/W/ADP
16" (400 mm)
Hose
(Quick Connect)

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GAK/7	44950	25

77 Greasing Accessory Kit Premium

GAK-P

Grease Gun Accessories, engineered to withstand rugged use in garages, workshops, construction sites, agricultural and marine applications

Versatile kit consist of professional use greasing attachments that fit most grease guns, hydraulic couplers, grease pumps and other grease dispensing equipment

Constituents safely stored in a heavy-duty blow moulded, easy to carry case

KIT CONSTITUENTS

ALA/01
90° Angled Lube Adaptor (Quick Connect)

RLA/01
Recessed Lube Adaptor (Quick Connect)

ANN/1-1-2
1-1/2" (38 mm) Narrow Needle Nose Adaptor (Quick Connect)

HC/90/Q
90° Compact Coupler (Quick Connect)

GIN/01
1-1/2" × 18 gauge Grease Injector Needle (Quick Connect)

SWV/1-8M/1-8F
Grease Gun Swivel (1/8" M × 1/8" F)

HC/21
Quick Lock Grease Coupler

GHC-12/SPR
12" (300 mm) Grease Hose with Spring

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
GAK/P1/8ST/B	44961	1/8" BSPT	20
GAK/P1/8ST/M	44960	M10 × 1	20
GAK/P1/8ST/N	44959	1/8" NPT	20

78 Greasing Accessory Kit Standard

GAK-E

Grease Gun Accessories for everyday lubrication in garages, workshops, construction sites, agricultural and marine applications

Kit consist of common greasing attachments that fit most grease guns, hydraulic couplers, grease pumps and other grease dispensing equipment

Constituents safely stored in a heavy-duty blow moulded, easy to carry case

KIT CONSTITUENTS

ANN/4
4" (100mm)
Needle Nose
Adaptor
(Quick Connect)

DNN/1-1-2/GFT
1-1/2" (38 mm)
Narrow Needle
Nose Dispenser
(Quick Connect)

DNN/1-8/GFT
19/32" (15 mm)
Needle Nose
Dispenser
(Quick Connect)

HC/R/01/GFT
90° Hydraulic
Coupler
(Quick Connect)

GIN/01
1-1/2" × 18 gauge
Grease Injector
Needle
(Quick Connect)

GHC-12
12" (300 mm)
Grease Hose

SOD/01/GFT
Seal Off
Dispenser
(Quick Connect)

HC/11/4
4 Jaw Standard
Hydraulic Coupler

HC/SW/11/4
360° Slim Line
Swivel Coupler

GSP/4
4" (100 mm)
Steel Extension

GBP/6
6" (150 mm)
Steel Extension

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
GAK/E1/11ST/B	44964	1/8" BSPT	15
GAK/E1/11ST/M	44963	M10 × 1	15
GAK/E1/11ST/N	44962	1/8" NPT	15

79 Air Operated Grease Ratio Pumps - High Volume

GPH

Heavy Duty Industrial grade pneumatic pump designed for unmatched performance in demanding conditions

Particularly suitable for grease distribution in pipe-works & installations where simultaneous grease supply is required on different dispensing points at high pressure or in large volume

Pump dispenses grease at 50 times the air inlet pressure

All metal construction, fully CNC machined with hardened wear resistant moving parts

Reciprocating piston operated 3" (76 mm) dia. air motor

Stall free, ice free motor with tough durable housing, integrated muffler for quiet operation

Rugged Design
Very few moving parts hence requires virtually no servicing

No special maintenance tools needed

No fragile trip rods

Supplied complete with drum cover, rubber lined follower plate, 10' (120") of high pressure grease hose, Z swivel & professional grease control valve

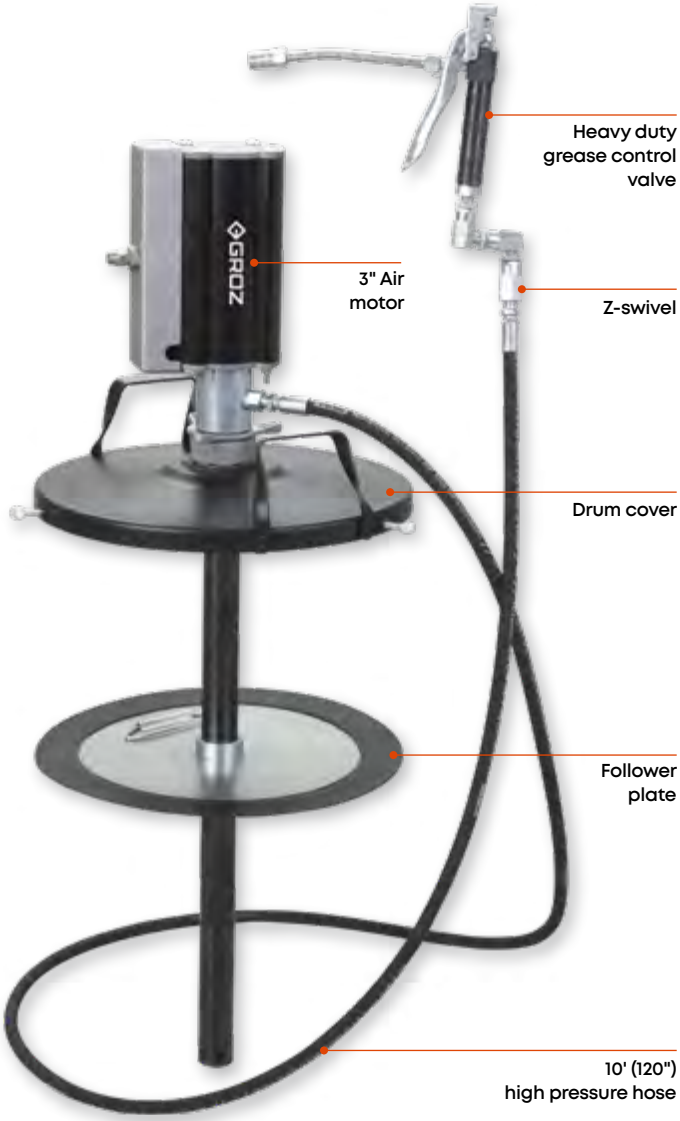

WETTED COMPONENTS

Steel, Polyurethane, Nitrile Rubber, C.R.C. Sheet, Copper, PTFE

RECOMMENDED USE

NLGI 1, 2, 3

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. OUTLET PRESSURE	7500PSI	500 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET CONNECTION	1/4" (F)	
AIR CONSUMPTION	13 CFM	
*GREASE OUTPUT (MAX.)	7.2 LB./MIN.	3.3 KG/MIN.
NOISE LEVEL	85-90 db	

* In free flow

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	FITS	DRUM COVER DIAMETER		FOLLOWER PLATE DIMENSIONS				BOX QTY.
							O.D. STEEL END		O.D. PLATE		
BSP THREADS		NPT THREADS			(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	
GPH/1/ST/BSP	45470	GPH/1/ST/N	45476	20-30 kg / 25-50 lb / 5 gal. pails	12	310	9-1/2	241	11-11/32	288	1
GPH/2/ST/BSP	45471	GPH/2/ST/N	45477	50-60 kg / 120 lb / 16 gal. pails	15	381	12-11/16	322	15	380	1
GPH/3/ST/BSP	45472	GPH/3/ST/N	45478	180 kg / 400lb drums	24-1/2	612	21-5/8	550	23-11/16	602	1

80 Air Operated Grease Ratio Pumps 50:1

High Pressure Grease pumps with guaranteed performance & hassle free operation

Pump dispenses grease at pressures upto 50 times the air inlet pressure

Designed to work in tough conditions - these are ideal for use in Industry, Workshop, Farm, Construction or as part of the Mobile Grease System

All metal construction, fully CNC machined with hardened wear resistant moving parts

Reciprocating piston operated 2-1/2" (63 mm) dia. air motor

Fitted with strainer at suction tube inlet for clean grease to the bearing

Supplied complete with drum cover, rubber lined follower plate, 7' (84") of high pressure grease hose, swivel & professional grease control valve

Portable version available with built-in steel drum, complete with wheels & pull handle

WETTED COMPONENTS

Steel, Brass, Aluminium, Polyurethane & Nitrile Rubber

RECOMMENDED USE

With light and self collapsing grease up to NLGI No. 2

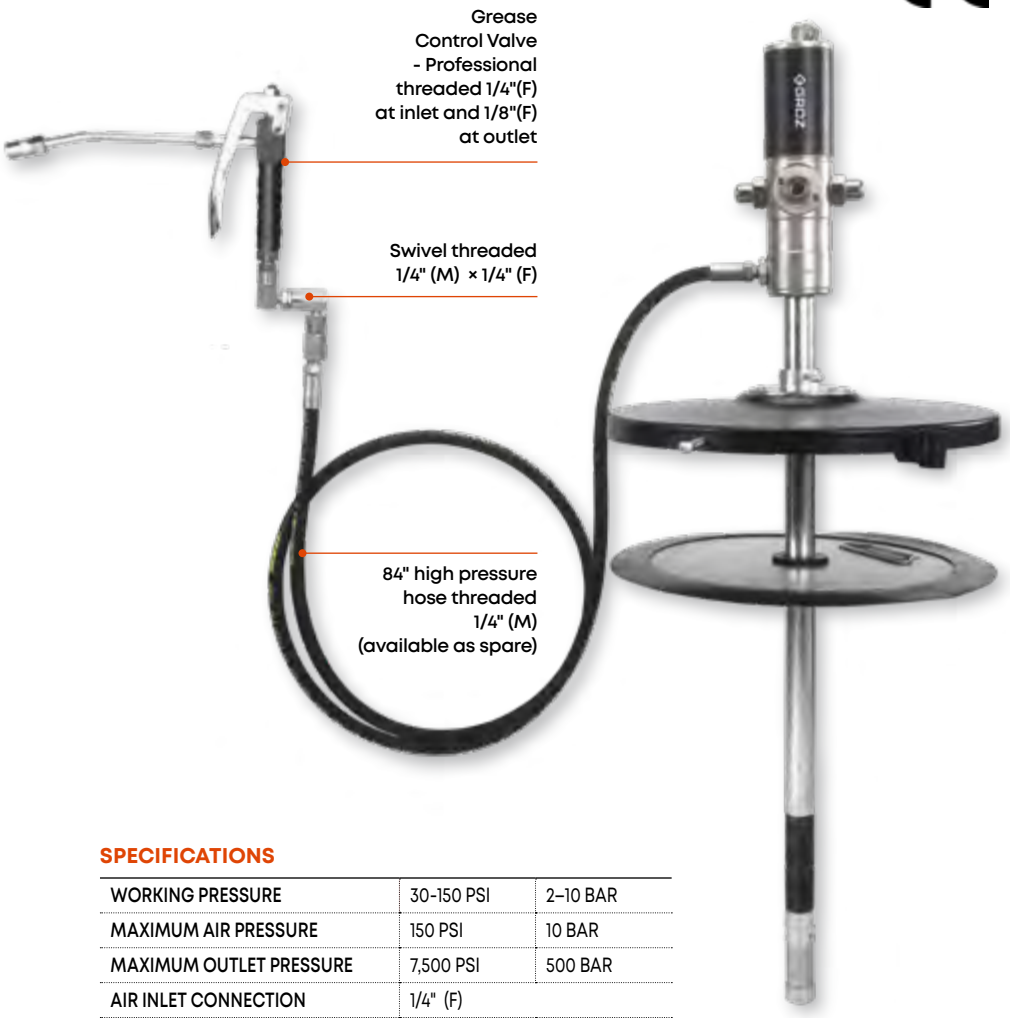

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2–10 BAR
MAXIMUM AIR PRESSURE	150 PSI	10 BAR
MAXIMUM OUTLET PRESSURE	7,500 PSI	500 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET CONNECTION	1/4" (F)	
AIR CONSUMPTION	61 GPM	230 LPM
GREASE OUTPUT (MAX.)	2.42 LBS/MIN.	1.10 KG/MIN.
NOISE LEVEL	81 db	

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	FITS	DRUM COVER DIAMETER		FOLLOWER PLATE DIMENSIONS						BOX QTY.
							O.D. STEEL END		O.D. PLATE		I.D. GROMMET		
BSP THREADS		NPT THREADS			(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	
PUMP ASSEMBLY													
GP0/ST/501/BSP	45409	-	-	12.5 kg drums	11	284	9-3/64	230	10-1/8	257	1.16	29.5	3
GP1/ST/501/BSP	45410	★ GP1/ST/501/N	45415	25-50 lb / 5 gal. / 20-30 kg pails	12	310	9-1/2	241	11-11/32	288	1.16	29.5	3
GP2/ST/501/BSP	45411	★ GP2/ST/501/N	45416	120 lb / 16 gal. / 50-60 kg pails	15	381	12-11/16	322	15	380	1.16	29.5	3
GP3/ST/501/BSP	45412	GP3/ST/501/N	45417	400lb / 180 kg drums	24-1/2	612	21-5/8	550	23-11/16	602	1.16	29.5	2
◆ GP4/ST6-501/BSP*	45422	-	-	25-50 lb / 5 gal. / 20-30 kg pails	13	330	10.25	260	12	305	1.16	29.5	-

★ Best Seller ◆ New

* Comes with a straight swivel

VARIANTS

GP0
For **12.5 kg pails**
Suction Tube: 17-5/16" (440 mm)

GP1
For **20 kg / 25-50 lbs / 5 gal. pails**
Suction Tube: 17-5/16" (440 mm)

GP2
For **50 kg / 120 lbs / 16 gal. pails**
Suction Tube: 28-3/4" (730 mm)

GP3
For **180 kg drums / 400 lbs**
Suction Tube: 37-3/8" (950 mm)

GP4
For **20-30 kg grease drums**
Suction Tube: 17-5/16" (440 mm)
Popular in Europe

BGRP/15
Portable grease pump with built-in
15 kg grease bucket

BGRP/30
Portable grease pump with built-in
30 kg grease bucket

BGRP/50
Portable grease pump with built-in
50 kg grease bucket

ORDERING INFORMATION

CAT NR.	ORD NR.	BUCKET CAPACITY (KG)	BOX QTY.
PORTABLE AIR OPERATED GREASE PUMP ASSEMBLY WITH BUCKET			
* BGRP/15	45432	15	1
* BGRP/30	45430	30	1
* BGRP/50	45431	50	1

* Best Seller

WARNING

Pump must be supplied with clean & dry compressed air via an FR unit

81 Air Operated Grease Ratio Pumps 60:1

World-class Industrial High Pressure Grease pumps with guaranteed performance & hassle free operation

Pump dispenses grease at pressures upto 60 times the air inlet pressure

Designed to work in tough conditions - these are ideal for use in Industry, Workshop, Farm, Construction or as part of a Mobile Grease System

For use even in very cold weather conditions to unclog choked grease fittings

All metal construction, fully CNC machined with hardened wear resistant moving parts

Reciprocating piston operated 2-3/4" (70 mm) dia. air motor

Fitted with strainer at suction tube inlet for clean grease to the bearing

Supplied complete with drum cover, rubber lined follower plate, 7' (84") of high pressure grease hose, Z swivel & grease control valve

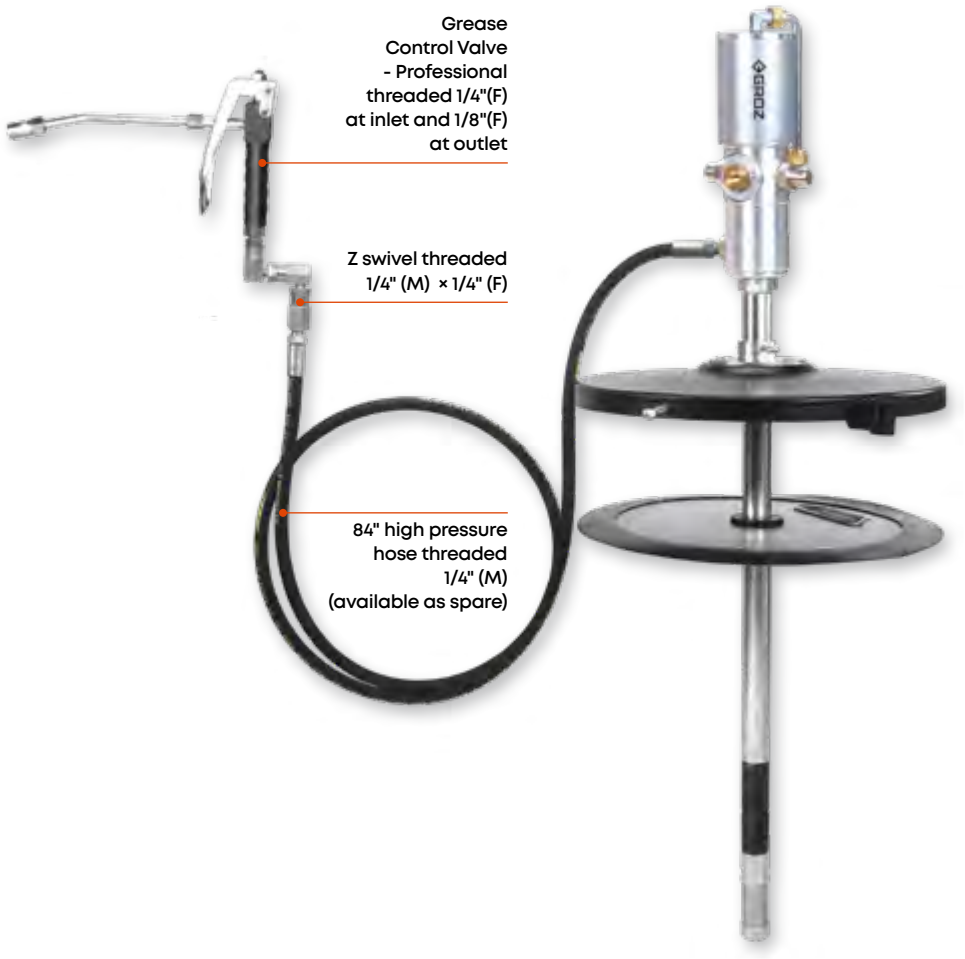

WETTED COMPONENTS

Steel, Brass, Aluminium, Polyurethane & Nitrile Rubber

RECOMMENDED USE

With light and self collapsing grease up to NLGI No. 2

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2–10 BAR
MAXIMUM AIR PRESSURE	150 PSI	10 BAR
MAXIMUM OUTLET PRESSURE	9000 PSI	600 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET CONNECTION	1/4" (F)	
AIR CONSUMPTION	61 GPM	230 LPM
GREASE OUTPUT (MAX.)	2.2 LBS/MIN.	1 KG/MIN.
NOISE LEVEL	81 db	

VARIANTS

GP1
For **20-30 kg / 25-50 lbs / 5 gal. pails.**
Suction Tube: 17-5/16" (440 mm)

GP2
For **50-60 kg / 120 lbs / 16 gal. pails**
Suction Tube: 28-3/4" (730 mm)

GP3
For **180 kg drums / 400 lbs**
Suction Tube: 37-3/8" (950 mm)

WARNING

Pump must be supplied with clean & dry compressed air via an FR unit

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	FITS	DRUM COVER DIAMETER		FOLLOWER PLATE DIMENSIONS						BOX QTY.
							O.D. STEEL END		O.D. PLATE		I.D. GROMMET		
BSP THREADS		NPT THREADS			(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	
PUMP ASSEMBLY													
GP1/ST/601/BSP	45880	GP1/ST/601/N	45890	20-30 kg / 25-50 lb / 5 gal. pails	12	310	9-1/2	241	11-11/32	288	1.16	29.5	1
GP2/ST/601/BSP	45881	GP2/ST/601/N	45891	50-60 kg / 120 lb / 16 gal. pails	15	381	12-11/16	322	15	380	1.16	29.5	1
GP3/ST/601/BSP	45882	GP3/ST/601/N	45892	180 kg / 400lb drums	24-1/2	612	21-5/8	550	23-11/16	602	1.16	29.5	1

82 Grease Pump Kits

Trolley mounted kits are ideal for use in workshops, garages, shop floors providing complete portability for everyday lubrication needs

TMK-GP1

KIT INCLUDES

A	**50:1 Air Operated Grease Pump**
B	**Grease Control Valve** Fitted with 360° Z swivel for trouble free dispensing
C	**Connecting Hose** 84" x 1/4" I.D. (2m x 6.5 mm I.D.) - SAE R2
D	**Steel Drum Cover** 12" (310 mm) Prevents impurities from contaminating grease and keeps pump in vertical position
E	**Rubber Lined Follower Plate** O.D. Steel End: 9-1/2" (241 mm) O.D. Plate: 11-11/32" (288 mm) I.D. Grommet: 1-3/16" (29.5 mm)
F	**Drum Trolley - Heavy Duty** Manufactured from 4 mm thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with nylon rim Rear castors with toe lock
G	***Filter-Regulator Combination & Lubricator with Pressure Gauge (FRCLM)** Port Size: 1/4" Type: Miniature Filter: 40 micron

*On selected models

For
20-30 kg
(35 lbs.) Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Polyurethane & Nitrile Rubber

RECOMMENDED USE

With light and self collapsing grease up to NLGI No. 2

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	THREADS	BOX QTY.
TMK/GP1/A/BSP	45820	Pump kit with FRCLM unit	1/8" BSPT	1
TMK/GP1/A/N	45825	Pump kit with FRCLM unit	1/8" NPT	1
TMK/GP1/B/BSP	45823	Pump kit without FRCLM unit	1/8" BSPT	1
TMK/GP1/B/N	45827	Pump kit without FRCLM unit	1/8" NPT	1

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	7,500 PSI	500 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/4" (F)	
AIR CONSUMPTION	72 GPM	270 LPM
NOISE LEVEL	85 db	
GREASE OUTPUT (MAX.)	2.42 lbs./min.	1.1 kg/min.
FOR USE WITH	35 lbs. drums	20-30 kg drums

TMK-GP2

KIT INCLUDES

A	**50:1 Air Operated Grease Pump**
B	**Grease Control Valve** Fitted with 360° Z swivel for trouble free dispensing
C	**Connecting Hose** 84" x 1/4" I.D. (2m x 6.5 mm I.D.) - SAE R2
D	**Steel Drum Cover** 15" (381 mm) Prevents impurities from contaminating grease and keeps pump in vertical position
E	**Rubber Lined Follower Plate** O.D. Steel End: 12-11/16" (322 mm) O.D. Plate: 15" (380 mm) I.D. Grommet: 1-3/16" (29.5 mm)
F	**Drum Trolley - Heavy Duty** Manufactured from 4 mm thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with nylon rim Rear castors with toe lock
G	***Filter-Regulator Combination & Lubricator with Pressure Gauge (FRCLM)** Port Size: 1/4" Type: Miniature Filter: 40 micron

*On selected models

For
50-60 kg
(120 lbs.) Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Polyurethane & Nitrile Rubber

RECOMMENDED USE

With light and self collapsing grease up to NLGI No. 2

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	THREADS	BOX QTY.
TMK/GP2/A/BSP	45821	Pump kit with FRCLM unit	1/8" BSPT	1
TMK/GP2/A/N	45826	Pump kit with FRCLM unit	1/8" NPT	1
TMK/GP2/B/BSP	48910	Pump kit without FRCLM unit	1/8" BSPT	1
TMK/GP2/B/N	48911	Pump kit without FRCLM unit	1/8" NPT	1

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	7,500 PSI	500 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/4" (F)	
AIR CONSUMPTION	72 GPM	270 LPM
NOISE LEVEL	85 db	
GREASE OUTPUT (MAX.)	2.42 lbs./min.	1.1 kg/min.
FOR USE WITH	120 lbs. drums	50-60 kg drums

Grease Pump Kits (Continued)

TMK-GP3H

KIT INCLUDES

A	**50:1 Air Operated Grease Pump**
B	**Grease Control Valve** With Z swivel for trouble free dispensing
C	**Grease Hose Reel - Heavy Duty Dual Arm Steel Reel** Hose I.D.: 1/4" (6.35 mm) Maximum Pressure: 5800 PSI (400 BAR)
D	**Steel Drum Cover** 24-1/2" (612 mm) Prevents contamination of grease and keeps pump in vertical position
E	**Rubber Lined Follower Plate** O.D. Steel End: 21-5/8" (550 mm) O.D. Plate: 23-11/16" (602 mm) I.D. Grommet: 1-3/16" (29.5 mm)
F	**Drum Trolley - Heavy Duty** Manufactured from 4 mm thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with nylon rim Rear castors with toe lock
G	**Filter-Regulator Combination with Pressure Gauge (FRC)** Port Size: 1/4" Type: Miniature Filter: 40 micron
H	**Feeder Hose** Connects pump outlet to the hose reel inlet Length: 1.5m (5')

For 180 kg (400 lbs.) Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Polyurethane & Nitrile Rubber

RECOMMENDED USE

With light and self collapsing grease up to NLGI No. 2

ORDERING INFORMATION

CAT NR.	ORD NR.	HOSE LENGTH		THREADS	BOX QTY.
		(M)	(FEET)		
TMK/GP3H-10/A/BSP	45824	10	32	1/8" BSPT	1
TMK/GP3H-10/A/N	45829	10	32	1/8" NPT	1
TMK/GP3H/A/BSP	45822	15	50	1/8" BSPT	1
TMK/GP3H/A/N	45826	15	50	1/8" NPT	1

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	7,500 PSI	500 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/4" (F)	
AIR CONSUMPTION	72 GPM	270 LPM
NOISE LEVEL	85 db	
GREASE OUTPUT (MAX.)	2.42 LBS./MIN.	1.1 KG/MIN.
FOR USE WITH	400 LBS. DRUMS	180 KG DRUMS

TMK1-GP3

KIT INCLUDES

A	**50:1 Air Operated Grease Pump**
B	**Grease Control Valve** With Z swivel for trouble free dispensing
C	**Connecting Hose** 84" x 1/4" I.D. (2m x 6.5 mm I.D.) - SAE R2
D	**Steel Drum Cover** 24-1/2" (612 mm) Prevents contamination of grease and keeps pump in vertical position
E	**Rubber Lined Follower Plate** O.D. Steel End: 21-5/8" (550 mm) O.D. Plate: 23-11/16" (602 mm) I.D. Grommet: 1-3/16" (29.5 mm)
F	**Drum Cart** Manufactured from thick steel sheet in powder coated finish Front Wheels: 10" (250 mm) wide Rear castors with toe lock 5" nylon

For
180 kg (400 lbs.)
Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Polyurethane & Nitrile Rubber

RECOMMENDED USE

With light and self collapsing grease up to NLGI No. 2

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK1/GP3/B/BSP	45860	1/8" BSPT	1
TMK1/GP3/B/N	45865	1/8" NPT	1

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	7,500 PSI	500 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/4" (F)	
AIR CONSUMPTION	72 GPM	270 LPM
NOISE LEVEL	85 db	
GREASE OUTPUT (MAX.)	2.42 LBS./MIN.	1.1 KG/MIN.
FOR USE WITH	400 LBS. DRUMS	180 KG DRUMS

Grease Pump Kits (Continued)

TMK1-GP3H

KIT INCLUDES

A	**50:1 Air Operated Grease Pump**
B	**Grease Control Valve** Fitted with 360° Z swivel for trouble free dispensing
C	**Grease Hose Reel - Heavy Duty Dual Arm Steel Reel** Hose I.D.: 1/4" (6.35 mm) Hose Length: 15 meter (50') Maximum Pressure: 5800 PSI (400 BAR)
D	**Steel Drum Cover** 24-1/2" (612 mm) Prevents impurities from contaminating grease and keeps pump in vertical position
E	**Rubber Lined Follower Plate** O.D. Steel End: 21-5/8" (550 mm) O.D. Plate: 23-11/16" (602 mm) I.D. Grommet: 1-3/16" (29.5 mm)
F	**Drum Cart** Manufactured from thick steel sheet in powder coated finish Front Wheels: 10" (250 mm) wide Rear castors with toe lock 5" nylon
G	**Feeder Hose** Connects pump outlet to the hose reel inlet Length: 1.5m (5')

For
180 kg (400 lbs.)
Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Polyurethane & Nitrile Rubber

RECOMMENDED USE

With light and self collapsing grease up to NLGI No. 2

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	7,500 PSI	500 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/4" (F)	
AIR CONSUMPTION	72 GPM	270 LPM
NOISE LEVEL	85 db	
GREASE OUTPUT (MAX.)	2.42 LBS./MIN.	1.1 KG/MIN.
FOR USE WITH	400 LBS. DRUMS	180 KG DRUMS

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK1/GP3H/B/BSP	45861	1/8" BSPT	1
TMK1/GP3H/B/N	45866	1/8" NPT	1

TMK2-GP1

KIT INCLUDES

A	**50:1 Air Operated Grease Pump**
B	**Grease Control Valve** Fitted with 360° Z swivel for trouble free dispensing
C	**Connecting Hose** 84" x 1/4" I.D. (2m x 6.5 mm I.D.) - SAE R2
D	**Steel Drum Cover** 12" (310 mm) Prevents impurities from contaminating grease and keeps pump in vertical position
E	**Rubber Lined Follower Plate** O.D. Steel End: 9-1/2" (241 mm) O.D. Plate: 11-11/32" (288 mm) I.D. Grommet: 1-3/16" (29.5 mm)
F	**Drum Trolley** Manufactured from thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with ball bearings Swivel Rear Castors: 3" (75 mm) Nylon

For
20-30 kg
(35 lbs.) Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Polyurethane & Nitrile Rubber

RECOMMENDED USE

With light and self collapsing grease up to NLGI No. 2

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	7,500 PSI	500 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/4" (F)	
AIR CONSUMPTION	72 GPM	270 LPM
NOISE LEVEL	85 db	
GREASE OUTPUT (MAX.)	2.42 LBS./MIN.	1.1 KG/MIN.
FOR USE WITH	35 LBS. PAILS	20-30 KG DRUMS

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK2/GP1/B/BSP	45870	1/8" BSPT	1
TMK2/GP1/B/N	45875	1/8" NPT	1

Grease Pump Kits (Continued)

TMK2-GP2

KIT INCLUDES

A	**50:1 Air Operated Grease Pump**
B	**Grease Control Valve** Fitted with 360° Z swivel for trouble free dispensing
C	**Connecting Hose** 84" x 1/4" I.D. (2m x 6.5 mm I.D.) - SAE R2
D	**Steel Drum Cover** 15" (381 mm) Prevents impurities from contaminating grease and keeps pump in vertical position
E	**Rubber Lined Follower Plate** O.D. Steel End: 12-11/16" (322 mm) O.D. Plate: 15" (380 mm) I.D. Grommet: 1-3/16" (29.5 mm)
F	**Drum Trolley** Manufactured from thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with ball bearings Swivel Rear Castors: 3" (75 mm) Nylon

Hook to hang control valve

For 50-60 kg (120 lbs.) Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Polyurethane & Nitrile Rubber

RECOMMENDED USE

With light and self collapsing grease up to NLGI No. 2

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK2/GP2/B/BSP	45871	1/8" BSPT	1
TMK2/GP2/B/N	45876	1/8" NPT	1

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	7,500 PSI	500 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/4" (F)	
AIR CONSUMPTION	72 GPM	270 LPM
NOISE LEVEL	85 db	
GREASE OUTPUT (MAX.)	2.42 LBS./MIN.	1.1 KG/MIN.
FOR USE WITH	120 LBS. DRUMS	50-60 KG DRUMS

83 Grease Control Valves Professional

APG-04

7,500 PSI

Premium quality Grease Control Valve, for use with air operated grease pumps

Provides continuous grease flow, with trigger fully pressed

Steel construction, provides durability & longevity

Ergonomically designed pistol handle

Available as valve only, or fitted with 360° Z Swivel

Comes complete with 6" steel extension & heavy duty coupler

Comes as standard on GROZ GP Series Air Operated Grease Pumps

Available in a choice of inlet thread sizes

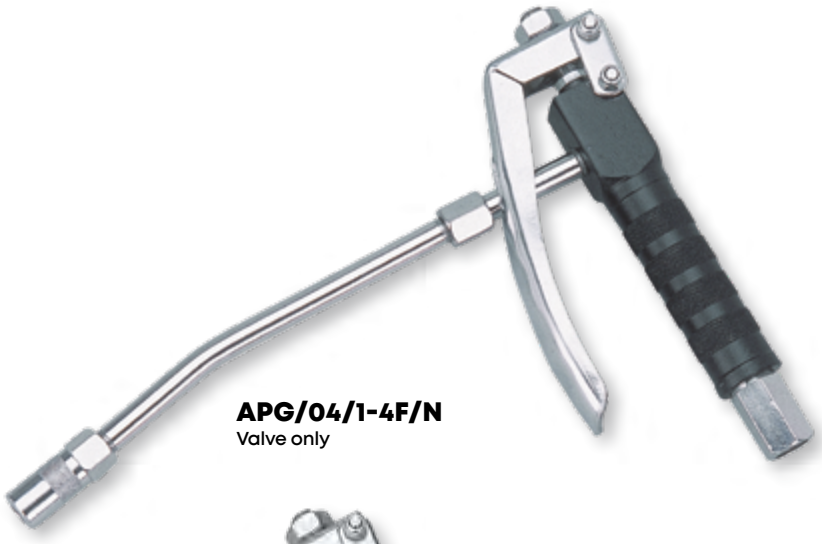

APG/04/1-4F/N
Valve only

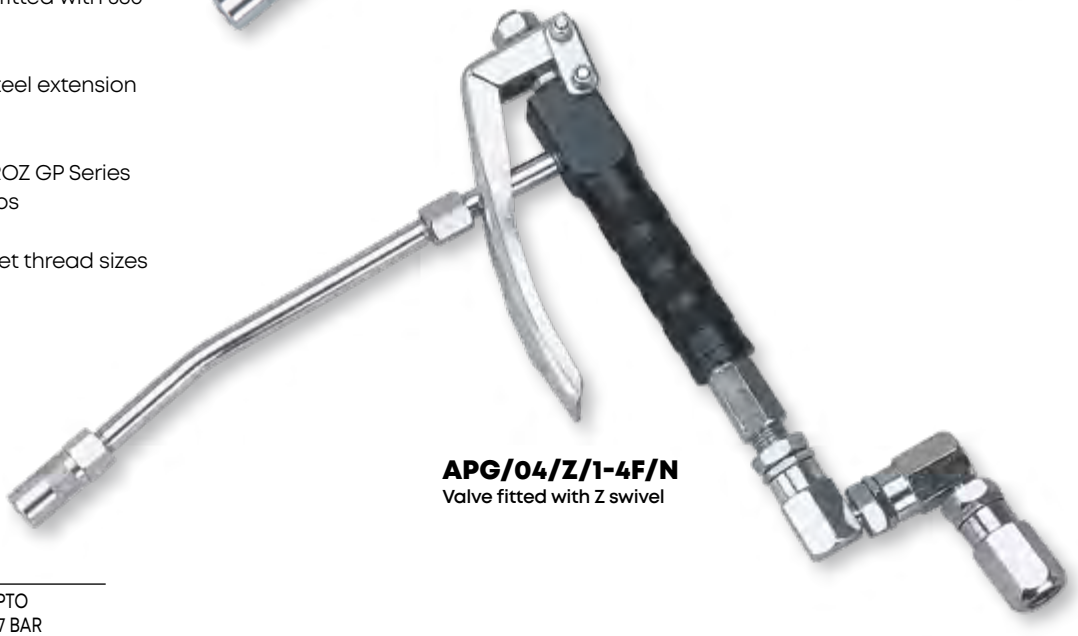

APG/04/Z/1-4F/N
Valve fitted with Z swivel

SPECIFICATIONS

WORKING PRESSURE	UPTO 7,500 PSI	UPTO 517 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREAD SPECIFICATION	OUTLET THREAD SPECIFICATION	BOX QTY.
VALVE				
APG/04/1-8F/B	43400	1/8" BSPT (F)	1/8" BSPT (F)	25
* APG/04/1-4F/B	43401	1/4" BSPT (F)	1/8" BSPT (F)	25
APG/04/1-4F/M	43402	1/4" BSPT (F)	M10 × 1 (F)	25
APG/04/1-8F/N	43403	1/8" NPTF (F)	1/8" NPT (F)	25
* APG/04/1-4F/N	43404	1/4" NPTF (F)	1/8" NPT (F)	25
VALVE FITTED WITH Z SWIVEL				
** APG/04/Z/1-4F/B	43420	1/4" BSPT (F)	1/8" BSPT (F)	20
APG/04/Z/1-4M/B	43421	1/4" BSPT (M)	1/8" BSPT (F)	20
APG/04/Z/1-4F/M	43422	1/4" BSPT (F)	M10 × 1 (F)	20
** APG/04/Z/1-4F/N	43423	1/4" NPTF (F)	1/8" NPT (F)	20
APG/04/Z/1-2-27M/N	43424	1/2" -27 NS (M)	1/8" NPT (F)	20

* Best Seller * Standard on Groz GP Series Air Operated Grease Ratio Pumps

WARNING

Skin Injection Hazard. Keep away from nozzle

The gun is continuous action. Be careful not to over lubricate

84 Grease Control Valves Booster

APG
APG-PR

10,000 PSI

Heavy Duty Grease Control Valve with built-in pressure boost mechanism

Continuous flow with pistol handle fully pressed

Pressure boost achieved through repeated actuation of the pistol handle

Boosts line pressure from 6,000 PSI (400 BAR) to 10,000 PSI (690 BAR); extremely useful to unblock frozen grease fittings

Heavy Duty steel construction,

Available in two models

a. Booster Grease Control Valve
b. Booster Grease Control with pressure relief valve

Available configuration

- Valve only
- Fitted with 360° Z Swivel

Comes complete with 6" (150 mm) steel extension & coupler

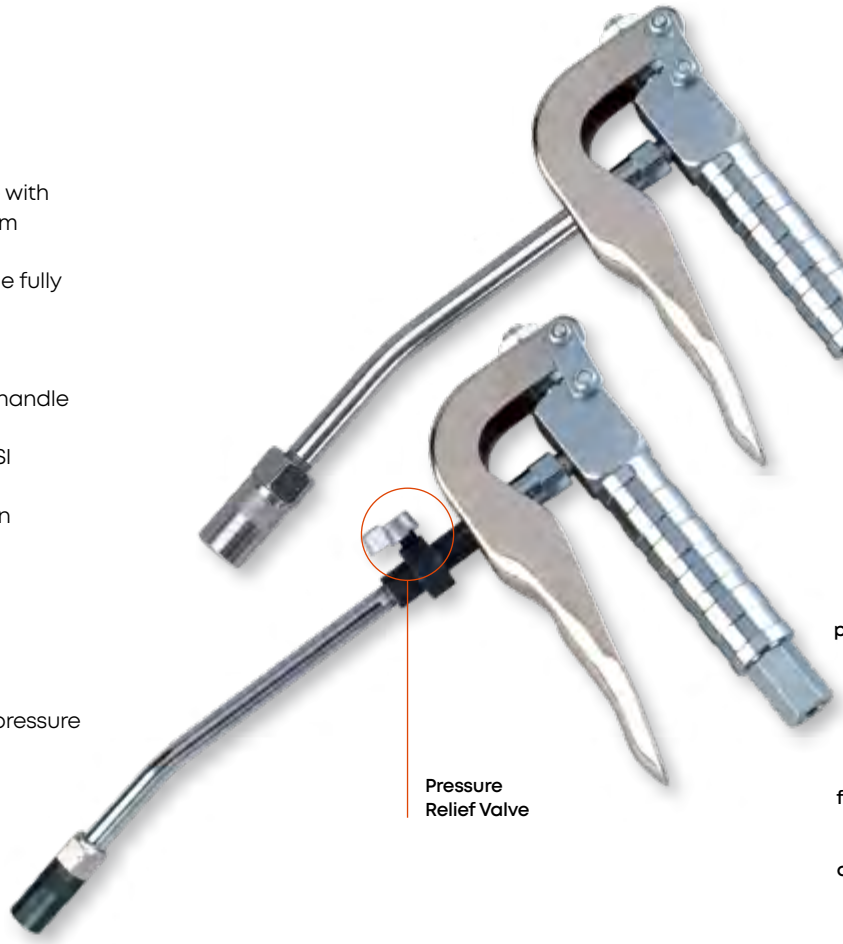

APG
Booster Grease Control Valve. Completer with heavy duty coupler with ball check

APG-PR
Booster Grease Control with pressure relief valve. Opening the relief valve removes high pressure from the coupler enabling easy coupler dis-connection from the zerk fitting. Complete with Professional coupler without ball check

SPECIFICATIONS

WORKING PRESSURE	UPTO 10,000 PSI	UPTO 690 BAR

WARNING

Skin Injection Hazard.
Keep away from nozzle.

The gun is continuous action.
Be careful not to over lubricate.

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREAD SPECIFICATION	OUTLET THREAD SPECIFICATION	BOX QTY.
GREASE CONTROL VALVE				
APG/1-8F/B	43450	1/8" BSPT (F)	1/8" BSPT (F)	25
★ APG/1-4F/B	43451	1/4" BSPT (F)	1/8" BSPT (F)	25
APG/1-4F/M	43452	1/4" BSPT (F)	M10 × 1 (F)	25
APG/1-8F/N	43453	1/8" NPTF (F)	1/8" NPT (F)	25
★ APG/1-4F/N	43454	1/4" NPTF (F)	1/8" NPT (F)	25
GREASE CONTROL VALVE WITH Z-SWIVEL				
★ APG/Z/1-4F/B	43470	1/4" BSPT (F)	1/8" BSPT (F)	20
APG/Z/1-4M/B	43471	1/4" BSPT (M)	1/8" BSPT (F)	20
★ APG/Z/1-4F/M	43472	1/4" BSPT (F)	M10 × 1 (F)	20
APG/Z/1-4F/N	43473	1/4" NPTF (F)	1/8" NPT (F)	20
APG/Z/1-2-27M/N	43474	1/2"-27 NS (M)	1/8" NPT (F)	20

★ Best Seller

CAT NR.	ORD NR.	INLET THREAD SPECIFICATION	OUTLET THREAD SPECIFICATION	BOX QTY.
GREASE CONTROL VALVE WITH PRESSURE RELIEF				
APG/PR/1-8F/B	43460	1/8" BSPT (F)	1/8" BSPT (F)	25
APG/PR/1-4F/B	43461	1/4" BSPT (F)	1/8" BSPT (F)	25
APG/PR/1-4F/M	43462	1/4" BSPT (F)	M10 × 1 (F)	25
APG/PR/1-8F/N	43463	1/8" NPTF (F)	1/8" NPT (F)	25
APG/PR/1-4F/N	43464	1/4" NPTF (F)	1/8" NPT (F)	25
GREASE CONTROL VALVE WITH PRESSURE RELIEF & Z SWIVEL				
APG/PR/Z/1-4F/B	43465	1/4" BSPT (F)	1/8" BSPT (F)	20
APG/PR/Z/1-4M/B	43466	1/4" BSPT (M)	1/8" BSPT (F)	20
APG/PR/Z/1-4F/M	43467	1/4" BSPT (F)	M10 × 1 (F)	20
APG/PR/Z/1-4F/N	43468	1/4" NPTF (F)	1/8" NPT (F)	20
APG/PR/Z/1-2-27M/N	43469	1/2"-27 NS (M)	1/8" NPT (F)	20

85 Grease Control Valves Heavy Duty

APG-HD

7,500 PSI

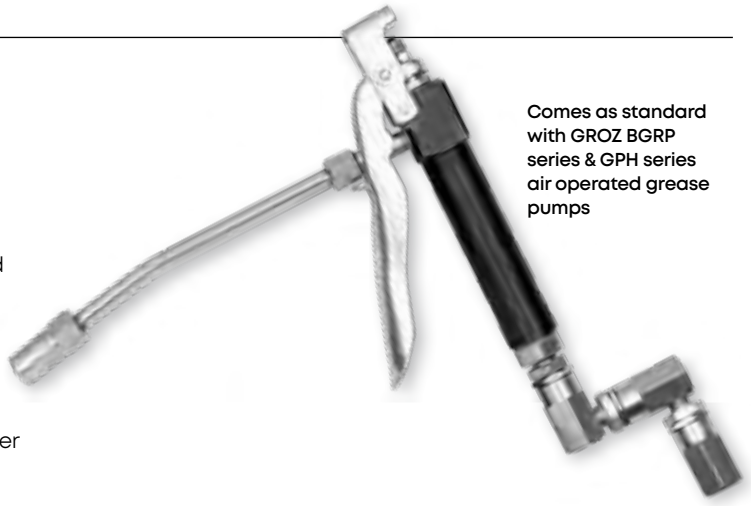

Comes as standard with GROZ BGRP series & GPH series air operated grease pumps

Provides continuous grease flow with the trigger fully pressed

Steel body, with fully hardened replaceable ball seat

Steel pistol handle with extra strong compression spring

Complete with 6" (150 mm) steel extension & heavy duty coupler

ORDERING INFORMATION

CAT NR.	ORD NR.	TYPE	INLET THREADS	OUTLET THREADS	BOX QTY.
APG/HD/1-4F/B	43445	Valve Only	1/4" BSPT (F)	1/8" BSPT (F)	25
APG/HD/1-4F/N	43446		1/4" NPT (F)	1/8" NPT (F)	25
* APG/HD/Z/1-4F/B	43447	Valve fitted with Z swivel	1/4" BSPT (F)	1/8" BSPT (F)	25
APG/HD/Z/1-4F/N	43448		1/4" NPT (F)	1/8" NPT (F)	25

* Best Seller

SPECIFICATIONS

DEVELOPS	UPTO 7,500 PSI	UPTO 517 BAR

WARNING

Skin injection hazard.
Keep away from nozzle

The gun is continuous action.
Be careful not to over lubricate

86 Grease Control Valve - Booster Aluminium Body

APG-NS

10,000 PSI

Supa Lite Grease Control Valve with built in pressure boost mechanism

Robust aluminium construction

Continuous flow with pistol handle fully pressed

Boosts line pressure from 6,000 PSI (400 BAR) to 10,000 PSI (690 BAR),

Complete with 6" (150 mm) steel extension & heavy duty coupler. Inlet threaded 1/4" (F)

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	OUTLET THREADS	BOX QTY.
* APG/NS/1-4F/B	43480	1/4" BSPT (F)	1/8" BSPT (F)	25
* APG/NS/1-4F/N	43481	1/4" NPT (F)	1/8" NPT (F)	25

* Best Seller

SPECIFICATIONS

DEVELOPS	UPTO 10,000 PSI	UPTO 690 BAR

87 Grease Control Valve Metered

APG-GM

7,500 PSI

Premium quality Grease Control valve, for use with air operated grease pumps

Built-In High Accuracy Digital Grease Meter for dispensing exact amount of grease

Measured greasing prevents both over & under lubrication & is valuable in saving bearing failures

Provides continuous grease flow, with trigger fully pressed

Steel construction

Ergonomically designed pistol handle

Meter works on oval gear technology

Complete with 6" (150 mm) steel extension & heavy duty coupler

APG/04/1-4F/GM/B

DGM/2/N
Grease meter available as spare for in-line applications. Measures both in kg & lbs

SPECIFICATIONS

CONTROL VALVE TYPE	Continuous Flow	
METER TYPE	Digital Oval Gear	
GREASE FLOW	0.2 - 5.5 LB / MIN	0.1 TO 2.5 KG / MIN
MAX. WORKING PRESSURE	7,500 PSI	517 BAR
WORKING TEMPERATURE RANGE	-10°C TO 60°C	14°F TO 140°F
UNIT OF MEASUREMENT	KG / GMS / OZ. / LBS	
RESOLUTION	0.10 OZ.	0.10 GMS
ACCURACY	± 3%	
RESETTABLE BATCH TOTAL	9,999	
CUMULATIVE TOTAL	999999	
BATTERY TYPE	2 × 1.5V SIZE N	

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	THREAD SPECIFICATION	BOX QTY.
APG/04/1-4F/GM/B	43415	Meter Fitted to Grease Control Valve	Inlet: 1/4" BSPT (F)	15
APG/04/1-4F/GM/N	43416	Meter Fitted to Grease Control Valve	Inlet: 1/4" NPTF (F)	15
DGM/2/N	45621	In-Line Grease Meter	Inlet/Outlet: 1/8" NPT (F)	25

WARNING

Skin Injection Hazard. Keep away from nozzle

The gun is continuous action. Be careful not to over lubricate.

88 Grease Swivels High Pressure

HFC

6,000 PSI

Swivels are installed between the delivery hose & grease control valve: these permit easy handling of control valves and prevent damage to hose caused by twisting

Heavy duty steel construction with ball bearings for smooth operation and free unrestricted movement

The swivelling joints are hardened for durability & wear resistance

Available in 3 forms

a. Straight - HFC - S: Single axis swivelling movement
b. 90° - HFC - R: 2 axes - 90° movement
c. Z–360° - HFC - 3 axes - 360° movement

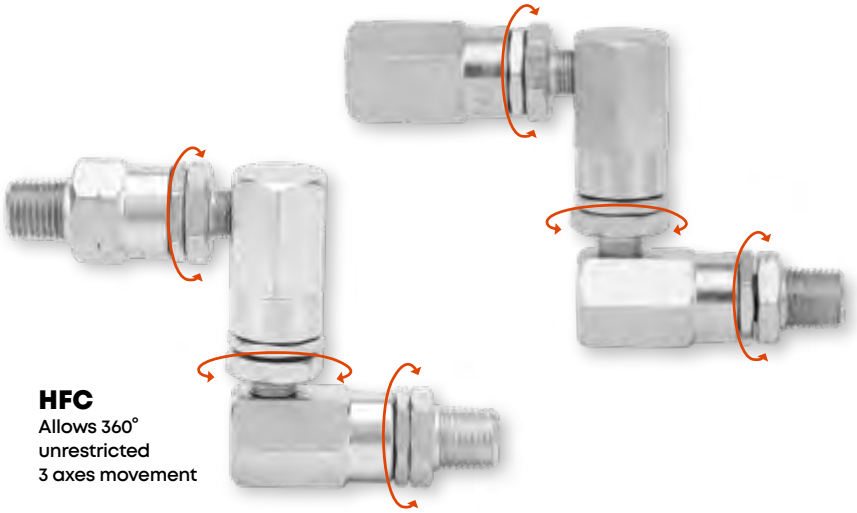

HFC
Allows 360° unrestricted 3 axes movement

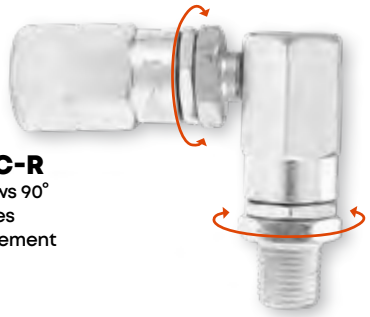

HFC-R
Allows 90° 2 axes movement

HFC-S
Allows single axes swivelling movement

SPECIFICATIONS

MAX. WORKING PRESSURE	UPTO 6,000 PSI	UPTO 413 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	THREAD SPECIFICATION		BOX QTY.
STRAIGHT SWIVELS				
HFC/S/1-4F/1-4M/B	43800	1/4" BSPT (F)	1/4" BSPT (M)	100
HFC/S/1-4F/1-8M/B	43801	1/4" BSPT (F)	1/8" BSPT (M)	100
HFC/S/1-8M/1-8M/N	43802	1/8" NPTF (M)	1/8" NPTF (M)	100
HFC/S/1-8F/1-8M/N	43803	1/8" NPTF (F)	1/8" NPTF (M)	100
HFC/S/1-4M/1-2-27M/N	43804	1/4" NPTF (M)	1/2"-27 NS (M)	100
90° SWIVELS				
HFC/R/1-4F/1-4M/B	43810	1/4" BSPT (F)	1/4" BSPT (M)	75
HFC/R/1-4F/1-8M/B	43811	1/4" BSPT (F)	1/8" BSPT (M)	75
HFC/R/1-8M/1-8M/N	43812	1/8" NPTF (M)	1/8" NPTF (M)	75
HFC/R/1-8F/1-8M/N	43813	1/8" NPTF (F)	1/8" NPTF (M)	75
HFC/R/1-4M/1-2-27M/N	43814	1/4" NPTF (M)	1/2"-27 NS (M)	75
Z - 360° SWIVELS				
HFC/1-4M/1-4M/B	43820	1/4" BSPT (M)	1/4" BSPT (M)	75
* HFC/1-4F/1-4M/B	43821	1/4" BSPT (F)	1/4" BSPT (M)	75
* HFC/1-4F/1-8M/B	43822	1/4" BSPT (F)	1/8" BSPT (M)	75
* HFC/1-4F/1-8M/N	43823	1/4" NPTF (F)	1/8" NPTF (M)	75
* HFC/1-4F/1-4M/N	43824	1/4" NPTF (F)	1/4" NPTF (M)	75
* HFC/1-4M/1-2-27M/N	43825	1/4" NPTF (M)	1/2"-27 NS (M)	75

* Best Seller

360° Z Swivel
Allows for convenient movement of the control valve & prevents the high pressure hose from kinking

89 Grease Pump Heavy Duty

VGP-HD

NEW!

The only 6,000 PSI hand grease pump built for the toughest environments!

Heavy-Duty Grease pump for quick and effortless greasing in applications requiring voluminous grease at high pressures

Designed for everyday lubrication of excavators and other earth moving equipment with multiple greasing points

Variable Handle Setting
Pump can be set for high volume or high pressure dispensing

Unbreakable Footrest
Designed to take a heavy beating the sturdy footrest is in-built in the pump base making it virtually unbreakable

Fully CNC machined pump internals for quick and easy priming

Available in 6 kg and 10 kg bucket capacity

WETTED COMPONENTS
Steel, Aluminum, Brass & Nitrile Rubber

RECOMMENDED USE
For Grease up to and including NLGI 3

High Pressure Setting



Medium Pressure Setting



High Volume - Low Pressure Setting



VARIANTS

VGP/HD/6A
Capacity: **6 kg**

VGP/HD/10A
Capacity: **10 kg**

VARIABLE HANDLE SETTING

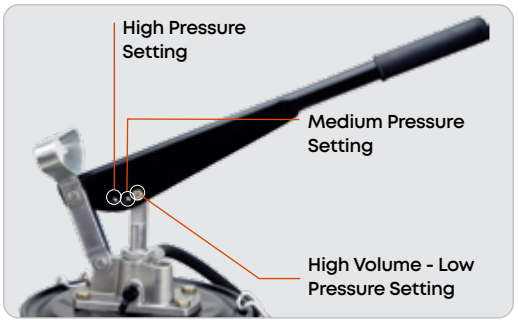

ORDERING INFORMATION

CAT NR.	ORD NR.	BUCKET CAPACITY (KG)	BOX QTY.
VGP/HD/6A	45140	6	1
VGP/HD/10A	45141	10	1

90 Bucket Greaser With Quick Lock Coupler

VGP-Q

NEW!

Now experience effortless greasing with our upgraded VGP Pump that comes with the innovative Quick Lock Grease Coupler!

Easy & quick lock-on mechanism, easy disengagement even under high pressure and hands-free operation, makes bulk greasing effortless, efficient and hassle free.

For use with agricultural equipment, commercial vehicles, excavators & other earth moving equipment

Variable Handle Setting
Can be set for high volume or high pressure grease discharge. Pump delivers upto 9gms of grease on high volume setting. Fully CNC machined to close tolerances the pump develops upto 4,000 PSI (275 BAR) on high pressure setting

Includes follower plate

WETTED COMPONENTS

Steel, Aluminium, Brass & Nitrile Rubber

RECOMMENDED USE

NLGI 1, 2 & 3 greases

High Pressure Setting



Medium Pressure Setting



High Volume Setting



VARIABLE HANDLE SETTING

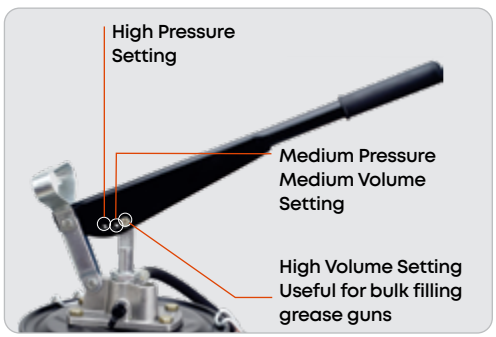

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY (KG)	CAPACITY (LBS)	DESCRIPTION	BOX QTY.
VGP/6A/Q	44203	6	13	Without Wheels	1
VGP/6/Q	44204	6	13	With Wheels	1
VGP/10A/Q	44205	10	22	Without Wheels	1
VGP/10/Q	44206	10	22	With Wheels	1

91 Bucket Greasers

Volume Grease Pump designed for quick effortless greasing in applications requiring voluminous everyday lubrication such as greasing of excavators & other earth moving equipment, agricultural equipment, automotive applications etc.

Variable Handle Setting
Pump can be set for high volume or high pressure dispensing with a simple switch

Fully CNC machined to very close tolerances, the pump develops pressure upto 4,000 PSI (275 BAR)

VGP series pumps work well with NLGI 1, 2 & 3 Greases

WETTED COMPONENTS
Steel, Aluminum, Brass & Nitrile Rubber

RECOMMENDED USE
For Grease up to and including NLGI 3

High Pressure Setting



Medium Pressure - Medium Volume Setting



High Volume Setting



VARIABLE HANDLE SETTING

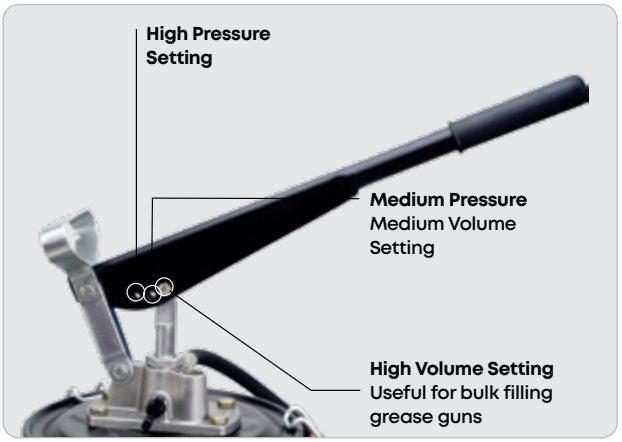

SPECIFICATIONS

SETTING	HIGH PRESSURE		MEDIUM PRESSURE		HIGH VOLUME	
DEVELOPS	UPTO 4,000 PSI	UPTO 275 BAR	UPTO 3,000 PSI	UPTO 275 BAR	UPTO 2,000 PSI	UPTO 275 BAR
DELIVERS	UPTO 4 GMS / STROKE		UPTO 7 GMS / STROKE		UPTO 9 GMS / STROKE	

VARIANTS

VGP/3/A
Without Wheels

3 KGS / 6.5 LBS.

VGP/6
With Wheels

6 KGS / 13 LBS.

VGP/6A
Without Wheels

6 KGS / 13 LBS.

VGP/10
With Wheels

10 KGS / 22 LBS.

VGP/10A
Without Wheels

10 kgs / 22 lbs.

VGP/15
With Wheels

15 kgs / 33 lbs.

VGP/15A
Without Wheels

15 kgs / 33 lbs.

VGP/20
With Wheels

20 kgs / 44 lbs.

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	BUCKET CAPACITY (KG)	BUCKET CAPACITY (LBS)	BOX QTY.
WITHOUT WHEELS		WITH WHEELS				
VGP/3/A	44277	-	-	3	6.5	1
✶ VGP/6A	44280	✶ VGP/6	44290	6	13	1
✶ VGP/10A	44281	✶ VGP/10	44291	10	22	1
✶ VGP/15A	44282	✶ VGP/15	44292	15	33	1
-	-	✶ VGP/20	44293	20	44	1

✶ Best Seller

92 Grease Pumps Foot Operated



NEVER BEATEN ON PERFORMANCE!

High pressure portable foot operated grease pump

Used for quick effortless greasing in everyday lubrication such as greasing of excavators & other earth moving equipment, agricultural equipment, automotive etc.

Hands Free – Fatigue Free Operation
Pump operates using the foot lever, which reduces effort & allows high pressure greasing with highest comfort. Can also be operated by hand when under low height machines

Fill It – Forget It
Holds upto 10 kg grease, which is 25% more than similar pumps in the market

Economical
Pump is operated by a single person & uses low cost bulk grease

Designed To Perfection
Designed with all moving parts submerged in the same grease which needs to be pumped, thereby staying lubricated at all times

Moving parts create wave action in grease, auto removing air pockets & eliminating the use of a follower plate

FOP-10A

Available in two variations:
- With regular coupler
- With quick lock grease coupler

Pump delivers 2 gms of grease per stroke and develops upto 8700 PSI (600 BAR)

Works with NLGI 1 & 2 greases

ORDERING INFORMATION

CAT NR.	ORD NR.	COUPLER	CAPACITY (KG)	CAPACITY (LBS.)	BOX QTY.
FOP/10A	44255	With Regular Coupler	10	22	1
★ FOP/10Q	44261	With Quick Lock Coupler	10	22	1

★ Best Seller

SPECIFICATIONS

PRESSURE	UPTO 8,700 PSI	UPTO 600 BAR
DELIVERS	UPTO 2 GMS / STROKE	

NOTE
Pump is 100% pressure tested using non food grade grease. New pumps would have some test grease inside, confirming that the pump has been factory tested

FOP

Quick lock grease coupler
(HC/21/1-4/B)
with 1/4" threaded adaptor

FOP-10Q

93 Scoop & Swipe Set

GSW

Now you can avoid the mess while working with bulk grease with hands

Use the GROZ Grease Scooper to avoid grease contamination and spillage in 3 simple steps

STEP 1
Use the Scooper to draw sizable amount of grease from the bucket.

STEP 2
Use the swipe to clean the Scoop from inside.

STEP 3
Use the swipe to clean the Scoop from outside.

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
GSW/1/ST	44896	50

94 Portable Greasing System

GS-5



Fully Portable & manual greasing system designed for volume greasing in workshops, site applications, on a pick-up truck, tractor, earth moving equipment etc.

Convenient Foot Charged Pump
Pump is operated by foot press of the spring loaded system. The hose gets charged with grease, which can then be dispensed through the Super Gun fitted at the end of the hose.
A single charge provides upto 30 shots of grease.

Quick & Convenient Adjustment
Aluminium die cast super gun is equipped with high pressure & high volume settings, actuated through a simple switch

SETTING	PRESSURE	DELIVERS	APPLICATION
High Pressure	10,000 PSI (690 BAR)	UPTO 0.45 GM/STROKE	Cold weather, blocked fittings
High Volume	5,000 PSI (345 BAR)	UPTO 1.25 GM/STROKE	Volume greasing

Pump assembly is fully sealed to prevent contamination

Complete with drum cover, rubber lined follower plate, premium 1/2" ID high pressure hose, super gun fitted with steel extension & coupler and 11 lb. (5 kg.) plastic grease bucket

WETTED COMPONENTS
Aluminum, Steel, Brass, Polyurethane & Nitrile Rubber

RECOMMENDED USE
For Grease up to and including NLGI No. 2

Common sight on construction equipment requiring high volume routine greasing

ORDERING INFORMATION

CAT NR.	ORD NR.	BUCKET CAPACITY		PUMP LENGTH BELOW DRUM COVER		DRUM COVER DIAMETER		FOLLOWER PLATE DIMENSIONS				HOSE LENGTH	BOX QTY.
								O.D. STEEL END		O.D. PLATE			
		(KG)	(LBS)	(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	(M)	
GS/5	44250	5	11	7-3/4	197	8-1/2	216	6-3/4	171	8-1/8"	206	1.5	4

95 Grease Filler Pumps

GFP

Easy to use Grease filling solution to load bulk or combination grease guns from bulk grease pails

No mess or waste. Full economy in buying bulk grease

Pump includes

- Zinc plated pump with zinc die cast pump head and cast aluminum adjusting flange
- Drum cover
- Follower plate
- Female loader fitting

Select models include follower plate with rubber lining for use with tapered drums

Available with a choice of female loader adaptors

a. **Regular**
For use with American Tapered 0.58" (14.7 mm) male loader fittings

b. **Universal**
For use with both European Straight (9 mm) and American Tapered 0.58" (14.7 mm) male loader fittings

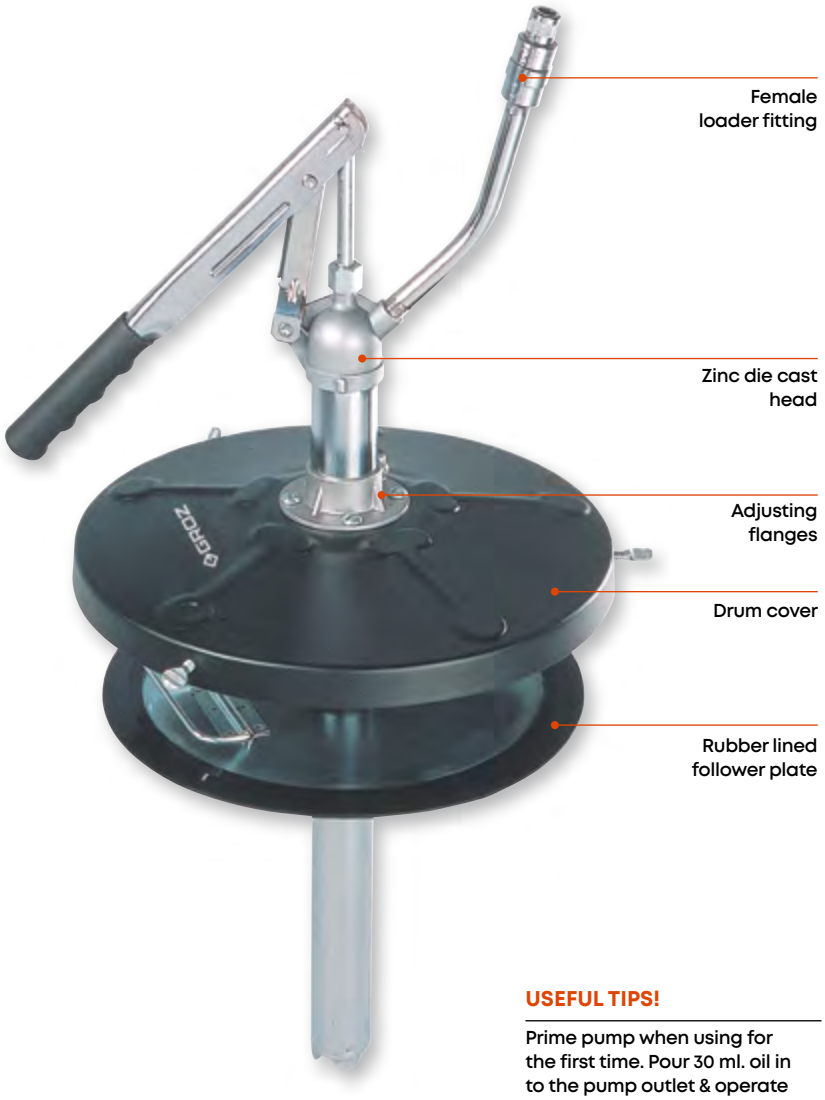

RECOMMENDED USE

For Light & self Collapsing Grease up to and including NLGI 2

SPECIFICATIONS

DELIVERS	UPTO 28GMS / STROKE	UPTO 1 OZ. / STROKE

USEFUL TIPS!

Prime pump when using for the first time. Pour 30 ml. oil in to the pump outlet & operate lever handle till grease starts dispensing. Never exert undue pressure on the lever handle

ORDERING INFORMATION

CAT NR.	ORD NR.	PAIL CAPACITY	PUMP LENGTH		DRUM COVER DIAMETER		TYPE OF FOLLOWER PLATE	FOLLOWER PLATE DIMENSIONS						FEMALE LOADER ADAPTOR	BOX QTY.
								O.D. STEEL END		O.D. PLATE		I.D. GROMMET			
			(INCH)	(MM)	(INCH)	(MM)		(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)		
GFP/02-PRO/UNI	44200	12.5 kg	18	457		287	Rubber Lining	-	230	-	272	1-1/2	38	Universal	10
GFP/03	44210	25-50 lb / 5gal.	18	457	12	310	Steel	-	-	11	280	1-1/2	38	American	10
GFP/03-PRO	44211	20 kg / 25-50 lb / 5gal.	18	457	12	310	Rubber Lining	9-1/2	241	11-11/32	288	1-1/2	38	American	10
* GFP/03-PRO/UNI	44212	20 kg / 25-50 lb / 5gal.	18	457	12	310	Rubber Lining	9-1/2	241	11-11/32	288	1-1/2	38	Universal	10
GFP/04	44222	50 kg / 120 lb.	30	760	15	381	Steel	-	-	13-5/8	346	1-1/2	38	American	10
GFP/04-PRO	44220	50 kg / 120 lb.	30	760	15	381	Rubber Lining	12-11/16	322	15	380	1-1/2	38	American	10
GFP/04-PRO/UNI	44221	50 kg / 120 lb.	30	760	15	381	Rubber Lining	12-11/16	322	15	380	1-1/2	38	Universal	10

* Best Seller

96 Grease Filler Pump High Pressure

GFP-HP

3,500 PSI

1.5 GM /STROKE

An easy & portable high pressure hand operated grease pump

Useful for clean greasing of machinery, equipment, trucks & cars

Provides high pressure greasing, where power is not available or when an air operated grease pump cannot be afforded

Steel construction with aluminum cast head & solid steel pumping chamber

Pump includes

- Lift handle, Drum Cover
- Rubber Lining Follower plate
- 48" (1220 mm) flexible grease hose fitted with professional 4 jaw coupler

SPECIFICATIONS

DEVELOPS	UPTO 3,500 PSI	UPTO 240 BAR
MAX. OUTPUT	1 OZ / 19 STROKES	1.5 GM. / STROKE

USEFUL TIPS!

Prime pump when using for the first time. Pour 30 ml. oil in to the pump outlet & operate lever handle till grease starts dispensing.

VARIANTS

GFP/HP-02
Use with 12.5 kg grease buckets popular in the United Kingdom

GFP/HP-03
For use with 20 kg / 25-50 lb. grease pails

ORDERING INFORMATION

CAT NR.	ORD NR.	PAIL CAPACITY	PUMP LENGTH BELOW DRUM COVER	DRUM COVER DIAMETER	TYPE OF FOLLOWER PLATE	FOLLOWER PLATE DIMENSIONS			BOX QTY.
						O.D. STEEL END	O.D. PLATE	I.D. GROMMET	
★ GFP/HP-02/PRO	44231	12.5 kg	315 mm	287 mm	Rubber Lining	230 mm	272 mm	25 mm	6
GFP/HP-03/PRO	44230	20 kg / 25-50 lb	13.11/16" (348 mm)	12" (310 mm)	Rubber Lining	9-1/2"	11-11/32"	1"	6
GHC-48/HC/14/4/B	44345	48" flexible high pressure hose with coupler (available as spare)							

★ **Best Seller**

97 Follower Plates

FLP

A range of follower plates, for use with Grease Pumps

Follower plates eliminate channelling & air pockets, keep lubricants from contamination & assist in pumping all of the lubricant from containers

Available in 2 types

a. Rubber lined follower plates

- Metal main body with grease resistant rubber lining
- Rubber lining is useful in wiping off grease from containers walls & also to eliminate air pockets
- Welded steel handle to pull out plate from container
- Rubber grommet for easy slide onto the pump suction tube
- Used for both straight & tapered grease pails

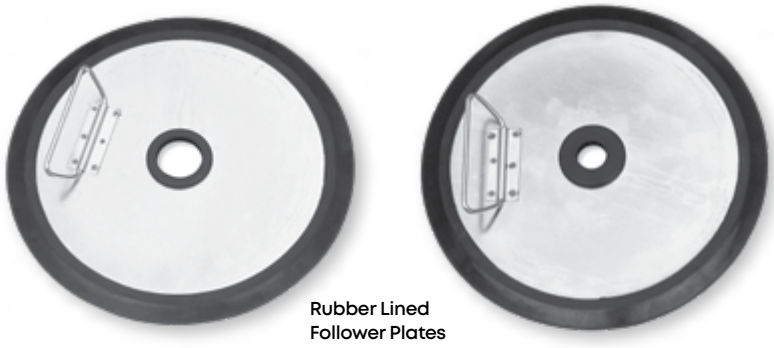

Rubber Lined Follower Plates

b. All steel follower plates

- Manufactured from plated steel with rubber grommet fitted in the center
- Used as a low cost alternative with straight pails

All Steel Follower Plates

ORDERING INFORMATION

CAT NR.	ORD NR.	PAIL CAPACITY	OUTER DIA. OF RIGID STEEL END OF FOLLOWER PLATE		OUTER DIA. OF FOLLOWER PLATE		INNER DIA. OF GROMMET RUBBER		FOR USE WITH GROZ PUMP SERIES	BOX QTY.
			(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)		
RUBBER LINED FOLLOWER PLATES										
FLP/195-225/6	47820	15 kg	-	195	-	225	-	29	BGRP/15	50
FLP/230-272	44321	12.5 kg	-	230	-	272	-	38	GFP/02	50
FLP/230-272/1	44334	12.5 kg	-	230	-	272	-	25	-	50
FLP/230-272/6	47821	12.5 kg	-	230	-	272	-	29.5	-	50
FLP/241-288	44322	20 kg / 25-50 lb. / 5gal.	9-1/2	241	11-11/32	288	1-1/2	38	GFP/03, GPH/1	50
FLP/241-288/1	44323	20 kg / 25-50 lb. / 5gal.	9-1/2	241	11-11/32	288	1	25	GFP/HP-03	50
FLP/241-288/2	44324	20 kg / 25-50 lb. / 5gal.	9-1/2	241	11-11/32	288	1-1/16	27.5	GRP/501/03	50
FLP/241-288/3	47822	20 kg / 25-50 lb. / 5gal.	9-1/2	241	11-11/32	288	1-7/32	31.3	-	50
FLP/241-288/4	47823	20 kg / 25-50 lb. / 5gal.	9-1/2	241	11-11/32	288	1-13/32	36	-	50
FLP/241-288/6	44330	20 kg / 25-50 lb. / 5gal.	9-1/2	241	11-11/32	288	1-3/16	29.5	GP1	50
FLP/241-288/7	47824	20 kg / 25-50 lb. / 5gal.	9-1/2	241	11-11/32	288	1-9/16	40	-	50
FLP/260-305/6	47827	20 kg / 25-50 lb. / 5gal.	9-1/2	241	12	305	-	29.5	GP4	25
FLP/322-380	44325	50 kg / 120 lb. / 16 gal.	12-11/16	322	15	380	1-1/2	38	GFP/04, GPH/2	25
FLP/322-380/1	47825	50 kg / 120 lb. / 16 gal.	12-11/16	322	15	380	1	25	-	25
FLP/322-380/2	44326	50 kg / 120 lb. / 16 gal.	12-11/16	322	15	380	1-1/16	27.5	GRP/501/04	25
FLP/322-380/3	47826	50 kg / 120 lb. / 16 gal.	12-11/16	322	15	380	1-7/32	31.3	-	25
FLP/322-380/6	44331	50 kg / 120 lb. / 16 gal.	12-11/16	322	15	380	1-3/16	29.5	GP2	25
FLP/550-602/6/GP3	44333	180 kg / 400 lb.	21-5/8	550	23-11/16	602	1-3/16	29.5	GP3	25
ALL STEEL FOLLOWER PLATES										
FP/01	44320	25-50 lb. / 5 gal.	-	-	11	280	1-1/2	38	GFP/03	50
FLP/346	44329	120 lb. / 16 gal. / 50 kg	-	-	13-5/8	346	1-1/2	38	GFP04	50

Caution: Above recommendations may not work with all containers of similar capacity. Due to difference in lube container specifications from one company to another, there can be a difference in your container size. Above recommendations are based on most widely used container specifications worldwide. Pls. ensure that your lube container falls within the above specified follower plate dimensions, for using standard parts. Other follower plate sizes can be made on request.

98 Bulk Fill Follower Plate

Rubber Lined Follower Plate with in-built 2" bung threaded 2.2806" × 16 UNS (F)

Used on 25-50 lb. / 5 gal. / 20 kg pails grease pails for suction filling of grease guns directly from the pail without any mess or wastage

ORDERING INFORMATION

CAT NR.	ORD NR.	PAIL CAPACITY	OUTER DIA. OF RIGID STEEL END OF FOLLOWER PLATE		OUTER DIA. OF FOLLOWER PLATE		INNER DIA. OF GROMMET RUBBER		FOR USE WITH GROZ PUMP SERIES	BOX QTY.
			(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)		
FLP/241-288/BNG	47830	25-50 lb / 5gal. / 20 kg	9-1/2	241	11-11/32	288	2.2806" × 16 UNS (F)		GFP/03	50

99 Female Loader Adaptors

Female adaptors are mounted on Grease Filler pumps for bulk filling Grease Guns

Male Loader fitting on Grease Gun fits onto the female loader adaptor with the rubber seal in the adapter making the transfer leak-proof

Adaptors are threaded 1/4" NPT (F)



Female Loader Adaptor mounted on Grease Filler Pump

ADP-9147
Universal Bulk Loader Valve
This dual-purpose adaptor can be used with both 9 mm Straight & American Tapered 0.58" (14.7 mm) Bulk Loader Valves
The top sleeve adapts to 9mm straight loader valves, which may be removed, and the base used with the larger 0.58" (14.7 mm) loader fittings

SFA/1-4/N
Designed for use with American Tapered 0.58" (14.7 mm) Bulk Loader Valves

ORDERING INFORMATION

CAT NR.	ORD NR.	TYPE	BOX QTY.
SFA/1-4/N	44360	For American Tapered 0.58" (14.7 mm) loader valves	10
ADP/9147	44361	Universal Adaptor for use with both 9 mm Straight & tapered 0.58" (14.7 mm) loader valves	10

02

OILING EQUIPMENT AND ACCESSORIES

- OIL PUMPS - MANUAL & PNEUMATIC
- OIL PUMP KITS
- OIL CONTROL GUNS & METERS
- MEASURES, JUGS & FUNNELS

100 Lever Action Oil Pumps

A range of popular fluid dispensing pumps for professional use

Ribbed section aluminum die cast pump head for maximum strength

Built-in 1-1/2" & 2" bung for use on drums with either openings

Plated steel lever handle with ergonomic rubber grip

Complete with curved metal spout & telescopic steel suction tube for use on 50–205 litre (15-55 US gallon) drums

For
50-205 litre
(15-55 US gal.)
Drum

LBP/04

SPECIFICATIONS

DELIVERS	UPTO 300 ML / STROKE	UPTO 10 OZ. / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
★ LBP/04	44100	Lever Action Oil Pump	10
LBP/04-CL	46950	Lever Action Oil Pump - Clear Tube	10
EBP/02	44116	Lever Action Oil Pump with PVC suction tube	10

★ Best Seller

VARIANTS

	LBP-04	LBP/04-CL	EBP-02
DESCRIPTION	LEVER ACTION OIL PUMP	LEVER ACTION OIL PUMP CLEAR TUBE Provides visibility to remaining oil and lubricant	LEVER ACTION OIL PUMP With PVC suction tube
PUMP BODY	Powder coated steel	Polycarbonate clear tube	Powder coated steel
PISTON MATERIAL	Zinc die cast	Steel	Steel
PISTON RINGS	Brass	NBR	NBR
DISCHARGE SPOUT	Plated steel discharge spout	Plated steel discharge spout	Plated steel discharge spout
NON RETURN SEAL	NBR	NBR	NBR
WETTED COMPONENTS	Steel, Aluminium, Zinc, Brass, NBR	Steel, Aluminium, olycarbonate, NBR	Steel , Aluminium, PVC & NBR
FOR USE WITH	Oil Based Fluids, Heating Oils, Motor Oils, Heavy & Light Oils, Diesel & Kerosene	Oil Based Fluids, Heating Oils, Motor Oils, Heavy & Light Oils	Oil Based Fluids, Heating Oils, Motor Oils, Heavy & Light Oils, Diesel & Kerosene
DO NOT USE WITH	Water Based Fluids, Solvents, Acids, Antifreeze, Gasoline etc.	Water Based Fluids, Solvents, Acids, Antifreeze etc.	Water Based Fluids, Solvents, Acids, Antifreeze, Gasoline etc.

101 Lever Action Antifreeze Pumps

LBP-06
LBP-96

A range of popular fluid dispensing pumps for professional use

Ribbed section aluminum die cast pump head for maximum strength

Built-in 1-1/2" & 2" bung for use on drums with either openings

Plated steel lever handle with ergonomic rubber grip

Complete with curved metal spout & telescopic steel suction tube for use on 50–205 litre (15-55 US gallon) drums

For
50-205 litre
(15-55 US gal.)
Drum

WETTED COMPONENTS
Steel, Aluminium, Zinc, Brass, Viton

RECOMMENDED USE
100% Antifreeze, Thinners, automotive additives, Industrial Chemicals, Oil based fluids & other non corrosive liquids

DO NOT USE WITH
Water Based Fluids, corrosive media, Gasoline etc.

SPECIFICATIONS

DELIVERS	UPTO 300 ML / STROKE	UPTO 10 OZ. / STROKE

VARIANTS

	LBP-06	LBP-96
DESCRIPTION	ANTIFREEZE PUMP	ANTIFREEZE PUMP Non-drip
DISCHARGE SPOUT	Plated steel discharge spout	Plated steel discharge spout with built in aluminium die cast non-drip & bucket hangar
PUMP BODY	Powder coated steel	Powder coated steel
PISTON MATERIAL	Zinc die cast	Zinc die cast
PISTON RINGS	Brass	Brass
NON RETURN SEAL	Viton	Viton

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
LBP/06	44120	Antifreeze Drum Pump	10
LBP/96	44125	Antifreeze Drum Pump with non-drip	10

102 Vertical Lift Pump

VLP

Self priming high volume Vertical Lift Pump

Aluminum die cast head, steel plunger rod & PTFE seals

Piston is made from Zinc with wear resistant brass piston rings

Complete with 2" cast iron bung adaptor

For use on 205 litre (55 US gallon) drums

WETTED COMPONENTS
Steel, Aluminum, Zinc, Brass & PTFE

RECOMMENDED USE
High viscosity petroleum based media, lacquer, thinners etc.

DO NOT USE WITH
Gasoline, water & other corrosive media

For 205 litre (55 US gal.) Drum

SPECIFICATIONS

DELIVERS	UPTO 750 ML / STROKE	UPTO 26 OZ. / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
VLP/01	44130	12

103 Oil Lube Dispensers

Pump designed for transferring transmission differentials & heavier oils

Zinc plated pump body with aluminium die cast head & adjusting flange

Powder coated steel drum cover

Wear resistant brass piston rings fitted onto zinc die cast piston

Complete with 48"/4' fuel resistant soft PVC hose with nozzle for efficient discharge

Also available complete with steel drum

Available in 2 versions

a. BLP Series
- Pump with drum cover, PVC hose & nozzle

b. OLP Series
- Pump with drum cover, PVC hose nozzle & steel bucket
- Variable setting on pump handle for use with media of different viscosities

WETTED COMPONENTS
Steel, Aluminum, Zinc, Brass, NBR, PVC

RECOMMENDED USE
Engine Oils, Transmission, Differentials & Heavier Oils

DO NOT USE WITH
Water based & other corrosive media

SPECIFICATIONS

DELIVERS - BLP	UPTO 60 ML / STROKE	UPTO 2.14 OZ. / STROKE
DELIVERS - OLP	UPTO 100 ML / STROKE	UPTO 3.4 OZ. / STROKE

VARIANTS

BLP SERIES

BLP-02

For 20 litre / 35 lbs / 5 US gal. pails

BLP-03

For 60 litre / 120 lbs / 16 US gal. drums

OLP SERIES - WITHOUT WHEELS

OLP-12
Complete with 12 litres steel bucket

OLP-16
Complete with 16 litres steel bucket

OLP SERIES - WITH WHEELS

OLP-12W
Complete with 12 litres steel bucket with wheels

OLP-16W
Complete with 16 litres steel bucket with wheels

OLP-30W
Complete with 30 litres steel bucket with wheels

ORDERING INFORMATION

CAT NR.	ORD NR.	DRUM CAPACITY			PUMP LENGTH		DRUM COVER DIA.		BOX QTY.
		(LBS)	(LITRES)	(US GAL.)	(INCH)	(MM)	(INCH)	(MM)	
BLP SERIES									
* BLP/02	44150	35	20	5	18	450	12	310	10
BLP/03	44160	120	60	16	30	760	15	381	6
OLP SERIES WITHOUT WHEELS									
OLP/12	44180	26	12	3.17	18	450	8-13/16	224	1
OLP/16	44181	35	16	4.23	20-5/8	524	8-13/16	224	1
OLP SERIES WITH WHEELS									
OLP/12W	44163	26	12	3.17	18	450	8-13/16	224	1
OLP/16W	44164	35	16	4.23	20-5/8	524	8-13/16	224	1
OLP/30W	44139	66	30	8	24	625	15	381	1
SPARES									
HOSE/48/BLP	44340	Spare 48" soft PVC hose							10

* Best Seller

104 Front Action Drum Pump

A2

Unique front action operation

Designed for convenient usage even on drums placed in inaccessible corners etc.

Heavy duty aluminum die cast pump head with 2" bung

Brass Piston rings for increased life

100% serviceability: no riveted parts

"Built-in" nozzle holder for convenient storage of discharge hose

Complete with telescopic suction tube for use on 50-205 litre (15-55 US gallon) drums, 1.8m PVC Nitrile delivery hose with metal nozzle spring & hose clamp



Position A
Set pivot pin here to pump light fluids



Position B
Set pivot pin here to pump heavy fluids

WETTED COMPONENTS

Steel, Aluminum, Brass, NBR and PVC Nitrile

RECOMMENDED USE

Diesel, Kerosene, Heating Oils, Motor Oils, Lubricating Oils (upto SAE 90), and other non-corrossive media

DO NOT USE WITH

Water based media, Antifreeze, Solvents, Acids, and Gasoline etc.

SPECIFICATIONS

DELIVERS	UPTO 250 ML / STROKE	UPTO 9 OZ. / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
A2H/BL	44110	Pump with telescopic suction tube	8
SPARES			
A2/TP/1-20	44309	Telescopic suction tube	25
SA/HOS/AA92/A2	44339	8' (1.8m) PVC hose with metal nozzle, spring & hose clamp	25

105 Steel Safety Pumps

VLP-5
VLP-55

165 ML / STROKE

FM APPROVED

Hand Operated Pumps for use with combustible & flammable media

Pump body made from Carbon Steel with PTFE piston & PTFE sealing gasket

Heavy-Duty bonding & grounding wires prevent hazardous static charge. Wires are secured by locknut & have heavy-duty Alligator Clips

Built-in Internal flame arrestor prevents flame flashback

WETTED COMPONENTS
Carbon Steel, PTFE

RECOMMENDED USE
Gasoline, Diesel, Kerosene, Lacquer, Thinners, Acetone, Benzene, Naphtha, Urea etc.

DO NOT USE WITH
Hydrochloric Acid, Sulphuric Acid, Water etc.

VARIANTS

VLP/5/F	VLP/55/F

SPECIFICATIONS

DELIVERS	UPTO 165 ML / STROKE	UPTO 5.5 OZ. / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	TYPE	SUITABLE FOR	BOX QTY.
VLP/5/F	44133	Pail Pump	20-30 litre (5 gal) pails	10
* VLP/55/F	44134	Drum Pump	205 litre (55 gal) drums	10

* Best Seller

GROZ

106 Rotary Drum Pumps

GNB-25

Most popular pump worldwide, the GROZ Rotary Pump is designed with unique features for maximum convenience

Dual Directional
Empty as well as refill containers just by the reverse turn of the handle

Rugged & Heavy Duty
Sturdy cast iron body with precisely machined cast iron vanes for better draw & smoother delivery

Inlet threaded 1"

Pump weighs 6.6 kg (14.5 lbs)

Complete with suction tube,
2" cast iron bung nut & discharge spout

Suitable for use on 50-205 litre (15-55 US gallon) drums

WETTED COMPONENTS
Steel, Cast Iron, NBR / Viton

RECOMMENDED USE
For Diesel, Kerosene, Heating Oils, Fuel Oil, Motor Oils, Lubricating Oils (upto SAE 90), and other non-corrosive media

DO NOT USE WITH
Water based media, Antifreeze, Solvents, Acids, Gasoline* etc.

*Except on model with viton seals

SPECIFICATIONS

DELIVERS FOR DIESEL FUEL	UPTO 250 ML / ROTATION	UPTO 9 OZ. / ROTATION

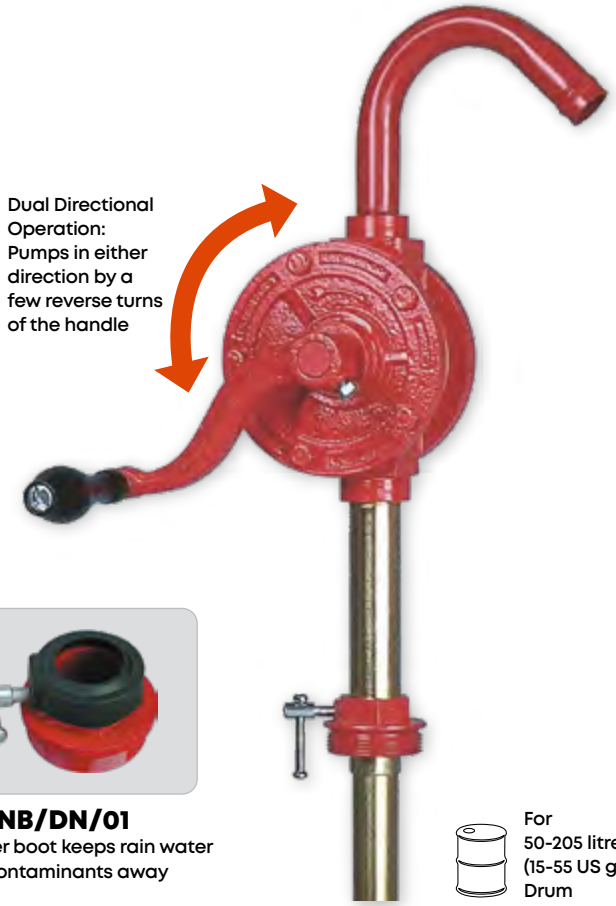

R/GNB/DN/01
Rubber boot keeps rain water and contaminants away

For 50-205 litre (15-55 US gal.) Drum

VARIANTS

GNB/25/3R/SPL	GNB/25/3R/PRO
Complete with 3 pc threaded rigid suction tube	Complete with 3 pc threaded rigid suction tube, 1.8m hose & metal nozzle

ORDERING INFORMATION

CAT NR.	ORD NR.	SEALS	DISCHARGE SPOUT	SUCTION TUBE	BOX QTY.
★ GNB/25T/SPL	44050	NBR	Steel	Telescopic	5
★ GNB/25/3R/SPL	44052	NBR	Steel	3 pc. Rigid	4
GNB/25V/3R/SPL	44064	Viton	Steel	3 pc. Rigid	4
GNB/25/3R/PRO	44058	NBR	With 1.8 m hose & metal nozzle	3 pc. Rigid	4
GNB/25T/PRO	44059	NBR	With 1.8 m hose & metal nozzle	Telescopic	5
R/GNB/DN/01	44092	-	Rubber Boot		-

★ Best Seller

USEFUL TIPS!

When using with low viscosity media like Diesel, Kerosene etc., pump should be primed by adding 30 ml of media or any oil into the pump outlet

107 Rotary Drum Pump Professional

RB-1

Aluminum Die Cast pump with heavy duty zinc die cast rotor & vanes

Specially designed horizontal outlet makes it easy to install filter/meter

Includes a 2" Cast Iron bung adaptor & die cast aluminum handle with security locking latch

Complete with a 3 pc threaded suction tube for use on 50-205 litre (15-55 US gallon) drums

Ideal for use in Industrial & Automotive applications

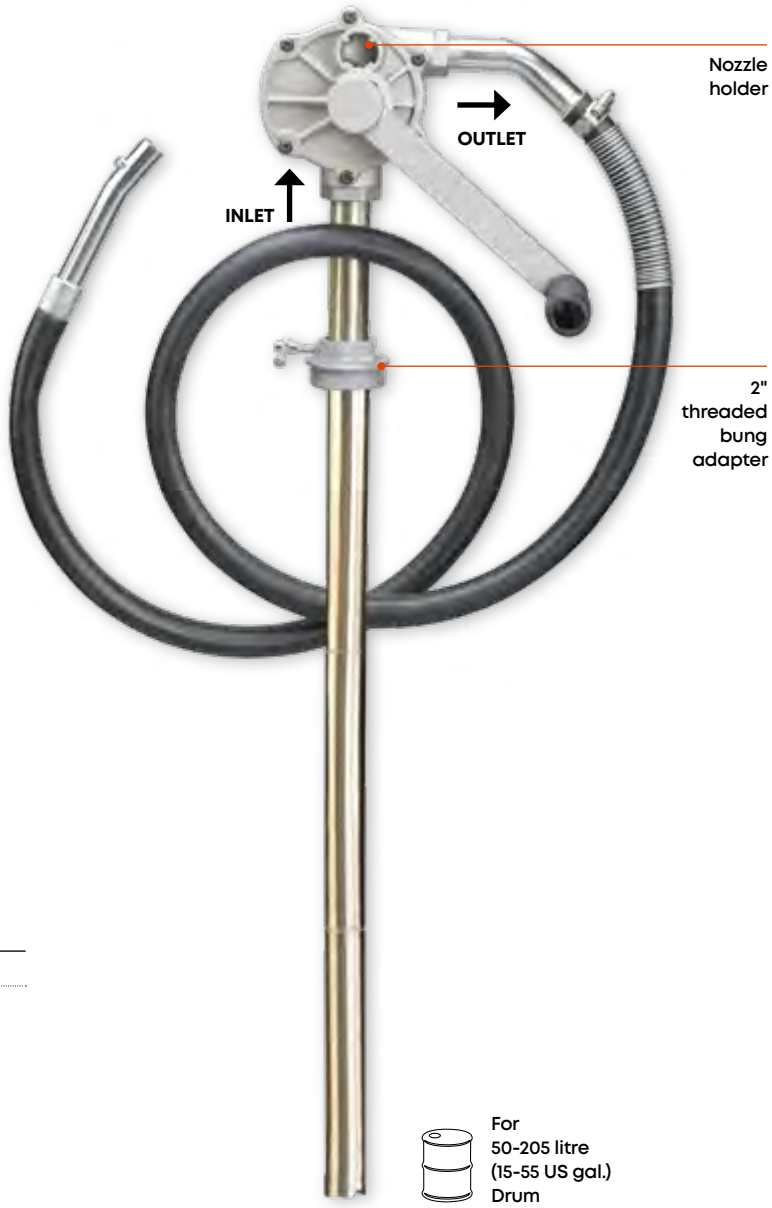

WETTED COMPONENTS

Aluminum, Zinc, Steel,
NBR/Viton & PVC nitrile* (*only for RB/1H)

RECOMMENDED USE

Gasoline, Diesel, Kerosene, Lubricating oils upto SAE 60 & 100% Antifreeze*
***only for RB/1V**

DO NOT USE WITH

With Corrosive liquids, Solvents, Acids, Alkalis etc.

VARIANTS

RB-1	RB-1H
Pump complete with steel discharge spout	Pump complete with steel discharge spout, 1.8m hose with nozzle, spring & hose clamp

SPECIFICATIONS

DELIVERS	UPTO 200 ML / ROTATION	UPTO 7 OZ. / ROTATION

ORDERING INFORMATION

CAT NR.	ORD NR.	SEALS	DISCHARGE SPOUT	BOX QTY.
RB/1	44030	NBR	Steel	4
RB/1V	44032	VITON	Steel	4
* RB/1H	44031	NBR	1.8 m hose with nozzle, spring & hose clamp	4
* SA/HOS/AA92/A2	44339	-	Spare 1.8m PVC nitrile delivery hose with metal nozzle, spring and hose clamp	25

* Best Seller

WARNING

Note fuels containing Ethanol will cause more frequent replacement of rubber parts

Never operate the pump near fire or source of spark. Some media may be explosive & dangerous to pump

108 Quart / Litre Stroke Pump

QSP

Heavy Duty Industrial Pump that dispenses measured quantity:
1 US quart (1 Litre) per rotation

Extremely useful in applications requiring metered delivery

The pump works on a precision rack & pinion mechanism

Pump comes with

- Spring loaded drain back tube for overflown media
- Lockable handle which allows the pump to be pad locked, when not in use
- Lock Nut for positioning the pump outlet in any direction
- Built in 2" bung adaptor
- Complete with a telescopic steel suction tube for use with 50-205 litre (15-55 US gallon) drums

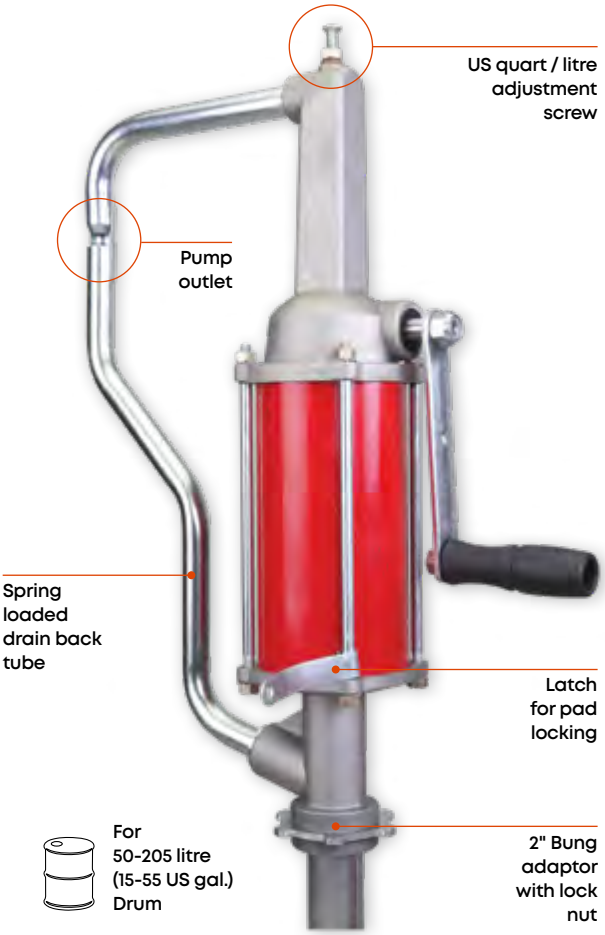

WETTED COMPONENTS

Steel, Aluminum, Nitrile Rubber & Acetal

RECOMMENDED USE

Gear & Lube Oil, Petroleum based Media, Diesel & Kerosene

DO NOT USE WITH

Water Based & other corrosive fluids

SPECIFICATIONS

DELIVERS	1 LITRE / ROTATION	1 US QUART / ROTATION

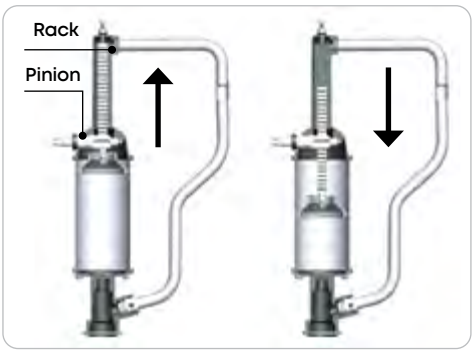

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
QSP/01	44187	4

109 Ezee Flow Pump

EZF-DS

Versatile Pump for use on 20-25 litre / 5 US gallon containers with plastic pull out (Rieke® spout) or 2" external threads

Downstroke operation
- Fluid discharge when pushing the handle down
- Enhanced ease of use & reduced fatigue especially when pumping heavy fluids
- Reduces pull out stress on the pump bung

Polyethylene pump head with nozzle holder & option to drain back over flown fluid into container

Heavy duty steel suction tube

Pump length can be extended by over 4" (100mm) for use on high depth containers, by conveniently sliding the suction tube extender

Interchangeable Bung Adaptors
- The standard bung adaptors can be slid over the pump, when using on containers with external threading
- When using the pump on pails with plastic pull out Rieke® spout, the other bung adaptor for Rieke® spout can be used
- 7 adaptors makes the pump good for use with most metal & plastic containers

Supplied complete with Rigid Steel Discharge Spout & 48" long Spring embedded non kink discharge hose fitted with non-drip

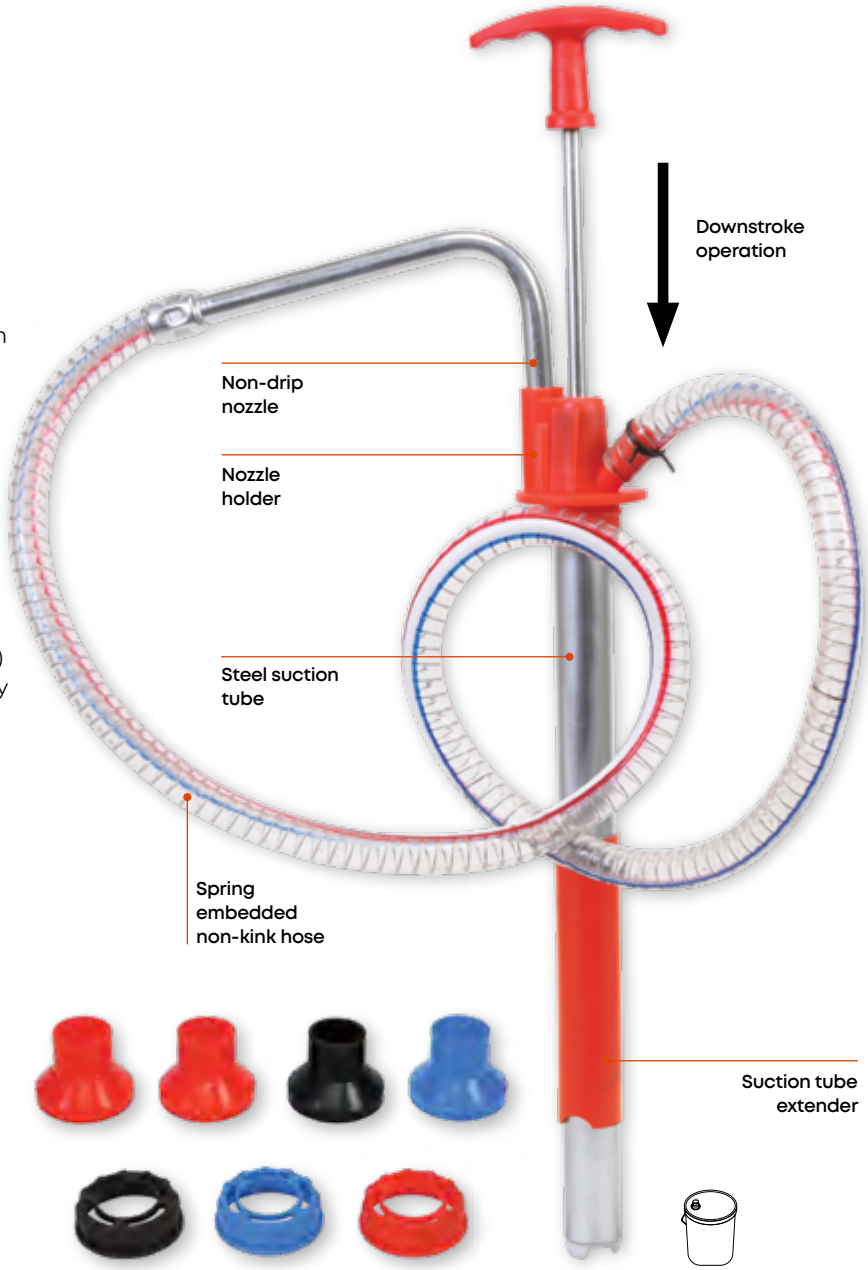

WETTED COMPONENTS
Steel, Aluminum, Polyethylene, Polypropylene, High Nitrile Rubber, PVC & Acetal

RECOMMENDED USE
Engine Oils, Gear Oils, Diesel and Light Fuel Oil, Antifreeze & Glycerine

DO NOT USE WITH
Water based & other corrosive media

ORDERING INFORMATION

CAT NR.	ORD NR.	PUMP LENGTH		SUCTION TUBE OUTER DIA.		BOX QTY.
		(INCH)	(MM)	(INCH)	(MM)	
EZF/DS/20	44183	12.7 - 17	323 - 435	1	25.4	25

SPECIFICATIONS

DELIVERS	UPTO 1 LITRE / 18 STROKES	UPTO 1 US QUART / 18 STROKES

110 Ezee Flow Pump Premium

EZF-PR

Versatile Pump for use on 20-25 litre / 5 US gallon containers with 2" bung

Downstroke Operation

- Fluid discharge when pushing the handle down
- Enhanced ease of use and reduced fatigue especially when pumping heavy fluids
- Reduces pull-out stress on the pump bung

High density polyethylene pump head incorporates a nozzle holder & option to drain back over from fluid back into the container

Heavy duty steel suction tube

Drum Filler Plug on the head helps in refilling the drum on which it is mounted without removing the pump from the drum.

Pump length can be extended upto 4" (100 mm) for use on high depth containers, by conveniently sliding the suction tube extender

Ergonomic D-Handle grip for easy operation. Slot in handle for fixing colour coding labels

Supplied with 48" long spring embedded non kink discharge hose fitted with steel discharge spout with non-drip

Hose clamping nut for easy assembly of hose

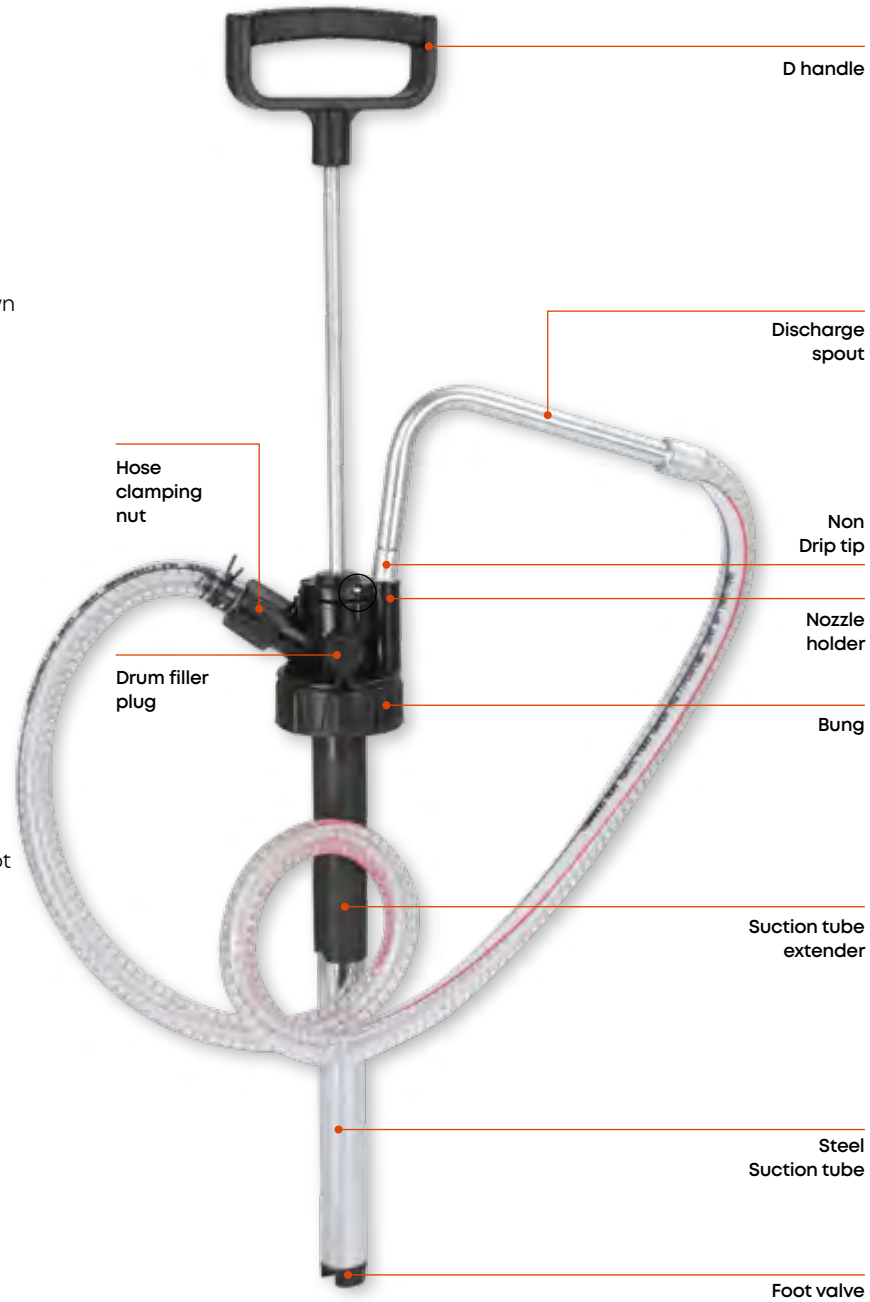

WETTED COMPONENTS

Steel, Aluminum, Polyethylene, Polypropylene co Polymer, Viton, PVC and Nylon

RECOMMENDED USE

Engine oils, Gear Oils, Diesel and Light Fuel Oil, Antifreeze, Glycerine

DO NOT USE WITH

Urea, Kerosene, Laquers, other water based and corrosive media

ORDERING INFORMATION

CAT NR.	ORD NR.	PUMP LENGTH		SUCTION TUBE OUTER DIA.		BOX QTY.
		(INCH)	(MM)	(INCH)	(MM)	
EZF/PR/20	44165	13.2 - 17.5	335 - 445	1	25.4	20

SPECIFICATIONS

DELIVERS	UPTO 0.91 LITRE / 14 STROKES	UPTO 0.9 US QUART / 14 STROKES

111 Ezee Flow Oil & Fuel Pump

EZF-WH20

NEW!

Heavy-duty downstroke pump for fast, clean & low-effort dispensing of engine oils, gear oils, diesel etc. from 20-25 litre / 5 US gallon containers with plastic pull out Rieke® spout

Downstroke operation
- Fluid discharge when pushing the handle down
- Ease of use & reduced operator fatigue especially when pumping high viscosity oils

Strong & durable Nylon pump head incorporates a nozzle holder with provision to drain excess fluid back into the drum

Extendable suction tube: Adjusts quickly for different drum sizes allowing the same pump to be used across multiple container sizes

Hose clamping nut for easy assembly of hose

Supplied complete with:
- 1.5m (5') reinforced dispensing hose with integrated spring guard that reduces kinking, ensuring uninterrupted flow & extended hose life
- Steel discharge spout fitted with a non-drip nozzle that minimizes spills

WETTED COMPONENTS

Steel, Aluminium, SS, Viton, High Nitrile Rubber & PVC

RECOMMENDED USE

Engine Oils, Gear Oils, Diesel, Light Fuel Oil, Antifreeze & Glycerine, Fluids upto ISO 320 viscosity

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
EZF/WH/20	45060	20

SPECIFICATIONS

DELIVERS	UPTO 1 LITRE / 12 STROKES	UPTO 1 US QUART / 12 STROKES

112 Ezee Flow Multi-Fluid Pump

EZF-WH30

NEW!

Heavy-duty downstroke pump designed for fast, clean & fatigue-free transfer of oils, diesel, DEF, water & industrial fluids from 20-25 litre / 5 US gallon containers with plastic pull out Rieke® spout

Downstroke operation with ergonomic D-handle

- Fluid discharge when pushing the handle down
- Ease of use & reduced operator fatigue especially when pumping high viscosity oils
- Oversized ergonomic D-handle provides comfortable grip & greater leverage for repetitive pumping operations, reducing operator fatigue during extended use

Strong & durable Nylon pump head with:

- Integrated refill port Refill the drum without removing the pump thus reducing risk of contamination & minimizing downtime
- Air breather port: Provision for adding air breather that helps seal the drum preventing entry of air borne contaminants

Hose clamping nut for easy assembly of hose

Extendable suction tube: Adjusts quickly for different drum sizes allowing the same pump to be used across multiple container sizes

Colour coded collars for quick fluid identification & to prevent cross-contamination.
(Also available as spare)

Supplied complete with:

- 1.5m (5') reinforced dispensing hose with integrated spring guard that reduces kinking, ensuring uninterrupted flow & extended hose life
- Steel discharge spout fitted with a non-drip nozzle that minimizes spills

WETTED COMPONENTS

Stainless Steel, Aluminium, Polyethylene, Steel, Polypropylene Copolymer, Viton, PVC & Nylon

RECOMMENDED USE

Engine Oils, Hydraulic Oils, Gear Oils, DEF, Diesel, Light Fuel Oils, Water & Antifreeze

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
EZF/WH/30	45061	20

SPECIFICATIONS

DELIVERS	UPTO 1 LITRE / 12 STROKES	UPTO 1 US QUART / 12 STROKES

113 Oil Bottle Pump

EZF-40

NEW!

The GROZ Oil Bottle Pump is a compact, hand-operated pump designed for clean and accurate dispensing of engine oils, gear oils, transmission fluids and other lubricants directly from small-pack containers

Threaded securely onto standard oil bottles, it provides a spill-free alternative to funnels

Ideal for automotive workshops, fleet maintenance, agricultural equipment, industrial maintenance, marine and powersports applications

Direct Bottle Mount
40 mm threaded adaptor fits standard 1L, 2.5L and 4L lubricant bottles for a secure, leak-free connection

One Pump for Multiple Bottle Sizes
Adjustable suction tube 9" (225 mm) to 11-11/32" (288 mm) accommodates varying bottle depths

Controlled Dispensing
Delivers approximately 10–15 ml per stroke for accurate filling and reduced product wastage

Easy to Clean
Quick disassembly allows thorough cleaning between different fluids, helping minimize cross-contamination

Complete with 20" (500 mm) flexible hose

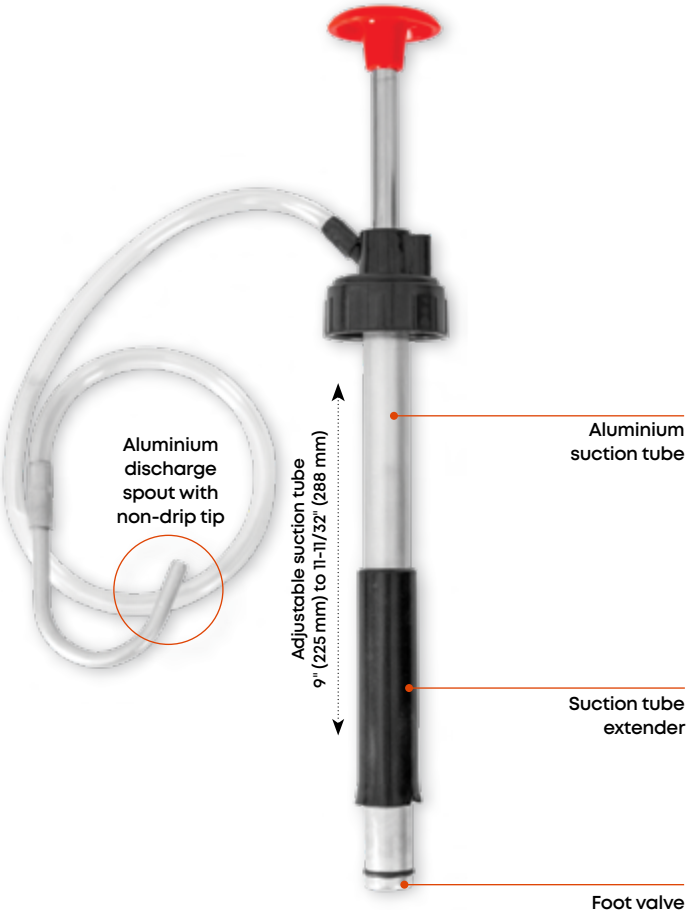

RECOMMENDED USE

Engine Oil, Gear Oil, Transmission Oil, Automatic Transmission Fluid (ATF) & General Lubricants

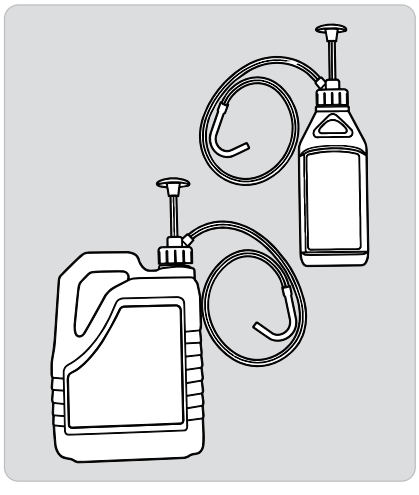

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
EZF/40	44466	20

SPECIFICATIONS

DELIVERS	UPTO 15 ML/ STROKE	UPTO 0.9 OZ / STROKE

114 Drip Pans

DP

Fit onto any 2" threaded opening on a drum, barrel or tank

Used as
- A drain for returning over flown media back to the drum
- Base for holding container during dispensing

Keep work place clean & eliminates wastage, saving money each time the pump is used

Available in 2 styles

a. Cast Iron type: For use on pumps with a suction tube - diameter equal or less than 1.32" (33.5 mm)
b. Cast Aluminum type: With 2" external & internal threads. Design allows any pump with a 2" bung to fit onto the Drip Pan

DP/GNB/25
With Cast Iron Body

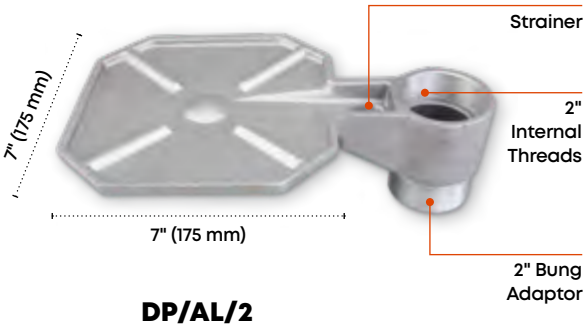

DP/AL/2
With Aluminium Body

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
DP/GNB/25	44075	10
DP/AL/2	44076	10

115 Bung Nuts

Cast iron bung nuts / adaptors for use on standard 2" drums

Plated spindle with Tommy Bar to firmly hold suction tube

ORDERING INFORMATION

CAT NR.	ORD NR.	COLOR / DESCRIPTION	SUITABLE FOR SUCTION TUBES WITH DIA. UPTO		FOR USE WITH GROZ PUMP SERIES	BOX QTY.
			(INCH)	(MM)		
GNB/DN/3-4	44380	Red	1.09	27.5	GNB-20	30
GNB/DN/0-1	44381	Red	1.27	32.5	GNB-25	30
GNB/DN/0-2	44382	Red	1.5	38	LLP/SS, VLP/SS	30
GNB/DN/0-2/SLV	44383	Silver Grey	1.5	38	RB-1, RB-3	30
BN/RBP/3V	44384	Black	1	26	RBP/3V	30
BN/RBP/3V/F	44388	Black with Flame Arrestor	1	26	RBP/3V (FM Approved Pumps)	30

116 Suction Tubes

Suction tubes, for use with all types of drum pumps

Available in telescopic or Rigid style

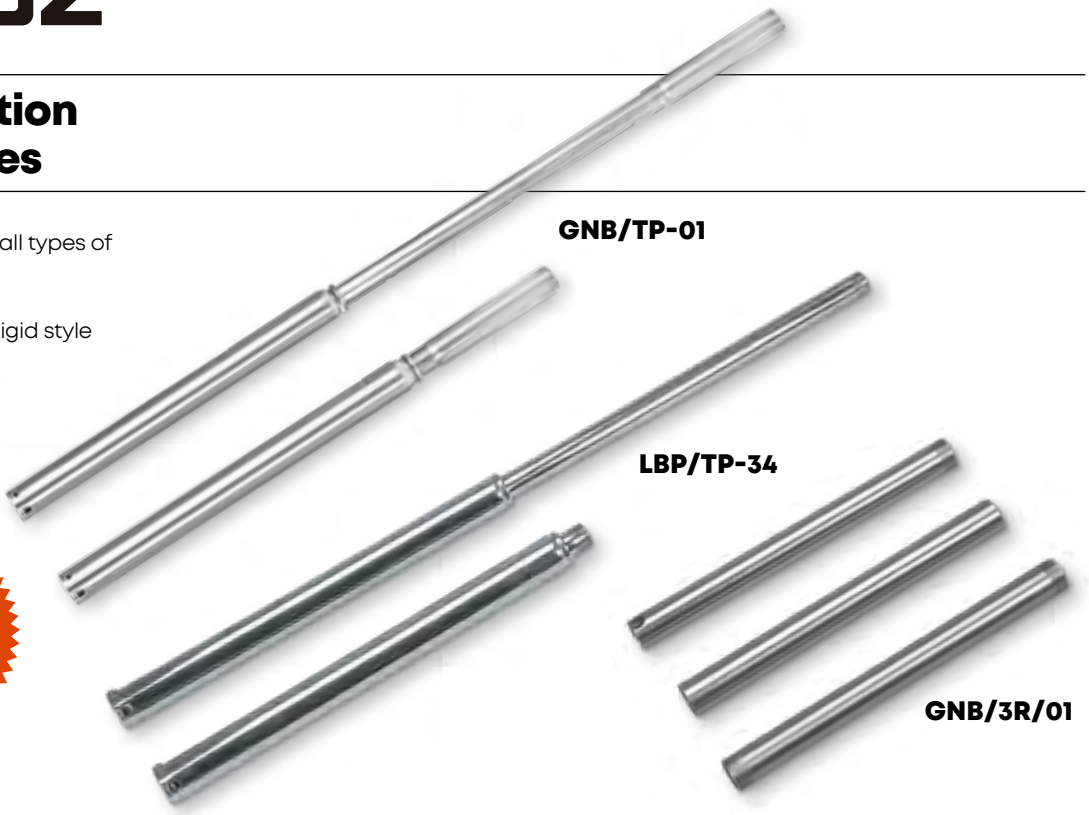

Other sizes can be custom manufactured

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	TUBE MATERIAL	SEAL	LENGTH		THREADS	FOR USE WITH GROZ PUMP SERIES	BOX QTY.
					(INCH)	(MM)			
TELESCOPIC									
GNB/TP/3-4	44300	Telescopic	Steel	Nitrile Rubber	24-7/32 - 39-3/4	615 - 1012	3/4" BSPT (M)	GNB-20	20
GNB/TP/3-4F/N	44305	Telescopic with Filter Screen at Inlet	Steel	Nitrile Rubber	24-7/32 - 40-3/32	608-1018	3/4" NPT (M)	RBP-3V	20
LBP/TP/3-4	44302	Telescopic	Steel	Nitrile Rubber	17-11/16 - 34-7/16	475 - 875	3/4" NPT (M)	LBP-04, LBP-06, LBP-96	20
LBP/TP/3-4/NR	44304	Telescopic with Non Return Valve at Inlet	Steel	Nitrile Rubber	19-3/8 - 34-27/32	492 - 885	3/4" NPT (M)	QSP-01, DPP-1	20
LBP/TP/3-4/PVC	44306	Telescopic	PVC	Nitrile Rubber	18-3/32 - 34-7/6	460-875	3/4" NPT (M)	LBP-04, LBP-06, LBP-96	20
PLP/TP/3-4	44307	Telescopic	Polypropylene & Polyethylene	Viton	13-3/4, 25-3/8 & 40	350, 645 & 1000	3/4" PF (M)	PLP-02	20
GNB/TP/0-1	44301	Telescopic	Steel	Nitrile Rubber	24-13/32 - 41	620-1044	1" BSPT (M)	GNB-25	20
A2/TP/1-20	44309	Telescopic	Steel	Nitrile Rubber	13-3/16 - 26	335 - 660	1"-20 UNEF (M)	A2	25
A2/TP/SPL/1-20V	44310	Telescopic	Steel	Viton	17-23/32 - 34-27/32	450 - 885	1"-20 UNEF (M)	LBP-85	25
RIGID									
EBP/2R/01	44311	2 pc Rigid Pipe	PVC	-	17-1/2 - 35-1/4	445 - 895	31/32 - 20 UNF (M)	EBP-01	50
GNB/3R/0-1	44303	3 pc Rigid Pipe	Steel	-	13-3/4, 26-3/8 & 39-3/8	350, 670 & 1000	1" BSPT (M)	GNB-25, RB-1, RB-3	20
FPM/2R/N	44312	2 pc Rigid Pipe	Steel	-	17.0 - 34.0	430 - 863	1" NPT (M)	FPM, OPM	20
PRP/3R	44313	3 pc Rigid Pipe	Polypropylene	-	16-23/32, 31-3/32 & 45-9/32	425, 790 & 1150	Special Non Std.	PRP, ERP	25

117 Air Operated Transfer Pump

ATP

40 LPM

The New Air Operated Fluid Transfer Pump Ideal for quick & safe transfer of fluids in industrial and workshop applications

Pump complete with:

- Air Pressure Regulator: Factory set at 7-8 PSI (0.5 BAR) for controlled air supply into the drum
- 1/4" spring loaded safety valve to prevent pressure build-up in the pump system
- 2 Pc telescopic suction tube: Suitable for use on 50-205 litre (15-55 US gallon) drums with 1-1/2" or 2" opening
- 6' (1.85m) × Ø 1" (25mm) discharge hose & steel spout

Available in two versions

	STEEL SUCTION TUBE	STAINLESS STEEL SUCTION TUBE
WETTED COMPONENTS	Steel, Cast Iron, Brass & NBR*	Stainless Steel, Cast Iron, Brass & NBR*
RECOMMENDED USE	Diesel, Kerosene & Oils	Water & Water Based Media, Corrosive media, Diesel, Kerosene & Oils
DO NOT USE WITH	Gasoline, Lacquer, Thinners, etc.	Gasoline, Lacquer, Thinners, etc.

*only for version with discharge hose

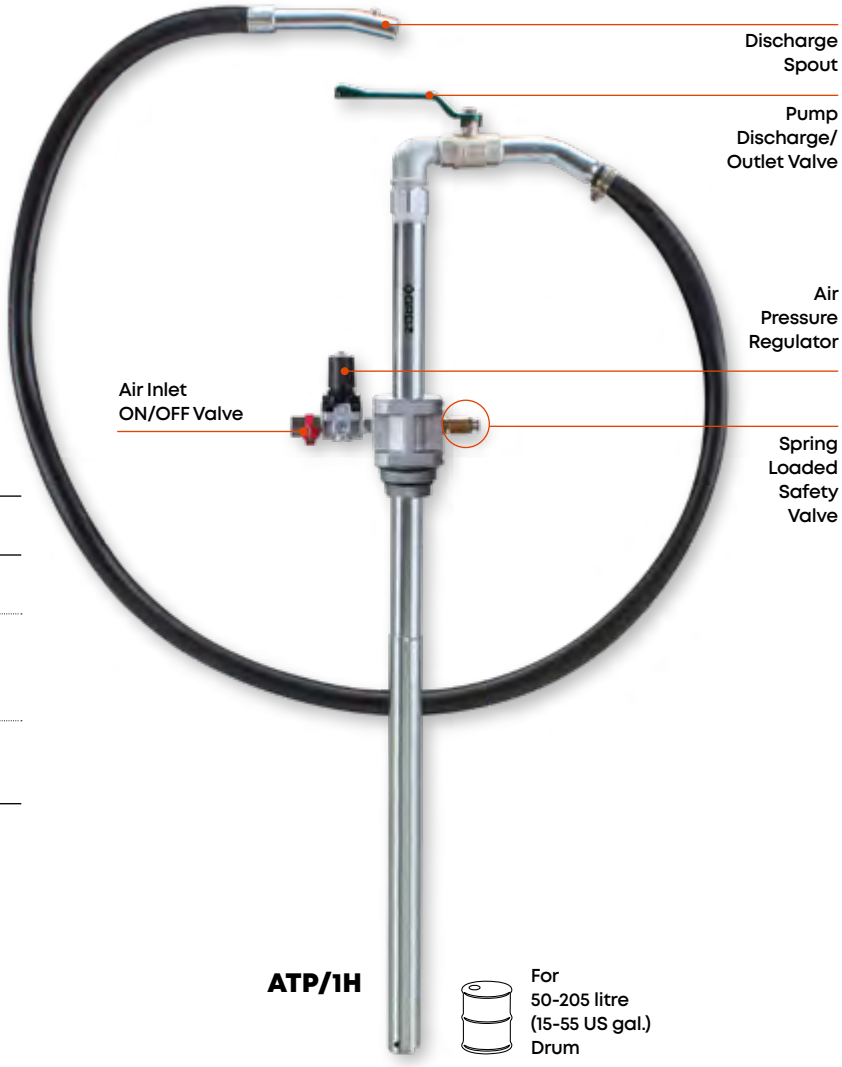

ATP/1H

For 50-205 litre (15-55 US gal.) Drum

SPECIFICATIONS

*FLOW RATE	UPTO 40 LPM	UPTO 10.56 GPM
MAX. AIR PRESSURE	0.5 BAR	7-8 PSI
AIR INLET CONNECTION	1/4" (F)	
BUNG SIZE	1-1/2" & 2"	

*Measured at pump outlet tested using water

FLUIDS

DIESEL | KEROSENE | OIL | WATER

*for SS suction tube pumps

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
ATP/1	45317	Pump with steel suction tube	4
ATP/1H	45318	Pump with steel suction tube & discharge hose	4
ATP/SS/1	45319	Pump with stainless steel suction tube	4
ATP/SS/1H	45314	Pump with stainless steel suction tube & discharge hose	4

WARNING

Pump must be supplied with clean & dry compressed air.
The standard pump configuration is also not suitable for use with flammable media such as Gasoline.
For the pump to operate, drum must be sealed ensuring no air outlet to maintain pressure.

118 Air Operated Oil Ratio Pump - 6.5:1

OPH



Heavy Duty Industrial grade air operated oil pump designed for unmatched performance in demanding conditions

Dispenses oil upto 6.5 times the pressure as air inlet

All metal construction, fully CNC machined with hardened wear resistant moving parts

Reciprocating piston operated 3" (76 mm) dia. air motor

Stall Free & Ice Free Motor
Tough durable housing with integrated muffler for quiet operation

Single Acting Pump
For dispensing high viscosity oils (upto SAE 240) for transferring over short & long distances upto 60 metres (196')

Low Maintenance Pump
Advanced, rugged design with few moving parts & no special maintenance tools make the pump servicing convenient

Stub pump comes with 2 additional threaded tubes for use on drums upto 205 litre (55 US gal.)

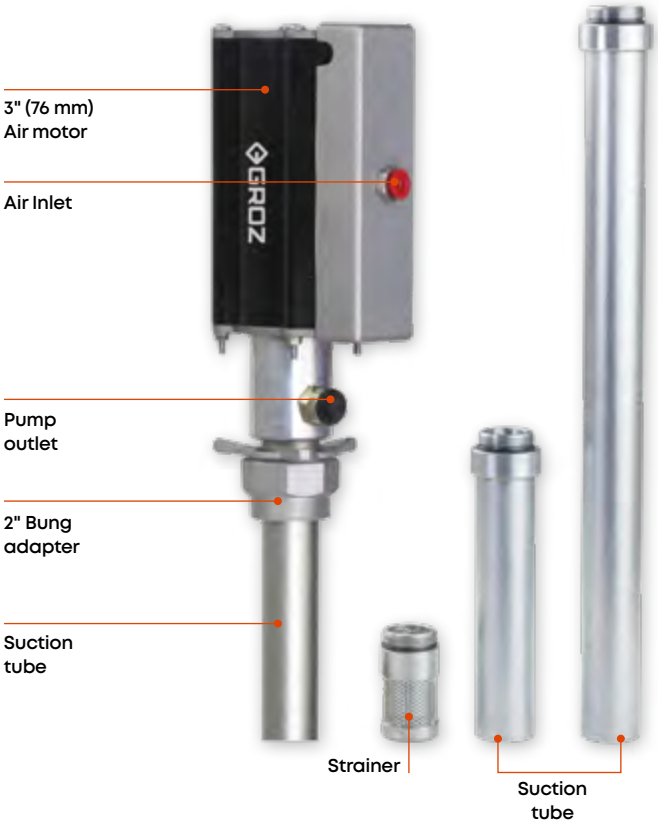

WETTED COMPONENTS

Steel, Brass, Aluminum, Turcite, Polyurethane, NBR

SPECIFICATIONS

WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
AIR INLET CONNECTION	1/4" (F)	
MAX MEDIA OUTLET PRESSURE	975 PSI	65 BAR
AIR CONSUMPTION	66 GPM	250 LPM
PUMP OUTLET CONNECTION	1/2" (F)	
PUMP INLET	1" (F)	
FLOW RATE	UPTO 4.76 GPM	UPTO 18 LPM
NOISE LEVEL	82 db	

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
OPH/S-T3/61/BSP	45363	BSP	4
OPH/S-T3/61/N	45368	NPT	4

119 Air Operated Oil Ratio Pumps 1:1

OP-11

40 LPM

1:1 air operated oil pump designed with a double acting mechanism for quick transfer of oil from large drums to smaller containers

All metal construction, fully CNC machined with hardened wear resistant parts

Reciprocating piston operated 2-1/2" (63mm) air motor

Use with low to medium viscosity oils upto SAE 80

Recommended Transfer Distance: Upto 5 metres

Air Consumption: 270 LPM (71.5 GPM)

Double Acting

WETTED COMPONENTS

Steel, Brass, Aluminum, Zinc, Hi Nitrile Rubber, Polyurethane & Nylon**

WARNING

Pump must be supplied with clean & dry compressed air via an FRL unit

VARIANTS

OP/S/11B

Stub pump with bung adaptor and foot valve
Inlet threaded: 1" (F)

OP/T2/11B

Pump complete with suction tube for **50-60 litre (16 US gal.)** drums & bung adaptor

OP/T3/11B

Pump complete with suction tube for **205 litre (55 US gal.)** drums & bung adaptor

OP/S-T3/11B

Stub pump with spare two piece threaded suction tube, bung adaptor and foot valve

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	BOX QTY.
BSP THREADS		NPT THREADS		
OP/S/11B/BSP	45322	OP/S/11B/N	45323	4
OP/T2/11B/BSP	45332	OP/T2/11B/N	45333	4
★ OP/T3/11B/BSP	45342	★ OP/T3/11B/N	45343	4
◆ OP/S-T3/11B/BSP	48871	OP/S-T3/11B/N	48858	4

★ Best Seller ◆ New

SPECIFICATIONS

FLOW RATE	UPTO 40 LPM	UPTO 10.5 GPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET CONNECTION	1/2" (F)	
PUMP INLET ON STUB PUMPS ONLY	1" (F)	
NOISE LEVEL	81 db	

120 Air Operated Oil Ratio Pumps 3:1

OP-31



Most popular air operated oil pumps for quick oil transfer over distances upto 30metres

All metal construction, fully CNC machined with hardened wear resistant parts

Reciprocating piston operated 2-1/2"(63mm) air motor

Use with medium to high viscosity oils upto SAE 130

Recommended Transfer Distance: Upto 30 metres

Air Consumption: 230 LPM (61 GPM)

WETTED COMPONENTS
Steel, Brass, Aluminum, Zinc, Hi Nitrile Rubber, Polyurethane & Turcite

WARNING

Pump must be supplied with clean & dry compressed air via an FRL unit

VARIANTS

OP/S/31B	**OP/T2/31**	**OP/T3/31B**	**OP/S-T3/31B**
Stub pump with bung adaptor and foot valve Inlet threaded: 1" (F)	Pump complete with suction tube for **50-60 litre (16 US gal.)** drums & bung adaptor	Pump complete with suction tube for **205 litre (55 US gal.)** drums & bung adaptor	Stub pump with spare two piece threaded suction tube, bung adaptor and foot valve

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	BOX QTY.
BSP THREADS		NPT THREADS		
OP/S/31B/BSP	45320	✶ OP/S/31B/N	45321	4
OP/T2/31B/BSP	45330	OP/T2/31B/N	45331	4
✶ OP/T3/31B/BSP	45340	✶ OP/T3/31B/N	45341	4
◆ OP/S-T3/31B/BSP	48872	OP/S-T3/31B/N	48859	4

✶ Best Seller ◆ New

SPECIFICATIONS

FLOW RATE	UPTO 14 LPM	UPTO 3.7 GPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET CONNECTION	1/2" (F)	
PUMP INLET ON STUB PUMPS ONLY	1" (F)	
NOISE LEVEL	81 db	

121 Air Operated Oil Ratio Pumps 5:1

OP-51

18 LPM

Double Acting

High pressure pump designed with a double acting mechanism for dispensing oil at 5 times the air inlet pressure

All metal construction, fully CNC machined with hardened wear resistant parts

Reciprocating piston operated 2-1/2"(63mm) air motor

Use with low to medium viscosity oils upto SAE 240

Recommended Transfer Distance: Upto 50 metres

Air Consumption: 250 LPM (66 GPM)

WETTED COMPONENTS

Steel, Brass, Aluminum, Zinc, Hi Nitrile Rubber, Polyurethane & Turcite

WARNING

Pump must be supplied with clean & dry compressed air via an FRL unit

VARIANTS

OP/S/51B	**OP/T2/51B**	**OP/T3/51B**	**OP/S-T3/51B**
Stub Pump with Bung Adaptor and Foot Valve Inlet threaded: 1" (F)	Pump complete with Suction Tube for **50-60 litre (16 US gal.)** drums & bung adaptor	Pump complete with Suction Tube for **205 litre (55 US gal.)** drums & bung adaptor	Stub Pump with spare two piece threaded suction tube, Bung Adaptor and Foot Valve

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	BOX QTY.
BSP THREADS		NPT THREADS		
OP/S/51B/BSP	45324	* OP/S/51B/N	45325	4
OP/T2/51B/BSP	45334	OP/T2/51B/N	45335	4
* OP/T3/51B/BSP	45344	* OP/T3/51B/N	45345	4
◆ OP/S-T3/51B/BSP	48873	OP/S-T3/51B/N	48860	4

* Best Seller ◆ New

SPECIFICATIONS

FLOW RATE	UPTO 18 LPM	UPTO 4.76 GPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET CONNECTION	1/2" (F)	
PUMP INLET ON STUB PUMPS ONLY	1" (F)	
NOISE LEVEL	81 db	

122 Air Operated Stainless Steel Ratio Pump - 3:1

14 LPM

Ideal for use with water based fluids, detergents etc. in garages workshops, car washers, lube trucks, industrial applications etc.

Wetted components are made out of Stainless Steel for protection against corrosion

Reciprocating piston operated 2-1/2" (63 mm) dia. Air Motor

Built in Stainless Steel Strainer at inlet keeps contaminants away

Includes 2" Die Cast Aluminium bung for use with 205 Litre (55 US gallons) drums

WETTED COMPONENTS

Stainless Steel, Brass, Aluminium, Hi-Nitrile Rubber, Polyurethane, Turcite

RECOMMENDED USE

Water, water soluble lubricants, coolants, soap solutions, detergents, windshield fluids etc.

DO NOT USE WITH

Food Grade media, waste oil or any media not compatible with the pump components

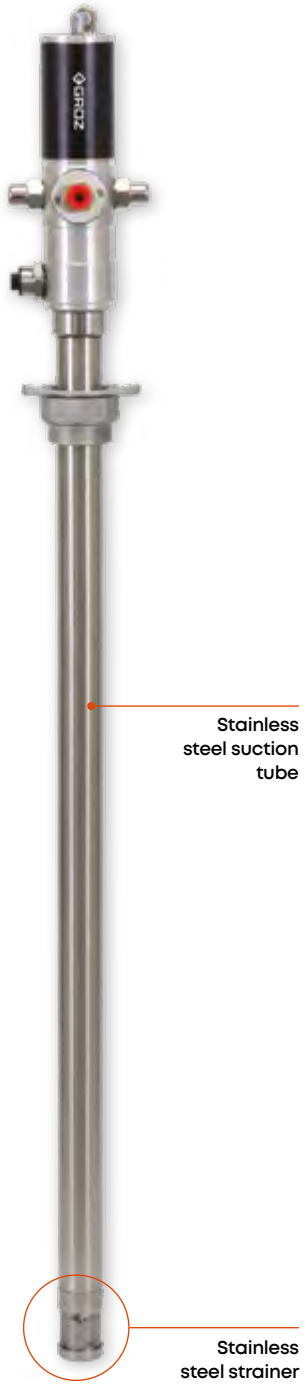

SPECIFICATIONS

FLOW RATE	UPTO 14 LPM	UPTO 3.70 GPM
WORKING PRESSURE	2 – 10 BAR	30 to 150 PSI
MAX. AIR INLET PRESSURE	10 BAR	150 PSI
MAX. MEDIA OUTLET PRESSURE	450 PSI	30 BAR
AIR CONSUMPTION	230 LPM	(61 GPM)
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET CONNECTION	1/2" (F)	
NOISE LEVEL	81 db	

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
OP/T3/SS/BSP	45360	BSP	4
* OP/T3/SS/N	45365	NPT	4

* Best Seller

WARNING

Pump must be supplied with clean & dry compressed air via an FRL unit

123 Oil Pump Kits

TMK-OP3

KIT INCLUDES

A	**3:1 Air Operated Oil Ratio Pump**
B	**Digital Oil Control Gun** Aluminium body gun with 1/2" swivel, flexible hose with manual non-drip nozzle Digital Meter: Accuracy ±0.5% Least Count: 0.001 unit
C	**Discharge Hose** 11' x 1/2" I.D. (3.4m x 12.7 mm I.D.) - SAE100 R1
D	**Drum Trolley - Heavy Duty** Manufactured from 4 mm thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with nylon rim Rear castors with toe lock
E	**Filter-Regulator Combination & Lubricator with Pressure Gauge (FRCLM)** Port Size: 1/4" Type: Miniature Filter: 40 micron

WETTED COMPONENTS

Steel, Brass, Aluminium, Zinc, Polyurethane, Turcite & Hi-Nitrile Rubber

RECOMMENDED USE

Transferring medium to high viscosity oils (upto SAE130) over short distances upto 30m

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK/OP3/A/BSP	45830	1/8" BSPT	1
TMK/OP3/A/N	45835	1/8" NPT	1

SPECIFICATIONS

FLOW RATE	UPTO 3.70 GPM	UPTO 14 LPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	450 PSI	30 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/2" (F)	
AIR CONSUMPTION	61 GPM	230 LPM
NOISE LEVEL	81 db	

TMK-OP3H

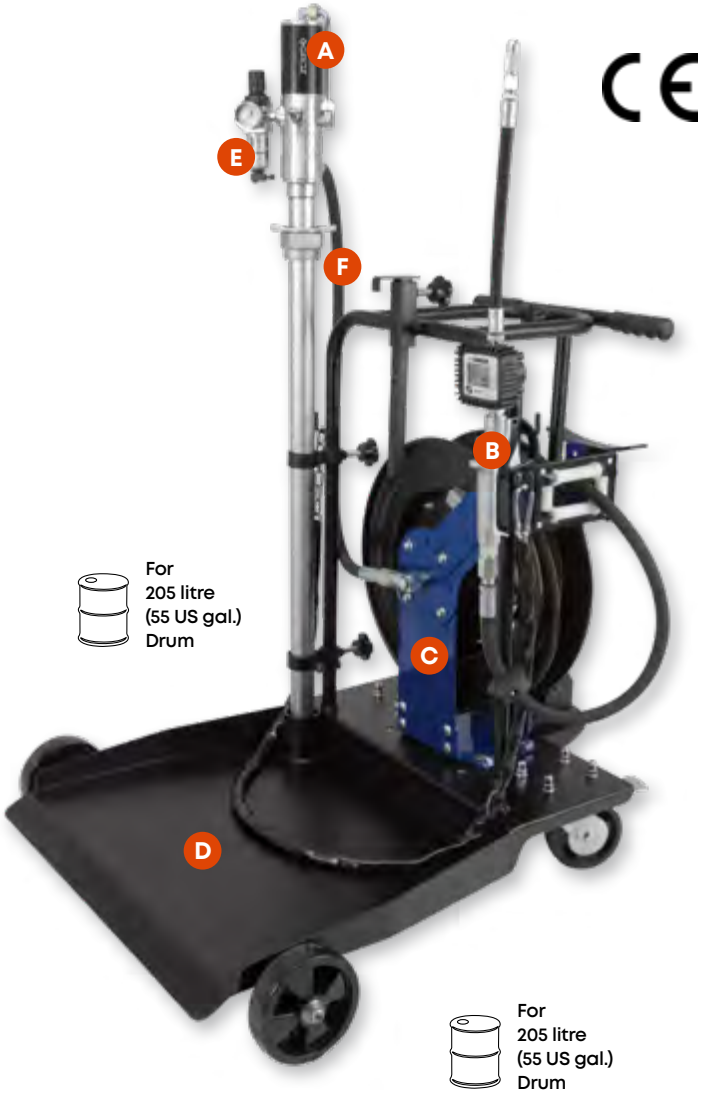

KIT INCLUDES

A	**3:1 Air Operated Oil Ratio Pump**
B	**Digital Oil Control Gun** Aluminium body gun with 1/2" swivel. Includes flexible hose with manual non-drip nozzle Digital Meter: Accuracy ±0.5% Least Count: 0.001 unit
C	**Oil Hose Reel - Heavy Duty Dual Arm Steel Reel** Hose I.D.: 1/2" (12.7 mm) Hose Length: 10 meter (32.8') Maximum Pressure: 2000 PSI (138 BAR)
D	**Drum Trolley - Heavy Duty** Manufactured from 4 mm thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with nylon rim Rear castors with toe lock
E	**Filter-Regulator Combination with Pressure Gauge (FRC)** Port Size: 1/4" Type: Miniature Filter: 40 micron
F	**Feeder Hose** Connects pump outlet to the hose reel inlet Length: 1.5m (5')

WETTED COMPONENTS

Steel, Brass, Aluminium, Zinc, Polyurethane, Turcite & Hi-Nitrile Rubber

RECOMMENDED USE

Transferring medium to high viscosity oils (upto SAE130) over short distances upto 30m

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK/OP3H/A/BSP	45832	1/8" BSPT	1
TMK/OP3H/A/N	45837	1/8" NPT	1

SPECIFICATIONS

FLOW RATE	UPTO 3.70 GPM	UPTO 14 LPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	450 PSI	30 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/2" (F)	
AIR CONSUMPTION	61 GPM	230 LPM
NOISE LEVEL	81 db	

Oil Pump Kits (Continued)

TMK-OP5H

For 205 litre (55 US gal.) Drum

KIT INCLUDES

A	**5:1 Air Operated Oil Ratio Pump** Double acting high pressure pump
B	**Digital Oil Control Gun** Aluminium body gun with 1/2" swivel. Includes flexible hose with manual non-drip nozzle Digital Meter: Accuracy ±0.5% Least Count: 0.001 unit
C	**Oil Hose Reel - Heavy Duty Dual Arm Steel Reel** Hose I.D.: 1/2" (12.7 mm) Hose Length: 10 meter (32.8') Maximum Pressure: 2000 PSI (138 BAR)
D	**Drum Trolley - Heavy Duty** Manufactured from 4 mm thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with nylon rim Rear castors with toe lock
E	**Filter-Regulator Combination & Lubricator with Pressure Gauge (FRCLM)** Port Size: 1/4" Type: Miniature Filter: 40 micron
F	**Feeder Hose** Connects pump outlet to the hose reel inlet Length: 1.5m (5')

WETTED COMPONENTS

Steel, Brass, Aluminium, Zinc, Polyurethane, Turcite & Hi-Nitrile Rubber

RECOMMENDED USE

Transferring high viscosity oils (upto SAE240) over long distances upto 50m

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK/OP5H/A/BSP	45831	1/8" BSPT	1
TMK/OP5H/A/N	45836	1/8" NPT	1

SPECIFICATIONS

FLOW RATE	UPTO 4.76 GPM	UPTO 18 LPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	750 PSI	50 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/2" (F)	
AIR CONSUMPTION	66 GPM	250 LPM
NOISE LEVEL	81 db	

TMK-OPH

KIT INCLUDES

A	**6.5:1 Air Operated Oil Ratio Pump**
B	**Digital Oil Control Gun** Aluminium body gun with 1/2" swivel. Includes flexible hose with manual non-drip nozzle Digital Meter: Accuracy ±0.5% Least Count: 0.001 unit
C	**Oil Hose Reel - Heavy Duty Dual Arm Steel Reel** Hose I.D.: 1/2" (12.7 mm) Hose Length: 10 meter (32.8') Maximum Pressure: 2000 PSI (138 BAR)
D	**Drum Trolley - Heavy Duty** Manufactured from 4 mm thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with nylon rim Rear castors with toe lock
E	**Feeder Hose** Connects pump outlet to the hose reel inlet Length: 1.5m (5')

For 205 litre (55 US gal.) Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Turcite, Polyurethane, & NBR

RECOMMENDED USE

Transferring medium to high viscosity oils (upto SAE130) over short distances upto 30m

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK/OPH/6H/B/BSP	45833	1/8" BSPT	1
TMK/OPH/6H/B/N	45838	1/8" NPT	1

SPECIFICATIONS

FLOW RATE	UPTO 4.76 GPM	UPTO 18 LPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	975 PSI	67 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/2" (F)	
AIR CONSUMPTION	66 GPM	250 LPM
NOISE LEVEL	82 db	

Oil Pump Kits (Continued)

TMK1-OP3

KIT INCLUDES

A	**3:1 Air Operated Oil Ratio Pump**
B	**Digital Oil Control Gun** Aluminium body gun with 1/2" swivel. Includes steel extension with automatic non-drip nozzle Digital Meter: Accuracy ±0.5% Least Count: 0.001 unit
C	**Discharge Hose** 79" x 1/2" I.D. (2m x 12.7 mm I.D.) - SAE R2
D	**Drum Cart** Manufactured from thick steel sheet in powder coated finish Front Wheels: 10" (250 mm) wide Rear castors with toe lock 5" nylon

For
205 litre
(55 US gal.)
Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Zinc, Polyurethane, Turcite & Hi-Nitrile Rubber

RECOMMENDED USE

Transferring medium to high viscosity oils (upto SAE130) over short distances upto 30m

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK1/OP3/B1/BSP	48950	1/8" BSPT	1
TMK1/OP3/B1/N	48955	1/8" NPT	1

SPECIFICATIONS

FLOW RATE	UPTO 3.70 GPM	UPTO 14 LPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	450 PSI	30 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/2" (F)	
AIR CONSUMPTION	61 GPM	230 LPM
NOISE LEVEL	81 db	

TMK1-OP3H

KIT INCLUDES

A	**3:1 Air Operated Oil Ratio Pump**
B	**Digital Oil Control Gun** Aluminium body gun with 1/2" swivel. Includes steel extension with automatic non-drip nozzle Digital Meter: Accuracy ±0.5% Least Count: 0.001 unit
C	**Oil Hose Reel** Hose I.D.: 1/2" (12.7 mm) Hose Length: 10 meter (32.8') Maximum Pressure: 2000 PSI (138 BAR)
D	**Drum Cart** Manufactured from thick steel sheet in powder coated finish Front Wheels: 10" (250 mm) wide Rear castors with toe lock 5" nylon
E	**Feeder Hose** Connects pump outlet to the hose reel inlet Length: 1.5m (5')

For
205 litre
(55 US gal.)
Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Zinc, Polyurethane, Turcite & Hi-Nitrile Rubber

RECOMMENDED USE

Transferring medium to high viscosity oils (upto SAE130) over short distances upto 30m

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK1/OP3H/B1/BSP	48952	1/8" BSPT	1
TMK1/OP3H/B1/N	48957	1/8" NPT	1

SPECIFICATIONS

FLOW RATE	UPTO 3.70 GPM	UPTO 14 LPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	450 PSI	30 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/2" (F)	
AIR CONSUMPTION	61 GPM	230 LPM
NOISE LEVEL	81 db	

Oil Pump Kits (Continued)

TMK1-OP5

For
205 litre
(55 US gal.)
Drum

KIT INCLUDES

A	**5:1 Air Operated Oil Ratio Pump** Double acting high pressure pump
B	**Digital Oil Control Gun** Aluminium body gun with 1/2" swivel. Includes steel extension with automatic non-drip nozzle Digital Meter: Accuracy ±0.5% Least Count: 0.001 unit
C	**Discharge Hose** 79" x 1/2" I.D. (2m x 12.7 mm I.D.) - SAE R2
D	**Drum Cart** Manufactured from thick steel sheet in powder coated finish Front Wheels: 10" (250 mm) wide Rear castors with toe lock 5" nylon

WETTED COMPONENTS

Steel, Brass, Aluminium, Zinc, Polyurethane, Turcite & Hi-Nitrile Rubber

RECOMMENDED USE

Transferring high viscosity oils (upto SAE240) over long distances upto 50m)

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK1/OP5/B1/BSP	48951	1/8" BSPT	1
TMK1/OP5/B1/N	48956	1/8" NPT	1

SPECIFICATIONS

FLOW RATE	UPTO 4.76 GPM	UPTO 18 LPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	750 PSI	50 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/2" (F)	
AIR CONSUMPTION	66 GPM	250 LPM
NOISE LEVEL	81 db	

TMK1-OP5H

KIT INCLUDES

A	**5:1 Air Operated Oil Ratio Pump** Double acting high pressure pump
B	**Digital Oil Control Gun** Aluminium body gun with 1/2" swivel. Includes steel extension with automatic non-drip nozzle Digital Meter: Accuracy ±0.5% Least Count: 0.001 unit
C	**Oil Hose Reel** Hose I.D.: 1/2" (12.7 mm) Hose Length: 10 meter (32.8') Maximum Pressure: 2000 PSI (138 BAR)
D	**Drum Cart** Manufactured from thick steel sheet in powder coated finish Front Wheels: 10" (250 mm) wide Rear castors with toe lock 5" nylon

For
205 litre
(55 US gal.)
Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Zinc, Polyurethane, Turcite & Hi-Nitrile Rubber

RECOMMENDED USE

Transferring high viscosity oils (upto SAE240) over long distances upto 50m

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK1/OP5H/B1/BSP	48953	1/8" BSPT	1
TMK1/OP5H/B1/N	48958	1/8" NPT	1

SPECIFICATIONS

FLOW RATE	UPTO 4.76 GPM	UPTO 18 LPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	750 PSI	50 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/2" (F)	
AIR CONSUMPTION	66 GPM	250 LPM
NOISE LEVEL	81 db	

Oil Pump Kits (Continued)

TMK2-OP3

KIT INCLUDES

A	**3:1 Air Operated Oil Ratio Pump**
B	**Digital Oil Control Gun** Aluminium body gun with 1/2" swivel. Includes steel extension with automatic non-drip nozzle Digital Meter: Accuracy ±0.5% Least Count: 0.001 unit
C	**Discharge Hose** 79" x 1/2" I.D. (2m x 12.7 mm I.D.) - SAE R2
D	**Drum Trolley** Manufactured from thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with ball bearings Swivel Rear Castors: 3" (75 mm) Nylon

For 50-60 litre (16 US gal.) Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Zinc, Polyurethane, Turcite & Hi-Nitrile Rubber

RECOMMENDED USE

Transferring medium to high viscosity oils (upto SAE130) over short distances upto 30m

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK2/OP3/B1/BSP	48960	1/8" BSPT	1
TMK2/OP3/B1/N	48965	1/8" NPT	1

SPECIFICATIONS

FLOW RATE	UPTO 3.70 GPM	UPTO 14 LPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	450 PSI	30 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/2" (F)	
AIR CONSUMPTION	61 GPM	230 LPM
NOISE LEVEL	81 db	

TMK2-OP5

KIT INCLUDES

A	**5:1 Air Operated Oil Ratio Pump** Double acting high pressure pump
B	**Digital Oil Control Gun** Aluminium body gun with 1/2" swivel. Includes steel extension with automatic non-drip nozzle Digital Meter: Accuracy ±0.5% Least Count: 0.001 unit
C	**Discharge Hose** 79" x 1/2" I.D. (2m x 12.7 mm I.D.) - SAE R2
D	**Drum Trolley** Manufactured from thick steel sheet in powder coated finish Front Wheels: 6" (150 mm) polyurethane with ball bearings Swivel Rear Castors: 3" (75 mm) Nylon

For
50-60 litre
(16 US gal.)
Drum

WETTED COMPONENTS

Steel, Brass, Aluminium, Zinc, Polyurethane, Turcite & Hi-Nitrile Rubber

RECOMMENDED USE

Transferring high viscosity oils (upto SAE240) over long distances upto 50m

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
TMK2/OP5/B1/BSP	48961	1/8" BSP	1
TMK2/OP5/B1/N	48966	1/8" NPT	1

SPECIFICATIONS

FLOW RATE	UPTO 4.76 GPM	UPTO 18 LPM
WORKING PRESSURE	30-150 PSI	2-10 BAR
MAX. AIR PRESSURE	150 PSI	10 BAR
MAX. OUTLET PRESSURE	750 PSI	50 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	1/2" (F)	
AIR CONSUMPTION	66 GPM	250 LPM
NOISE LEVEL	81 db	

124 Electric Oil Drum Pumps

16 LPM

Workshop use Electric Oil Transfer pump

Compact & lightweight construction

ON/OFF Switch with LED Indicator

Built-in fuse for overload protection

Silenced motor makes almost no noise

Duty Cycle
15 minutes On / 30 Minutes Off

Self priming design
Allows for high suction lift even at dry start-up

Stainless steel filter built into the suction tube inlet prevents contaminants from entering & hence avoiding resultant damage

Discharge spout with
a. Aluminium die cast non-drip attachment
b. Welded steel holder that prevents entry of contaminants

Built-in 2" bung adaptor fits 205 litre (55 US gal.) drums. Bung adapter can be adjusted by 0.6" (15 mm) to adjust to drums with varying heights.

Includes an additional bung thread converter for converting 2" standard bung threads to 2.5" × 5 mm buttress for using the same pumps with IBC's/Totes

Telescopic suction tube extends from 33-1/2" (850 mm) to 49" (1245 mm)

Suitable for use with
205 litres (55 US gal.) drums or 1000 - 1250 litres (275-330 US gal.) IBC's/Totes

Also available in metered version:
High pressure positive displacement meter suitable for in-line applications

Electric Oil Meter-Professional (OM-2000) measures in Litres, US Gallons, US Quarts, Pints (see details on page 168)

Rigid Spout - Can be rotated 180° to double up as a non-drip nozzle

Lift Handle

Thread Converter (with 2.5x5 mm Buttress Threads)

Telescopic Suction Tube

SS Filter

With 100V-240V, 50/60 Hz, AC Dual Voltage Power Adaptor

WETTED COMPONENTS
Viton, POM, Stainless Steel, PE, NBR, PP, Steel, Aluminium

RECOMMENDED USE
Motor oil, Hydraulic oil, Lubricants

DO NOT USE WITH
Gasoline, Corrosive chemicals, Lacquer thinners, any material that is not compatible with the pump construction

VARIANTS

ELECTRIC OIL PUMP	ELECTRIC OIL PUMP - METERED

SPECIFICATIONS

FLOW RATE*	UPTO 16 LPM	UPTO 4.2 GPM
MOTOR TYPE	DC Brush Motor	5 Pole
AC POWER ADAPTER	Input: 100 - 240 V AC, 50 / 60 Hz, Output: 20 V DC Constant Voltage, 6A max	
MAX. VISCOSITY OF MEDIA	100 cSt	465 SSU
TEMPERATURE	5° to 40°C	41° to 104°F
ACCURACY**	±0.50%	
REPEATABILITY**	0.25%	
MAX RESETTABLE TOTAL	9,99,999 units (6 digits × 100 indicator)	
MAX NON-RESETTABLE TOTAL	9,99,999 units (6 digits × 100 indicator)	
LEAST COUNT/ RESOLUTION	UPTO 0.001 units	

*With SAE-30 Hydraulic Oil
** Tested in laboratory conditions

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	PLUG TYPE	BOX QTY.
ELECTRIC OIL PUMP				
EDR/OL/AC/AU	45840	With non-drip attachment & AC power adaptor with AU plug	Australian	4
EDR/OL/AC/EU	45841	With non-drip attachment & AC power adaptor with EU plug	European	4
EDR/OL/AC/UK	45842	With non-drip attachment & AC power adaptor with UK plug	UK	4
EDR/OL/AC/US	45843	With non-drip attachment & AC power adaptor with US plug	US	4
ELECTRIC OIL PUMP - METERED				
EDR/OLM/AC/AU	45844	With oil meter, non-drip attachment & AC power adaptor with AU plug	Australian	4
EDR/OLM/AC/EU	45845	With oil meter, non-drip attachment & AC power adaptor with EU plug	European	4
EDR/OLM/AC/UK	45846	With oil meter, non-drip attachment & AC power adaptor with UK plug	UK	4
EDR/OLM/AC/US	45847	With oil meter, non-drip attachment & AC power adaptor with US plug	US	4

125 Electric Oil Pumps



Heavy duty oil pump designed to transfer bulk oils, hydraulic oils etc.

Air cooled motor with thermal protection

Non corroding aluminium die cast pump body

Sintered powder metal gears

Self priming, positive displacement design

High horsepower to flow ratio assures adequate power to pump viscous fluids at low temperatures

Pump has an internal bypass valve to bypass flow, if the discharge pressure exceeds the bypass valve setting

Built-in 2" bung adaptor for mounting on drums/tanks

Suitable for use with 50-205 litre (15-55 US gallon) drums

Can be used to transfer used oil with a screen fitted onto the suction tube

Duty Cycle
30 minutes ON / 30 minutes OFF

Available in following versions:
1. AC regular flow
2. AC high flow
3. DC regular flow

WETTED COMPONENTS
Aluminium, Steel, Cast Iron, Nylon, NBR, Zinc, Polypropylene, PVC

RECOMMENDED USE
Oils, Synthetic Oils, Hydraulic Oils, Cutting Oils & Non-Flammable Oils

* only on AC models

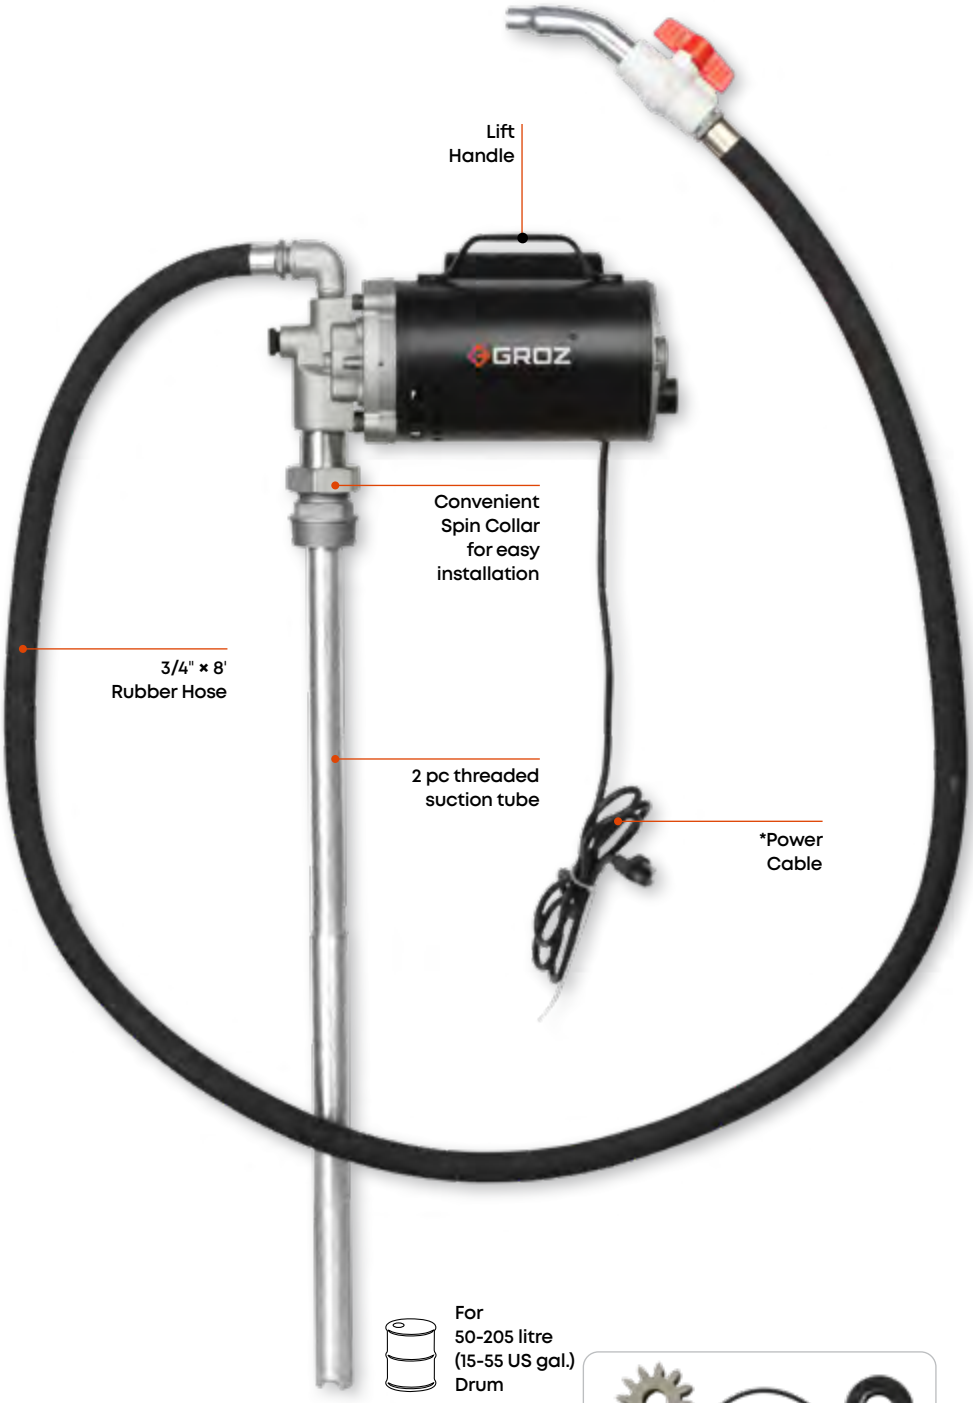

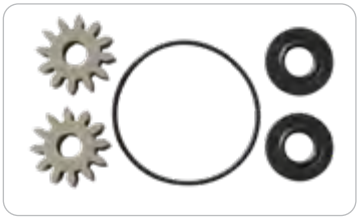

KIT/OPM - Repair Kit

SPECIFICATIONS

	AC REGULAR FLOW		AC HIGH FLOW		DC REGULAR FLOW
	OPM/115	OPM/220	OPM/115/HF	OPM/220/HF	OPM/12
DESCRIPTION	Heavy Duty, 115V AC	Heavy Duty, 220V AC	High Flow Heavy Duty , 115V AC	High Flow Heavy Duty, 220V AC	Heavy duty 12V DC
FLOW	Upto 15 LPM (4 GPM)	Upto 11.5 LPM (3 GPM)	Upto 30 LPM (8 GPM)	Upto 23 LPM (6 GPM)	Upto 13.2 LPM (3.5 GPM)
MOTOR	1/2 HP 115V AC, 60 Hz	1/2 HP 220V AC, 50 Hz	1/2 HP 115V AC, 60 Hz	1/2 HP 220V AC, 50 Hz	1/2 HP 12V DC
AMP	9 Amp	6 Amp	9 Amp	6 Amp	39 Amp
RPM	1600	1300	3400	2800	1500
MECHANISM	Gear Pump	Gear Pump	Gear Pump	Gear Pump	Gear Pump
SUCTION PIPE	34" long	34" long	34" long	34" long	34" long
HOSE	3/4" × 8'	3/4" × 8'	3/4" × 8'	3/4" × 8'	3/4" × 8'
BUNG ADAPTOR	2" Threaded	2" Threaded	2" Threaded	2" Threaded	2" Threaded
INLET	1" NPT	1" NPT	1" NPT	1" NPT	1" NPT
OUTLET	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
DISPENSING NOZZLE	Ball Valve	Ball Valve	Ball Valve	Ball Valve	Ball valve
POWER CABLE LENGTH	8'	8'	8'	8'	-
AIR COOLED	Yes	Yes	Yes	Yes	Yes
MAX. VISCOSITY OF OIL	SAE 90	SAE 90	SAE 90	SAE 90	SAE 90
MAX. WORKING PRESSURE	65 PSI (4.5 BAR)	65 PSI (4.5 BAR)	65 PSI (4.5 BAR)	65 PSI (4.5 BAR)	65 PSI (4.5 BAR)
THERMAL PROTECTION	Yes	Yes	Yes	Yes	No

ORDERING INFORMATION

CAT NR.	ORD NR.	POWER SUPPLY	BOX QTY.
★ OPM/115	45550	115V AC	1
OPM/220	45551	220V AC	1
OPM/115/HF	45555	115V AC	1
OPM/220/HF	45556	220V AC	1
OPM/12	45560	12V DC	1
REPAIR KIT			
KIT/OPM	45565	-	-

★ Best Seller

126 Air Operated Double Diaphragm Pumps

Driven by compressed air, these pumps are designed for large volume transfer in a very short time

Pumps transfer contaminated media & are good at cleaning out pits or liquids that can be a mix of several products like oil, water and antifreeze all mixed together

Handle a wide variety of fluids with high solid content
No close fitting or rotating parts so liquid with high solids content and/or size can be easily pumped

Self Priming
The pump design with internal check valves allows for high suction lift even at dry start-up and with heavy fluids

Ability to run dry
No close fittings or sliding parts are at risk. The pump can run dry without damage

Variable flow rate and discharge pressure
Pumps will run at any setting within their operating range simply by adjusting the air inlet pressure and system conditions. One pump can fit a broad spectrum of applications

Portable/Simple Installation
Pumps transport easily to the application site. Simply connect your air supply line and liquid lines; the pump is ready to perform. There are no complex controls to install and operate

Dead Head
Discharge pressure never exceeds air inlet pressure, hence the discharge line can be closed with no damage or wear. The pump will simply slow down and stop

Shear Sensitive
Minimal parts contact with the liquid makes these pumps an excellent choice for shear sensitive fluids

Explosion Proof
Operated by compressed air; pumps are intrinsically safe

Submersible
Pumps can be submerged in the liquid by simply running the exhaust line above the liquid level

	AODD/1-4/FPT/N	AODD/1-2/BAH/N
SIZE	1/4"	1/2"
CASING	Polypropylene	Aluminium
DIAPHRAGM	PTFE	Hytrel®
FLOW RATE	0 - 11 LPM (0 - 2.90 GPM)	0 - 50 LPM (0 - 13.22 GPM)
AIR INLET PRESSURE	29-100 PSI (2-7 BAR)	29-100 PSI (2-7 BAR)
PUMP INLET/ OUTLET NPT (F)	1/4"	1/2"
AIR EXHAUST NPT(F)	3/8"	3/8"
MAX PARTICLE SIZE	N/A	1/32" (1 mm)
SUCTION LIFT (DRY)	5-feet	5-feet
MAX AIR CONSUMPTION	250 LPM (8.83 CFM)	450 LPM (15.9 CFM)
WETTED COMPONENTS	Polypropylene, PTFE	Aluminium, PA, Stainless steel, Hytrel®
VALVE BALL MATERIAL	PTFE (Flat type)	Hytrel®
AIR MOTOR	Ryton®	Aluminium
MAXIMUM LIQUID TEMP.	60°C (140°F)	80°C (176°F)

Constant Pumping efficiency
No rotors, gears, or pistons, which wear over time and lead to the gradual decline in performance/flow rate

Diaphragm pumps however do not produce pressure as they have a 1:1 operation & cannot be used with a flow meter. The standard pump configuration is also not suitable for use with flammable media (Gasoline)

All pump Models are designed for use with an Inlet Air Pressure of 20 – 100 PSI (1.40 - 6.89 BAR). Air Inlet on all pump models is threaded 1/4" NPT (F)

These pumps are available in a choice of 2 body materials:

a. Aluminum
Aluminum Body pumps come with a Hytrel® (TPEE) Diaphragm. Hytrel® allows these pumps to be used at higher temperatures & imparts much longer life as opposed to pumps with BUNA-N diaphragm. Highly suitable for use with oils. Not recommended for use with abrasive & corrosive liquids.

b. Polypropylene
Polypropylene body pumps come with a choice of Diaphragms

a. Santoprene® (TPO): Best for use with abrasives, acids, caustics etc.
b. Teflon® (PTFE): Chemically most inert compound. Suitable for use with highly aggressive liquids such as solvents etc.

TEMPERATURE RANGE FOR VARIOUS MATERIALS

BODY / CASING MATERIAL	LIQUID TEMPERATURE RANGE
Aluminium	0 to 100°C (32°F to 212°F)
Polypropylene	0 to 60°C (32°F to 140°F)
DIAPHRAGM MATERIAL	**LIQUID TEMPERATURE RANGE**
BUNA N	0 to 70°C (32°F to 158°F)
Hytrel® (TPEE)	0 to 80°C (32°F to 176°F)
Santoprene® (TPO)	0 to 90°C (32°F to 194°F)
Teflon® (PTFE)	0 to 100°C (32°F to 212°F)

AODD/1-2/FPT/N	AODD/1-2/FPS/N	AODD/3-4/BAH/N	AODD/3-4/BPS/N	AODD/0-1/BAH/N
1/2"	1/2"	3/4"	3/4"	1"
Polypropylene	Polypropylene	Aluminium	Polypropylene	Aluminium
PTFE	Santoprene®	Hytrel®	Santoprene®	Hytrel®
0 - 45 LPM (0 - 11.90 GPM)	0 - 45 LPM (0 - 11.90 GPM)	0 - 110 LPM (0 - 29.1 GPM)	0 - 110 LPM (0 - 29.1 GPM)	0 - 110 LPM (0 - 29.1 GPM)
29-100 PSI (2-7 BAR)	29-100 PSI (2-7 BAR)	29-100 PSI (2-7 BAR)	29-100 PSI (2-7 BAR)	29-100 PSI (2-7 BAR)
1/2"	1/2"	3/4"	3/4"	1"
3/8"	3/8"	3/4"	3/4"	3/4"
N/A	N/A	1/16" (2.0 mm)	1/16" (2.0 mm)	1/16" (2.0 mm)
8-feet	8-feet	18-feet	18-feet	18-feet
350 LPM (12.4 CFM)	350 LPM (12.4 CFM)	1200 LPM (42.4 CFM)	1200 LPM (42.4 CFM)	1200 LPM (42.4 CFM)
Polypropylene, PTFE	Polypropylene, PTFE	Aluminium, Stainless steel Hytrel®	Polypropylene, Santoprene®	Aluminium, Stainless steel, Hytrel®
PTFE (Flat type)	PTFE (Flat type)	Hytrel®	Santoprene®	Hytrel®
Ryton®	Ryton®	Aluminium	Glass-filled polypropylene	Aluminium
60°C (140°F)	60°C (140°F)	80°C (176°F)	60°C (140°F)	80°C (176°F)

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE	CASING	DIAPHRAGM	RECOMMENDED FLUIDS	BOX QTY.
AODD/1-4/FPT/N	44710	1/4"	Polypropylene	PTFE	Windshield washer fluid, Antifreeze, Caustic soda, Sulfuric acid (up to 75%), Plating Solution, Photograph developing liquid, Benzene , Hydrogen Peroxide, Waste water etc.	4
* AODD/1-2/BAH/N	44720	1/2"	Aluminium	Hytrel®	Diesel fuel, Kerosene, Lubricants, Gear oil, Engine oil, Waste oil, Brake fluid, Naphtha , Mold lubricants, Antifreeze and Waste water	1
* AODD/1-2/FPT/N	44721	1/2"	Polypropylene	PTFE	Windshield washer fluid, Antifreeze, Caustic soda, Sulfuric acid (up to 75%), Plating Solution, Photograph developing liquid, Benzene , Hydrogen Peroxide, Waste water etc.	1
AODD/1-2/FPS/N	44722	1/2"	Polypropylene	Santoprene®	Antifreeze, Ethanol, Ammonium hydroxide and Waste water	1
AODD/3-4/BAH/N	44730	3/4"	Aluminium	Hytrel®	Diesel fuel, Kerosene, Lubricants, Gear oil, Engine oil, Waste oil, Brake fluid, Naphtha, Mold lubricants, Antifreeze and Waste water	1
AODD/3-4/BPS/N	44731	3/4"	Polypropylene	Santoprene®	Antifreeze, Ethanol, Ammonium hydroxide and Waste water	1
* AODD/0-1/BAH/N	44740	1"	Aluminium	Hytrel®	Diesel fuel, Kerosene, Lubricants, Gear oil, Engine oil, Waste oil, Brake fluid, Naphtha, Mold lubricants, Antifreeze and Waste water	1

* Best Seller

127 Oil Control Guns

30 LPM

1,000 PSI

Heavy duty gun for controlling fluid deliveries in most demanding applications

Aluminium die cast construction with heavy duty steel trigger

Built-in continuous flow switch can be activated for unattended dispensing

Swivel at inlet for easy manoeuvrability. Strainer in the swivel keeps contaminants, dust, grit etc. from entering the gun

WETTED COMPONENTS
Aluminum, Steel, Brass & NBR

RECOMMENDED USE
Oils with viscosity upto SAE 140

DO NOT USE WITH
Water based media, Gasoline etc.

SPECIFICATIONS

FLOW RATE	UPTO 8 GPM	UPTO 30 LPM
MAX. WORKING PRESSURE	UPTO 1000 PSI	UPTO 70 BAR
WORKING TEMPERATURE RANGE	-14°C TO 55°C	7°F TO 131°F
INLET THREADS	1/2" (F)	
IN-LINE SWIVEL	INCLUDED	
OUTLET DIAMETER OF STEEL SPOUT	1/2"	12.7 MM
INSIDE DIAMETER OF HOSE EXTENSION	1/2"	12.7 MM

VARIANTS

With Steel Extension	With Steel Extension & Manual Non-drip Nozzle	With Steel Extension & Automatic Non-drip Nozzle	With Hose & Manual Non-drip Nozzle	With Hose & Automatic Non-drip Nozzle	With Hose Extension With Bent Steel Pipe & Manual Non-drip Nozzle	With Hose Extension with Bent Steel Pipe & Automatic Non-drip Nozzle

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	NON DRIP NOZZLE	BOX QTY.
BSPT		NPT			
WITH STEEL EXTENSION					
OGN/S/1-2R/B	45704	OGN/S/1-2R/N	45707	-	20
OGN/SM/1-2R/B	45705	OGN/SM/1-2R/N	45708	Manual	20
* OGN/SA/1-2R/B	45706	OGN/SA/1-2R/N	45709	Automatic	20
WITH FLEXIBLE HOSE EXTENSION					
OGN/SM/1-2F/B	45711	OGN/SM/1-2F/N	45713	Manual	20
OGN/SA/1-2F/B	45712	OGN/SA/1-2F/N	45714	Automatic	20
WITH FLEXIBLE HOSE EXTENSION WITH BENT STEEL PIPE					
OGN/SM/1-2FB/B	45725	* OGN/SM/1-2FB/N	45727	Manual	20
OGN/SA/1-2FB/B	45726	OGN/SA/1-2FB/N	45728	Automatic	20

* Best Seller

DIMENSIONS

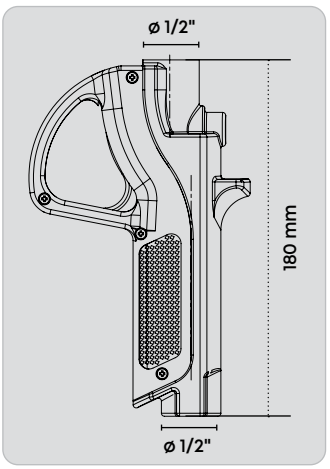

128 Electronic Oil Meter Professional

OM-2000

High pressure positive displacement meter suitable for in-line and end of line applications

Oval gear mechanism for optimum accuracy

6 Digit Non-Resettable Totaliser

Meter Inlet / Outlet threaded 1/2" (F)

Electronic Display using One 3V lithium Ion battery (CR2450)

Display can be rotated in every 90° orientation for ease of installation

Robust Aluminum Die Cast construction with protective shroud on meter

Measures in litres, US gallons, US quarts, pints

Easy user re-calibration

WETTED COMPONENTS
Aluminum, Acetal, Nitrile Rubber & Stainless Steel

RECOMMENDED USE
Oils upto SAE 140

DO NOT USE WITH
Water based media, Gasoline etc.

Display can be changed by rotating the card in its housing thus ensuring great versatility in positioning

SPECIFICATIONS

FLOW RATE	0.3-8 GPM	1-30 LPM
PRESSURE	UPTO 1,000 PSI	UPTO 70 BAR
WORKING TEMPERATURE RANGE	-4°F TO 158°F	-20°C TO 70°C
ACCURACY*	±0.50%	
REPEATABILITY*	0.25%	
MAX WORKING PRESSURE	1000 PSI	70 BAR
UNITS OF MEASURE	PINTS, US QUARTS, LITRES, US GALLONS	
MAX RESETTABLE TOTAL	99,999,999 (Six digits with × 100 indicator) UNITS	
MAX NON-RESETTABLE TOTAL	99,999,999 (Six digits with × 100 indicator) UNITS	
LEAST COUNT / RESOLUTION	UPTO 0.001 UNITS	

Note: Not to be used to measure media for resale
*Tested in laboratory conditions

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
OM/2000/1-2/BSP	47005	1/2" BSP (F)	20
OM/2000/1-2/N	47006	1/2" NPT (F)	20

129 Oil Meters Mechanical

OM-10

High pressure positive displacement meter suitable for in-line and end of line applications

Oval gear mechanism for optimum accuracy

High reliability mechanical display

Robust Aluminum die cast construction with protective shroud on meter

Available in Litres / US Quarts version

WETTED COMPONENTS
Aluminum, Stainless Steel, Nitrile Rubber & POM

RECOMMENDED USE
Oils with viscosity upto 2000 cSt, Diesel, Biodiesel

DO NOT USE WITH
Water based media, Gasoline etc.

SPECIFICATIONS

FLOW RATE	0.3-8 GPM	1-30 LPM
PRESSURE	UPTO 1,000 PSI	UPTO 70 BAR
WORKING TEMPERATURE RANGE	14°F TO 131°F	-10°C TO 55°C
ACCURACY	±1%	
REPEATABILITY	±0.20%	
MAX. RESETTABLE BATCH TOTAL	999.9 LITRES OR US QUARTS	
MAX. NON RESETTABLE TOTALIZER	999999.9 LITRES OR US QUARTS	
LEAST COUNT / RESOLUTION	0.10 LITRES OR US QUARTS	
WATER RESISTANCE	IP55	

Note: Not to be used to measure media for resale

ORDERING INFORMATION

CAT NR.	ORD NR.	MEASUREMENT	THREADS	BOX QTY.
OM-10/1-2/BSP	45790	Litres	1/2" BSP (F)	20
OM-10/1-2/N	45792	Litres	1/2" NPT (F)	20
OM-10Q/1-2/N	45791	US Quarts	1/2" NPT (F)	20

130 Electronic Oil Control Gun Professional

30 LPM | 1,000 PSI | OVAL GEAR

Super accurate heavy duty gun for controlling fluid deliveries in most demanding applications

Oval gear mechanism for optimum accuracy

Electronic Display using one 3V Lithium Ion battery (CR 2450)

Aluminum Die cast meter & gun body

Built-in continuous Flow switch can be activated for un-attended dispensing

Measures in Litres, US Gallons, US Quarts, Pints,

Easy user re-calibration

Swivel at inlet for easy manoeuvrability. Strainer in the swivel keeps contaminants, dust, grit etc. away from entering the gun

Available in the following variations
a. Control gun with Rigid Steel extension and non-drip nozzle
b. Control gun with flexible hose with non-drip nozzle
c. Control gun with flexible hose extension with Rigid Steel Extension and non-drip nozzle

All guns with non-drip are available with choice of high flow manual or high control automatic non-drip nozzle

WETTED COMPONENTS
Aluminum, Acetal, Brass, Nitrile Rubber, Steel & Stainless Steel

RECOMMENDED USE
Oils with viscosity upto SAE 140

DO NOT USE WITH
Water based media, Gasoline etc.

VARIANTS

With Steel Extension & Manual Non-drip Nozzle	With Steel Extension & Automatic Non-drip Nozzle	With Hose & Manual Non-drip Nozzle	With Hose & Automatic Non-drip Nozzle	With Hose Extension With Bent Steel Pipe & Manual Non-drip Nozzle	With Hose Extension with Bent Steel Pipe & Automatic Non-drip Nozzle

SPECIFICATIONS

FLOW RATE	0.3-8 GPM	1-30 LPM
MAX. WORKING PRESSURE	UPTO 1,000 PSI	UPTO 70 BAR
WORKING TEMPERATURE RANGE	-4°F TO 158°F	-20°C TO 70°C
ACCURACY	±0.50%	
REPEATABILITY	0.25 %	
MAX. RESETTABLE BATCH TOTAL	9,99,999 (six digits with × 100 indicator) UNITS	
MAX. NON RESETTABLE TOTALIZER	9,99,999 (six digits with × 100 indicator) UNITS	
LEAST COUNT /RESOLUTION	UPTO 0.001 UNITS	
INLET THREADED	1/2" (F)	
IN-LINE SWIVEL	INCLUDED	
OUTLET DIAMETER OF STEEL SPOUT	1/2"	12.7 MM
INSIDE DIAMETER OF HOSE EXTENSION	1/2"	12.7 MM

Note
Not to be used to measure media for resale

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	NON-DRIP NOZZLE	BOX QTY.
BSPT THREAD		NPT THREAD			
WITH STEEL EXTENSION					
OM/2000/OGN/RM/B	47020	OM/2000/OGN/RM/N	47040	Manual	6
OM/2000/OGN/RA/B	47021	OM/2000/OGN/RA/N	47041	Automatic	6
WITH FLEXIBLE HOSE EXTENSION					
OM/2000/OGN/FM/B	47022	OM/2000/OGN/FM/N	47042	Manual	6
OM/2000/OGN/FA/B	47023	OM/2000/OGN/FA/N	47043	Automatic	6
WITH FLEXIBLE HOSE EXTENSION WITH BENT STEEL PIPE					
OM/2000/OGN/FB-M/B	47024	OM/2000/OGN/FB-M/N	47044	Manual	6
OM/2000/OGN/FB-A/B	47025	OM/2000/OGN/FB-A/N	47045	Automatic	6

131 Mechanical Oil Control Gun

Super accuracy heavy duty gun for controlling fluid deliveries in most demanding applications

Oval gear mechanism

High Reliability Mechanical display

Aluminium Die cast meter & gun body

Built-in continuous Flow switch can be activated for un-attended dispensing

Available in Litre / US Quart version

Swivel at inlet for easy maneuverability. Strainer in the swivel keeps contaminants, dust, grit etc. away from entering the gun

Available in the following variations
1. Control gun with steel spout and non-drip nozzle
2. Control gun with flexible hose with non-drip nozzle
3. Control gun with flexible hose extension with bent steel spout and non-drip nozzle

All guns with non-drip are available with choice of high flow manual or high control automatic non-drip nozzle

WETTED COMPONENTS
Aluminum, Steel, Brass, Stainless Steel, NBR & Acetal

RECOMMENDED USE
Oils with viscosity upto 2000 cST

DO NOT USE WITH
Water based media, Gasoline etc

SPECIFICATIONS

FLOW RATE	0.3-8 GPM	1-30 LPM
ACCURACY	±1%	
REPEATABILITY	0.20 %	
MAX. WORKING PRESSURE	UPTO 1000 PSI	UPTO 70 BAR
WORKING TEMPERATURE RANGE	14°F TO 140°F	-10°C TO 60°C
MAX. RESETTABLE BATCH TOTAL	999.9 LITRES OR US QUARTS	
MAX. NON RESETTABLE TOTALIZER	999999.9 LITRES OR US QUARTS	7 DIGIT
LEAST COUNT /RESOLUTION	0.10 LITRES OR US QUARTS	
INLET THREADED	1/2" (F)	
IN-LINE SWIVEL	1/2" (F)	
OUTLET DIAMETER OF STEEL SPOUT	1/2"	12.7 MM
INSIDE DIAMETER OF HOSE EXTENSION	1/2"	12.7 MM

VARIANTS

With Steel Extension & Manual Non-drip Nozzle	With Steel Extension & Automatic Non-drip Nozzle	With Flexible Hose Extension & Manual Non-drip Nozzle	With Flexible Hose Extension & Automatic Non-drip Nozzle	With Flexible Hose Extension with Bent Steel Pipe & Manual Non-drip Nozzle	With Flexible Hose Extension with Bent Steel Pipe & Automatic Non-drip Nozzle

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	MEASUREMENT	NON DRIP NOZZLE	BOX QTY.
BSPT THREAD		NPT THREAD				
WITH STEEL EXTENSION						
OM/10/OGN/RM/B	48980	OM/10/OGN/RM/N	48990	Litres	Manual	6
OM/10/OGN/RA/B	48981	OM/10/OGN/RA/N	48991	Litres	Automatic	6
-	-	OM/10Q/OGN/RM/N	49000	US Quarts	Manual	6
-	-	OM/10Q/OGN/RA/N	49001	US Quarts	Automatic	6
WITH FLEXIBLE HOSE EXTENSION						
OM/10/OGN/FM/B	49010	OM/10/OGN/FM/N	49020	Litres	Manual	6
OM/10/OGN/FA/B	49011	OM/10/OGN/FA/N	49021	Litres	Automatic	6
-	-	OM/10Q/OGN/FM/N	49030	US Quarts	Manual	6
-	-	OM/10Q/OGN/FA/N	49031	US Quarts	Automatic	6
WITH FLEXIBLE HOSE EXTENSION WITH BENT STEEL PIPE						
OM/10/OGN/FB-M/B	49040	OM/10/OGN/FB-M/N	49050	Litres	Manual	6
OM/10/OGN/FB-A/B	49041	OM/10/OGN/FB-A/N	49051	Litres	Automatic	6
-	-	* OM/10Q/OGN/FB-M/N	49060	US Quarts	Manual	6
-	-	OM/10Q/OGN/FB-A/N	49061	US Quarts	Automatic	6

* Best Seller

132 Electronic Preset Oil Control Gun

OM-300

Heavy Duty Oil Control gun with Robust Aluminium Construction

Electronic Preset design, works on 4 × 1.5V AA Batteries

Dual Mode: Manual & Pre Set (dispenses set qty. of media & stops)

Oval Gear Mechanism for Optimum accuracy

Adjustable Outlet nozzle can be positioned for in-line or 90° dispensing

Resettable Totalizer for Individual Batch can be set in Litres, US Quarts, Pints & US gallons

A second Resettable Totalizer for multiple dispense operations can be set in Litres, US Quarts, Pints & US gallons with a Max. Pre Set volume of 99.9 units

Lifetime Non-Resettable Totalizer can be set in Litres or US gallons

Built in Swivel at Inlet fitted with strainer

Supplied complete with Steel Extension with Built-in non-drip tip

WETTED COMPONENTS
Aluminium, Steel, Stainless Steel, Brass, Polyurethane, Acetic Resin, Hi Nitrile Rubber

RECOMMENDED USE
Oils with viscosity in the range of 10 to 5000 cst, Diesel

DO NOT USE WITH
Gasoline, Antifreeze, Windshield Fluids etc.

SPECIFICATIONS

FLOW RATE	0.3-8 GPM	1-30 LPM
PRESSURE	UPTO 1,000 PSI	UPTO 70 BAR
WORKING TEMPERATURE RANGE	-23°F TO 122°F	-5°C TO 50°C
INLET	1/2" (F)	
ACCURACY	±0.50%	
REPEATABILITY	0.20%	
MEASURING UNITS	LITRES, US QUARTS, PINTS, US GALLONS	
MINIMUM PRE SET QTY.	0.10 UNITS	
MAXIMUM PRE SET QTY.	99.9 UNITS	
MAX. RESETTABLE BATCH TOTAL	999.9 UNITS	
MAX. NON RESETTABLE TOTALIZER	999999 UNITS	
VISCOSITY OF MEDIA DISPENSED	10 TO 5000 CST	
RESOLUTION / LEAST COUNT	0.0013 US GALLON	0.005 LITRE

Note: Not to be used to measure media for resale

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	BOX QTY.
OM/300/PS/RA/BSP	45722	1/2" BSP (F)	6
OM/300/PS/RA/N	45721	1/2" NPT(F)	6

133 Oil Control Gun Accessories

NON-DRIP NOZZLES

Commonly used with oil control guns. Used either with steel extensions or hose at discharge end to cut off media supply, once the filling is complete. Steel construction with nitrile rubber seals. Available in following models

AUTOMATIC NON-DRIP NOZZLE & TIP

Nozzle opens automatically under fluid pressure; and shuts off with release of pressure

Discharge end with a narrow opening for convenient dispensing into small openings

NDN/02
Non-drip Nozzle

NDN/OM300
Non-drip Tip

ORDERING INFORMATION

CAT NR.	ORD NR.	TIP DIA.		INLET THREADS	BOX QTY.
		(INCH)	(MM)		
NDN/02/1-4F/B	45010	5/8	16	1/4" BSPT (F)	25
NDN/02/1-4F/N	45012	5/8	16	1/4" NPT (F)	25
NDN/OM300	45001	17/32	13.4	9/16" - 18 UNF	-

MANUAL NON-DRIP NOZZLE

Operated by manually rotating the body

Opening & shutting off the nozzle are manual.

Provide minimal pressure drop and are ideal for high flow applications

NDN/26

ORDERING INFORMATION

CAT NR.	ORD NR.	TIP DIA.		INLET THREADS	BOX QTY.
		(INCH)	(MM)		
NDN/26/1-4F/B	45035	19/32	15	1/4" BSPT (F)	25
NDN/26/1-4F/N	45034	19/32	15	1/4" NPT (F)	25

OIL GUN HOSE EXTENSION

2,320 PSI

Flexible Oil Hose Extension for use with Oil Control Guns

Overall Length
14" (350 mm)

Hose Inner Dia.
1/2" (12. 7 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	THREAD 1	THREAD 2	BOX QTY.
HOS/OG/F/BSP	43897	1/2" BSP (M)	1/4" BSPT (M)	25
HOS/OG/F/N	43898	1/2" NPT (M)	1/4" NPT(M)	25

OIL METER SWIVEL

2,320 PSI

Oil swivel for hose end guns

Large 1/2" (13 mm) inner dia. for least resistance to flow

Steel construction with bright zinc plated finish

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
SWV/1-2M/1-2F/B	43891	1/2" BSPT (M) × 1/2" BSPT (F)	25
SWV/1-2M/1-2F/N	43890	1/2" NPT (M) × 1/2" NPT (F)	25

134 Air Operated Oil Pump Accessories

MOUNTING BRACKET

All steel construction

2" (F) bung welded at the centre for installing stub pumps

Black powder coated finish

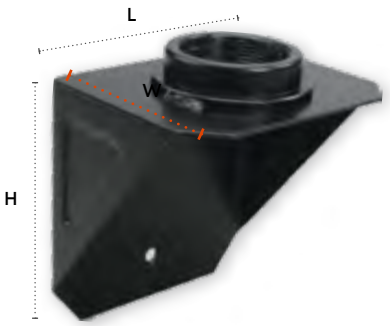

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH (L)		WIDTH (W)		HEIGHT (H)		BOX QTY.
		(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	
BKT/S/RP	45395	4-3/4	120	6	150	6	150	18

FOOT VALVE

Used at the bottom of a suction tube as a non return valve, these help in retaining prime

Machined Aluminum construction with a steel non return ball

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
FV/3-4F/BSP	45392	3/4" BSP (F)	100
FV/0-1F/BSP	45393	1" BSP (F)	100
FV/3-4F/N	45390	3/4" NPT (F)	100
FV/0-1F/N	45391	1" NPT (F)	100

BUNG NUTS

2" Drum Bungs for use with Air Operated Pumps

Aluminium and zinc construction

ORDERING INFORMATION

CAT NR.	ORD NR.	INSIDE DIAMETER	BOX QTY.
		(MM)	
BUNG/OP/30	45396	30	30
BUNG/OP/36	45397	36	30
*BUNG/OP/42	45398	42	30

*Standard on all Groz Air Operated OP Series Oil Pumps

HYDRAULIC HOSES

2,200 PSI

Hydraulic Rubber Hoses for use with Air Operated Oil Pumps

Exceeds SAE 100 R1 specification

Inner Dia. 1/2"
Outer Dia. 7/8"
Hydraulically crimped with steel fittings with 1/2" (M) threads on both ends

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH (M)	THREAD	BOX QTY.
HH/1.5/1-2M/BSP	45380	1.5	1/2" BSP (M)	25
HH/2.5/1-2M/BSP	45381	2.5	1/2" BSP (M)	25
HH/3.5/1-2M/BSP	45382	3.5	1/2" BSP (M)	25
HH/1.5/1-2M/N	45385	1.5	1/2" NPT (M)	25
HH/2.5/1-2M/N	45386	2.5	1/2" NPT (M)	25
HH/3.5/1-2M/N	45387	3.5	1/2" NPT (M)	25

135 Oil Spigots

OBT

800 PSI

Spigots are used as a dispenser with air operated pumps and also to construct oil bars.

Spring Loaded dispensing mechanism

CNC machined for non-drip operation

Available in:
a. Locking style
b. Non Locking style

OBT-01
With Wall Mount

OBT-02
Without Wall Mount

OBT-01
- Steel body in plated finish
- Includes wall mount attachment
- Locking style
- Available with nitrile or viton seals

OBT-02
- Steel body in plated finish
- Without wall mount attachment
- Locking style
- Available with nitrile or viton seals

OBT-03
- Steel body in plated finish
- Includes wall mount attachment
- Non-locking style
- Available with nitrile or viton seals

OBT-03WF
- Aluminium body with stainless steel internal parts
- Includes wall mount attachment
- Non-locking style
- Viton seals

SPECIFICATIONS

MAX. PRESSURE	UPTO 800 PSI	UPTO 55 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	TYPE	SEALS	THREADS	BODY MATERIAL	BOX QTY.
BSP THREADS		NPT THREADS						
OBT/01	44350	OBT/01/N	45351	Locking	Nitrile	3/4" (M)	Steel	20
OBT/01V	44352	OBT/01V/N	47801	Locking	Viton	3/4" (M)	Steel	20
OBT/02	44351	-	-	Locking	Nitrile	3/4"(F)	Steel	20
OBT/02V	44353	-	-	Locking	Viton	1/2"(F)	Steel	20
OBT/03	47802	OBT/03/N	45352	Non-Locking	Nitrile	3/4" (M)	Steel	20
OBT/03/WF	47804	OBT/03/WF/N	47805	Non-Locking	Viton	3/4" (M)	Aluminium & SS	20

136 Suction Guns

SG10 | SG10-CL | SG11 | SG11-XL

Rugged Transfer Guns
Designed for use with gear oils to get them both into and out of gear boxes, transfer cases and differentials

Deluxe lip seal provides maximum suction

Available in 2 options
1. Steel Barrel in premium powder coated finish
2. Clear tube barrel helps identify fluid contamination

Fully serviceable

Needs no priming

Suitable for use with non corrosive liquids

VARIANTS

SG/10BL	SG/11BL	SG/11/XL	SG/1000	SG/10-CL/BU
Steel Barrel Aluminium Die Cast Head Capacity: 500 ml (16 oz.)	Steel Barrel Plated Steel Head Capacity: 500 ml (16 oz.)	Steel Barrel Plated Steel Head Capacity: 700 ml (24 oz.)	Steel Barrel Plated Steel Head Capacity: 1000 ml (32 oz.)	Clear Tube Barrel Aluminium Head Capacity: 500 ml (16 oz.)

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY (ML)	CAPACITY (OZ.)	BOX QTY.
STEEL BARREL				
SG/10BL	45200	500	16	20
★ SG/11BL	45205	500	16	20
SG/11/XL	45220	700	24	10
SG/1000	45221	1000	32	10
CLEAR TUBE BARREL				
SG/10-CL/BU	46940	400	14	16
SPARE				
HOSE/SG/10/12	44342	12" (300 mm) Replacement Hose		100

★ **Best Seller**

137 Transfer Guns

SG-20 | SG-21 | SG-21CL

Complete vehicle fluid transfer solutions

Draws in & pumps out liquid in a single stroke

Easy & safe answer to fluid transfer, especially useful in transferring media unsafe for body contact

Rugged aluminium die cast head

'V' type drop resistant plunger handle

Complete with 8' of vinyl hose (4' with each valve)

VARIANTS

	SG-20	SG-21	SG-21CL
BARREL	Aluminium	Steel	Clear Tube helps identify fluid contamination
CAPACITY	350 ML (12 OZ.)	500 ML (16 OZ.)	450 ML (15 OZ.)
WETTED COMPONENTS	Aluminum, Brass, Viton, PVC	Steel, Aluminium, PVC	Steel, Aluminium, PVC, Polycarbonate & NBR
RECOMMENDED USE	Fuel Oils, Mineral Oils, Synthetic & Biological Oils, Petrol, Cooling Liquids, Water, Antifreeze, Spirits & Brake Fluids	Fuel Oils, Mineral Oils, Synthetic & Biological Oils, Cooling liquids & Spirits	Hydraulic Oil, Lubricating Oils, Engine Oil, Non-Corrosive liquids, Fuel Oils, Mineral Oils, Synthetic Oil, Cooling liquids & Spirits

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY (ML)	CAPACITY (OZ.)	BOX QTY.
SG/20	45250	350	12	20
SG/21	45270	500	16	20
CLEAR TUBE BARREL				
SG/21-CL/BU	46945	450	15	20
SPARE				
HOSE/SG/20/96	44343	8' Spare Hose		50

138 Oil Cans

Complete range of oil dispensing cans in a range of sizes from 125 ml to 1 litre (4 oz. to 1 US quart)

All steel construction, with the body seamless drawn from tin coated sheet in premium powder coated finish

Metal pump has 2 ball valves for large volume delivery per stroke. The suction valve at the bottom of pump is without spring, which prevents malfunctioning because of sticking valve due to resinous oil

PT Series
Modern & contemporary design with a dome shaped body. Manufactured with
a. Steel Pump - Powder coated Red
b. Brass Pump - Powder coated Blue

Can be supplied with rigid steel extension, wire braided flexible spout or both

Also available with metal corrugated flex spout

OC Series
Designed for large hands & are popular in North America. Available both in Lever & Pistol style, these have a steel pump construction & have a black powder coated finish. Lever style Oil Cans come with a choice of rigid steel spouts with 30° bent or wire braided flexible spouts. Pistol style are supplied with either rigid steel or wire braided flexible extension

PT SERIES

LEVER TYPE - STEEL PUMP

MP23/R
Rigid Spout

MP23/F
Flexible
Spout

MP23/S
Corrugated Flex
Steel Spout

LEVER TYPE - BRASS PUMP

MP23B/R
Rigid Spout

MP23B/F
Flexible
Spout

PISTOL TYPE - STEEL PUMP

M15/BS/R
Rigid Spout &
Base

M15/R
Rigid Spout

M15/BS/F
Flexible Spout
& Base

M15/F
Flexible Spout

PISTOL TYPE - BRASS PUMP

M15B/BS/R
Rigid Spout &
Base

M15B/R
Rigid Spout

M15B/BS/F
Flexible Spout
& Base

M15B/F
Flexible Spout

OC SERIES

OC/15/BS/R
Pistol Type
Rigid Spout

OC/40/R
Pistol Type
Rigid Spout


OC/1/F
Lever Type
Flexible Spout

OC/1/R30
Lever Type
30° Angled Rigid
Spout

ORDERING INFORMATION - PT SERIES

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CAT NR.	ORD NR.	CAT NR.	ORD NR.	CAPACITY	SPOUT LENGTH						BOX QTY.
									(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	
RIGID SPOUT		FLEXIBLE SPOUT		RIGID & FLEXIBLE SPOUT		CORRUGATED FLEX STEEL SPOUT			RIGID		FLEXIBLE		CORRUGATED STEEL		
LEVER TYPE - STEEL PUMP															
MP21/R	41410	MP21/F	41420	MP21/RF	41430	◆ MP21/S	41530	200 ml / 6 oz.	5	125	6	150	6	150	72
MP22/R	41411	MP22/F	41421	MP22/RF	41431	◆ MP22/S	41531	300 ml / 10 oz.	5	125	6	150	6	150	72
MP22/4/R	41412	MP22/4/F	41422	MP22/4/RF	41432	-	-	400 ml / 13 oz.	6	150	7	175	-	-	72
MP23/R	41413	MP23/F	41423	MP23/RF	41433	◆ MP23/S	41532	500 ml / 16 oz	6	150	7	175	6	150	72
MP24/R	41414	MP24/F	41424	MP24/RF	41434	◆ MP24/S	41533	700 ml / 23 oz.	7	175	8	200	6	150	60
MP25/R	41415	MP25/F	41425	MP25/RF	41435	◆ MP25/S	41534	1000 ml / 1 qt.	8	200	9	225	6	150	48
LEVER TYPE - BRASS PUMP															
MP21B/R	41610	MP21B/F	41620	MP21B/RF	41630	-	-	200 ml / 6 oz.	5	125	6	150	-	-	72
MP22B/R	41611	MP22B/F	41621	MP22B/RF	41631	-	-	300 ml / 10 oz.	5	125	6	150	-	-	72
MP22/4B/R	41612	MP22/4B/F	41622	MP22/4B/RF	41632	-	-	400 ml / 13 oz.	6	150	7	175	-	-	72
MP23B/R	41613	MP23B/F	41623	MP23B/RF	41633	-	-	500 ml / 16 oz.	6	150	7	175	-	-	72
MP24B/R	41614	MP24B/F	41624	MP24B/RF	41634	-	-	700 ml / 23 oz.	7	175	8	200	-	-	60
MP25B/R	41615	MP25B/F	41625	MP25B/RF	41635	-	-	1000ml / 1 qt.	8	200	9	225	-	-	48
PISTOL TYPE - STEEL PUMP															
M10/R	42220	M10/F	42225	M10/RF	42230	-	-	125 ml / 4 oz.	4	100	5	125	-	-	120
M15/R	42221	M15/F	42226	M15/RF	42231	-	-	180 ml / 6 oz.	4	100	5	125	-	-	120
M15/BS/R*	42222	M15/BS/F*	42227	M15/BS/RF*	42232	-	-	180 ml / 6 oz.	4	100	5	125	-	-	120
M40/R	42223	M40/F	42228	M40/RF	42233	-	-	500 ml / 16 oz.	6	150	7	175	-	-	72
PISTOL TYPE - BRASS PUMP															
M10B/R	42240	M10B/F	42245	M10B/RF	42250	-	-	125 ml / 4 oz.	4	100	5	125	-	-	120
M15B/R	42241	M15B/F	42246	M15B/RF	42251	-	-	180 ml / 6 oz.	4	100	5	125	-	-	120
M15B/BS/R*	42242	M15B/BS/F*	42247	M15B/BS/RF*	42252	-	-	180 ml / 6 oz.	4	100	5	125	-	-	120
M40B/R	42243	M40B/F	42248	M40B/RF	42253	-	-	500 ml / 16 oz.	6	150	7	175	-	-	72

◆ New

ORDERING INFORMATION - OC SERIES

CAT NR.	ORD NR.	CAT NR.	ORD NR.	CAPACITY	SPOUT LENGTH				BOX QTY.
					(INCH)	(MM)	(INCH)	(MM)	
30° RIGID SPOUT		FLEXIBLE SPOUT			RIGID		FLEXIBLE		
LEVER TYPE									
OC/1/R30	41810	OC/1/F	41815	500 ml / 16 oz.	9	225	9	225	72
OC/2/R30	41811	OC/2/F	41816	1000ml / 1 qt.	9	225	9	225	48
PISTOL TYPE									
OC/15/BS/R*	41820	OC/15/BS/F*	41825	180 ml / 6 oz.	6	150	6	150	120
OC/40/R	41821	OC/40/F	41826	500 ml / 16 oz.	6	150	6	150	64

*With Base

139 Precision Oiler

POL-5

Groz Precision Oiler is designed to lubricate the smallest, narrowest and hardest to reach places.

Manufactured from solid Aluminium with a steel needle.

Precisely formed threads and rubber seals for leak-proof connections

Integrated pocket clip and protective screw-on cap for conveniently carrying it in the pocket/ work apron without fear of leakage.

To use the Oiler

- Fill up to 5ml of oil into the aluminium reservoir.
- Push the thumb actuator to release a fine stream of small drops of oil with the highest precision exactly where needed

No mess, no leakage, no spillage.

Can be used safely even with very low viscosity oils.

A small compact easily refillable tool, it finds use in:

1. Automotive applications
2. Boats and marine applications
3. Model making
4. Repair shops
5. Construction and maintenance
6. Engineering & industrial applications
7. Watch & jewelry making
8. Optometrists
9. DIY applications around the home

The needlepoint tip allows for precise insertion of oil in confined areas

ORDERING INFORMATION

CAT NR.	ORD NR.	OVERALL LENGTH		BOX QTY.
		(INCH)	(MM)	
POL/5	41805	5-5/8	143	30

140 Measuring Jugs

JUG
JUG-S

Handy measuring jugs suitable for industrial and automotive applications

Heavy duty clear and transparent polypropylene body with exceptional optical clarity. Usage of food grade polymer makes these useful in food industry too

Strong and sturdy handle with ergonomic thumb grip for convenient usage

Graduated in Litres and Ounces

Highly resistant to acids, bases and chemicals these are Autoclavable at 121°C (250°F). Can be safely used in a microwave without fear of any deformation

Available in two types

a. Non-stackable - With D handle for comfortable grip
b. Stackable - Designed to be shipped in nested form

Non-stackable

Stackable

Shipped in nested form

COMPATIBILITY CHART

ACIDS, DILUTE OR WEAK	Excellent
ACIDS, STRONG AND CONCENTRATED	Excellent
ALCOHOLS	Excellent
ALDEHYDES	Very Good
BASES	Excellent
HYDROCARBONS	Very Good
OXIDIZING AGENTS, STRONG	Not Recommended

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY (ML)	CAPACITY (OZ.)	BOX QTY.
NON-STACKABLE				
JUG/100G	41943	100	3	10
JUG/250G	41944	250	8	10
JUG/600G	41945	600	20	10
JUG/1000G	41946	1000	32	10
JUG/2000G	41947	2000	64	10
JUG/3000G	41948	3000	96	10
JUG/5000G	41949	5000	160	10
SETS				
JUG/5-2-600	41990	600, 2000 & 5000	20, 64 & 160	5
JUG/5-1-600	41991	600, 1000 & 5000	20, 32 & 160	5
JUG/1-600-100	41992	100, 600, 1000	3, 20 & 32	5
STACKABLE				
JUG/1G	42020	1000	32	50
JUG/2G	42021	2000	64	25

Note
Jugs must not be used to measure media for sale / commercial use

141 Oil Cans Squeeze Bottle

SQZ

Low density polyethylene body is unbreakable, light-weight & corrosion resistant

Manufactured in translucent white material to give a clear view of media

Bottle Oil Cans with graduations marked on the bottle in both ml & oz.

Easy to open, clean and can be filled repeatedly

Oil discharge is through the "squeeze action" of the oil can bottle.

Complete with a bent spout that is attached to the cap

Suitable for spot lubrication

WETTED COMPONENTS
Polyethylene

RECOMMENDED USE
Water, water based media, alcohol, soaps, plant nutrient solution, Light and heavy oils

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY (ML)	CAPACITY (OZ.)	BOX QTY.
SQZ/125G	41806	125	4	10
SQZ/250G	41807	250	8	10
SQZ/500G	41808	500	16	10
SQZ/1000G	41809	1000	32	10
SETS				
SQZ/2G/ST	41812	125 & 250 ml		5
SQZ/4G/ST	41813	125, 250, 500 & 1000 ml		5

142 Flexible Spout Measures

MSR

High density polyethylene construction

Used for transferring metered qty. of fluids

8 Litre (8 US Quart) measure is especially useful for transferring oils into the Engine / Transmission system of trucks & heavy vehicles.

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY (LITRE)	CAPACITY (US QUART)	BOX QTY.
MSR/P/F-1	41900	1	1	40
MSR/P/F-2	41901	2	2	25
MSR/P/F-3	41902	3	3	20
★ MSR/P/F-5	41903	5	5	15
MSR/P/F-6	41904	6	6	12
MSR/P/F-8	41913	8	8	12

★ Best Seller

Note
Jugs must not be used to measure media for sale / commercial use

143 Flexible Spout Measures 5 Pc Set

MSR-PRO

NEW!

A visual colour coded system for operators to eliminate lubricant contamination & mixing up

High density polyethylene construction

Used for transferring metered qty. of fluids

Threaded lock put prevents leakage and ensures convenient assembly of spout

Flexible spout: easy to dispense fluid without the need for secondary tools such as funnels etc.

Graduated in litres & US quart

Set includes 5 different coloured lids (Blue, Red, Yellow, Green, Black to differentiate between different fluids / lubricants

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY		BOX QTY.
		(LITRE)	(US QUART)	
MSR/P/F-5/PRO/ST5	41883	5	5	1
MSR/P/F-6/PRO/ST5	41885	6	6	1
* MSR/P/F-8/PRO/ST5	41886	8	8	1

* Best Seller

Note
Jugs must not be used to measure media for sale / commercial use

144 Flexible & Rigid Spouts

Oil can discharge spouts - rigid or flexible are fully interchangeable and available as spares in different lengths

Spouts are threaded 1/4" UNEF × 32 TPI

For GROZ PT Series Oil Cans

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH END TO END		BOX QTY.
		INCH	MM	
FLEXIBLE SPOUT				
FS/5	41205	5	125	500
FS/6	41206	6	150	500
FS/7	41207	7	175	500
FS/8	41208	8	200	500
FS/9	41209	9	225	500
RIGID SPOUT				
RS/4	41224	4	100	500
RS/5	41225	5	125	500
RS/6	41226	6	150	500
RS/7	41227	7	175	500
RS/9	41229	9	225	500

FS
Wire braided PVC construction, with solid brass ends. The ends are male threaded & can be easily screwed onto the female threaded spout on the oil can. These are especially useful for oiling hard to reach areas

RS
Rigid spouts are made from zinc plated steel, with a slight bent at the discharge end. The ends are male threaded and can be easily screwed onto the female threaded spout on the oil can

145 Flexible Dispensing Spout

FDS

NEW!

Plastic spout designed for quick & drip free transfer of variety of fluids

Fits most US gallon & US quart plastic containers

Comes with a spout cap for protection against spillage

Gets compressed to pocket size for easy storage

RECOMMENDED USE

Oils, Kerosene, Diesel, Gasoline, Water and Water based fluids

SPECIFICATIONS

MAX. LENGTH	10-3/64" (255 MM)
MIN. LENGTH	5-45/64" (145 MM)
US GALLON THREAD SIZE	1-1/2" (38 MM)
US QUARTS THREAD SIZE	1-7/64" (28 MM)

US Gallon Threads
(Container not included)

US Quart Threads
(Container not included)

US Quart Threads
US gallon Threads

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH		BOX QTY.
		(INCH)	(MM)	
FDS/2	42010	5 × 1-1/2 × 5	125 × 38 × 125	30

146 Measuring Funnels

MFNL

Funnel & measure built into one!

A funnel with graduations that can be used for transferring measured quantity of fluid without any spills or splash

Graduated in US quarts & litres

Simple press of lever dispenses media. Releasing the lever stops outflow

Heavy duty polyethylene construction

Built in metal sieve ensures a contaminant free transfer

WETTED COMPONENTS
Polyethylene, Aluminum, Steel, NBR

RECOMMENDED USE
Diesel, Gasoline, Kerosene, Oils etc.

DO NOT USE WITH
Water Based Media

NOTE
Must not be used to measure media for sale / commercial use

Built in metal sieve ensures a contaminant free transfer

MFNL/5BC

MFNL/2BC

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	CAPACITY (LITRE/US QUART)	BOX QTY.
MFNL/2	41980	Funnel only	2	10
MFNL/2B	41981	Funnel with base	2	10
MFNL/2C	41982	Funnel with dust cap	2	10
MFNL/2BC	41983	Funnel with base and dust cap	2	10
◆ MFNL/5	41985	Funnel only	5	10
◆ MFNL/5B	41986	Funnel with base	5	10
◆ MFNL/5C	41987	Funnel with dust cap	5	10
◆ MFNL/5BC	41988	Funnel with base and dust cap	5	10

◆ New

Funnel filled with oil

Press lever to start outflow

147 Conical Funnels

FNL-6
FNL-7

Polypropylene funnels designed for use with virtually any media. Will never corrode or rust.

WETTED COMPONENTS
Polypropylene

RECOMMENDED USE
Diesel, Gasoline, Kerosene, Urea, Oils, Antifreeze & Other Water based media.

DO NOT USE WITH
Acids & Other media at temperatures above 60°C (140° F)

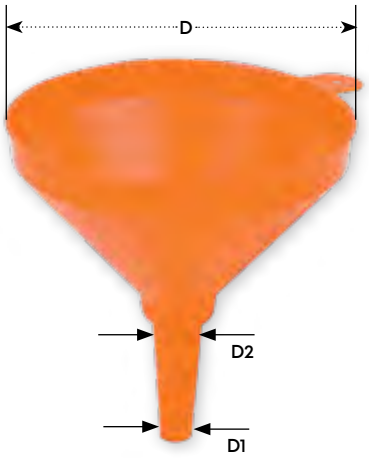

FNL/7

FNL/6

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY	HEIGHT (H)		D		D1		D2		BOX QTY.
		(ML)	(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	(INCH)	(MM)	
FNL/6	41935	650	6	153	5-3/4	146	9/16	14	7/8	22	120
FNL/7	41936	1800	8-11/32	214	8-11/32	212	1-1/8	28.9	1-7/8	46.5	60

148 Conical Funnel Set 4 Pieces

FNL-4ST

Polypropylene funnels designed for quick & drip-free transfer of variety of fluids

High rim works as an effective splash guard

Sold as a set of 4

RECOMMENDED USE
Diesel, Gasoline, Kerosene, Urea, Oils, Antifreeze & Other Water based media.

DO NOT USE WITH
Acids & other media at temperatures above 60°C (140°F)

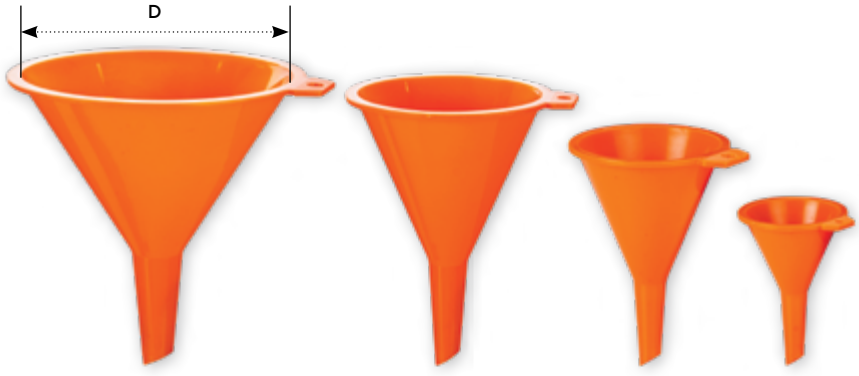

SET INCLUDES 4 FUNNELS

DIA (D)		CAPACITY	
(INCH)	(MM)	(ML)	(OZ.)
5	125	430	15
4	100	245	8.5
3	75	120	4.2
2	50	40	1.4

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
FNL/4/ST	42005	50

149 Super Quick Fill Funnel

FNL-SQF

NEW!

Heavy-duty polyethylene funnel designed for high-volume fluid transfer, reducing filling time in automotive and industrial applications

Tapered neck directs fluid smoothly into a wide range of filler openings

Integrated
- Splash guard minimize drips, splashes & fluid wastage
- Hanging hole for convenient storage & accessibility

Ideal for automotive servicing, agricultural equipment, lawn and garden machinery, workshops and garages

RECOMMENDED USE
Engine oil, transmission fluid, gear oil, coolant, antifreeze, brake fluid, washer fluid and other automotive and industrial fluids

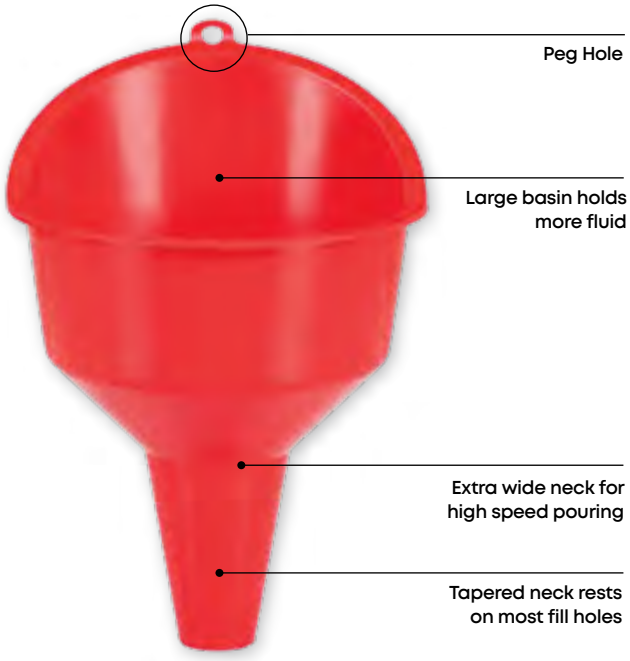

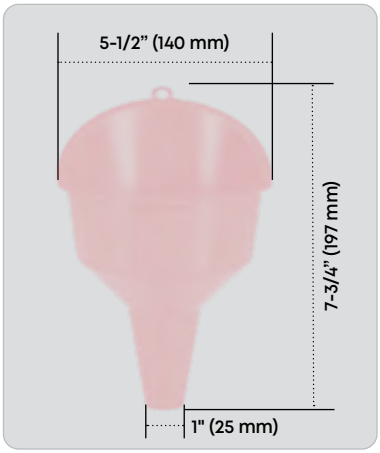

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY		BOX QTY.
		(LITRE)	(US QUART)	
FNL/SQF	42035	1	1	108

150 Radiator / Big Mouth Funnels

NEW!

Heavy-duty polyethylene funnels designed for fast, clean and controlled transfer of automotive and industrial fluids

Extra-wide mouth for high-flow pouring for quick and efficient fluid transfer

Integrated bottle rest prevents containers from slipping or tipping during filling

Built-In splash guard minimizes drips, spills and fluid wastage for clean operation

Ideal for automotive servicing, agricultural equipment, workshops and industrial maintenance applications

RECOMMENDED USE

Engine oil, transmission fluids, Gear Oils, Coolants, Antifreeze, Brake fluids, windshield washer etc.

VARIANTS

YELLOW	BLACK
FNL/RDT	FNL/BMF

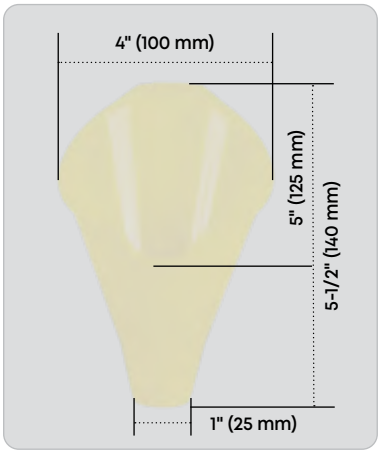

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY (LITRE)	CAPACITY (US QUART)	COLOUR	BOX QTY.
FNL/RDT	42036	1	1	Yellow	216
FNL/BMF	42037	1	1	Black	216

151 Multi-purpose Funnel

FNL-MP

NEW!

Heavy-duty polyethylene funnel designed for convenient, controlled fluid transfer across a wide range of applications

Long, tapered spout helps direct fluid accurately into narrow and hard-to-access openings

Integrated splash guard minimizes drips, spills and fluid wastage for clean operation

Lightweight, versatile design makes it suitable for workshops, garages, agricultural equipment and general maintenance applications

RECOMMENDED USE

Transmission fluid, oil, power steering fluid and gas/oil additives

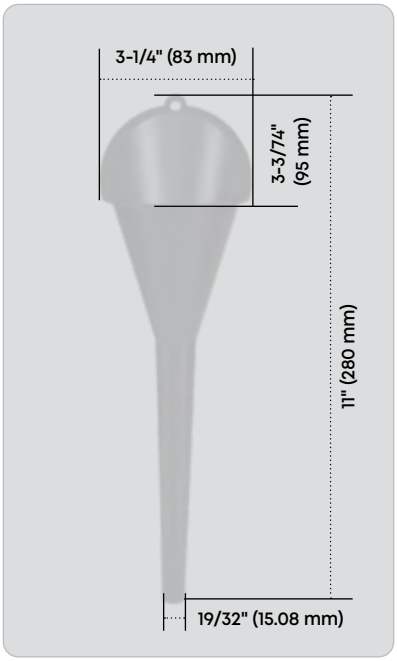

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY		BOX QTY.
		(ML)	(OZ.)	
FNL/MP	42038	150	5	96

152 Quick Fill Funnel

FNL-QF

NEW!

Heavy-duty polyethylene funnel designed for fast, high-volume fluid transfer in automotive and industrial applications

Integrated splash guard minimizes drips, spills and fluid wastage for clean operation

Built-in speed channels maximize fluid flow, enabling faster filling and reducing fluid backup

Ergonomic hand grips provide a secure hold and improved pouring control

RECOMMENDED USE

Engine oil, transmission fluid, coolant, hydraulic oil, fuels and other automotive and industrial fluids

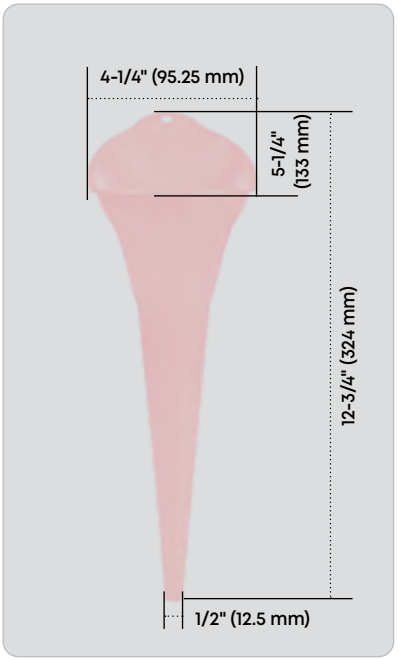

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY		BOX QTY.
		(ML)	(OZ.)	
FNL/QF/7	42039	450	15	144

153 Extra Long Reach Funnel

FNL-XL18

NEW!

Heavy-duty polyethylene funnel designed for deep & difficult-to-access filler openings.

Narrow tapered spout directs fluid accurately into confined openings and transmission dipstick tubes.

Integrated splash guard minimizes spills, drips and fluid wastage for clean operation.

Ideal for servicing passenger vehicles, commercial vehicles, agricultural equipment and outdoor power equipment

RECOMMENDED USE

Engine oil, transmission fluid, gear oil, hydraulic oil, coolant, antifreeze and other automotive and industrial fluids

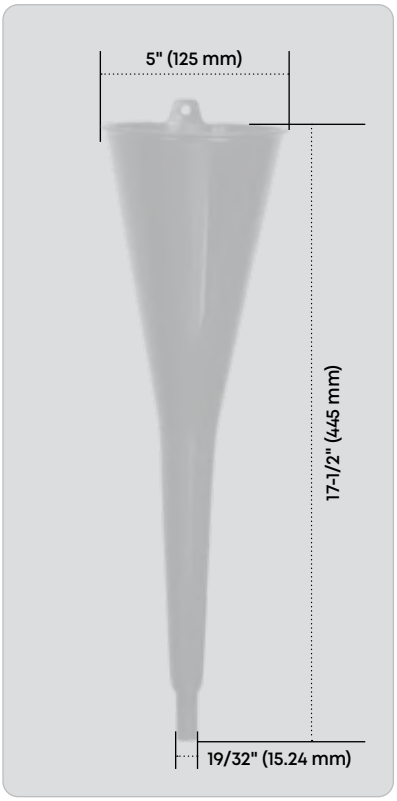

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY		BOX QTY.
		(ML)	(OZ.)	
FNL/XL/18	42030	1170	39.5	72

154 Multipurpose Funnel Set 3 Pieces

FNL-3ST

High-quality polypropylene funnels designed for quick, clean and drip-free transfer of a wide range of automotive and industrial fluids.

High-rim design acts as an effective splash guard, minimizing spills and mess.

Integrated hanging hook for convenient storage.

Spouts designed to fit a wide range of filler tube sizes, ensuring compatibility with most vehicles and equipment

RECOMMENDED USE
Transmission oils, radiator coolants, engine oils and other automotive fluids

Super Quick Fill Funnel | Radiator Funnel | Multi-purpose Funnel

SPECIFICATIONS

FUNNEL TYPE	COLOUR	HEIGHT (H)		SPOUT DIAMETER (D)	
		(INCH)	(MM)	(INCH)	(MM)
Super Quick Fill Funnel	Red	12-3/4	324	1	25
Radiator Funnel	Yellow	5-1/2	140	1	25
Multi-Purpose Funnel	Orange	11	280	1/2	12.5

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
FNL/3/ST	42006	50

155 Tractor Funnel

FNL-11

High flow fuel & oil funnel with extra large mouth for easy pouring

Heavy duty polypropylene construction

For outdoor use over varying temperate conditions & sunlight

Ships in nested form

RECOMMENDED USE
Diesel, Gasoline, Kerosene, Urea, Antifreeze & Water

Filter Screen

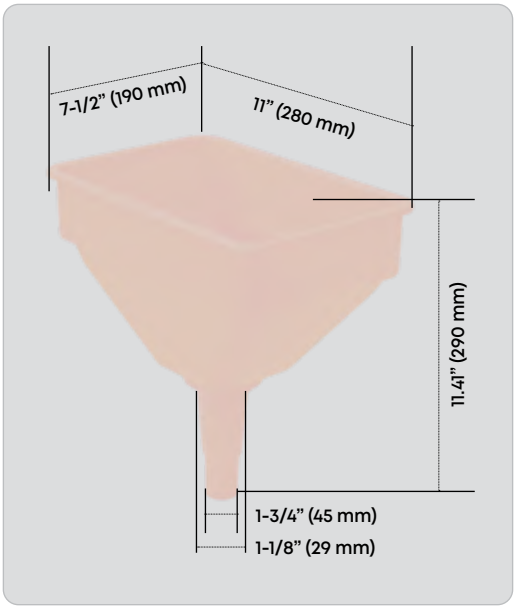

ORDERING INFORMATION

CAT NR.	ORD NR.	TYPE	CAPACITY		BOX QTY.
			(LITRE)	(US GAL)	
FNL/11	41930	Funnel only	4.7	1.2	30
FNL/11F	41931	Funnel with Filter Screen			

156 Flexible Funnel

FNL-FX

NEW!

Flexible funnel to transfer a wide variety of media in industrial, agriculture, automotive & DIY applications.

Constructed from high grade nitrite blended PVC, it can be folded into any shape to drain & refill liquid without mess.

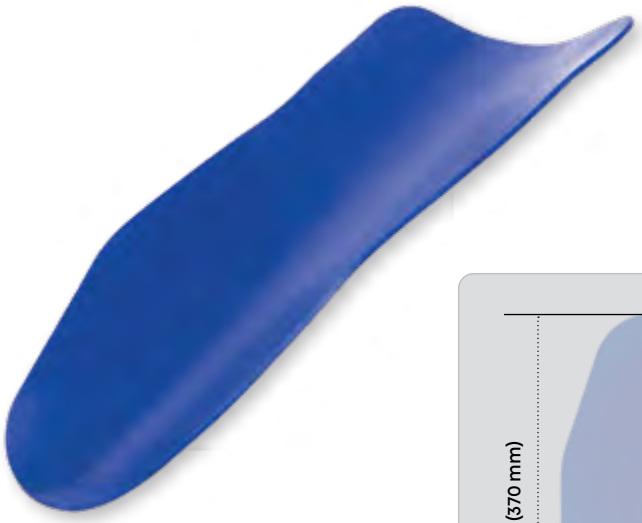

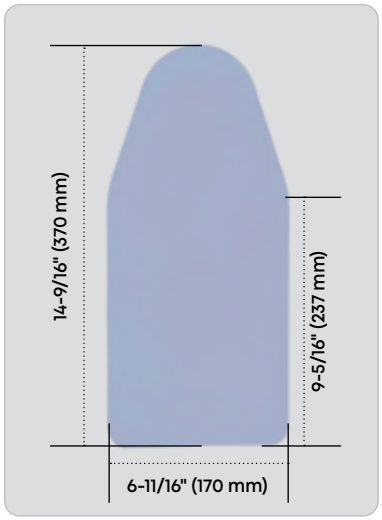

RECOMMENDED USE

Hydraulic oils, Heating oils etc. in cars, trucks, motorcycles, ATVs, industrial equipment, lawns, forklifts etc.

User Convenience
Can be folded into any shape

Compact Design
Roll up & store in the tool box

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
FNL/FX/37-17	42000	30

157 Flexible Funnel Extra Large

FNL FX-XL

NEW!

Flexible funnel to transfer a wide variety of media in industrial, agriculture, automotive & DIY applications.

Constructed from high grade PVC with textile reinforcement

Strong neodymium magnets on both ends to fix the funnel to any metallic surface

Integrated bending metal elements to shape the funnel as per requirement

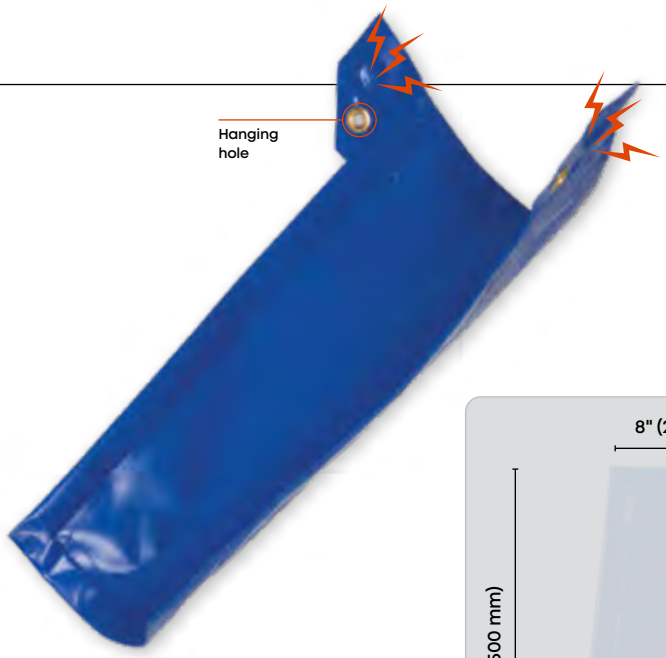

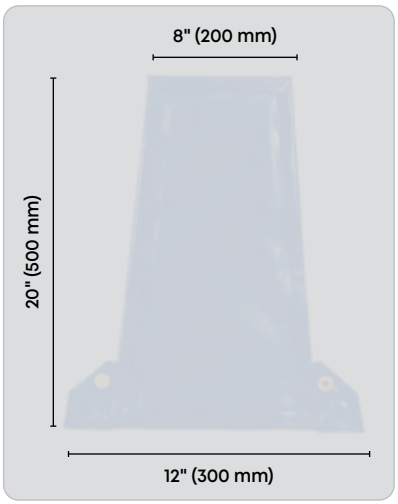

RECOMMENDED USE

Hydraulic oils, Heating oils etc. in cars, trucks, motorcycles, ATVs, industrial equipment, lawns, forklifts etc.

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
FNL/FX/XL	42004	25

158 Smart Funnels

FNL-8
FNL-9

Heavy duty polyethylene construction

Designed with special contours in the funnel body for easy handling

Anti-splash & spill proof, with rim of the funnel curved in

Complete with wire mesh screen, dust cover & flexible spout

Available in 2 sizes. The larger size is available both with and without drum bung attachment, which allows the funnel to be mounted direct onto drums with 2" threaded opening

Manufactured in translucent white to give a clear view of media

Other colour options can be custom built on request

Connects directly to drums with 2" opening

Spill proof funnel design

VARIANTS

FNL-8	FNL-9	FNL-9B
• Capacity: 1.7 Litre (1.7 Qt.) • Dia: 8" (205 mm)	• Capacity: 3.0 Litre (3 Qt.) • Dia: 9-1/2" (240 mm)	• Capacity: 3.0 Litre (3 Qt.) • Dia: 9-1/2" (240 mm) • Complete with 2" bung for direct attachment to a drum

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY		MAJOR DIA.		SPOUT LENGTH		BOX QTY.
		(LITRE)	(US QUART)	(INCH)	(MM)	(INCH)	(MM)	
✱ FNL/8	41920	1.7	1.7	8	205	6-11/16	170	15
FNL/9	41921	3	3	9-1/2	240	9-5/8	245	15
✱ FNL/9B	41922	3	3	9-1/2	240	9-5/8	245	15

✱ Best Seller

159 Universal Oil Funnel

FNL-UV

The No Mess, No Spill, Hands Free
Solution for refilling of engine oil, diesel, gasoline etc. on almost all vehicle openings

- **Unique & Innovative Design**
- Adjustable spring loaded, glass filled pliers for openings from 1" - 3-1/8" (25 mm - 80 mm)
- Adjustable clamp ring to screw funnel on different base heights
- Funnel sits tight without wobbling; no oil spill, no mess.

WETTED COMPONENTS
Polypropylene, Polycarbonate

RECOMMENDED USE
Light, Medium and High Viscosity Oils, Diesel, Detergents & Gasoline.

DO NOT USE WITH
Urea, Kerosene, Lacquer, Lacquer Thinner, Hydrochloric Acid, Aromatic Hydrocarbons

Setting the Funnel

Thread funnel into the clamp ring

Start refilling the fluid into the engine

Interchangeable Funnel

Thread funnel into the clamp ring

Adjust the clamp ring

Also available with Seal Piercing Filter

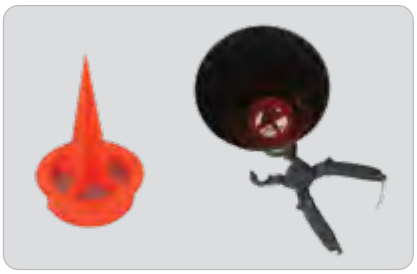

- For direct transfer of oil from bottles/ packs
- Filter pierces through the seal on the bottle /pack eliminating the need to manually remove the seal
- Prevents contamination of oil

ORDERING INFORMATION

CAT NR.	ORD NR.	MIN. FILL DIA.		MAX. FILL DIA.		TYPE	BOX QTY.
		(INCH)	(MM)	(INCH)	(MM)		
FNL/UV/25-80	41940	1	25	3-1/8	80	Funnel only	12
FNL/UV/25-80F	41941	1	25	3-1/8	80	Funnel with seal piercing filter	12

03

METAL HOSE REELS

- GREASE HOSE REEL
- OIL HOSE REEL
- AIR/WATER HOSE REEL

160 Hose Reels

All metal hose reels

Ribbed steel design prevents bending & flexing. Rolled edges for added strength & stability

Compact design allows these to be used in confined spaces with ease

Cassetted Spring Design: Drive springs are manufactured from highest quality spring steel that ensures long life. Precise manufacturing guarantees a superior quality edge

Fully enclosed cassetted design makes the spring resistant to corrosion caused by water & dirt, guaranteeing longer life & trouble free operation. Convenient & safe maintenance

Ratchet: Heavy duty dual ratchet reduces stress on spring providing smooth & balanced operation during hose extension & retraction. Dual ratchet teeth can lock hose in multiple usable positions

Multiple Position Guide Arm: Guide arms can be adjusted at 45° intervals that provides versatile floor, wall or truck mounting with a convenient mounting angle for hose to be released at optimum position

Reels are available With

a. **Dual Guide Arm:** Medium & high pressure applications involving grease & oils. Dual guide arm design is structurally reinforced strengthened with metal ribs that prevent flexing and bending due to hose pull
b. **Single Guide Arm:** For low pressure applications involving air and water

Adjustable roller guide arm with removable nylon guide rollers reduces drag & wear

Inlet swivel reduces torque load on power spring for smoother hose movement & durability

1/4" (6.35 mm) thick steel base with easy mounting eyelet hole

All components are powder coated after cleaning, degreasing & iron phosphate penetrating ensuring a long lasting, durable & attractive finish

Hose reels come with an option of 10m (32.8') & 15m (49.2') hose

Hose Reel accessories for floor mounting & angular mounting on walls are also available

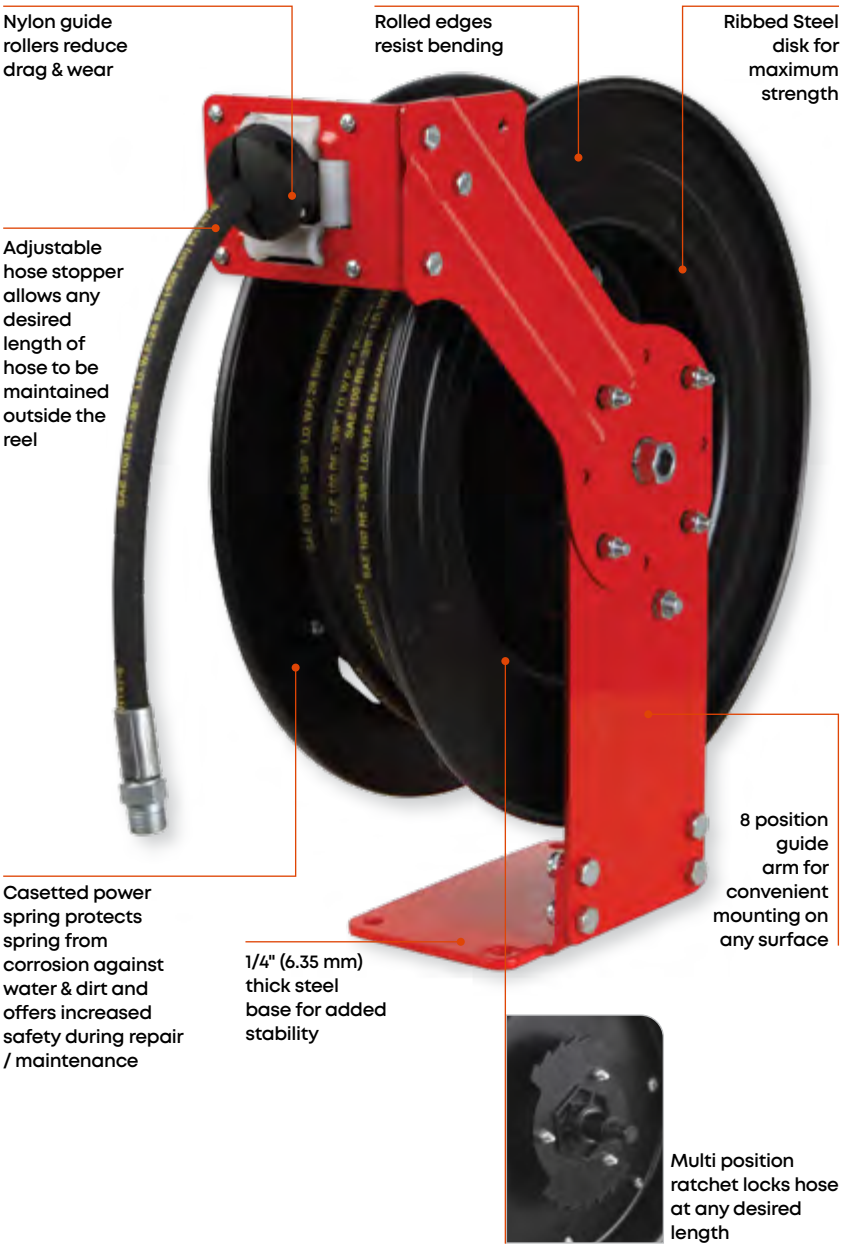

MOUNTING BRACKET OPTIONS

SWV/HR/360 47950	SWV/HR/140 47951
Floor Mounting Bracket (available as spare)	Wall Mounting Bracket (available as spare)

VARIANTS

AIR / WATER LOW PRESSURE HOSE REELS

OIL / MEDIUM PRESSURE HOSE REELS

GREASE / HIGH PRESSURE HOSE REELS

Hose Reel Bolt Pattern

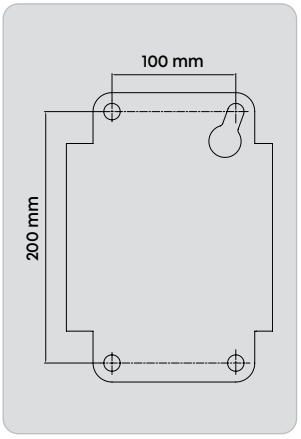

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	MAX. PRESSURE		INLET / OUTLET THREADS	HOSE ID		HOSE OD		HOSE LENGTH		BOX QTY.
BSPT		NPT		(PSI)	(BAR)	(INCH)	(INCH)	(MM)	(INCH)	(MM)	(M)	(FEET)	
AIR WATER - LOW PRESSURE HOSE REELS													
HR/AW/10M/3-8/B	47900	HR/AW/10M/3-8/N	47920	300	21	3/8	3/8	9.5	5/8	15.9	10	32.8	1
HR/AW/15M/3-8/B	47901	HR/AW/15M/3-8/N	47921	300	21	3/8	3/8	9.5	5/8	15.9	15	49.2	1
HR/AW/10M/1-2/B	47902	HR/AW/10M/1-2/N	47922	300	21	1/2	1/2	12.7	3/4	19	10	32.8	1
HR/AW/15M/1-2/B	47903	HR/AW/15M/1-2/N	47923	300	21	1/2	1/2	12.7	3/4	19	15	49.2	1
OIL - MEDIUM PRESSURE HOSE REELS													
HR/OL/10M/3-8/B	47960	HR/OL/10M/3-8/N	47970	2000	138	3/8	3/8	9.5	23/32	18.1	10	32.8	1
HR/OL/15M/3-8/B	47962	HR/OL/15M/3-8/N	47972	2000	138	3/8	3/8	9.5	23/32	18.1	15	49.2	1
HR/OL/10M/1-2/B	47961	HR/OL/10M/1-2/N	47971	2000	138	1/2	1/2	12.7	7/8	21.5	10	32.8	1
HR/OL/15M/1-2/B	47963	HR/OL/15M/1-2/N	47973	2000	138	1/2	1/2	12.7	7/8	21.5	15	49.2	1
GREASE - HIGH PRESSURE HOSE REELS													
HR/GR/10M/1-4/B	47980	HR/GR/10M/1-4/N	47990	5800	400	1/4	1/4	6.35	5/8	15.9	10	32.8	1
HR/GR/15M/1-4/B	47982	HR/GR/15M/1-4/N	47992	5800	400	1/4	1/4	6.35	5/8	15.9	15	49.2	1
HR/GR/10M/3-8/B	47981	HR/GR/10M/3-8/N	47991	4000	276	3/8	3/8	9.5	3/4	19	10	32.8	1
HR/GR/15M/3-8/B	47983	HR/GR/15M/3-8/N	47993	4000	276	3/8	3/8	9.5	3/4	19	15	49.2	1

161 Air/Water Hose Reels

HRE-AW

NEW!

Metal hose reel for everyday use in garages & workhshops

Casetted Spring: Drive springs are made of high quality spring steel. Casetted design ensures protection from corrosion and trouble free operation

Ratchet: Dual ratchet reduces stress on spring providing smooth & balanced operation during hose extension & retraction

Equipped with a strong locking mechanism

Guide arms can be adjusted at 45° intervals that provides versatile floor, wall or truck mounting with a convenient mounting angle for hose to be released at optimum position

Adjustable roller guide arm with removable nylon guide rollers reduces drag & wear

Inlet swivel reduces torque load on power spring for smoother hose movement & durability

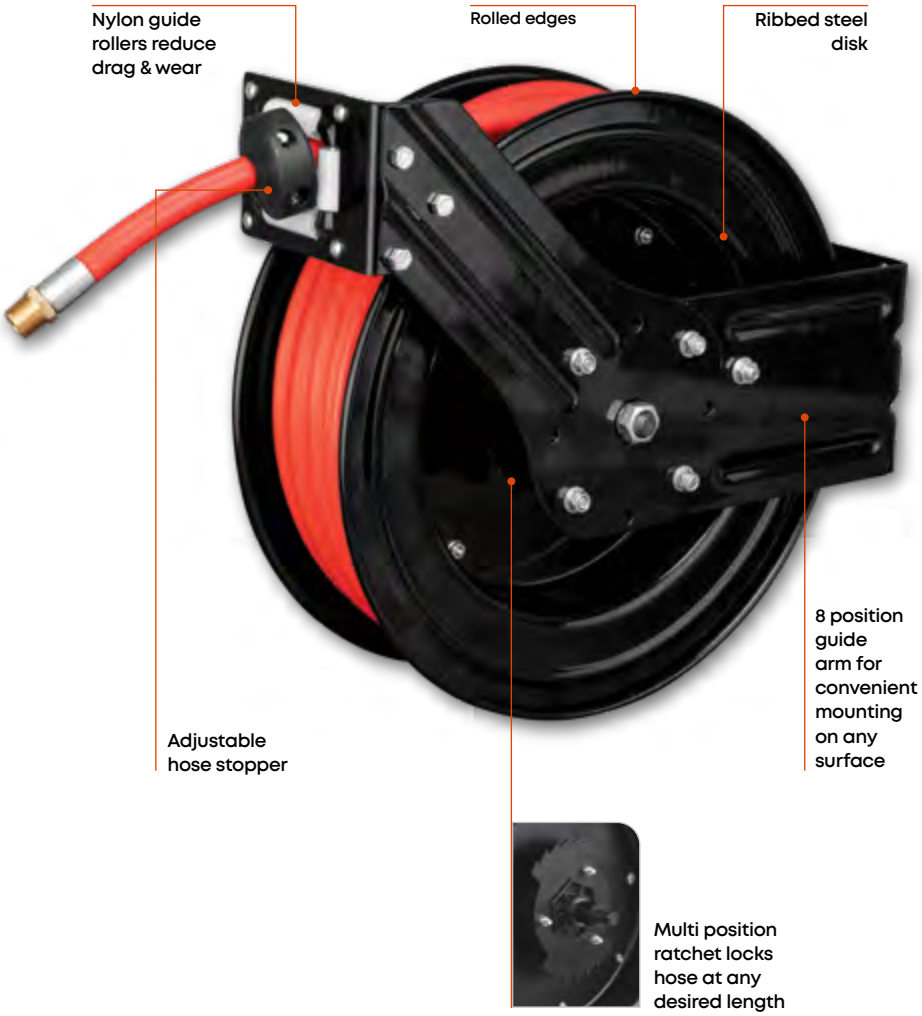

Multi position ratchet locks hose at any desired length

For Plastic Hose Reel Refer to Page 335

ORDERING INFORMATION

CAT NR.	CAT NR.	MAX. PRESSURE		INLET / OUTLET THREADS	HOSE ID		HOSE OD		HOSE LENGTH		BOX QTY.
BSPT	NPT	(PSI)	(BAR)	(INCH)	(INCH)	(MM)	(INCH)	(MM)	(M)	(FEET)	
HRE/AW/10M/3-8/B	HRE/AW/10M/3-8/N	300	21	3/8	3/8	9.5	5/8	15.9	10	32.8	1
HRE/AW/15M/3-8/B	HRE/AW/15M/3-8/N	300	21	3/8	3/8	9.5	5/8	15.9	15	49.2	1
HRE/AW/10M/1-2/B	HRE/AW/10M/1-2/N	300	21	1/2	1/2	12.7	3/4	19	10	32.8	1
HRE/AW/15M/1-2/B	HRE/AW/15M/1-2/N	300	21	1/2	1/2	12.7	3/4	19	15	49.2	1

04

WASTE OIL HANDLING

- WASTE OIL PUMPS
- WASTE OIL DRAINS
- OIL DRAIN PANS

162 Electric Waste Oil Pumps

EWOP

Electric Pump for waste oil evacuation

Flexible impeller design enables pumping high viscosity fluids at high flow rate

Motor with thermal overload protection to prevent over heating

Self priming ZAMAC body can handle a wide variety of fluids

Suction and Discharge Ports
Dual threads: 3/8" NPT thread (F) and 3/4"-11.5 NH(M)

Ideal for pumping used engine oil, transmission oil, hydraulic oil etc.

Available in the following options
a. 115V, 60Hz AC
b. 12V DC

Duty Cycle
45 min ON / 45 min OFF

WETTED COMPONENTS
ZAMAC, Stainless Steel, Nitrile Rubber, Neoprene

RECOMMENDED USE
Used Oil, Engine Oil, Transmission Oil, Hydraulic Oil, Water, Ethylene Glycol

DO NOT USE WITH
Gasoline, any flammable media

	EWOP/115/US		EWOP/12	
FLOW RATE	23 LPM	6 GPM	17 LPM	4.5 GPM
MAX. PRESSURE*	18 PSI	1.25 BAR	18 PSI	1.25 BAR
SUCTION LIFT (DRY/WET)	6' / 8'	182 CM / 243 CM	6' / 8'	182 CM / 243 CM
DISCHARGE HEAD (WATER)	40'	12.2M	40'	12.2M
MAX. VISCOSITY	2000 SSU	SAE 30	2000 SSU	SAE 30
POWER CABLE LENGTH	6'	182 CM	N/A	N/A

*As pressure increases the flow rate will decrease

ORDERING INFORMATION

CAT NR.	ORD NR.	INPUT POWER	BOX QTY.
EWOP/115/US	45850	115V, 60HZ AC	4
EWOP/12	45852	12V DC	4

163 Fluid Extractor Pump

FEV

NEW!

The GROZ Fluid Extractor Pump is designed as a convenient manual solution for extracting engine oil and other service fluids through dipstick tubes or filler ports

8.7 Litre (2.3 US Gallon) reservoir, graduated in both litres and gallons for easy monitoring of extracted fluid.

Fibre reinforced polypropylene construction enables safe handling of hot oils upto 80°C (175°F) & ensures durable performance even under demanding conditions

Simple Manual Operation: No electricity or compressed air required, making it ideal for use in workshops, field and mobile repair units and for work on remote locations

Cleanly extracts fluids through dipstick tubes and filler ports, eliminating the need to remove drain plugs. Reduces service time and minimizes spills, mess and downtime.

Stable foot base provides secure support for smooth, hands-free operation.

Comes Complete With
- Ø6.5 mm (0.26") extraction tube
- Ø6 mm (0.24") extraction tube
- Ø10 mm (0.39") main suction hose

Graduated both in gallons & litres

RECOMMENDED USE

Engine Oi, Automatic Transmission Fluid (ATF), Gear Oil, Hydraulic Oil, Power Steering Fluid, Engine Coolant*

***Use only with fluids compatible with pump seal materials**

APPLICATIONS

- Engine oil extraction
- Automatic transmission servicing
- Gearbox oil replacement
- Hydraulic system maintenance
- Power steering fluid replacement
- Coolant extraction
- Automotive, agricultural, marine and industrial equipment servicing

SPECIFICATIONS

RESERVOIR CAPACITY	8.7 L litres	2.3 US Gallons
DIMENSIONS (H × W)	24" × 8"	600 × 200 mm
MAX TEMPERATURE OF FLUIDS	80°C	175°F

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
FEV/2.3	45072	1

164 Brake Bleeder & Vacuum Tester Kit

VPUMP-1

NEW!

The Groz Brake Bleeder & Vacuum Tester Kit delivers reliable vacuum generation for efficient brake bleeding and fast, accurate diagnosis of vacuum leaks, faulty actuators and other system faults

Ergonomic hand pump provides a comfortable grip, reducing fatigue during prolonged use

Durable, workshop-grade construction ensures dependable performance and long service life

4 oz (120 ml) fluid collection cup with a secure suction base and transport lid enables clean, stable and spill-free fluid handling

Transparent collection cup allows easy monitoring of extracted fluid during operation

Single person operation minimizes time and effort during brake bleeding

Suitable for servicing: Passenger Cars, SUVs, Light Commercial Vehicles (LCVs), Motorcycles, ATVs, Utility Vehicles

APPLICATIONS

- Brake bleeding
- Vacuum line testing
- Brake booster testing
- Vacuum actuator testing
- EGR valve testing
- PCV system diagnostics
- Emission control system testing
- General automotive vacuum troubleshooting
- Vehicle Compatibility

Comes as a 16 pc kit, with the following inclusions:

1. Vacuum Pump
2. Suction Lid
3. Transport Lid
4. 4 oz. Cup
5. 1/4" x 23" Vacuum Hose (2)
6. 1/4" x 3" Vacuum Hose (2)
7. Tapered Hose Adapter
8. "T" Hose Connector
9. Straight Hose Connector
10. Brake Bleed Screw Adapter - A
11. Brake Bleed Screw Adapter - B
12. Brake Bleed Screw Adapter - C
13. Universal Cup Adapter
14. Cup O-Ring

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
VPUMP/1G	45070	4

165 Dual Vacuum & Pressure Hand Pump Kit

VPUMP-2

NEW!

The Groz Dual Vacuum & Pressure Hand Pump Kit is an indispensable diagnostic tool for modern automotive workshops

By generating both vacuum and pressure from a single unit, it enables technicians to efficiently diagnose leaks, evaluate component performance, and service a wide range of vehicle systems

Built to withstand demanding workshop conditions, the drop-resistant gauge incorporates a precision diaphragm mechanism for consistently accurate readings. Covering 0–30 inHg vacuum and 0–31 PSI pressure, the high-accuracy diaphragm gauge enables quick, precise diagnosis and reliable troubleshooting of engine and vacuum system faults

Durable all-steel construction with corrosion-resistant powder-coated finish for reliable performance in demanding workshop environments.

Ergonomic one-hand operation for maximum convenience

Complete adaptor kit for compatibility with a wide range of vehicle systems

Supplied in a durable blow-moulded storage case for easy organization and portability

Suitable for Passenger vehicles, SUVs, Motorcycles, ATVs, Light Commercial Vehicles (LCVs) and small engines

APPLICATIONS

- Vacuum system diagnostics
- Pressure testing
- Brake bleeding (one-person operation)
- Fluid transfer and evacuation
- Testing EGR valves, fuel pressure regulators, vacuum switches, HVAC controls, hydraulic clutch systems, and other vacuum-operated components

What's included

1. Vacuum Pump
2. Suction Lid
3. Transport Lid
4. 4 oz. cup
5. 1/4" x 23" Vacuum Hose
6. 1/4" x 3" Vacuum Hose
7. Connection Tube
8. T Hose Connector
9. Straight Hose Connector
10. Brake Bleed Screw Adapter-A
11. Brake Bleed Screw Adapter-B
12. Universal Cup Adapter
13. Cup O-Ring
14. 5/32" x 1/4" I.D. Tubing Adapter
15. Vacuum Line Cap
16. Tapered Hose Adapter
17. 12 oz. Bottle Adapter
18. 32 oz. Bottle Adapter
19. 3" Master Cylinder Plate
20. 6" Master Cylinder Plate
21. 4" x 8" Dual Chamber Master Cylinder Plate

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
VPUMP/2G	45071	1

166 Air Operated Double Diaphragm Pumps

AODD

Specifically engineered with reduced parts ensuring maximum performance & reliability. These are used for transfer of clean & particulate laden fluids including waste oil in industrial, automotive, chemical processing, oil & gas and marine applications

Truly Non-lubricated Design
A non lubricated outside accessible air distribution system with no messy pre-packed grease

Energy saving
20% less air consumption over conventional pumps

Fully bolted design
Quick tear down & rebuild, Hence negligible downtime during operation

20% Fewer wearing parts
Low periodic maintenance is required

Self Priming
The pump design (incorporating internal check valves) allows for high suction lift even at dry start-up and with heavier fluids

Explosion Proof
As pumps are operated by compressed air, therefore, they are intrinsically safe

Submersible
If external components are compatible - these pumps can be submerged in the liquid by simply running the exhaust line above the liquid level

Ideal for transfer of waste oil in workshops, garages etc.

VARIANTS

	AODD/50/BAH/N	AODD/25/BAH/N	AODD/15/BAH/N	AODD/15/BPS/N
SIZE	2"	1"	1/2"	1/2"
CASING	Aluminum	Aluminum	Aluminium	Polypropylene
DIAPHRAGM	Hytrel	Hytrel	Hytrel	Santoprene
FLOW RATE	UPTO 670 LPM (177 GPM)	UPTO 140 LPM (37 GPM)	UPTO 58 LPM (15.3 GPM)	UPTO 55 LPM (14.5 GPM)
PUMP INLET/OUTLET (F)	2" Opening	1" Opening	1/2" Opening, 4 Inlets & 4 Outlets	1/2"
AIR INLET	3/4"	3/8"	1/4"	1/4"
AIR INLET PRESSURE	29 - 100 PSI (2 - 7 BAR)	29 - 100 PSI (2 - 7 BAR)	29 - 100 PSI (2 - 7 BAR)	29 - 100 PSI (2 - 7 BAR)
MAX. PARTICLE SIZE	5/16" or less (8 MM or less)	1/8" or less (3 MM or less)	1/32" or less (1 MM or less)	1/32" or less (1 MM or less)
WETTED COMPONENTS	Aluminum & Hytrel	Aluminum & Hytrel	Aluminum & Hytrel	Polypropylene & Santoprene
DISCHARGE VOLUME PER CYCLE	UPTO 600 ML	UPTO 600 ML	UPTO 160 ML	UPTO 190 ML
DIMENSIONS	90 × 123 × 265" (2290 × 3130 × 6740 MM)	10 × 10 × 12-3/8" (257 × 257 × 315 MM)	8-1/2 × 9-21/32 × 11-11/32" (216 × 245 × 288 MM)	8.5 × 8.5 × 11.34" (216 × 216 × 288 MM)
LIQUID TEMP.	0 - 80°C	0 - 80°C	0 - 80°C	0 - 60°C
MAX. AIR CONSUMPTION	5400 LPM (190.7 CFM)	900 LPM (31.8 CFM)	520 LPM (18.3 CFM)	700 LPM (24.7 CFM)
NOISE LEVEL	88.5 db	81 db	81 db	81 db
WEIGHT	29 KG (641 LBS)	9.3 KG (20 LBS)	5.4 KG (11.9 LBS)	2.54 KG (5.6 LBS)
RECOMMENDED USE	Diesel, Kerosene, Lubricants, Gear oil, Engine oil, Waste oil, Brake fluid, Naphtha, Mold lubricants, Antifreeze & Waste water	Diesel Fuel, Kerosene, Lubricants, Gear Oil, Engine Oil, Waste Oil, Brake Fluid, Naphtha, Mold Lubricants, Antifreeze & Waste Water	Diesel Fuel, Kerosene, Lubricants, Gear Oil, Engine Oil, Waste Oil, Brake Fluid, Naphtha, Mold Lubricants, Antifreeze & Waste Water	Antifreeze, Ethanol, Ammonium Hydroxide & Waste Water

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE INCH	CASING	BOX QTY.
◆ AODD/50/BAH/N	44747	2	Aluminium	1
AODD/25/BAH/N	44746	1	Aluminium	1
AODD/15/BAH/N	44726	1/2	Aluminium	1
AODD/15/BPS/N	44725	1/2	Polypropylene	1

◆ New

167 Waste Oil Evacuation Kits

KIT-AODD

20-100 PSI

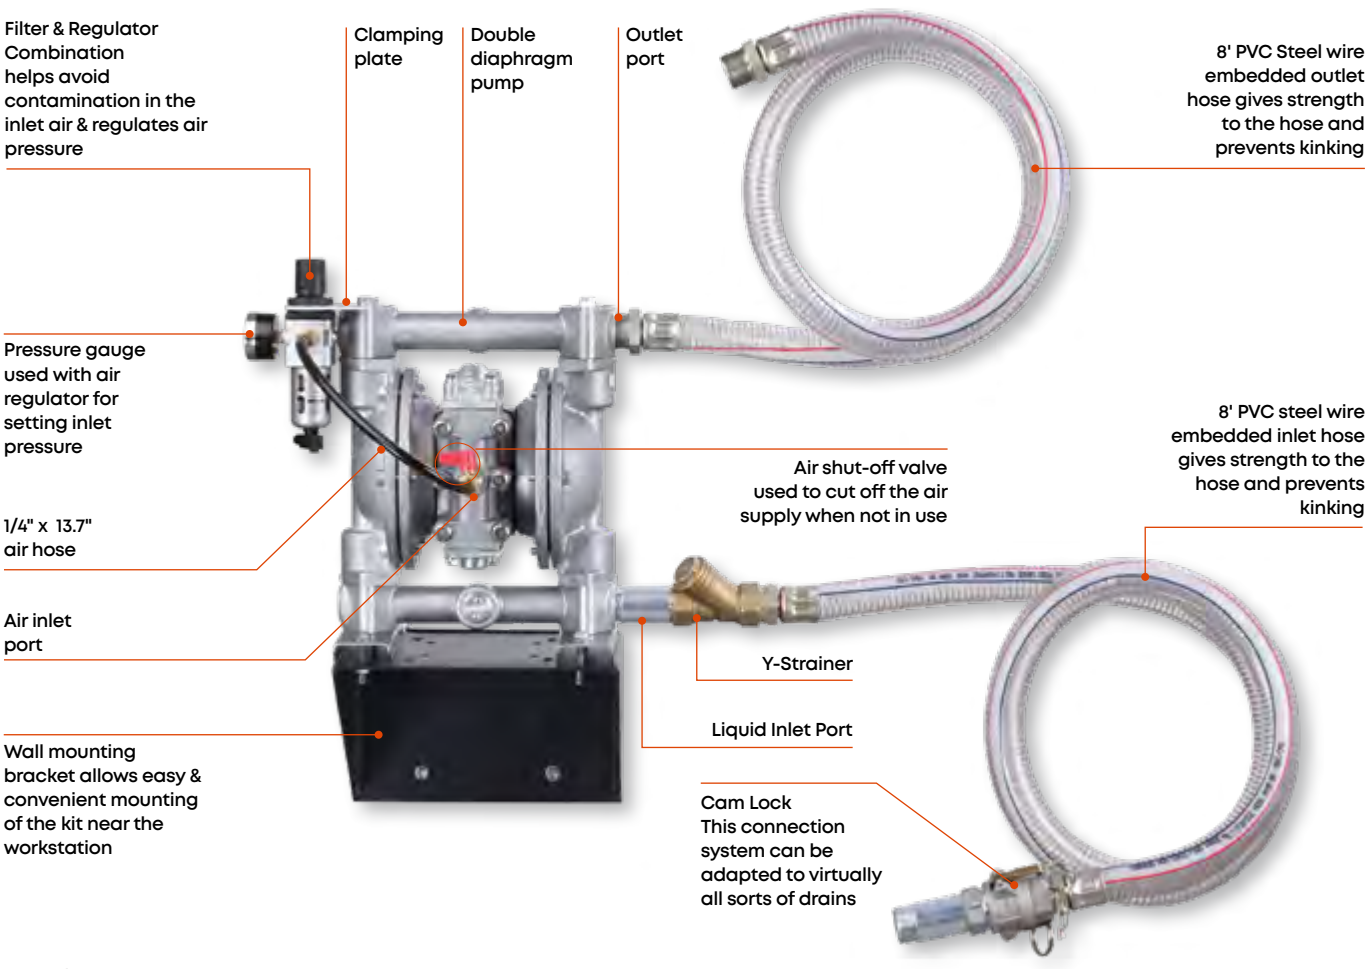

Ideal for use in workshops & garages for removing used oil from drains and delivering to the used oil sump tank

Waste Oil Evacuation System includes:

1. Double Diaphragm pump
2. Filter Regulator Combination
3. Two 8' PVC hoses, cam lock, Y-strainer, fittings
4. Pressure gauge and air hose
5. Wall mounting bracket
6. Clamping plate
7. PTFE tape

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
KIT/AODD/1-2/WO/N	47750	1
KIT/AODD/0-1/WO/N	47751	1

SPECIFICATIONS

	KIT/AODD/1-2/WO/N	KIT/AODD/0-1/WO/N
SIZE	1/2"	1"
FLOW RATE	0-50 LPM	0-110 LPM
AIR INLET PRESSURE	29-100 PSI (2-7 BAR)	29-100 PSI (2-7 BAR)
CASING	Aluminium	Aluminium
DIAPHRAGM	Hytrel	Hytrel
MAX. PARTICLE SIZE	1/32" (1 MM)	1/16" (2 MM)

168 Waste Oil Drain Pressurized

WOD-68

Oil Drain with wheel mounted tank

Suitable for gravity draining of motor, engine, gearbox & differential oils, transmission & power steering fluids etc. from all types of motor vehicles placed on auto lift or a pit

Durable all-steel design and re-inforced castors

Centrally mounted 10 litres (10.50 qt.) capacity bowl is height adjustable & can be optimally positioned for oil draining and other maintenance operations

Designed for excellent mobility, easy bowl positioning & simple to use pressurized evacuation

Complete with a 14" (355mm) telescopic bowl that can be adjusted from 45" (1143 mm) to 72" (1828 mm)

68 litre (18 gallon) tank includes a pre-set air regulator that allows the use of standard compressed air up to 150 PSI (10 BAR)

Tank includes a safety valve and a reinforced dispensing hose that doubles as a sight gauge to prevent overfilling

Not for use with fuels and corrosive media

Bowl fitted with anti-splash screen



Lockable front wheels provide stability to the unit

Used oil being drained from vehicle in an automotive workshop

SPECIFICATIONS

TANK CAPACITY	68 LITRES	18 US GALLONS
MAX. COLLECTION CAPACITY	55 LITRES	14.5 US GALLONS
BOWL CAPACITY	10 LITRES	10.50 US QUARTS
BOWL INNER DIAMETER	14"	355 MM
LENGTH OF DRAINING HOSE	2 METER	
MAXIMUM HEIGHT	72"	1828 MM
MINIMUM HEIGHT	45"	1143 MM
RECOMMENDED DRAINING PRESSURE	8 PSI	0.5 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
WOD/68A	44601	1

169 Waste Oil Drains

WODP

Oil Drain with wheel mounted tank suitable for gravity draining of motor engine, gearbox & differential oils, transmission & power steering fluids etc. from motor vehicles

Heavy-duty polypropylene blow moulded tank with polyethylene injection moulded bowl & aluminium tube

Tank includes:
- Level indicator to monitor oil level and avoid oil spillage
- Deep & wide pockets with separation to store tools & small parts while working
- Cap with rubber washer that prevents leakage while moving the drain

Special features on the 68 litres (18 gallon) tank
- 2" bung for installing pump to extract waste oil
- Bottom mounted oil drain tap to drain out waste oil
- Drain holes with plugs in the sloped tank pockets for easy flow of excess oil into the tank
- Ergonomic grip on the top & bottom of the tank for ease in pouring out oil

Bowl
- Centrally mounted 13 litres (3.4 gallon) capacity bowl is height adjustable & can be optimally positioned for oil draining
- Filter in bowl retains drain plugs, nuts & bolts & prevent them from falling into the tank

Not for use with fuels and corrosive media

Supplied in CKD form

NEW!

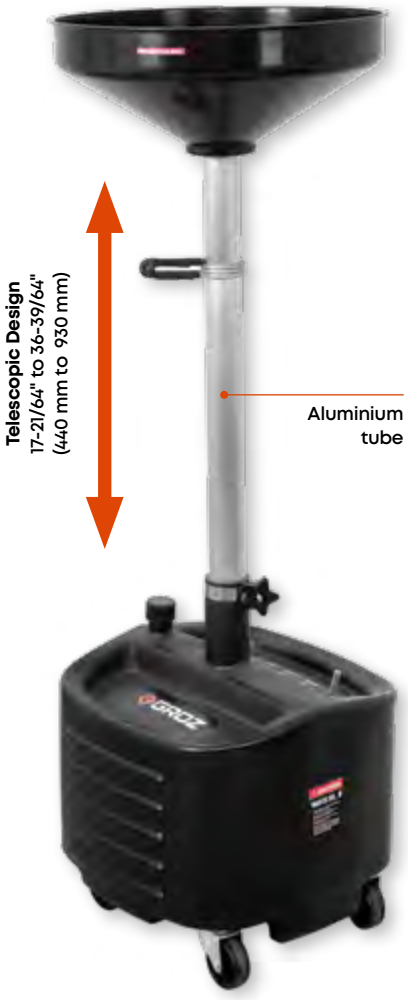

The 68 litres (18 gallon) Oil Drain can be used with oil pumps for quick removal of waste oil. (Pump not included)

Rotary Barrel Pump

Lever Barrel Pump

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
* WOD/P/8G	44605	1
WOD/P/18G	44606	1

* Best Seller

VARIANTS

	WOD/P/8G		WOD/P/18G	
TANK CAPACITY	30 Litres	8 US Gallons	68 Litres	18 US Gallons
BOWL CAPACITY	13 Litres	3.4 US Gallons	13 Litres	3.4 US Gallons
BOWL INNER DIAMETER	411 MM	16-3/16"	411 MM	16-3/16"
MAX. HEIGHT	1575 MM	62"	1676.5 MM	66"
MIN. HEIGHT	1092 MM	43"	1194 MM	47"
DRAIN TAP	No		Yes	

170 Plastic Truck Drain

Designed for use with heavy-duty Trucks, Buses, RV's & other low profile automobiles.

17 gallon (65 litre) capacity reservoir moulded from robust, lightweight high-impact polyethylene.

Used to collect waste fluids, including motor oil and transmission fluid, coolant etc. Eliminates the need to lift the vehicle

4" (100 mm) nylon castors for better maneuverability.

Hose hanger for safe keeping the hose when not in use

Removable anti-splash tray does not allow solid particles/debris above 0.15" (3.8 mm) dia. to enter into the tank.

Recessed pocket at each corner provides storage space for drain plugs & filters

Baffles inside the reservoir prevent oil spillage during transport

Available in two versions:

a. Truck Drain (Gravity Drain): Waste Oil is removed by gravity outflow
b. Truck Drain with Manual Rotary Pump
c. Truck Drain with Electric Oil Pump

TD-17P

RECOMMENDED USE

Diesel, Kerosene, Lubricating Oil (upto SAE 90), Non Corrosive Media, Waste Fluids including Motor Oil, Transmission Fluids, Coolant etc.

SPECIFICATIONS

TRUCK DRAIN HEIGHT	7 -3/4" (195 MM)

FLUIDS

VARIANTS

GRAVITY DRAIN	TRUCK DRAIN WITH MANUAL ROTARY PUMP	TRUCK DRAIN WITH ELECTRIC OIL PUMP
WETTED COMPONENTS Polyethylene, PVC, Steel, Cast Iron, NBR, Aluminum, & Brass	**WETTED COMPONENTS** Polyethylene, PVC, Steel, Cast Iron, NBR, Aluminum, & Brass	**WETTED COMPONENTS** Polyethylene, PVC, Steel, Cast Iron, NBR, Aluminum, Brass, SS, Zamac & Neoprene

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	DISCHARGE HOSE - 6' (1.8 M)	FEEDER HOSE- 1.25' (380 MM)	STEEL SPOUT	PUMP FLOW RATE	BOX QTY.
TD/17G	45810	Gravity Drain	Yes	No	Yes	-	1
TD/17P	45811	Truck Drain with Manual Rotary Pump	Yes	Yes	Yes	1 litre (0.25 gal.)/5 strokes	1
TD/17E/12	45817	Truck Drain with 12 V DC Electric Oil Pump	Yes	Yes	Yes	Upto 17 LPM (4.5GPM)	1
TD/17E/115/US	45818	Truck Drain with 115 V AC Electric Pump	Yes	Yes	Yes	Upto 23 LPM (6GPM)	1

171 Low Profile Truck Drain

Designed for use with heavy duty trucks, buses, RV's and other low profile automobiles to collect waste fluids such as motor oils, transmission fluids, coolants etc.

Rugged steel construction makes this ideal for use in heavy duty applications in workshops

Removable anti-splash tray reduces splash and prevents entry of particles more than 0.20" (5mm) dia into the tank

Both sizes of Truck Drain are available in 3 versions

1. Gravity Drain: Waste Oil is removed by gravity outflow
2. Truck Drain with Manual Rotary Oil Pump
3. Truck Drain with Electric Pump
   - With a flexible impeller design, pump can pump high viscosity fluids at a higher flow rate.
   - Duty Cycle: 45 minutes ON/ 45 minutes OFF
   - UL Listed motor with thermal overload protection

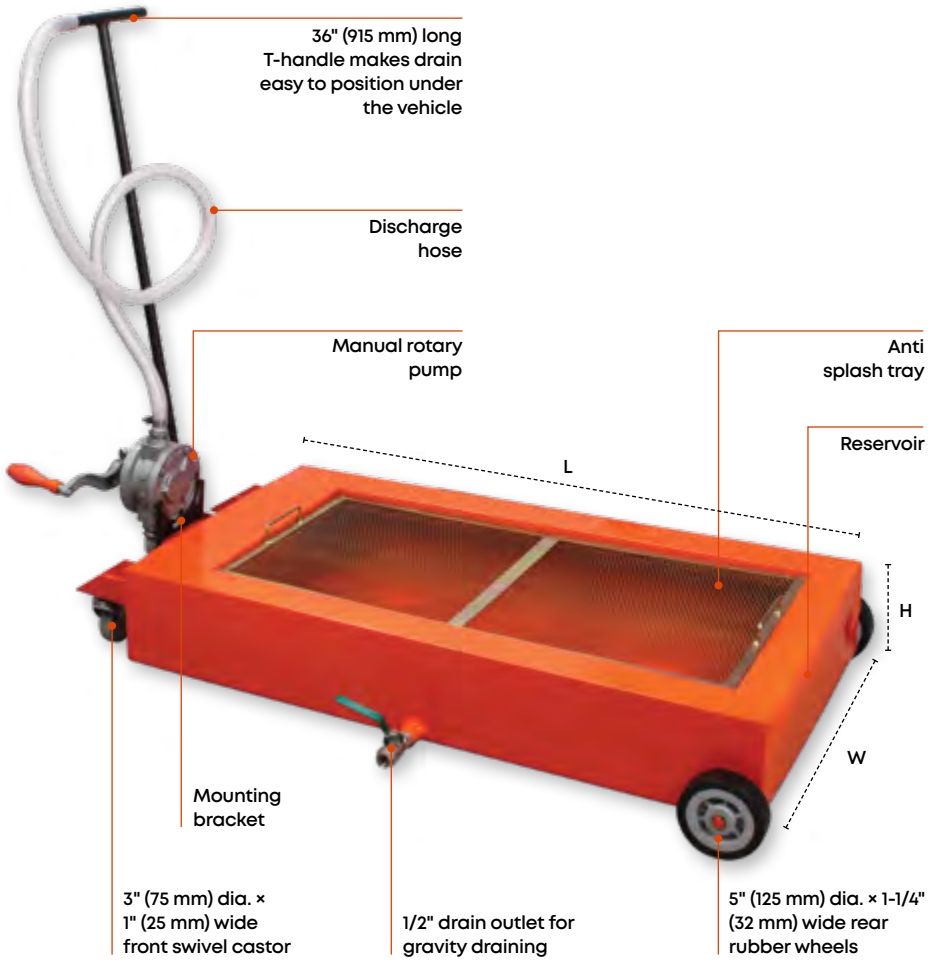

SPECIFICATION

DESCRIPTION	GRAVITY TRUCK DRAIN	TRUCK DRAIN WITH MANUAL ROTARY PUMP	TRUCK DRAIN WITH ELECTRIC OIL PUMP	
			WITH 115V AC	WITH 12V DC
CAT NR.	TD/68G TD/90G	TD/68P TD/90P	TD/68E/115/US TD/90E/115/US	TD/68E/12 TD/90E/12
DISCHARGE HOSE - 8.2FT (2.5M)	Yes	Yes	Yes	Yes
FEEDER HOSE	No	Yes	Yes	Yes
PUMP FLOW RATE		Upto 1 litre (0.25 gallon) / 5 turns	Upto 23 LPM (6 GPM)	Upto 17 LPM (4.5 GPM)

VARIANTS

GRAVITY DRAIN	TRUCK DRAIN WITH MANUAL ROTARY PUMP	TRUCK DRAIN WITH ELECTRIC OIL PUMP
WETTED COMPONENTS Steel & PVC	**WETTED COMPONENTS** Steel, PVC & NBR	**WETTED COMPONENTS** Steel, PVC, NBR, SS, Zamac & Neoprene

Available in 2 sizes

a. **68 litres (18 gallons)** reservoir capacity
Reservoir dimensions (L × W × H) :
41-15/16" × 22" × 7-1/2" (1065 × 560 × 190 mm)

b. **90 litres (23.7 gallons)** reservoir capacity.
This sizes comes with in-built baffles
Reservoir dimensions (L × W × H) :
47-27/32" × 29-1/2" × 8 × 11/32" (1215 × 750 × 212 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	RESERVOIR CAPACITY (LITRES)	RESERVOIR CAPACITY (US GALLONS)	BOX QTY.
GRAVITY DRAIN				
TD/68G	45802	68	18	1
TD/90G	45806	90	23.7	1
WITH MANUAL ROTARY PUMP				
TD/68P	45803	68	18	1
TD/90P	45807	90	23.7	1
WITH 115V 60 HZ AC PUMP				
TD/68E/115/US	44440	68	18	1
TD/90E/115/US	44450	90	23.7	1
OIL DRAIN 12V DC PUMP				
TD/68E/12	44442	68	18	1
TD/90E/12	44452	90	23.7	1

172 Drain Pans

ODP-8
ODP-16

High density polyethylene construction

Chemical / solvent resistant

Designed to ship in nested form

Available in 2 capacities
- 16 Litre (4-1/4 Gallon)
- 8 Litre (2 Gallon)

ODP-16

NEW 8 LITRE (2 GALLON)

ODP-8

Designed to ship in nested form

VARIANTS

RECOMMENDED USE Waste Oil	RECOMMENDED USE Antifreeze

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY (LITRE)	CAPACITY (US GALLON)	COLOUR	RECOMMENDED USE	BOX QTY.
◆ ODP/8	41965	8	2	Black	Waste Oil	15
◆ ODP/8/GN	41968	8	2	Green	Antifreeze	15
ODP/16	41960	16	4-1/4	Black	Waste Oil	15
ODP/16/GN	41961	16	4-1/4	Green	Antifreeze	15

◆ New

173 Drain Pan V Series

ODP-7Q

NEW!

Manufactured from polyethylene for superior durability

Chemical & solvent resistant, suitable for use with automotive waste oils, coolant and other workshop fluids

Integrated pour spout enables precise, controlled pouring and easy disposal

Moulded handle ensures comfortable carrying and better grip during use

Designed for routine oil changes, fluid drainage and general automotive service tasks

Stackable / nestable design for efficient storage and optimized shipping

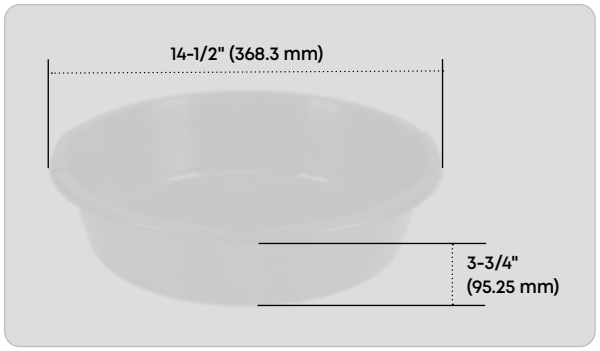

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY		BOX QTY.
		(LITRE)	(US QUART)	
ODP/7Q	41971	7	7	60

174 Drain Container

ODP-15

High density polyethylene drain container for recycling of used oil

Designed for use with heavy duty, large capacity equipment involving multiple oil changes

Closed design for safe & spill-free disposal

No mess to clean up on top or side

Drain direct - No oil tub or funnel needed

Large 8" (200 mm) opening with catch all basket holds small parts & filters & screw cap with exclusive o-ring seal

Integrated handle for easy carrying and handling

Stores upright or flat without leakage

Complete with wheels for slosh & spill free mobility

RECOMMENDED USE
Used oil, Antifreeze

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY		DIMENSIONS		BOX QTY.
		(LITRE)	(US QUART)	(INCH)	(MM)	
ODP/15	41966	14.25	15	18 × 16 × 5	457 × 406.4 × 127	5

175 Drain Container Heavy Duty

ODP-HD

NEW!

High density HDPE construction

Closed design for safe & spill free disposal of waste & used oils

4-Hole sieve cap design enhances filtration performance & debris separation

Leak Proof Design: Cap with integrated sealing washer ensures tight closure during storage or transportation

Internal flow channels ensure smooth & controlled pouring, minimizing splashing

Stores upright or flat without leakage

Air vent for glug free pouring

Suitable for cars, SUVs, motorcycles, and light commercial vehicles

VARIANTS

ODP/HD/10Q	ODP/HD/16Q
• 10 Litres (10 US Quarts) Capacity • For use with cars & passenger vehicles	• 16 Litres (16 US Quart) Capacity • Includes bottom handle for ease of use when the container is full • For use with large trucks & commercial vehicles

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY		BOX QTY.
		(LITRE)	(US QUART)	
ODP/HD/10Q	41972	10	10	5
ODP/HD/16Q	41973	16	16	5

05

FUEL EQUIPMENT & SPECIALITY PUMPS

- FUEL PUMPS
- DEF PUMPS
- SPECIALITY PUMPS
- FUEL METERS, NOZZLES & ACCESSORIES

176 Electric Fuel Pumps Heavy Duty



cULus LISTED

Heavy duty industrial grade fuel pumps.

Designed for everyday use in agricultural, construction, automotive & industrial applications

Lightweight, yet strong non-corroding aluminium die-cast construction. Weather proof for tough outdoor use

Geared pump design using precision sintered metal gears

Geared construction makes the pump tolerant to contaminants in fuel; in addition to offering tremendous suction & minimal noise

UL & cUL listed Motor

Duty Cycle
30 minutes ON /
30 minutes OFF

WETTED COMPONENTS
Aluminium, Steel, Cast Iron, Nylon, NBR, Zinc, Viton, Stainless Steel

RECOMMENDED USE
Gasoline, Diesel, E15 Fuel, Kerosene, Bio Diesel (B20)

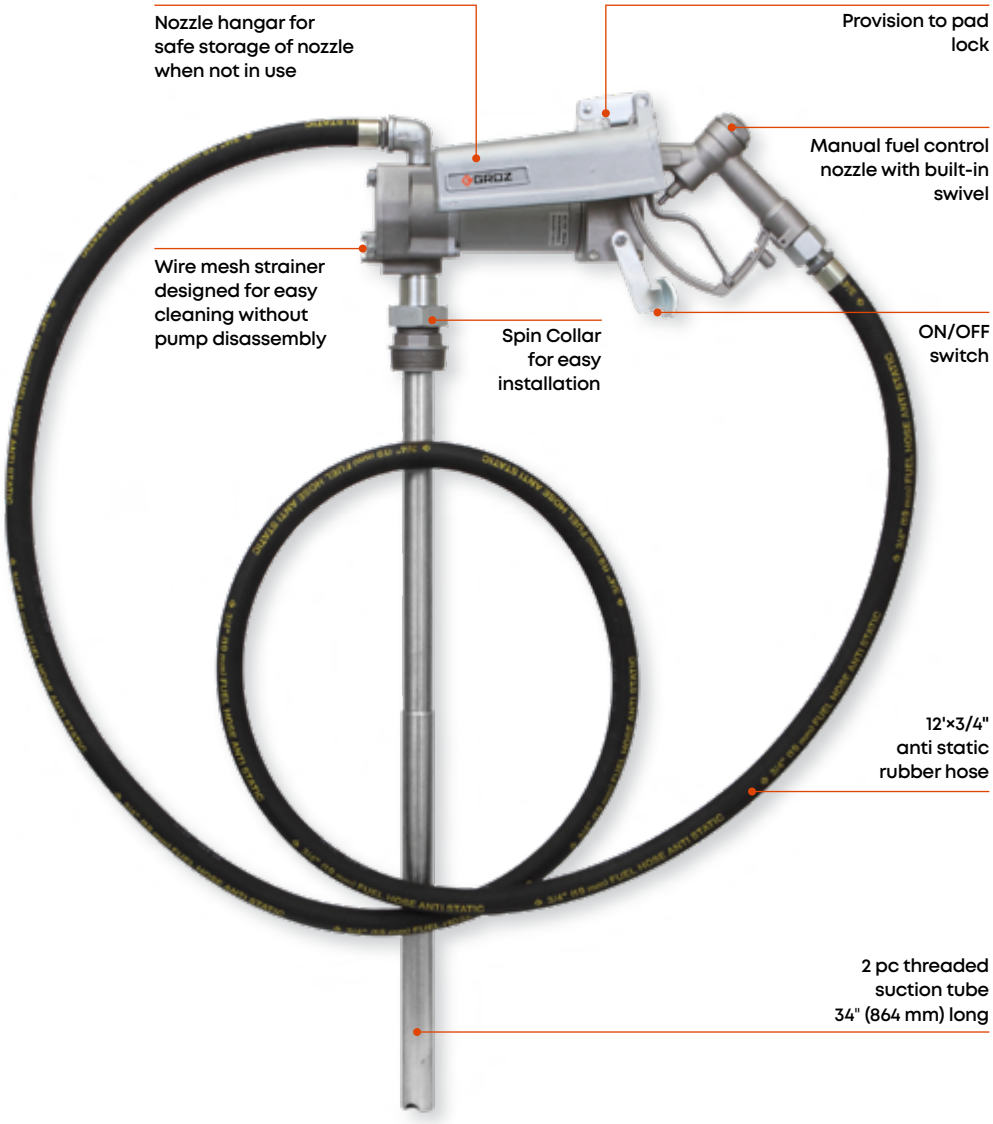

Drum Mounting

PUMP INTERNALS

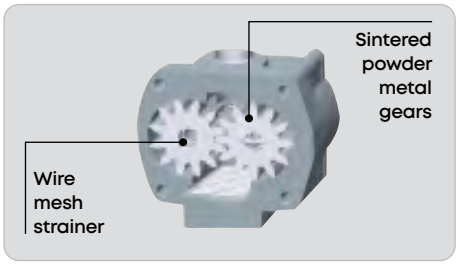

VARIANTS

	FPM-12	FPM-24	FPM-115	FPM-220
DESCRIPTION	Heavy Duty 12V DC	Heavy Duty 24V DC	Heavy Duty 115V AC	Heavy Duty 220V AC
FLOW RATE (AT PUMP OUTLET)	UPTO 57 LPM (15 GPM)*	UPTO 57 LPM (15 GPM)*	UPTO 49 LPM (13 GPM)	UPTO 49 LPM (13 GPM)
EXPLOSION PROOF MOTOR	1/7 HP 12V DC	1/7 HP 24V DC	1/8 HP 115V AC , 60 Hz.	1/8 HP 220V AC , 50/60 Hz.
AMP	25 Amp	11 Amp	2.7 Amp	1.4 Amp
INTERNAL BYPASS VALVE	Yes	Yes	Yes	Yes
SUCTION PIPE	Steel	Steel	Steel	Steel
HOSE	3/4" × 12' anti static hose	3/4" × 12' anti static hose	3/4" × 12' anti static hose	3/4" × 12' anti static hose
TANK ADAPTER	2" threaded	2" threaded	2" threaded	2" threaded
INLET	1" NPT	1" NPT	1" NPT	1" NPT
OUTLET	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
DISPENSING NOZZLE	3/4" manual with swivel	3/4" manual with swivel	3/4" manual with swivel	3/4" manual with swivel
BATTERY CABLE (2 WIRES)	15'	15'	NA	NA

*Measured at pump outlet with Vehicle Engine switched on

FLUIDS

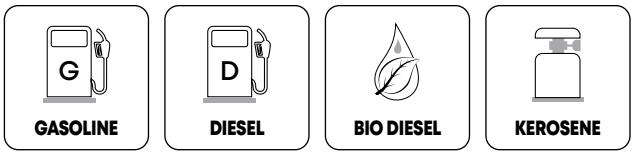

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
* FPM/12	44040	12V DC	1
FPM/24	44041	24V DC	1
FPM/115	44042	115V AC	1
FPM/220	44043	220V AC	1
SPARE			
ZSA/HOS/FPM/12	44077	12' × 3/4" anti static rubber hose	-

* Best Seller

177 Electric Fuel Pump High Flow

FPM-HF





c UL us LISTED

Heavy duty industrial grade high flow fuel pump

Designed for heavy duty usage in agricultural, construction, automotive & industrial applications

Lightweight yet strong, non-corroding aluminium die cast construction. Weather proof for tough outdoor use

Geared pump design using precision sintered metal gears

Geared construction using precision sintered gears makes the pump tolerant to contaminants in fuel; in addition to offering tremendous suction & minimal noise

UL & cUL listed Motor

Duty Cycle
30 minutes ON /
30 minutes OFF

WETTED COMPONENTS

Aluminum, Steel, Cast Iron, Nylon, NBR, Zinc, Viton, Stainless Steel

RECOMMENDED USE

Gasoline, Diesel, E15 Fuel, Kerosene, Bio Diesel (B20)

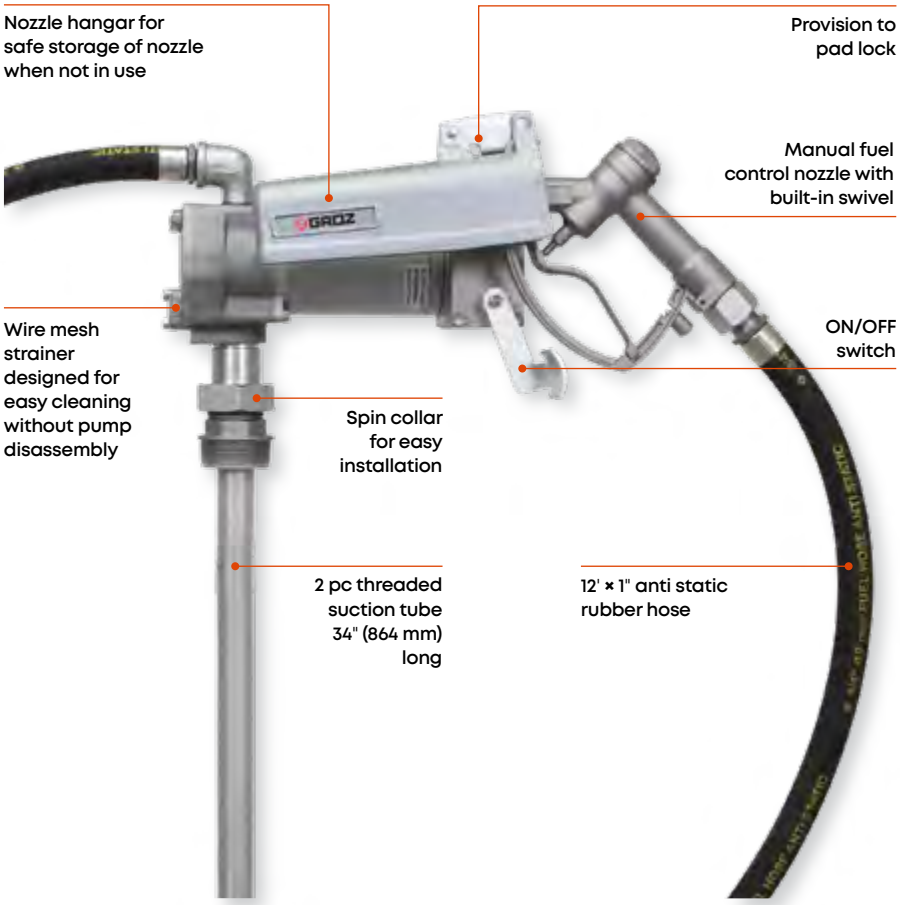

FLUIDS



ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
★ FPM/12/HF	44045	12V DC	1

★ Best Seller

SPECIFICATIONS

DESCRIPTION	Heavy Duty 12V DC
FLOW RATE (AT PUMP OUTLET)*	UPTO 75 LPM (20 GPM)
EXPLOSION PROOF MOTOR	1/7 HP 12V DC*
AMP DRAW FROM BATTERY	30 Amp
INTERNAL BYPASS VALVE	Yes
SUCTION PIPE	Steel
HOSE	1" × 12' anti static hose
TANK ADAPTER	2" threaded
INLET	1" NPT
OUTLET	1" NPT
DISPENSING NOZZLE	1" manual with swivel
BATTERY CABLE (2 WIRES)	15'

*Measured at pump outlet with vehicle engine switched on

178 Electric Fuel Pump Continuous Duty

CDP





Continuous Duty

Diesel Transfer Pump

Ideal for use on stationary tanks, fixed fuel transferring systems, dispensers & other similar industrial applications

Lightweight yet strong, non-corroding aluminium die cast construction

Self priming vane pump

Motor with thermal overload protection

Duty Cycle
Continuous Duty

WETTED COMPONENTS
Aluminium, Nitrile Rubber, Steel, Nylon

RECOMMENDED USE
Diesel & Kerosene

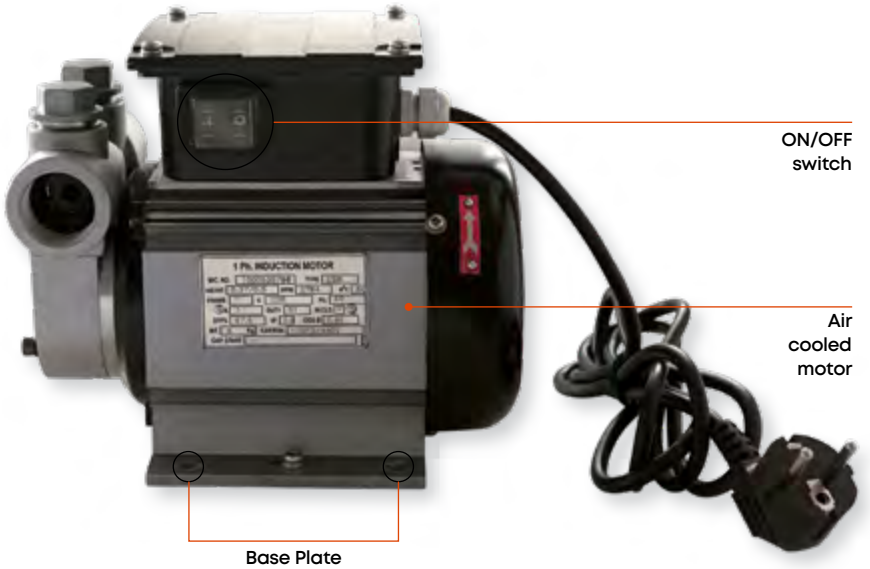

VARIANTS

	CDP/115	CDP/220
DESCRIPTION	115V AC	220V AC
FLOW RATE*	UPTO 56 LPM (15 GPM)	UPTO 56 LPM (15 GPM)
MOTOR	1/2 HP 115V AC, 60 Hz	1/2 HP 220V AC, 50/60 Hz
RPM	3400	2800
INTERNAL BYPASS VALVE	Yes	Yes
INLET / OUTLET	1" NPT (F)	1" BSP (F) / 1" NPT (F)
POWER CABLE LENGTH	1.8M (6')	1.6M (5.3')
OPERATING TEMPERATURE	10°C TO 50°C	10°C TO 50°C
DUTY CYCLE	Continuous Duty	Continuous Duty

*Measured at pump outlet

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	INLET / OUTLET	BOX QTY.
CDP/115/US	45514	115V AC, 60 Hz, Power Cord with US Socket	1" NPT (F)	1
* CDP/220/EU	45510	220V AC, 50/60 Hz, Power Cord with European Socket	1" BSP (F)	1
CDP/220/AU	45512	220V AC, 50/60 Hz, Power Cord with Australian Socket	1" BSP (F)	1
CDP/220/US	45513	220V AC, 50/60 Hz, Power Cord with US Socket	1" NPT (F)	1

* Best Seller

FLUIDS



179 Electric Fuel Pump Continuous Duty - High Flow

CDP-HF

NEW!
Continuous Duty

Continuous-duty diesel transfer pump

For use with stationary tanks, on-site fixed fuel transferring system, dispensers etc.

Self-priming vane pump with steel rotor & built-in by-pass valve, for ease of maintenance

Aluminium die-cast construction with IP 54 Protection

Duty Cycle
Continuous Duty

WETTED COMPONENTS
Cast Iron, NBR, PPS, Steel, Nylon

RECOMMENDED USE
Diesel & Kerosene

SPECIFICATIONS

DESCRIPTION	115V AC	220V AC
FLOW RATE*	UPTO 80 LPM (22 GPM)	UPTO 80 LPM (22 GPM)
MOTOR	3/4 Hp 115V AC	3/4 Hp 220V AC
RPM	3420	2800
INTERNAL BYPASS VALVE	Yes	Yes
INLET / OUTLET	1" NPT (F)	1" BSPT (F)
POWER CABLE LENGTH	2M	2M

*Measured at pump outlet

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	INLET/OUTLET	BOX QTY.
CDP/115/80/US	49511	115V AC with US socket	1" NPT (F)	1
CDP/220/80/EU	49510	220V AC with EU socket	1" BSP (F)	1

FLUIDS



180 Open Bowser AC Diesel Refilling System

OBN-AC

80 LPM

± 0.5%

NEW!

Continuous Duty

The Groz OBN-AC is a complete diesel dispensing system with a meter, pump

Easy to install, this station is designed to reliably pump and transfer diesel for stationary diesel refilling applications

In-built Fuel Nozzle Holder

Duty Cycle
Continuous duty

Includes

a. **AC Powered Continuous Duty Diesel Pump:** Self-priming, vane pump with an internal bypass valve
b. **Mechanical Fuel Meter (FM-OV10)**
c. **Fuel Control Nozzle – Automatic (FCNA-60)**
d. **Fuel Hose:** 4m non-grounded dispensing hose threaded 3/4"
e. **Suction Hose:** 2m × 3/4" ID Braided transparent hose
f. **Hardware:** Strainer, hose barb, hose clamp & swivel

WETTED COMPONENTS
Cast Iron, NBR, Aluminum, POM, PP

RECOMMENDED USE
Diesel & Kerosene

SPECIFICATION

DESCRIPTION	115V AC	115V AC High Flow	220V AC	220V High Flow
FLOW RATE	Upto 60 LPM (16 GPM)	Upto 80 LPM (22 GPM)	Upto 60 LPM (16 GPM)	Upto 80 LPM (22 GPM)
INLET/ OUTLET	1"	1"	1"	1"
MOTOR	1/2 Hp 115V / 50 HZ	1/2 Hp 115V / 50 HZ	1/2 Hp 220V / 60 HZ	3/4 Hp 220V / 60 HZ
RPM	3500	3500	2800	2800
METER ACCURACY	±0.5%	±0.5%	±0.5%	±0.5%
METER LEAST COUNT	0.1 US Gallon	0.1 US Gallon	0.1 Litre	0.1 Litre
MAX. RESETTABLE BATCH TOTAL	999.9 US Gallon	999.9 US Gallon	999.9 litres	999.9 litres
MAX. NON RESETTABLE TOTALIZER	99999999 US Gallon	99999999 US Gallon	99999999 litres	99999999 litres
BATTERY CABLE	2m with US plug	2m with US plug	2m with EU plug	2m with EU plug
SUCTION HOSE	2m x 1" transparent braided hose	2m x 1" transparent braided hose	2m x 1" transparent braided hose	2m x 1" transparent braided hose
DISCHARGE HOSE	4m x 3/4" non-grounded hose	4m x 3/4" non-grounded hose	4m x 3/4" non-grounded hose	4m x 3/4" non-grounded hose

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
OBN/60/115US/G/A	49531	115V AC with US socket	1
OBN/80/115US/G/A	49533	115V AC High Flow with US socket	1
OBN/60/220EU/L/A	49530	220V AC with EU socket	1
OBN/80/220EU/L/A	49532	220V AC High Flow with EU socket	1

FLUIDS

D DIESEL

KEROSENE

181 Mini Bowser Diesel Refilling System

44 LPM

±1%

A compact & convenient system designed for all stationary diesel refilling applications

Extremely versatile, the bowser can be installed directly on a wall, on an existing structure with screws or directly on a tank

Complete system consists of:

a. **Continuous duty self priming diesel pump**
Self priming, vane pump with an internal bypass valve is equipped with a self ventilated, 1/2 HP motor with thermal overload protection for continuous usage

b. **Mechanical Fuel Meter**
Nutating disc mechanical meter, flow rate of 20-120 LPM (5-30 GPM) & pressure rating 145 PSI (10 BAR)

c. **Fuel Control Nozzle – Automatic**
- Sensor in the discharge spout outlet automatically shuts off supply when fuel level in the tank reaches the discharge spout
- The nozzle is equipped with a swivel at the inlet for convenience in usage

d. **Nozzle Holder**
In-built into the metal casing for keeping hose safe when not in use

e. **Anti static fuel hose**
3.6m (10.5') × 1" (ID) long

f. **Hose Hangar**
For safe storage of nozzle

All encased in a sturdy weather proof metal housing

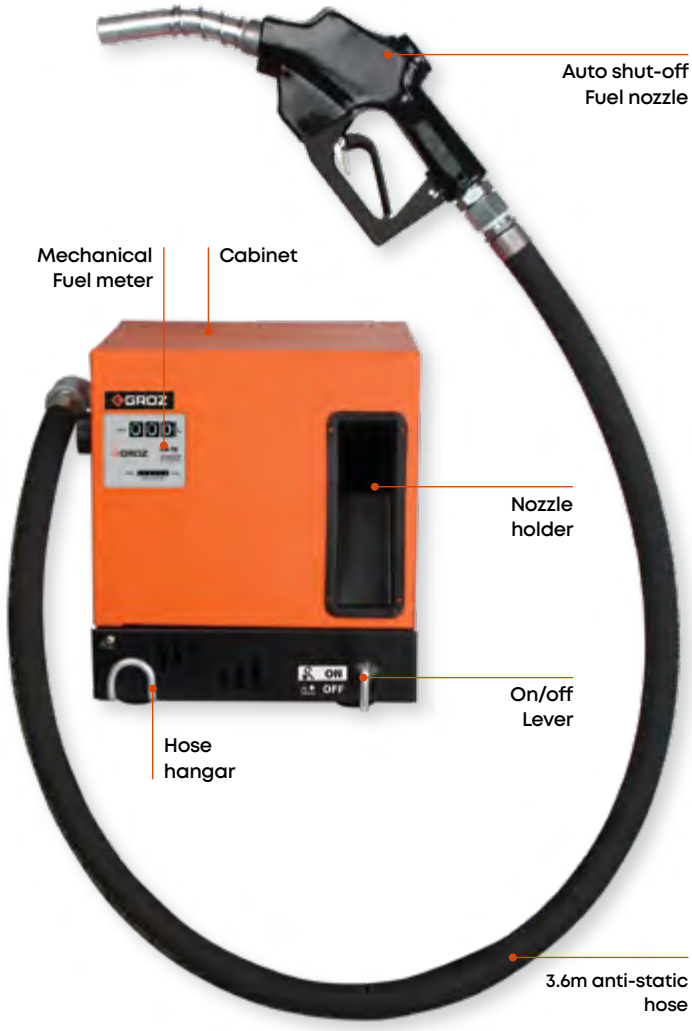

Internal Parts

FLUIDS

D

DIESEL

KEROSENE

VARIANTS

	CBN/115	CBN/220
DESCRIPTION	115V AC	220V AC
FLOW RATE*	UPTO 44 LPM (11 GPM)	UPTO 44 LPM (11 GPM)
INLET / OUTLET	1" NPT (F)	1" BSP (F)
PUMP MOTOR	1/2 HP 115V AC, 60 Hz	1/2 HP 220V AC, 50 Hz
PUMP RPM	3400	2800
DUTY CYCLE	Continuous Duty	Continuous Duty
POWER CABLE LENGTH	1.8M (6')	1.6M (5.3')
METER ACCURACY	± 1%	± 1%
METER LEAST COUNT	0.10 US gallons	0.10 litres
MAX. RESETTABLE BATCH TOTAL	99.9 US gallons	999.9 litres
MAX. NON RESETTABLE TOTALIZER	99999.9 US gallons	999999 litres
HOSE LENGTH	12 ft long × 1" ID	3.6m × 1" ID

*Measured at nozzle outlet

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	INLET / OUTLET	BOX QTY.
CBN/115US/G/A	45676	1/2 HP 115V AC, 60 Hz	1" NPT	1
CBN/220EU/L/A	45675	1/2 HP 220V AC, 50/60 Hz. Power Cord	1" BSP	1

182 Electric Diesel Pumps



Portable diesel transfer pumps

Designed for everyday use in agricultural, construction, automotive & industrial applications

Lightweight, yet strong non-corroding aluminum die-cast construction

Self priming vane pump design

Bypass valve keeps the motor safe even when the outlet is closed

Duty Cycle
30 minutes ON /
30 minutes OFF

WETTED COMPONENTS
Steel, Aluminum, Zinc, Nylon, NBR, PVC Nitrile, Acetal

RECOMMENDED USE
Diesel & Kerosene

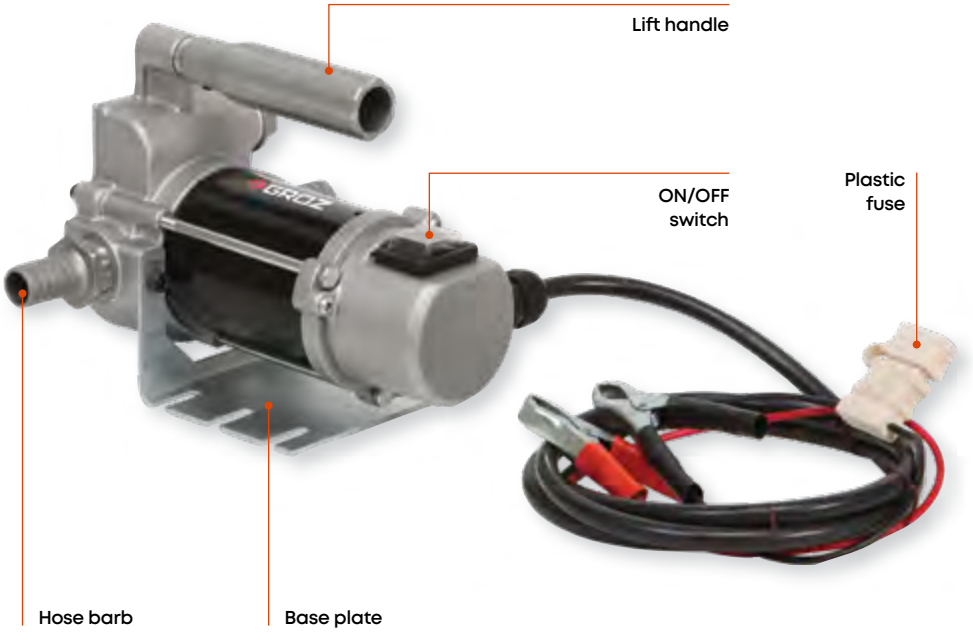

SPECIFICATIONS

DESCRIPTION	12V DC	24V DC
FLOW RATE*	UPTO 46 LPM	12 GPM
MOTOR	1/4 HP 12V DC	1/4 HP 24V DC
RPM	2600	2600
AMP DRAW FROM BATTERY	18 Amp	11 Amp
INTERNAL BYPASS VALVE	Yes	Yes
OUTLET	3/4" NPT	3/4" NPT
BATTERY CABLE	2M	2M

*Measured at pump outlet with vehicle engine switched on

FLUIDS



ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	BASE PLATE	LIFT HANDLE	DRUM BUNG	NOZZLE TYPE	NOZZLE HOLDER	PUMP INLET THREADED	PUMP OUTLET THREADED
12V DC PUMPS		24V DC PUMPS								
EDP/12	45530	EDP/24	45535	Yes	Yes	No	No	No	3/4" HB	3/4" HB
★ EDP/12M/ST	45531	EDP/24M/ST	45536	Yes	Yes	No	Manual	No	3/4" HB	3/4" HB
EDP/12A/ST	45532	EDP/24A/ST	45537	Yes	Yes	No	Automatic	No	3/4" HB	3/4" HB
EDP/12MD/ST	45533	EDP/24MD/ST	45538	No	No	Yes	Manual	Yes	1"	3/4" HB
EDP/12AD/ST	45534	EDP/24AD/ST	45539	No	No	Yes	Automatic	Yes	1"	3/4" HB
BASE TO DRUM MOUNT CONVERSION KIT										
DMK/EDP	45540	Accessories kit to convert Base to Drum Mount version				Yes		Yes		

★ Best Seller

VARIANTS

BASE MOUNT STYLE

EDP-12	EDP/12M/ST	EDP/12A/ST
Pump with • Base plate and lift handle • 2m long battery cable	Pump with • Base plate and lift handle • Manual Nozzle • 4m x 3/4" (ID) hose that can be cut & used as suction & delivery hose • Strainer • 2m long battery cable with fuse & clamps • Hardware - 3 hose barbs (3/4") & 4 hose clamps	Pump with • Base plate and lift handle • Automatic Nozzle • 4m x 3/4" (ID) hose that can be cut & used as suction & delivery hose • Strainer • 2m long battery cable with fuse & clamps • Hardware - 3 hose barbs (3/4") & 4 hose clamps

DRUM MOUNT STYLE

EDP/12MD/ST	EDP/12AD/ST
Pump with • Manual nozzle with nozzle holder • 2" bung • Elbow fitting • 2 pc suction tube • 3m x 3/4" (ID) delivery hose • 2m long battery cable with fuse & clamps • Hardware - 2 hose barbs (3/4") & 2 hose clamps	Pump with • Automatic nozzle with nozzle holder • 2" bung • Elbow fitting • 2 pc suction tube • 3m x 3/4" (ID) delivery hose • 2m long battery cable with fuse & clamps • Hardware - 2 hose barbs (3/4") & 2 hose clamps

	DISCHARGE HOSE	SUCTION TUBE	NYLON SUCTION STRAINER	BOX QTY.
	No	No	No	4
	Combo Hose 4m long		Yes	4
	Combo Hose 4m long		Yes	4
	Hose 3 m long	2 pc Steel	No	4
	Hose 3 m long	2 pc Steel	No	4
		2 pc Steel		

WARNING

Do not use fluids with a flash point below 100°F (38°C), such as Gasoline & Alcohol

Sparking could result in explosion causing fatal injury

183 Electric Diesel Pumps-V Series

DP
DP-D

NEW!



Portable diesel transfer pump

Designed for everyday use in agricultural, construction, automotive & industrial applications

Heavy Duty Cast iron Construction

Self-priming vane pump design

Bypass valve keeps the motor safe even when the outlet is closed

Duty Cycle
30 minutes ON /
30 minutes OFF

DP/12

WETTED COMPONENTS
Cast Iron, NBR, PPS, Steel, Nylon

RECOMMENDED USE
Diesel, Kerosene

DO NOT USE WITH
Petrol (Gasoline) and solvents with flash point below 100°F (38°C)

DP/12M/ST	DP/12MD/ST
BASE MOUNTED	DRUM MOUNTED

FLUIDS



WARNING

Do not use fluids with a flash point below 100°F (38°C), such as Gasoline & Alcohol Sparking could result in explosion causing fatal injury

SPECIFICATIONS

DESCRIPTION	12V DC
FLOW RATE*	Upto 45 LPM (12GPM)
MOTOR	1/4 HP 12V DC
AMP DRAW FROM BATTERY	24 Amp
INTERNAL BYPASS VALVE	Yes
OUTLET	3/4" NPT(F)
BATTERY CABLE	2 meters with fuse & aligator clips

*Measured at pump outlet with vehicle engine switched on

ORDERING INFORMATION

CAT NR.	ORD NR.	BASE PLATE	LIFT HANDLE	DRUM BUNG	NOZZLE TYPE	NOZZLE HOLDER	PUMP INLET THREADED	PUMP OUTLET THREADED	DISCHARGE HOSE	SUCTION TUBE	NYLON SUCTION STRAINER	BOX QTY.
DP/12	49500	Yes	Yes	No	No	No	3/4" HB	3/4" HB	-	-	-	4
DP/12M/ST	49501	Yes	Yes	No	Manual	No	3/4" HB	3/4" HB	Combo Hose 4m long		Yes	4
DP/12MD/ST	49502	No	No	Yes	Manual	Yes	1"	3/4" HB	Hose 3 m long	2 pc Steel	No	4

184 Electric Diesel Pump Heavy Duty

EDP-HD





Designed for use in extreme heat without loss in performance

Portable Heavy Duty Diesel Transfer Pump

Designed for heavy usage in agricultural, construction, automotive and industrial applications

Lightweight & non-corroding Aluminium die cast construction

Self-Priming Vane pump design

Vanes made from steel for high tensile strength

Air Cooled Motor

Fuse position in secure electric box for increased safety

Compact Bracket Mounting design for use in confined spaces

Duty Cycle
45 minutes ON /
45 minutes OFF

Pump complete with

- Base plate and lift handle
- 4m × 3/4" (ID) hose that can be cut & used as suction & delivery hose
- Nylon suction strainer
- Battery cable 2m with fuse & clamps
- Manual nozzle
- Hardware - 3 hose barbs (3/4") & 4 hose clamps

WETTED COMPONENTS

Steel, Aluminium, Zinc, Nylon, Rubber & PVC Nitrile

RECOMMENDED USE

Diesel & Kerosene

VARIANTS

	EDP/HD/12M/ST	EDP/HD/24M/ST
DESCRIPTION	12V DC	24V DC
FLOW RATE*	UPTO 40 LPM	UPTO 40 LPM
MOTOR	1/4 HP 12V DC	1/4 HP 24V DC
POWER	180 Watts	180 Watts
RPM	2400	2400
CURRENT DRAWN	25 Amp	12 Amp
INTERNAL BYPASS VALVE	Yes	Yes
INLET	3/4" NPT	3/4" NPT
OUTLET	3/4" NPT	3/4" NPT
BATTERY CABLE	2M	2M

*Measured at pump outlet with vehicle engine switched on

FLUIDS



ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
EDP/HD/12M/ST	45561	4
EDP/HD/24M/ST	45563	4

WARNING

Do not use fluids with a flash point below 100°F (38°C), such as Gasoline or Alcohol. Sparking could result in explosion causing fatal injury

185 Electric Oil & Fuel Pumps



Vertical mount Oil & Fuel pump

Designed for light industrial, automotive, heating & marine applications

For use with non-flammable media

Built-in bung adapter fits directly on drums with 2" threaded opening

Manufactured from chemically inert materials, pumps work with a wide variety of low viscosity media

Motor has double insulation making it safe for use with water & emulsions

Built-in anti-siphoning system ensures that media does not flow out by siphon action causing accidental damage to the delivery hose or dispensing nozzle

Complete with 2pc threaded telescopic suction tube for use on 50-205 litre (15-55 US gallon) drums

Duty Cycle
Continuous Duty

WETTED COMPONENTS

POM, Polypropylene,
Stainless Steel, Nitrile Rubber, Viton & PTFE

RECOMMENDED USE

Diesel, Kerosene, Mineral & Synthetic Oils, Heating Oils, Antifreeze, Water, Emulsions etc. Pump can be used with Fluids with a maximum viscosity of 114 cst

For
50-205 litre
(15-55 US gal.)
Drum

FLUIDS

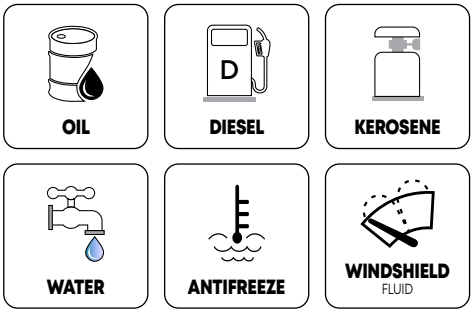

WARNING

DO NOT USE
With fluids with a flash point below 100°F (38°C), such as Gasoline & Alochol

Sparking could result in explosion causing fatal injury

VARIANTS

	EOP/DC/12	EOP/DC/24	EOP/AC/110	EOP/AC/230
DESCRIPTION	12V DC	24V DC	115V AC, 60 Hz	220V AC, 50 Hz
FLOW RATE*	UPTO 35 LPM (9.25 GPM)	UPTO 35 LPM (9.25 GPM)	UPTO 40 LPM (10.5 GPM)	UPTO 40 LPM (10.5 GPM)
MOTOR	0.43 HP Centrifugal Motor	0.43 HP Centrifugal Motor	0.43 HP Centrifugal Motor	0.43 HP Centrifugal Motor
AMP	9.2 Amp	5.6 Amp	2.9 Amp	1 Amp
ABSORBED POWER	110 W	135 W	320 W	224 W
INTERNAL BYPASS VALVE	No	No	No	No
DISCHARGE HEAD	1 Meter	1 Meter	1 Meter	1 Meter
TELESCOPIC SUCTION TUBE	Extends from 31-1/2" to 43-45/64" (800 mm to 1110 mm)			
DELIVERY HOSE	3/4" ID × 2.5M Long			
TANK ADAPTOR	2" & M64 × 4			
OUTLET	3/4" HB			
DISPENSING NOZZLE	Manual Polypropylene nozzle with 3/4" Hose Barb			
BATTERY/POWER CABLE	3m long with battery clamps		2m long with US plug	2m long with EU plug
WATER/ DUST PROTECTION	IP X 4 (protection against splashing water)			
NOISE LEVEL	70 db			

*Measured at pump outlet tested using Diesel

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
EOP/DC/12	45521	12V DC	4
EOP/DC/24	45523	24V DC	4
* EOP/AC/110	45522	115V AC	4
* EOP/AC/230	45520	220V AC	4

* Best Seller

186 Lever Action Fuel Pump

LBP-85

Rugged all steel construction
Fracture proof design with steel pump head & 2" bung

Extra long pump body makes it easy to place refill containers on the drum for convenient filling

Complete with telescopic suction tube for use on 50–205 litres (15-55 US gallons) drums

WETTED COMPONENTS
Steel, Viton, PTFE

RECOMMENDED USE
Light Oils, Diesel, Bio Diesel & E85 fuels

DO NOT USE WITH
Corrosive liquids, Solvents, Acids, Alkalis etc.

SPECIFICATIONS

FLOW RATE	UPTO 300 ML / STROKE	UPTO 10 OZ. / STROKE

FLUIDS



ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
LBP/85	44109	10

WARNING

Never operate the pump near fire or source of spark. Some media may be explosive & dangerous to pump

187 Rotary Booster Pump 3:1

RB-3



Geared rotary drum pump with 3 times discharge per rotation

For every complete handle turn, the rotor turns 3 times

Ideal for volume dispensing, such as on construction sites, workshop, aviation, farms / ranches, boats etc.

Die Cast Aluminum construction with sintered gear driven die cast zinc rotor & vanes

Complete with 3 pc threaded suction tube for use on 50-205 litre (15-55 US gallon) drums

WETTED COMPONENTS

Aluminum, Zinc, Steel, NBR & PVC Nitrile*
(*only on RB/3H)

RECOMMENDED USE

Diesel & Kerosene

DO NOT USE WITH

With Corrosive liquids, solvents, acids, alkalis etc.

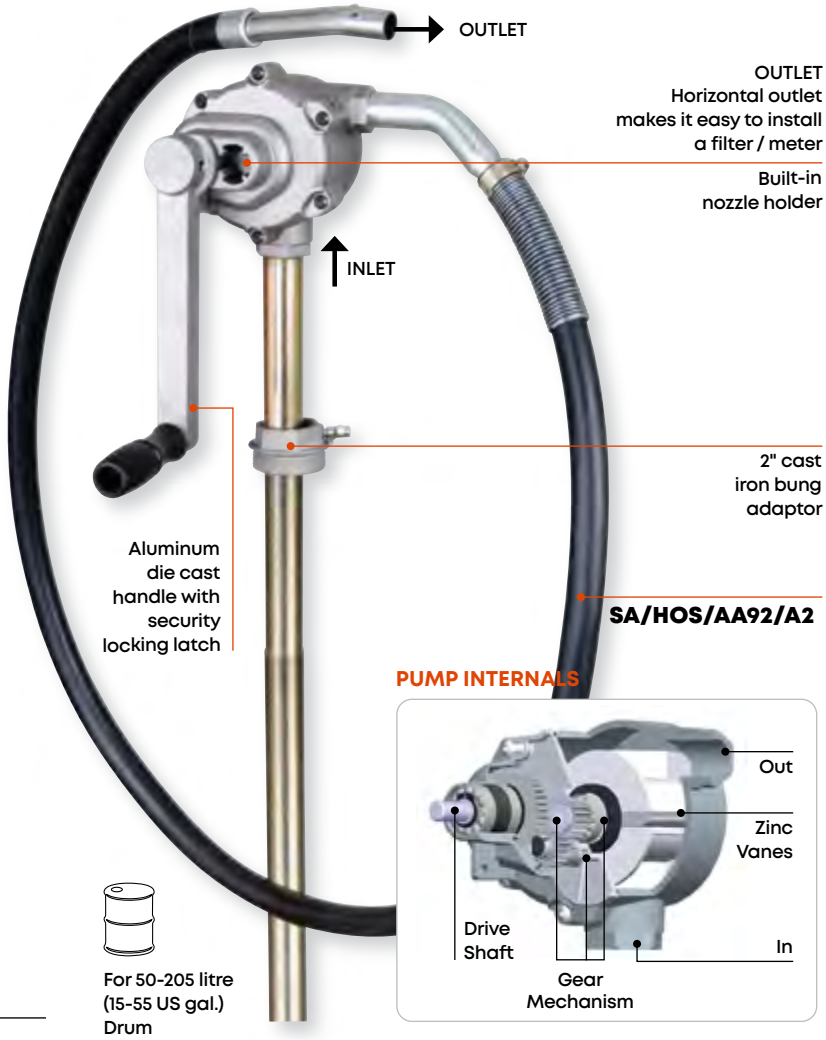

VARIANTS

RB/3	RB/3H
With metal outlet spout	With 8' (1.8 m) delivery hose & metal nozzle

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
RB/3	44201	With metal outlet spout	4
* RB/3H	44198	With 8' (1.8 m) delivery hose & metal nozzle	4
SPARE			
ZSA/HOS/AA92/A2	44339	Spare hose 8' (1.8 m) discharge hose with metal nozzle, spring & hose clamp	-

* Best Seller

SPECIFICATIONS

FLOW RATE	UPTO 205 LITRES IN 3 MINUTES	UPTO 55 US GALLON IN 3 MINUTES

FLUIDS



WARNING

Note that fuels containing Ethanol will cause more frequent replacement of rubber parts

Never operate the pump near fire or source of spark. Some media may be explosive & dangerous to pump

188 Industrial Rotary Drum Pumps



Industry Standard for Rotary Pumps

Ideal for tough outdoor use in extreme weather conditions

Solid cast iron construction, fully CNC machined to close tolerances

Pump Handle rotates a high quality sintered powder metal 3 vane rotor inside a highly finished pumping chamber

Self lubricating & non-wearing graphite vanes

High quality graphite seal allows the pump to be used with a wide variety of fluids including Diesel with upto 15% Ethanol blend

Self Priming operation with flow rate up to 38 LPM (10 GPM)

Supplied complete with 2" Bung, Telescopic Suction Tube with Strainer for use with 50-205 litre (15-55 US gallon) drums

WETTED COMPONENTS
Cast Iron, Steel, Graphite, Paper, Acetal, NBR

DO NOT USE WITH
With Water Based Media

SPECIFICATIONS

FLOW RATE	UPTO 38 LPM	UPTO 10 GPM

FM APPROVED

RBP/3V/H/F
For use with Class I & Class II flammable & combustible liquids such as Gasoline, Naphtha, Alcohols & other solvents compatible with the pump components

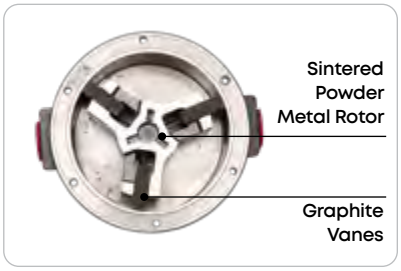

Pump Chamber with 3 Vane Construction



KIT/RBP/3V
Includes pump head gasket, graphite vanes (3), Vane springs(3) Shaft nut, packing nut, paper washers (3), & rod guide

FLUIDS

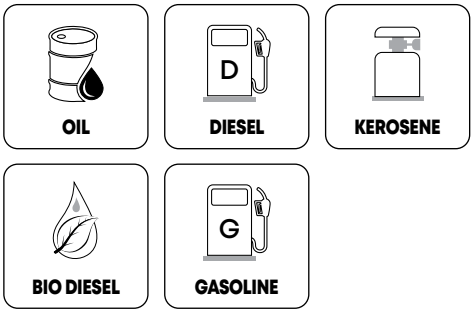

VARIANTS

RBP/3V

- For use with Petroleum based fluids, Diesel & Kerosene
- Ideal for use with barrels, drums & tanks for transferring media into smaller containers

RBP/3V/H

- For use with Petroleum based fluids, Diesel & Kerosene
- Ideal for use with barrels, drums & tanks for quick refuelling of diesel powered vehicles & equipment

RBP/3V/H/MT

DP/RBP/3V

- For use with Diesel & Kerosene
- Ideal for quick refuelling of diesel powered vehicles & equipment

RBP/3V/F

FM APPROVED

- For use with Class I & Class II flammable & combustible liquids such as Gasoline, Naphtha, Alcohols & other solvents compatible with the pump components

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
* RBP/3V	44080	Steel Discharge Spout	4
RBP/3V/H	44081	8' (1.8 m) Anti-Static Hose, Non-Sparking Aluminum Nozzle & Nozzle Holder	2
RBP/3V/H/MT	44085	8' (1.8 m) Anti-Static Hose, Non Sparking Aluminium Nozzle, Nozzle Holder & Mechanical Fuel Meter (Litres)	2
RBP/3V/H/MTG	44087	8' (1.8 m) Anti-Static Hose, Non Sparking Aluminium Nozzle, Nozzle Holder & Mechanical Fuel Meter (US Gallons)	2
FM APPROVED PUMPS			
RBP/3V/F	44084	Steel Discharge Spout, Drip Pan with Flame Arrestor	4
* RBP/3V/H/F	44082	8' (1.8 m) Anti-Static Hose, Non-Sparking Aluminum Nozzle & Nozzle Holder, Vaccum Breaker & Flame Arrestor	2
DP/RBP/3V	44083	Replacement Drip Pan only	10
SERVICE PARTS			
KIT/RBP/3V	44086	Repair Kit	-
SA/HOS/RBP/3V	44338	8' (1.8 m) × 3/4" Replacement Hose	-

* **Best Seller**

189 Fuel Transfer Pump Double Diaphragm

DPP-1



Heavy Duty Fuel Transfer Pump

Ideal for use where compressed air / power is not easily available such as on farms ranches, construction sites, boat etc.

Heavy duty aluminum die cast pump with stainless steel piston & fuel resistant hi-nitrile rubber diaphragm

Includes a 2" die cast bung adaptor & extra heavy duty steel handle with security locking latch

Pump inlet fitted with easy to clean wire mesh screen

Complete with: Telescopic suction tube with non-return valve, 8' (1.8 m) of anti-static rubber hose with die cast nozzle

For use with 50-205 litre (15-55 US gallon) drums

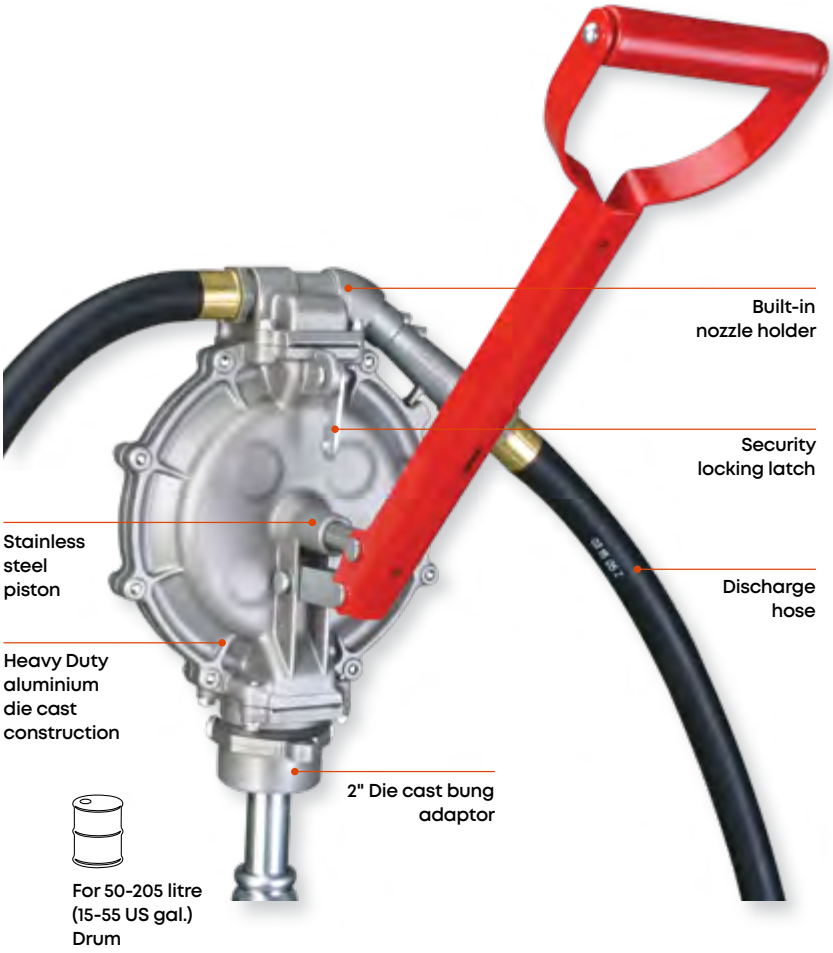

WETTED COMPONENTS
Aluminum, Steel, Stainless Steel, Poly Acetal & NBR

RECOMMENDED USE
Gasoline, Diesel Fuel, Fuel Oil, Motor Oil & other light petroleum products

DO NOT USE WITH
With Corrosive Liquids, Solvents, Acids, Alkalis etc.

SPECIFICATIONS

FLOW RATE	UPTO 800 ML /STROKE	UPTO 1 US GALLON IN 5 STROKES

FLUIDS

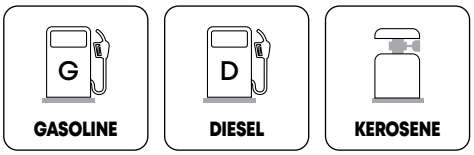

Note
Pump has a vent/air hole built-in which will drain back any excess media into the drum

PUMP INTERNALS

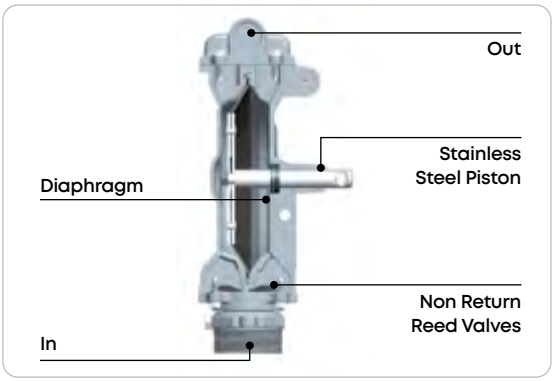

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
DPP/1	44195	Complete Pump Assembly	4
SPARE			
ZSA/HOS/RBP/3V	44338	8' (1.8 m) x 3/4" Replacement Hose	-
GKT/DPP/1	44194	Non Return Reed Valve Kit	-

USEFUL TIPS

- Note that Fuels containing Ethanol will cause more frequent replacement of rubber parts
- Do not use with Fuels with Ethanol content greater than 10%
- Never operate the pump near fire or source of spark. Some media may be explosive & dangerous to pump
- Pump is designed primarily for use with low viscosity media. Pumping heavy fluids may cause undue stress resulting in fracture

190 DEF Pumps Electric

DEFP

Diaphragm pumps designed for DEF dispensing

Non-corroding and weather-proof polypropylene body

Self-priming pump with built-in thermal overload protection

Duty Cycle
30 minutes ON /
30 minutes OFF

WETTED COMPONENTS
Polypropylene, EPDM, Viton

RECOMMENDED USE
DEF, Urea, Water, Antifreeze, Detergents etc.

DO NOT USE WITH
Diesel, Kerosene, Gasoline, Oils etc.

DEFP/12

DEFP/115

SPECIFICATIONS

	12V DC	220V AC	115V AC
INPUT VOLTAGE	12 V DC	220V AC, 50/60 Hz.	115V AC, 60 Hz.
FLOW RATE	Upto 36 LPM (9.5 GPM)	Upto 40 LPM (10.5 GPM)	Upto 40 LPM (10.5 GPM)
MOTOR	1/4 Hp	1/2 Hp	1/2 Hp
RPM	2900	2800	3400
CURRENT DRAWN	16 Amp	1.5 Amp	3.0 Amp
INLET/ OUTLET THREAD	1" BSP (F)	1" BSP (F)	1" BSP (F)
PUMP INLET/ OUTLET	3/4" HB & 1" HB	3/4" HB & 1" HB	3/4" HB & 1" HB
POWER CABLE	2m long with alligator clamps	2m long with EU Plug	2m long with US Plug
WORKING TEMPERATURE	10°C TO 50°C (14°F TO 122°F)	10°C TO 50°C (14°F TO 122°F)	10°C TO 50°C (14°F TO 122°F)

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
DEFP/12A	49570	12V DC	4
DEFP/220A	49571	220V AC, 50 Hz.	4
DEFP/110A	49572	115V AC, 60 Hz.	4

FLUIDS

191 DEF Transfer Systems

DEF - Diesel Exhaust Fluid is a mixture of high purity synthetic automotive grade urea & de-ionised water. It is used in SCR (Selective Catalytic Reduction) system on diesel engines to reduce emissions

Designed to transfer DEF from a Drum/ Tote to smaller container/engines etc.

FLUIDS



A DEF transfer system consists of

a. DEF Transfer Pump
- 115V AC Diaphragm pump with lightweight non-corroding polypropylene body

b. DEF Digital Turbine Meter (WM-20)
- Battery operated digital meter for use with DEF & water based media. Polyamide body & sealed electronic card makes it suitable for use in all sorts of weather conditions
- Measures in Litres, Quarts, Pints & US gallons

c. Inlet Hose
Special EPDM inlet hose connecting the Drum/Tote opening to the pump inlet respectively

d. Suction Hose
Special EPDM suction hose

e. Outlet Hose
20' special EPDM hose connecting the pump meter outlet to the dispensing nozzle

f. Reusable Dispensing Valve
- 3/4" BSPP threaded valve

g. Manual DEF Nozzle (FCN/NY/HB/3-4)
Nylon construction with SS hardware & Viton seals, Manual control, but also includes a continuous flow switch for unattended dispensing

h. Auto Shut Off DEF Nozzle (FCNA/S/SS/3-4)
Sensor built into the discharge spout automatically shuts off the supply once fluid level in the Drum/ Tote reaches that of the outlet discharge spout

i. Nozzle Holder
For safe storage of the nozzle while the fluid is not being dispensed

j. Mounting Plate
- Stainless Steel mounting plate for use in 1000/1200 litres (275/330 US gallons) totes & 205 litre (55 US gallon) drums
- Drum mounting plate is stretchable for varying drum dia and acts as base for installing pump & other accessories

SPECIFICATIONS

DESCRIPTION	DRUM MOUNT	TOTE MOUNT
FLOW RATE	UPTO 34 LPM (9 GPM)	UPTO 34 LPM (9 GPM)
INLET HOSE SIZE	4' × 3/4" ID	6' × 3/4" ID
OUTLET HOSE SIZE	2' × 3/4" ID	20' × 3/4" ID
SUCTION HOSE SIZE	4' × 3/4" ID	5' × 3/4" ID
INPUT VOLTAGE	115V AC	115V AC
MOTOR RATING	1/2 HP	1/2 HP
PROTECTION	IP55	IP55
DUTY CYCLE	30 mins ON / OFF	30 mins ON / OFF
WORKING TEMPERATURE RANGE	-10°C TO 50°C	14°F TO 122°F
ACCURACY*	± 1 %	± 1 %
REPEATABILITY*	0.30 %	0.30 %
MAX. WORKING PRESSURE	145 PSI (10 BAR)	145 PSI (10 BAR)
MAX. RESETTABLE BATCH TOTALIZER	99,999 units	99,999 units
MAX. NON RESETTABLE BATCH TOTALIZER	9,99,999 units	9,99,999 units
LEAST COUNT	0.001 units	0.001 units

*Tested in laboratory conditions

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
TOTE MOUNTING KIT		
KIT/IBC/DEF/1/US	47320	1
KIT/IBC/DEF/2/US	47321	1
KIT/IBC/DEF/3/US	47322	1
KIT/IBC/DEF/4/US	47323	1
DRUM MOUNTING KIT		
KIT/DRM/DEF/1/US	47340	1
KIT/DRM/DEF/2/US	47341	1
KIT/DRM/DEF/3/US	47342	1
KIT/DRM/DEF/4/US	47343	1

TOTE MOUNTING KIT

34 LPM

-10°C TO 50°C

DRUM MOUNTING KIT

34 LPM

-10°C TO 50°C

PART LIST

TOTE MOUNTING KIT				
	KIT/IBC/DEF/1/US	KIT/IBC/DEF/2/US	KIT/IBC/DEF/3/US	KIT/IBC/DEF/4/US
	BASIC	BASIC WITH DISPENSING VALVE	ADVANCED	PREMIUM
STAINLESS STEEL TOTE MOUNTING PLATE	Yes	Yes	Yes	Yes
ELECTRIC DEF PUMP	Yes	Yes	Yes	Yes
DEF DIGITAL TURBINE METER	-	-	-	Yes
DEF CONTROL NOZZLE - MANUAL	Yes	Yes	-	-
DEF CONTROL NOZZLE - AUTOMATIC	-	-	Yes	Yes
REUSABLE DISPENSING VALVE	-	Yes	Yes	Yes
INLET HOSE	Yes	Yes	Yes	Yes
DISCHARGE HOSE	Yes	Yes	Yes	Yes
SUCTION HOSE	Yes	-	-	-
CONNECTING HARDWARE	Yes	Yes	Yes	Yes
DRUM MOUNTING KIT				
	KIT/DRM/DEF/1/US	KIT/DRM/DEF/2/US	KIT/DRM/DEF/3/US	KIT/DRM/DEF/4/US
STAINLESS STEEL DRUM MOUNTING PLATE	Yes	Yes	Yes	Yes
ELECTRIC DEF PUMP	Yes	Yes	Yes	Yes
DEF DIGITAL TURBINE METER	-	-	-	Yes
DEF CONTROL NOZZLE - MANUAL	Yes	Yes	-	-
DEF CONTROL NOZZLE - AUTOMATIC	-	-	Yes	Yes
REUSABLE DISPENSING VALVE	-	Yes	Yes	Yes
INLET HOSE	Yes	Yes	Yes	Yes
DISCHARGE HOSE	Yes	Yes	Yes	Yes
SUCTION HOSE	Yes	-	-	-

192 DEF Transfer Pump Electric

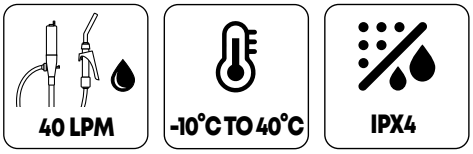

NEW!

CE

ISO 22241 Continuous Duty

Vertical mount DEF transfer pump

Designed for safe & secure transferring of DEF from drums & totes

Built-in bung adapter fits directly on drums with 2" threaded opening

Manufactured from chemically inert materials, pumps work with a wide variety of low viscosity media

IPX4 Rated
Motor has double insulation making it safe for use with splashing water

Built-in anti-siphoning system ensures that media does not flow out by siphon action causing accidental damage to the delivery hose or dispensing nozzle

Duty Cycle
Continuous Duty

Pump comes complete with
- 2pc threaded Telescopic suction tube for use on 50-205 litre (15-55 US gallon) drum & 1000 litre (275 US gallon) totes
- Delivery hose
- Manual Dispensing Nozzle
- 2m Long Power Cable
- 2" Drum Bung

For 50-205 litre (15-55 US gal.) Drum

For 1000 litre (275 US gal.) Tote

WETTED COMPONENTS
POM, PA, Stainless Steel, PP & Rubber

RECOMMENDED USE
DEF & Water based media

FLUIDS



WARNING

DO NOT USE
With fluids with a flash point below 100°F (38°C), such as Gasoline & Alochol

Sparking could result in explosion causing fatal injury

VARIANTS

CAT NR.	EOP/DEF/DC/12	EOP/DEF/DC/24	EOP/DEF/AC/110	EOP/DEF/AC/230
DESCRIPTION	12V DC	24V DC	115V AC, 60 Hz	220V AC, 50 Hz
FLOW RATE	UPTO 35 LPM (9.25 GPM)	UPTO 35 LPM (9.25 GPM)	UPTO 40 LPM (10.5 GPM)	UPTO 40 LPM (10.5 GPM)
ABSORBED POWER	110 W	135 W	320 W	224 W
ABSORPTION	9.2 A	5.6 A	2.9 A	0.97 A
INSULATION CATEGORY	III	III	II	II
DISCHARGE HEAD	1 m (3.28 ft)	1 m (3.28 ft)	1 m (3.28 ft)	1 m (3.28 ft)
POWER CABLES	2 m	2 m	2 m	2 m
DELIVERY HOSE	2,5 m (8 ft)	2,5 m (8 ft)	2,5 m (8 ft)	2,5 m (8 ft)
OPERATING TEMPERATURE	-10°C to +40°C (14°F to 104°F)	-10°C to +40°C (14°F to 104°F)	-10°C to +40°C (14°F to 104°F)	-10°C to +40°C (14°F to 104°F)
NOISE LEVEL	70 dB	70 dB	70 dB	70 dB

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
EOP/DEF/DC/12	49610	12V DC	4
EOP/DEF/DC/24	49611	24V DC	4
EOP/DEF/AC/110	49612	115V AC	4
EOP/DEF/AC/230	49613	220V AC	4

193 Electric DEF Pumps Stainless Steel

DEFP-SS

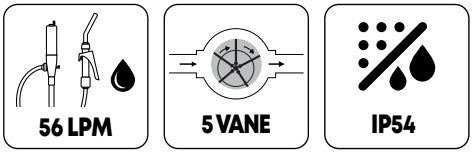

Continuous Duty

The Groz Professional Series, Stainless Steel Pump is specifically engineered for efficient & safe dispensing of DEF

Rugged Construction
Stainless Steel SS 304 imparts durability and extended life to the pump as compared to commonly available regular polypropylene/ nylon pumps

Vane Pump Mechanism
The centrifugal vane pumping mechanism makes it more effective with enhanced suction lift & self priming feature as opposed to regular pumps that require priming and have limited suction ability

Continuous Duty
Time Saving Pump. Can run continuously without any stoppage, as opposed to regular pumps with a duty cycle of 15-20 minutes.

Safe Operation
Pump constructed using totally enclosed motor

Available in 2 variants
a. 115V AC, 60 Hz.
b. 220V AC, 50/ 60 Hz.

WETTED COMPONENTS
304 SS, PP5, Viton

RECOMMENDED USE
DEF, Urea, Water,
Antifreeze, Detergents etc.

DO NOT USE WITH
Diesel, Kerosene, Gasoline, Oils etc.

SPECIFICATIONS

DESCRIPTION	115V AC	220V AC
FLOW RATE	UPTO 56 LPM (15 GPM)	UPTO 56 LPM (15 GPM)
PUMP TYPE	Vane	Vane
MOTOR	1/2 HP, 60 Hz	1/2 HP, 50/60 Hz
RPM	3400	2800
AMP	3	1.5
DRY SUCTION HEIGHT	1M (3.2')	1M (3.2')
INLET/OUTLET	1"	1"
POWER CABLE	1.6M (5-1/2')	1.6M (5-1/2')
DUTY CYCLE	Continuous	Continuous
WORKING TEMPERATURE	-10°C TO 50°C	14°F TO 122°F
WATER/ DUST PROTECTION	IP54	IP54

FLUIDS

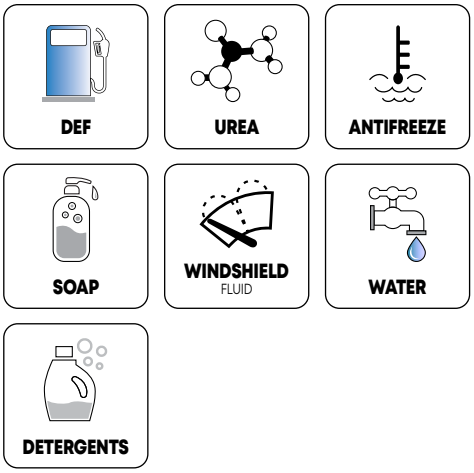

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	INLET / OUTLET	BOX QTY.
DEFP/SS/220/EU	47550	220V AC, 50Hz, Power cord with European Socket	3/4" Hose Barb	1
DEFP/SS/220/AU	47551	220V AC, 50Hz, Power cord with Australian Socket		1
DEFP/SS/220/UK	47552	220V AC, 50Hz, Power cord with British Socket		1
DEFP/SS/115/US	47554	115V AC, 60Hz, Power cord with US Socket		1
REPAIR KIT				
RK/DEFP/SS	47555	Repair kit for SS electric DEF pump		10

194 Submersible Diesel Pump

SDP



12-24V DC powered submersible pump

Suitable for on-site diesel refuelling at construction sites, farms, cement plants, mining sites etc.

Pump motor fully covered with a water tight corrosion and rust proof PVC casing making it suitable to be used as a high quality, submersible pumping unit

Easy to clean filter keeps contaminants away

Duty Cycle
60 minutes ON /
60 minutes OFF

Complete with 4m (13') of cable with 2 alligator clamps and 3m (9.8') flexible hose and a Nozzle.

WETTED COMPONENTS
PVC, PP, NBR, Zinc, Stainless Steel, PE, PU

RECOMMENDED USE
Kerosene, Diesel, Water, Untreated water, DEF (Not safe for drinking), light oils

DO NOT USE WITH
Gasoline or Other volatile liquids.

Do not run dry

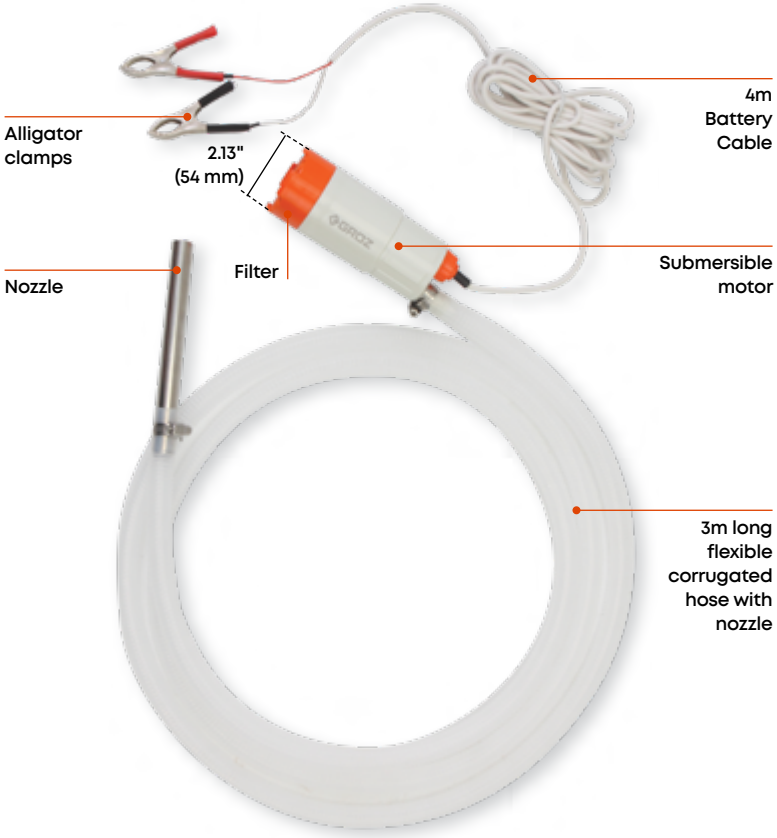

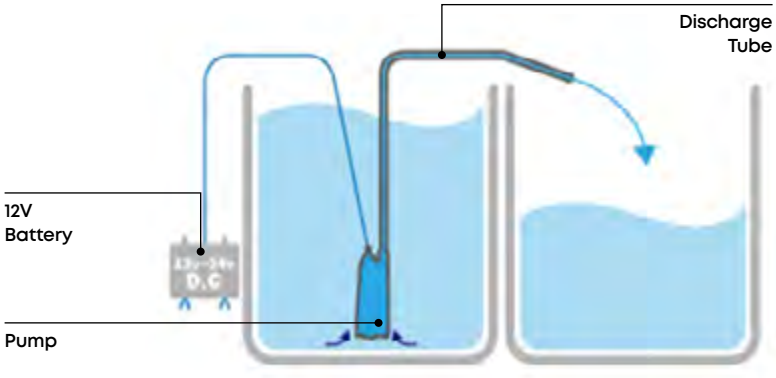

FLUIDS

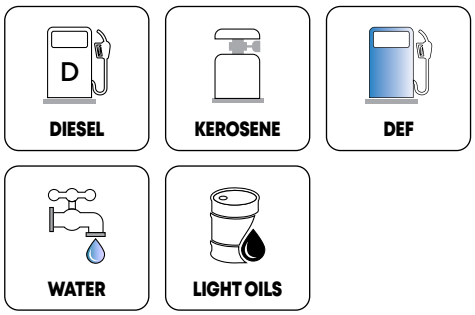

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
SDP/12-24	44415	10

SPECIFICATIONS

FLOW RATE	UPTO 10 LPM at 1m Height	UPTO 2.78 GPM at 1m Height
MOTOR TYPE	Submersible	
MOTOR RATING	12V-24V DC	
BODY DIA.	54 MM	2.13"
MAX. DISCHARGE HEAD	UPTO 11M	UPTO 36.1'
DISCHARGE HOSE LENGTH	3m	9.8'
GROSS WEIGHT	Approx. 575 GM	Approx. 20.3 OZ.

195 Electric Drum / IBC Pumps

The world's first rechargeable DEF pump designed to eliminate power limitations

Designed to operate on:
- AC power
- DC power or
- Rechargeable battery, it delivers reliable fluid transfer anywhere. Included adapters further extend compatibility with your existing power tool batteries, making it one of the most versatile DEF pumps ever built

Compact & lightweight construction

Convenient ON/OFF switch with LED indicator

Built-in fuse for overload protection

Silenced motor makes almost no noise

Stainless steel filter built into the suction tube inlet prevents contaminants from getting in & causing damage

Built-in 2" bung adaptor fits directly on 205 litre (55 US gallon) metal drums. Bung adapter can be adjusted by 0.6" (15 mm) to adjust to drums with varying heights

Includes an additional bung thread converter for converting 2" standard bung threads to 2.5" x 5 mm buttress for using pump with IBC / Totes

Battery Capacity
Fully charged battey can dispense upto 1250 litres (330 US gallon)
*tested using water

Duty Cycle
15 minutes ON / 15 Minutes OFF

WETTED COMPONENTS
Viton, POM, Stainless Steel, PE, NBR, PP

RECOMMENDED USE
Diesel, Kerosene, Bio Diesel, Urea, DEF, Water based media, Antifreeze, Detergents, Light oils with viscosity upto 100 cst

DO NOT USE WITH
Gasoline, Corrosive chemicals, Lacquer thinners, any material that is not compatible with the pump construction

FLUIDS

DIESEL | DEF | WATER | KEROSENE | UREA

DETERGENTS | ANTIFREEZE | PESTICIDES & HERBICIDES | LIGHT OILS | BIO DIESEL

VARIANTS

NEW!

PUMP WITH DIFFERENT POWER OPTIONS

DC POWERED PUMP
With 12V DC
Power Cable

AC POWERED PUMP
With 100V-240V, 50/60 Hz
AC Dual Voltage
Power Adaptor

PUMP WITH
GROZ RECHARGEABLE BATTERY
20V, 4Ah Lithium ion battery

PUMP WITH
DMM BATTERY ADAPTOR
Compatible with
- 20V DEWALT BATTERY
- 18V MILWAUKEE BATTERY
- 14.4V & 18V SERIES METABO BATTERIES

PUMP WITH
PHMB BATTERY ADAPTOR
Compatible with
- 18-20V PANASONIC BATTERY
- 18-20V HIKOKI BATTERY
- 18-20V MAKITA BATTERY
- 18-20V BOSCH BATTERY

SPECIFICATIONS

MOTOR TYPE	DC Brush Motor (5 Pole)
DC POWER CABLE	4M long with Crocodile Clips
AC POWER ADAPTER	Input: 100 to 240 V AC, 50 / 60 Hz, Output: 12 V DC Constant Voltage, 3A max
RECHARGEABLE BATTERY	20V, 4Ah Li-Ion Rechargeable Battery
MAX. VISCOSITY OF MEDIA	100 cst
TEMPERATURE	5°C to 40°C (41°F to 104°F)

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	FLOW RATE (UPTO)		BOX QTY.
			(LPM)	(GPM)	
DC POWERED PUMP					
EDR/55T/DC	45503	Electric Drum Pump with DC Power Cable (12V)	18.4	4.86	4
AC POWERED PUMP					
EDR/55T/AC/US	45504	Electric Drum Pump with UL Listed AC Power Adapter, US Socket	18.9	5	4
EDR/55T/AC/EU	45505	Electric Drum Pump with CE AC Power Adapter, European Socket	18.9	5	4
EDR/55T/AC/AU	45506	Electric Drum Pump with AC Power Adapter, AU Socket	18.9	5	4
EDR/55T/AC/UK	45517	Electric Drum Pump with AC Power Adapter, UK Socket	18.9	5	4
PUMP WITH GROZ RECHARGEABLE BATTERY					
EDR/55T/RB/20-4L/US	48975	Electric Drum Pump with 20V, 4Ah Lithium ion battery and battery charger with US plug	28	7.4	4
EDR/55T/RB/20-4L/EU	48976	Electric Drum Pump with 20V, 4Ah Lithium ion battery and battery charger with EU plug	28	7.4	4
EDR/55T/RB/20-4L/UK	48977	Electric Drum Pump with 20V, 4Ah Lithium ion battery and battery charger with UK plug	28	7.4	4
EDR/55T/RB/20-4L/AU	48978	Electric Drum Pump with 20V, 4Ah Lithium ion battery and battery charger with AU plug	28	7.4	4
PUMP WITH BATTERY ADAPTOR					
EDR/55T/DMM	45848	Electric Drum Pump with DMM Adaptor	28	7.4	4
EDR/55T/PHMB	45849	Electric Drum Pump with PHMB Adaptor	28	7.4	4

196 DEF Pumps Air Operated

PAOP

Air operated transfer pump for dispensing DEF

Choice of materials makes it compatible with many more fluids, compared to other air pumps which primarily pump oil

Built-in 2" bung adaptor allows the pump to be fixed on drums with 2" opening. Pump position can be adjusted using the lock nut incorporated in the pump body

Air supply is provided via a ball valve connected to an air regulator which limits max. air pressure to 100 PSI (7 BAR)

Supplied complete with Suction Tube with check valve for use with 50-205 litres (15-55 US gallons) drums

WETTED COMPONENTS

Polypropylene, Viton, Stainless Steel, Nylon*, PVC*
*only pump with hose & nozzle

RECOMMENDED USE

Water-based media, Detergents, Soaps, Antifreeze, Windshield Washer, Hydraulic Oils, Lubricants, Herbicides & Pesticides, Urea, DEF etc. Pump should only be used with Non-flammable liquids

DO NOT USE WITH

Any media not compatible with materials used in the pump construction. Pump must never be used for Fuel Transfer or with Thinners, Solvents etc.

FLUIDS

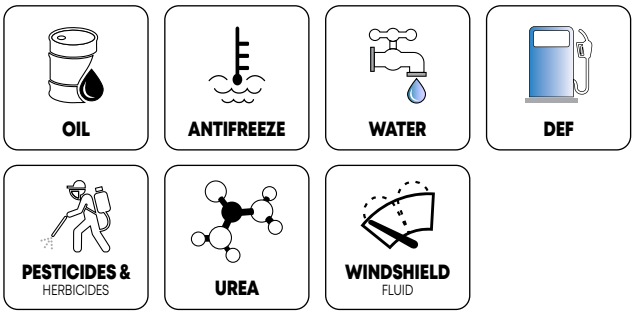

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
PAOP/1	45315	Pump Only	6
PAOP/1H	45316	Pump with 2m × 3/4" ID PVC Hose, Nylon dispensing nozzle, 2 Hose clamps and safety steel bracket	6

SPECIFICATIONS

FLOW RATE	UPTO 30 LPM	UPTO 8 GPM
WORKING PRESSURE	30–100 PSI	2–7 BAR
MAX. AIR INLET PRESSURE	100 PSI	7 BAR
MAX. OUTLET PRESSURE	45 PSI	3 BAR
AIR CONSUMPTION	125 LPM	4.40 CFM
MAX. PUMP DISCHARGE	30 LPM at Air Pressure of 100 PSI	8 GPM at Air Pressure of 7 BAR
AIR INLET CONNECTION	1/4" (F)	
PUMP OUTLET	3/4" dia.	19.5 MM dia.
PUMP INLET	1" (F)	
NOISE LEVEL	78 db	
MAX. TEMPERATURE OF MEDIA BEING PUMPED	60°C	140°F
MAX. VISCOSITY OF MEDIA BEING PUMPED	SAE 50 / ISO 220	

197 Electric Drum Pump

EDR-205



Compact & light weight dual power pump: Designed to work both on AC & DC supply.

Self Priming Design
For high suction lift even on dry start-up

Duty Cycle
15 min ON/15 min OFF

Built in fuse for overload protection

Noiseless motor

Telescopic Suction Tube adjustable 22-1/2"-34" (576-865 mm) suitable for 50-205 litre (15-55 US gallon) drums

Stainless steel filter built into the suction tube inlet prevents contaminants entry into pump tube.

Built-in 2" bung adaptor fits directly on 205 litre (55 US gallon) drums. Bung adaptor can be adjusted by 0.6" (15 mm) to adjust to drums with varying heights.

Comes complete with:

a. 2m (6.6') reinforced flexible hose with layered construction that makes it weather-proof, flame-proof and resistant to oil
b. Manual dispensing nozzle with swivel and easy to press lever
c. AC Adaptor with 1m (3.3') power cord to plug into AC outlet and 4m (13') DC power cable

WETTED COMPONENTS

NBR, Acetal, PE, Urethane, SS-304, PP, PVC

RECOMMENDED USE

Motor Oil, Hydraulic Oil, Lubricants, Diesel, DEF, Water (not safe for drinking), Kerosene, Antifreeze, Windshield Washer Fluid, Mild detergents, Agricultural Chemicals, Light Oil (Max. 100 cst)

DO NOT USE WITH

Gasoline, Corrosive chemicals, Lacquer, Thinners, etc.

SPECIFICATIONS

FLOW RATE	UPTO 16 LPM	UPTO 4.2 GPM

FLUIDS

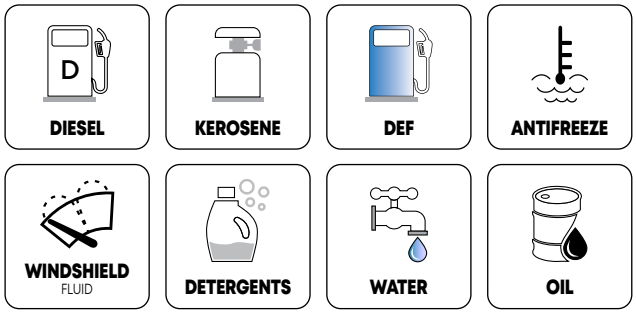

ORDERING INFORMATION

CAT NR.	ORD. NR.	DESCRIPTION	BOX QTY
EDR/205T/DC/AC-EU	48970	Pump complete with EU plug	4
EDR/205T/DC/AC-US	48971	Pump complete with US plug	4
EDR/205T/DC/AC-UK	48972	Pump complete with UK plug	4
EDR/205T/DC/AC-AU	48973	Pump complete with AU plug	4

198 Plastic Lever Pump

PLP-10

NEW!



Lever action piston pump for use with water and water based fluids, DEF, Windshield washer, Antifreeze, Agricultural chemicals, lubricants etc

Ergonomic design for fatigue free use

Double blade piston for higher suction power

2" bung adaptor with a flared design for convenient tightening on the drum

Pump outlet fitted with air vent cap that can be turned counter-clockwise to break the siphoning action and stop flow

Complete with:
- Telescopic suction tube for use with 50-205 litre (15-55 US gallon drums)
- 2m x 3/4" (19 mm) flexible hose

For 50-205 litre (15-55 US gal.) Drum

SPECIFICATIONS

FLOW RATE	UPTO 350 ML /STROKE	UPTO 12 OZ. / STROKE
WORKING TEMPERATURE	+5°C TO 40°C	41°F TO 104°F

FLUIDS

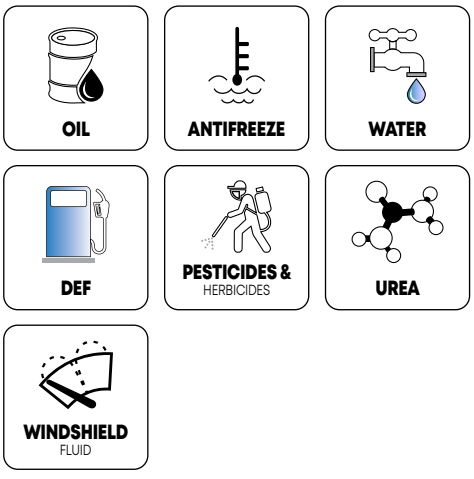

Lever Handle
Convenient Up-Down Movement
- Sturdy grip with ergonomic design
- Convenient & smooth lever operation with min. force



Double Blade
Airtight Design
- Quick to Prime
- Pump holds prime longer than other pumps in market

Swivel Bung Adaptor
- Pump swivels freely on the bung adaptor making it convenient to use it at any position
- Large bung is easy to tighten & loosen

Discharge Hose
Superior quality fracture resistant hose will not crack or kink even after repeated use

Hose Clamp with Hose Holder
Hose holder with swivel keeps hose safe when not in use while

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
PLP/10	44690	4
PLP/10T	44691	4

199 Vertical Lift Pump 316 Stainless Steel

VLP-SS

Self priming vertical lift pump with exceptional chemical resistance

Pump body made of 316 stainless steel

PTFE piston makes it suitable for use with wide variety of media

Pump includes a 2" bung adaptor with dual threads for use with metal and plastic drums

In-built lock nut for attaching grounding wires

Flow control tube can be inserted into lift handle to restrict the flow rate

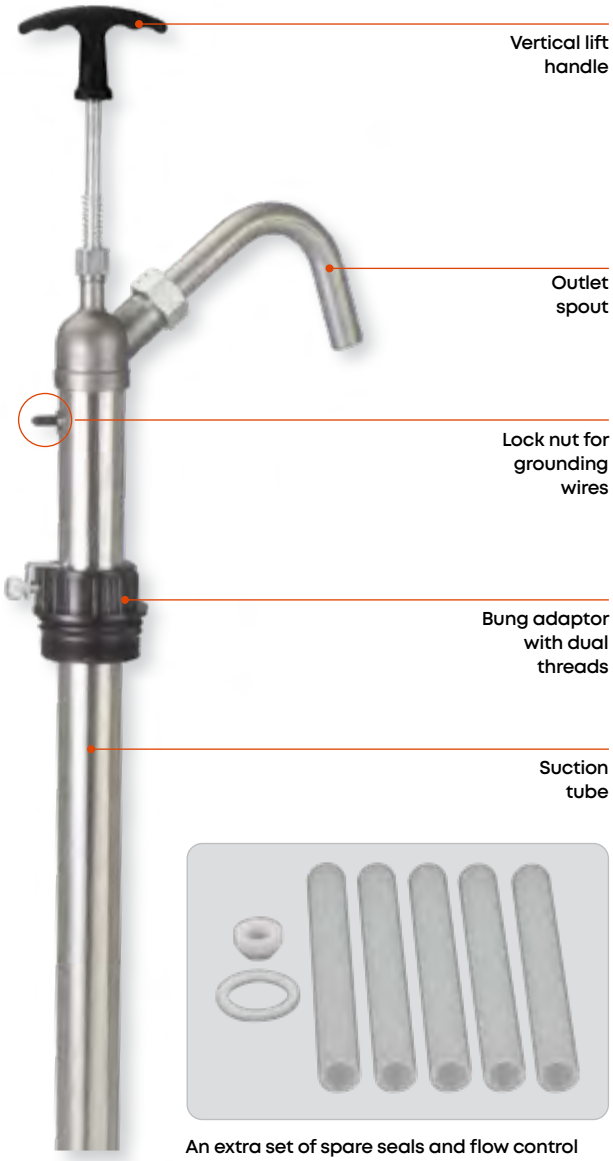

An extra set of spare seals and flow control tubes included with each pump

WETTED COMPONENTS

316 Stainless steel, PTFE

RECOMMENDED USE

Photographic chemicals / Solvents, Diesel, Kerosene, Thinners, Acetone, Benzene, Naphtha, Urea, DEF, Light oil (upto SAE 40) etc.

DO NOT USE WITH

Heavy oils

FLUIDS

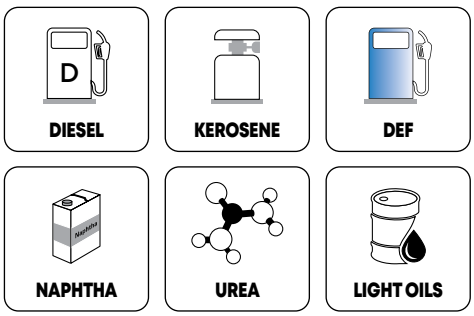

ORDERING INFORMATION

CAT NR.	ORD NR.	FOR USE WITH DRUMS		FLOW RATE UPTO		BOX QTY.
		(LITRE)	(US GALLON)	(ML)	(OZ.)	
* VLP/SS/01	44137	205	55	600	20	12
VLP/SS/02	44138	20	5	300	10	10

* Best Seller

SPECIFICATIONS

FLOW RATE	UPTO 600 ML / STROKE (20 OZ. / STROKE)
MAX. VISCOSITY	SAE 40
MAX. TEMPERATURE	60° C (140°F)

200 Safety Pumps 316 Stainless Steel

316 Stainless Steel Hand Operated Pumps for use with combustible & flammable media

Built-in Internal Flame Arrestor prevents flame flashback

Heavy-Duty bonding & grounding wires prevent hazardous static charge. Wires are secured by locknut & have heavy-duty Alligator Clips

Pump body made from 316 Stainless Steel with PTFE Piston & PTFE Sealing Gasket

Available in a choice of Vertical Lift & Lever Action for use with 20-30 litre (5 US gallon) pails or 50-205 litres (15-55 US gallons) drums

Pail pump comes with 3 screw cap adapters (1-3/4", 2-1/8" & 2-7/8") for use with most common pails. Drum pump comes with 2" Bung Adapter

WETTED COMPONENTS
316 Stainless Steel, PTFE

RECOMMENDED USE
Gasoline, Diesel, Kerosene, Lacquer, Thinners, Acetone, Benzene, Naphtha, Urea, DEF etc. (more comprehensive list on adjoining page)

DO NOT USE WITH
Hydrochloric Acid, Sulphuric Acid etc

For 20-30 litres (5 US gal.) pails

For 50-205 litre (15-55 US gal.) Drum

FLUIDS

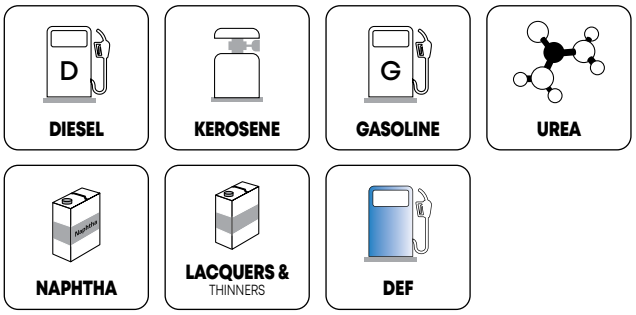

ORDERING INFORMATION

CAT NR.	ORD NR.	SUITABLE FOR	BOX QTY.
VLP/SS/5/F	44131	20-30 litre (5 US gal.) pails	10
* VLP/SS/55/F	44132	50-205 litre (15-55 US gal.) drums	10

* Best Seller

SPECIFICATIONS

FLOW RATE	UPTO 200 ML / STROKE	UPTO 7 OZ. / STROKE

CHEMICAL COMPATIBILITY CHART

CHEMICALS	COMPATIBILITY
Acetaldehyde	Excellent
Acetic acid 20%	Excellent
Acetone	Excellent
Alcohol: Amyl	Excellent
Alcohol: Benzyl	Good
Alcohol: Diacetone	Excellent
Alcohol: Ethyl	Excellent
Alcohol: Hexyl	Excellent
Alcohol: Isobutyl	Excellent
Alcohol: Methyl	Excellent
Ammonia, anhydrous	Good
Ammonia, liquid	Good
Ammonia: 10%	Excellent
Ammonium Hydroxide	Excellent
Amyl Acetate	Excellent
Anti-freeze	Fair
Benzene	Good
Benzoic Acid	Good
Bleach	Fair
Boric Acid	Excellent
Calcium Chloride (30% in water)	Good
Calcium Hypochlorite	Good
Citric Acid	Excellent
Detergents	Excellent
Diesel Fuel	Excellent
Ethyl Acetate	Good
Ethylene Glycol	Good
Formic Acid	Excellent
Fuel Oils	Good
Gasoline	Excellent
Glycerin	Excellent
Hydrochloric Acid, to 37%	Bad
Hydrogen Peroxide, to 30%	Good

CHEMICALS	COMPATIBILITY
Jet Fuel (JP3: JP4: JP5)	Excellent
Kerosene	Excellent
Lacquer/lacquers	Excellent
Lacquer thinner	Excellent
Lactic Acid	Good
Methyl Ethyl Ketone	Excellent
Mineral Spirits	Excellent
Naphtha	Good
Nitric Acid, to 20%	Excellent
Oxalic Acid, (Cold)	Excellent
Phenol	Good
Phosphoric Acid, to 40% solution	Fair
Photographic (developer)	Excellent
Potassium Chloride	Excellent
Potassium Hydroxide	Excellent
Potassium Sulfate	Excellent
Propylene Glycol	Good
Silicone	Excellent
Sodium Bicarbonate (Baking Soda)	Excellent
Sodium Carbonate (Soda Ash)	Excellent
Sodium Chloride	Good
Sodium Hydroxide 50% (Caustic Soda)	Good
Sodium Nitrate	Good
Sodium Sulfate	Good
Stoddard Solvent	Excellent
Sulfuric Acid, 75%	Bad
Toluene, Toluol	Excellent
Trichlorethylene	Good
Thinners	Excellent
Turpentine	Excellent
Urea/DEF	Good
Water	Excellent
Xylene	Good

DISCLAIMER
The information in this chart is to be used ONLY as a guide in selecting equipment for appropriate chemical compatibility. Before permanent installation, test the equipment with the chemicals and under the specific conditions of your application.
We do not warrant (neither express nor implied) that the information in this chart is accurate or complete or that any material is suitable for any purpose.

Variations in chemical behaviour during handling due to factors such as temperature pressure, and concentrations can cause equipment to fail.
The compatibility shown in the chart is based on 22°C (72°F)

201 Rotary Drum Pump Stainless Steel

GNB-SS

Superior quality stainless steel hand operated rotary drum pump

Choice of construction materials: Stainless steel body with stainless steel bung & suction tube

Rotor with PTFE vanes & seals makes it resistant to corrosion & useful for transferring a wide Variety of fluids such as water based media, chemicals, all petroleum products etc.

Superior machining of vanes ensures better draw & smooth delivery

Fits 50 to 205 litres (15 to 55 US gallon drums)

Comes complete with
- Pump Body
- 2" Bung Adaptor
- Handle
- Discharge Spout
- 3 pc Suction tube

WETTED COMPONENTS
Stainless Steel 304, PTFE

RECOMMENDED USE
Water based media, antifreeze, acids, chemicals, all petroleum based products, lacquer, thinner, urea, DEF

DO NOT USE WITH
Hydrochloric acid, Sulphuric acid etc.

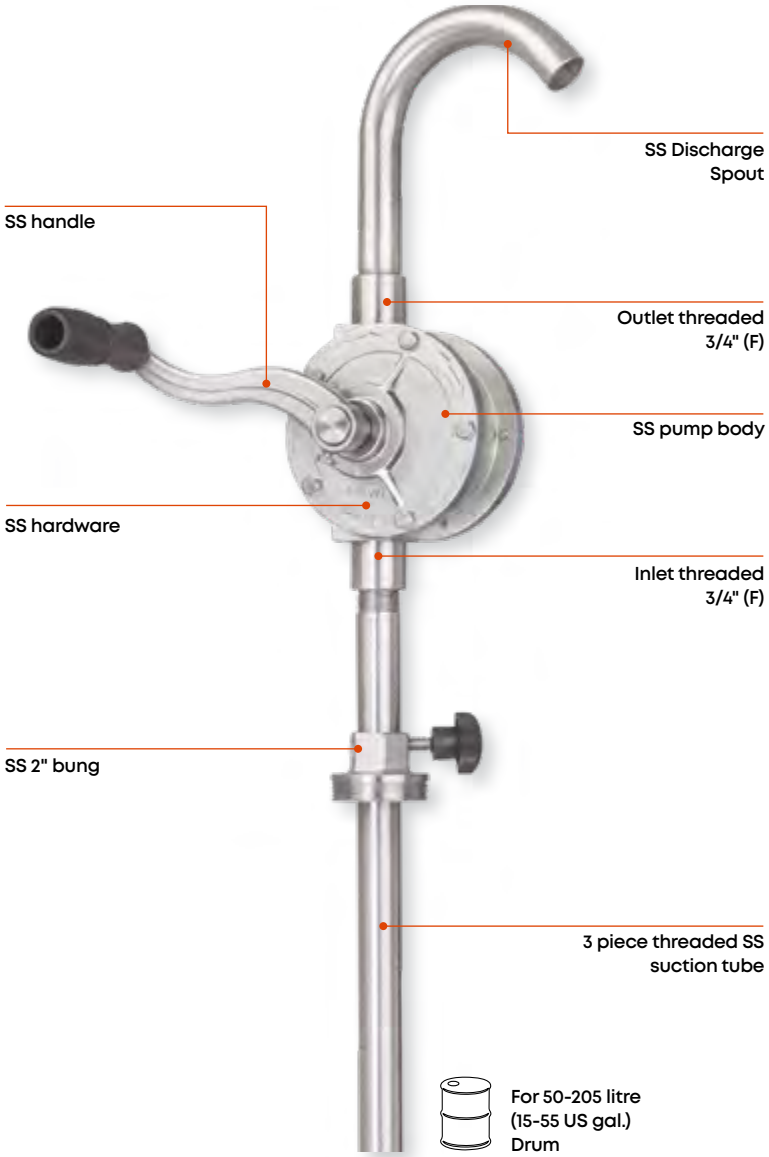

FLUIDS

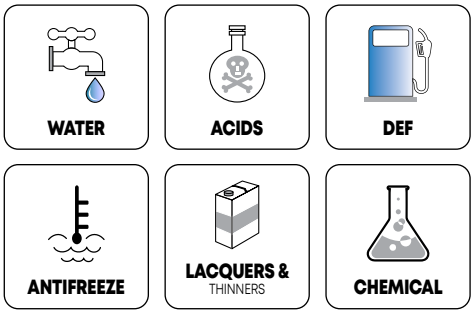

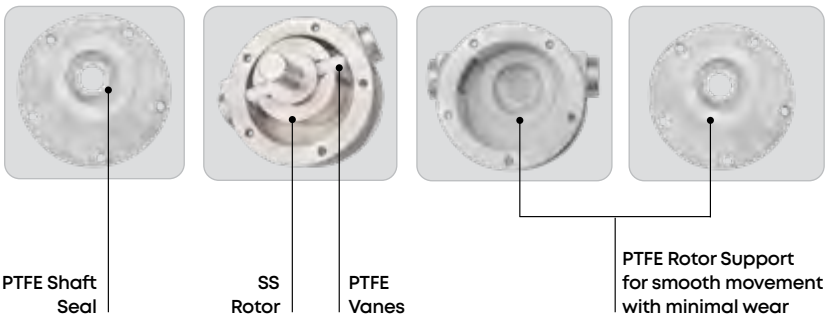

ORDERING INFORMATION

CAT NR.	ORD NR.	PUMP INLET/OUTLET	BOX QTY.
GNB/SS/25/3R/SPL	44015	3/4" (F)	4

SPECIFICATIONS

FLOW RATE	UPTO 4 LITRE / 20 TURNS	UPTO 1 US GALLON / TURN

202 Plastic Lever Pump Value

PLP-20

PISTON

Lever Action Drum Pump suitable for use with fluids of varying viscosities

Construction:
Polypropylene body, handle and outlet spout

Stainless Steel piston rod and Viton seal

Strainer built into suction tube inlet to keep contaminants away

Complete with
a. Two piece telescopic suction tube for use with 50-205 litres (15-55 US gallons) drums
b. Outlet spout

WETTED COMPONENTS
Polypropylene, Viton, Stainless steel

RECOMMENDED USE
Petroleum-based non-corrosive liquids
Fuels: Diesel, Kerosene
Light oils, Low viscosity lubricants, Acetone, Anti-freeze, Ammonium Hydroxide, Glycerine, Alcohols,
Water, Water based chemicals. Weaker acids, Mild solvents and Alkaline solutions.

DO NOT USE WITH
Lubricant or liquids above 100 cst or any media not compatible with materials used in the pump construction

VARIABLE HANDLE SETTING

FLOW SETTING	LOW FLOW 1	MEDIUM FLOW 2	HIGH FLOW 3
FLOW RATE*	UPTO 270 ML (9 OZ.) / STROKE	UPTO 350 ML (12 OZ.) / STROKE	UPTO 430 ML (15 OZ.) / STROKE
TYPE OF FLUIDS	Lubricants or liquids under 35 cst	Anti-freeze, Alcohols, Water, Water based chemicals, low viscosity lubricants	Diesel, Kerosene, Petroleum-based non-corrosive liquids upto 100 cst

* Measured at pump outlet. Tested using water

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
PLP/20	44113	10

SPECIFICATIONS

WORKING TEMPERATURE	-5°C TO 45°C	23°F TO 113°F

203 Plastic Rotary Pumps

A range of special application pumps designed for use with media that cannot be pumped using a regular cast-iron or steel pump

Choice of 4 configurations built using different materials for handling mild to very aggressive media

Pump body & Handle are constructed using Glass Filled Polypropylene

Vanes made out of Ryton

Dual directional operation: Pumps in either direction by a few reverse turns of the handle

*for PRP/02 & PRP/10 only

Complete with 3 pc threaded suction tube for use on 50-205 litres (15-55 US gallons) drums

For 50-205 litre (15-55 US gal.) Drum

SPECIFICATIONS

FLOW RATE	UPTO 5 LITRES / 20 TURNS	UPTO 1.3 US GALLON / 20 TURNS

Below tabulation details construction & application details of the 4 pump types:

	ERP/01	PRP/01	PRP/02	PRP/10
DESCRIPTION	Standard	Professional	DEF	Heavy Duty
BODY COLOUR	Black	Yellow	White	Blue
ROTOR MATERIAL	PPCP	Ryton	Polypropylene	Ryton
HANDLE MATERIAL	PPCP	40% Glass Filled PP	40% Glass Filled PP	Aluminum Die Cast
SHAFT SEAL	Viton	Viton	Viton	PTFE
FASTENERS	Steel	Stainless Steel	Stainless Steel	Stainless Steel
INLET THREADS	Custom	Custom	Custom	3/4" BSP (F)
OUTLET THREADS	Custom	Custom	Custom	3/4" BSP (F)
DISCHARGE TUBE MATERIAL	PPCP	PPCP	PPCP	Stainless Steel SS 304
SUCTION TUBE	PPCP	PPCP	PPCP	Stainless Steel SS 304
STRAINER AT SUCTION TUBE INLET	Yes	Yes	Yes	No
NON RETURN VALVE AT SUCTION TUBE INLET	Yes	Yes	No	No
BUNG ADAPTOR MATERIAL	PPCP	PPCP	PPCP	Cast Iron
BUNG ADAPTOR SPEC.	2" for Metal Drums	2" for Metal Drums & 2nd adaptor for Plastic Drums	2" for Metal Drums & 2nd adaptor for Plastic Drums	2" for Metal Drums
WETTED COMPONENTS	Polypropylene, Ryton, Viton	Polypropylene, Ryton, Viton	Polypropylene, Ryton, Viton	Polypropylene, Ryton PTFE, Stainless Steel
TYPICAL USE	Infrequent / Light Use	Heavy Use	Medium Use	Tough Use

VARIANTS

ERP/01	PRP/01	PRP/02	PRP/10
			3/4" Inlet & Outlet threads on the pump also make it suitable for use on IBC's/ Totes, connecting with standard fittings
RECOMMENDED USE Light Oils, Antifreeze **DO NOT USE WITH** Acids, Chemicals, Solvents etc.	**RECOMMENDED USE** Acids, Chemicals, Water based media, antifreeze, detergents, Urea, DEF, Benzene, Glycerine etc. **DO NOT USE WITH** Acetone, Lacquer, Mineral Oils, Solvents, Turpentine etc.	**RECOMMENDED USE** DEF, Urea **DO NOT USE WITH** Acetone, Lacquer, Mineral Oils, Solvents, Turpentine etc.	**RECOMMENDED USE** • Esters- Ethyl Acetate • Alcohols- Benzyl Alcohol, Butyl Alcohol, Methyl Alcohol • Acetone, MEK • Bases- Ammonium Hydroxide, Potassium Hydroxide, Sodium Hydroxide, Baking Soa, detergents etc. • Hydrocarbons- Ethylene Glycol, NAPHTHA, Fuel Oils, Phenol • Water Based Media • Urea, DEF **DO NOT USE WITH** With Benzoic Acid, Gasoline, lacquer Thinners, Bleach, Benzene, Toluene, Xylene, Turpentine, Jet Fuel etc.

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
ERP/01	44196	6
* PRP/01	44191	6
PRP/02	44145	6
PRP/10	44144	6

* Best Seller

204 Chemical Pumps Nylon

CMP-12

Self priming vertical lift pump

Designed primarily for use with lacquer thinners, Urea, DEF etc.

Nylon construction with stainless steel plunger rod & PTFE seals

Complete with 2" polypropylene bung adaptor

WETTED COMPONENTS
Nylon, Stainless Steel & PTFE

RECOMMENDED USE
Lacquer thinners, Acetone, Antifreeze, Brake Kleen, Detergents, Glycerine, Water, Weed Killer, Mild acids, Urea, DEF, Petroleum based media etc.

DO NOT USE WITH
Strong acids, Bleach, Gasoline etc.

Available in a choice of

a. Full length pump for use on

205 litre (55 US gal.) Drum

b. Shorter pump for use on

25 litre drum (popular in UK)

FLUIDS

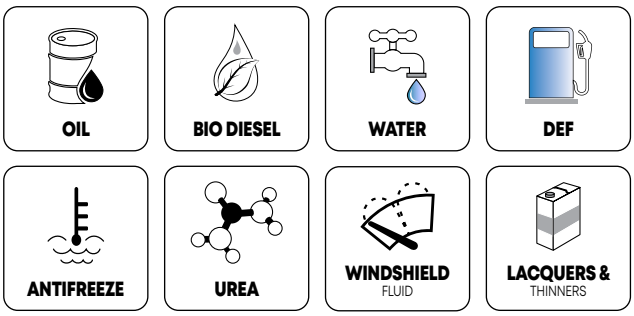

ORDERING INFORMATION

CAT NR.	ORD NR.	FOR USE ON	FLOW RATE UPTO	BOX QTY.
* CMP/12	44193	205 litre (55 US gal.) drums	400 ml (14 oz) /stroke	25
CMP/12S	44186	25 litre drums	190 ml (6.3 oz) /stroke	40

* Best Seller

205 Chemical Pump Polypropylene

CMP-10

Self priming Vertical Lift Pump designed for use with antifreeze, detergents etc.

Polypropylene construction with steel plunger rod & viton seals

Complete with 2" polypropylene bung adaptor for use on 205 litre (55 US gallon) drums

WETTED COMPONENTS
Polypropylene, Steel & Viton

RECOMMENDED USE
Antifreeze, detergents, windshield fluids, glycerine, mild acids, most petroleum based media etc.

DO NOT USE WITH
With strong acids, lacquers, acetone, gasoline etc.

SPECIFICATIONS

FLOW RATE	UPTO 400 ML / STROKE	UPTO 14 OZ. / STROKE

FLUIDS

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
CMP/10	44192	25

206 Battery Transfer Pump

BOP-5A



High flow battery operated pump for quick & convenient transfer of diesel, kerosene, light oils & water based media

Ideal for transferring small quantities of media into boats, garages & small shops

Self priming pump with 3V DC motor

Pump is operated by sliding the actuation button located on top

Suitable for use on 20 litres/ 5 US gallon pails

Works on 2 “D” size (LR20) Alkaline Batteries
(not included with the pump). Approx working life with one set of batteries is 1000 litres (265 US gallons)

Complete with 23-1/2" (600 mm) long flexible corrugated discharge hose

Hang Hole provided at top allows pump to be conveniently stored when not in use

Hose holder for convenient storage of hose after use to avoid spillage

WETTED COMPONENTS
Polypropylene, Polyethylene, Acetal, NBR, PVC & PET

RECOMMENDED USE
Diesel, Kerosene, Light Oils, Water, DEF, Antifreeze, Windshield washer water, Mild Detergent, Agriculture chemical

DO NOT USE WITH
Any media not compatible with materials used in the pump construction

SPECIFICATIONS

FLOW RATE	UPTO 10 LPM	UPTO 2.6 GPM

FLUIDS

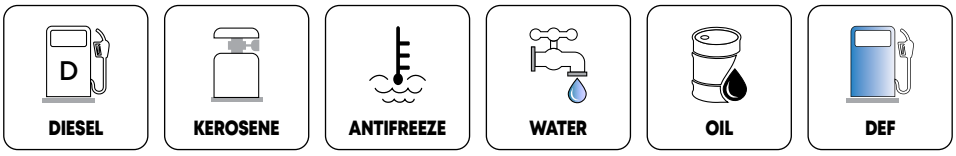

ORDERING INFORMATION

CAT NR.	ORD NR.	TOTAL LENGTH		SUCTION TUBE LENGTH		BOX QTY.
		(INCH)	(MM)	(INCH)	(MM)	
BOP/5A	44414	23	585	15.15	385	40

WARNING

Pump must never be used with hot media at temperatures above 60°C (140°F)

207 Fuel Transfer Pump Battery Operated

BOP-10A

NEW!



Battery operated fuel transfer pump

Designed for convenient & quick transfer of Kerosene, diesel, light oil, water & water based media on sites with limited access to electric power, such as construction site, cement plants, mining sites etc.

Works on 4 AA batteries (not included)

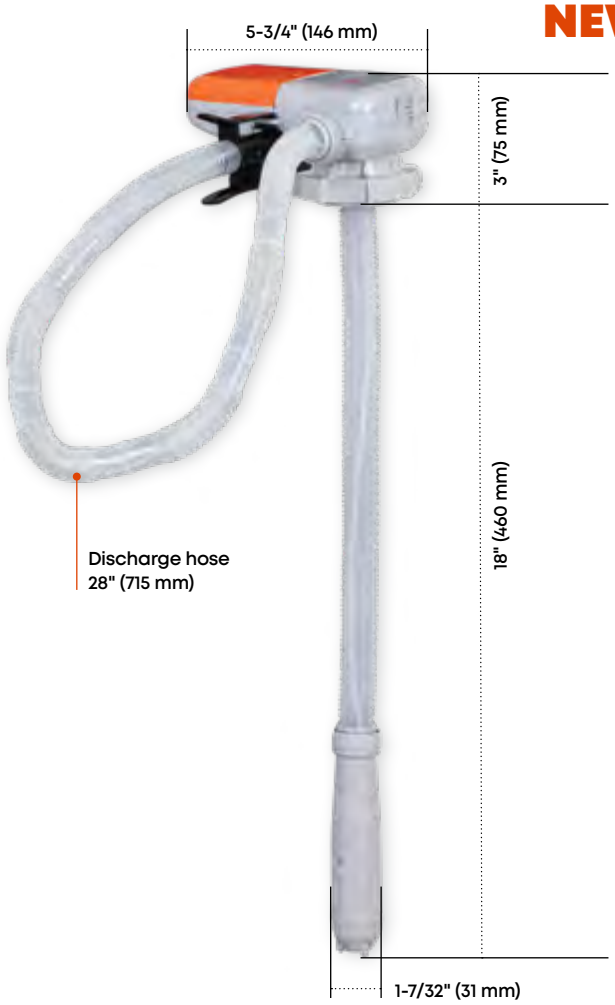

WETTED COMPONENTS
Polypropylene, Polyethylene, Polyacetal

RECOMMENDED USE
Gasoline, Kerosene, Diesel, Water, Light viscosity oils, Dirty water (Not safe for drinking)

DO NOT USE WITH
Lacquer thinners, Acetone and other liquids that are not compatible with wetted components of the pump

FLUIDS

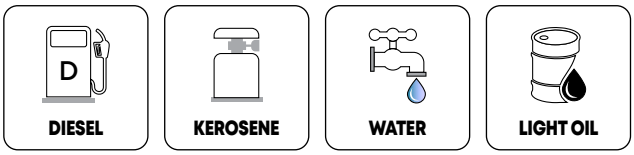

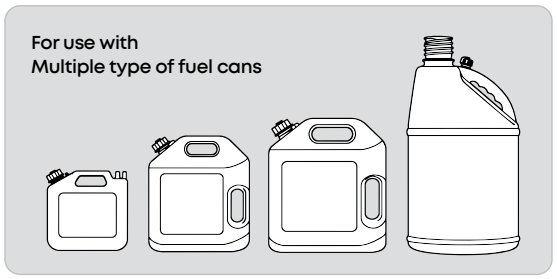

On/Off switch with cover for protection against dust & water

Auto shut-off nozzle with sensor automatically stops pump when container is full

Hand-free operation: Integrated clamps can be hooked in horizontal & vertical positions

Universal dual adaptor fits most fuel cans

Flexible suction hose for 20 litre (5 gallon) fuel cans

LED indicator turns green when container is empty

SPECIFICATIONS

MOTOR RATING	12V DC	
FLOW RATE	UPTO 9 LPM	UPTO 2.4 GPM
NET WEIGHT	304 GM	10.7 OZ
WORKING TEMPERATURE	-5°C TO 45°C	23°F TO 113°F

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
BOP/10A	44439	20

WARNING
Do not run dry

208 DEF Pump Battery Operated

BOP-50



Battery operated pump for quick & convenient transfer of Gasoline, Diesel, DEF, Water & water based media

Self priming pump with 3V DC motor

Convenient to operate trigger for
a. Full control on fluid outflow
b. No spillage even when the electric switch is On

Works on 2 'D' size (LR20) alkaline batteries, not included with the pump

Approximate working life with one set of batteries - 1000 litres (264 US gallons)

Duty cycle: 10 min ON/ 10 min OFF

Use with 20 litre (5 US gallon) pails

WETTED COMPONENTS
Polypropylene, Polyethylene & Acetal

RECOMMENDED USE
Diesel, Kerosene, DEF, Antifreeze, Windshield Fluid, mild detergents, agricultural chemicals, Herbicides Pesticides & Water

DO NOT USE WITH
With Acids, Acetone, Benzene etc

FLUIDS

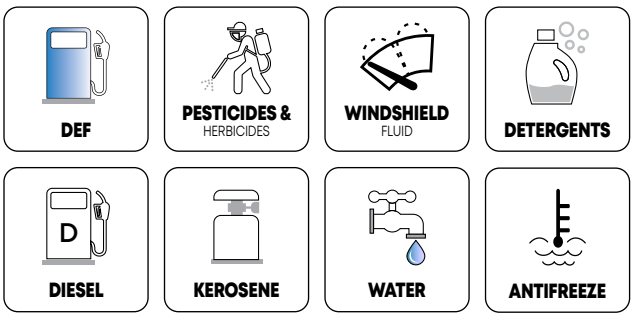

SPECIFICATIONS

FLOW RATE	UPTO 9 LPM	UPTO 2.4 GPM

ORDERING INFORMATION

CAT NR.	ORD NR.	TOTAL LENGTH		SUCTION TUBE LENGTH		BOX QTY.
		(INCH)	(MM)	(INCH)	(MM)	
BOP/50	44412	26-1/2	674	18-3/8	467	40

WARNING

Pump must never be used with hot media at temperatures above 60°C (140°F)

209 Rechargeable DEF Pump

BOP-60

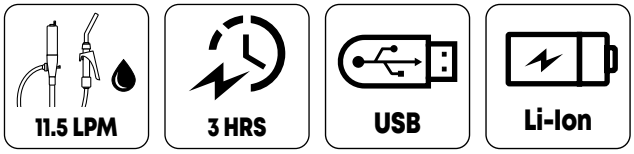

Rechargeable Battery Operated Pump for quick and convenient transfer of wide variety of fluids

Lightweight yet sturdy pump with convenient to operate large ON/OFF switch

Pump complete with

1. **Control Nozzle** with lever for:
   - Full control on fluid outflow
   - No spillage even when the electric switch is ON
2. **Telescopic Suction Tube** adjustable 15"-20-1/2" (380-520 mm) suitable for use on 20 to 50 litre (5 to 15 US gallon) pails
3. **1.5m (4.9 ft) Flexible Hose** with swivel at end to prevent kinking of hose

Convenient & Safe Storage Hang pump onto the supply tank via the U-shaped hook after use

Power Source
2900mAh Rechargeable Lithium ion battery. Rechargeable via USB 2.0 type B connector (USB cable included)

Battery Capacity
Fully charged battery can discharge upto 300 litres (79 US gallons)*
*tested using water

WETTED COMPONENTS
Polypropylene, Polyethylene, PVC & Acetal

RECOMMENDED USE
Diesel, Kerosene, Light oils, DEF, Water, Antifreeze, Windshield fluid, Mild detergents, Agricultural chemicals etc

DO NOT USE WITH
Acids, Acetone, Benzene etc

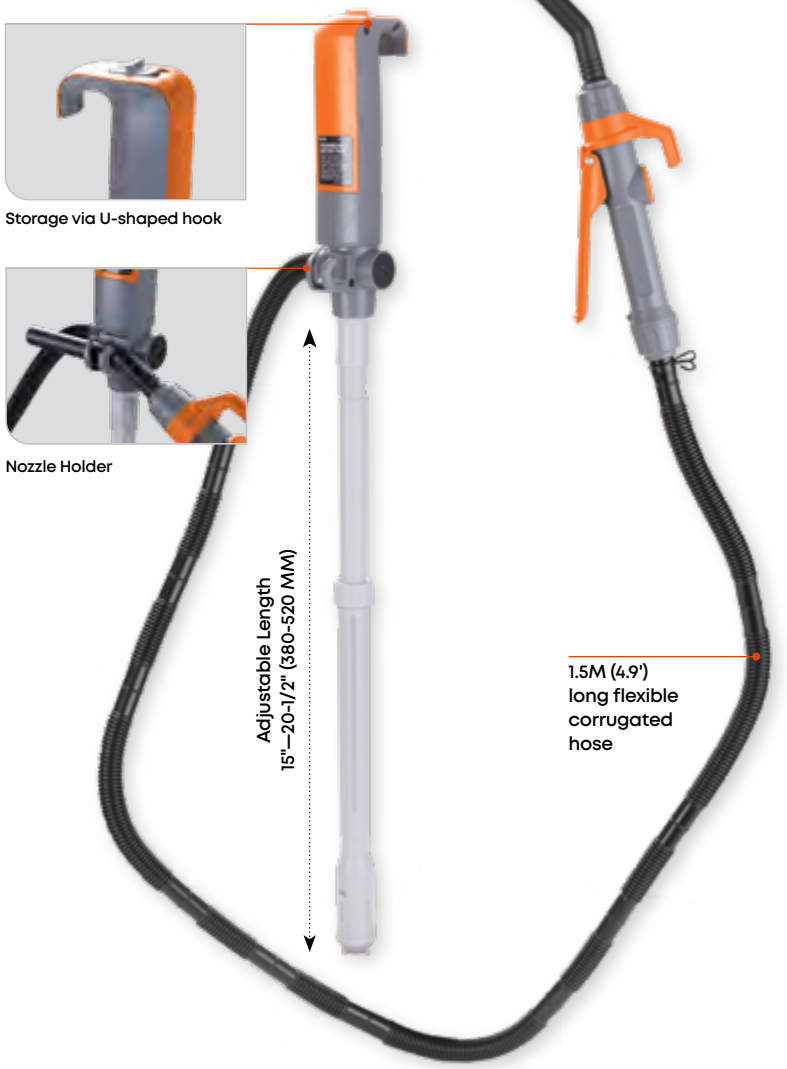

FLUIDS

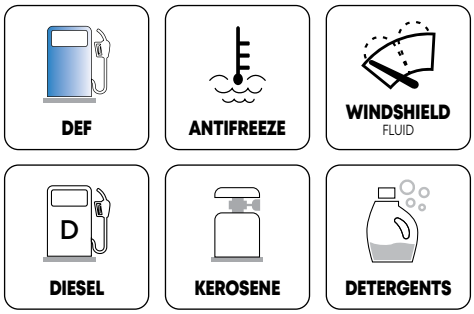

SPECIFICATIONS

FLOW RATE	UPTO 11.5 LPM	UPTO 3 GPM

ORDERING INFORMATION

CAT NR.	ORD NR.	SUCTION TUBE LENGTH		BOX QTY.
		(INCH)	(MM)	
BOP/60	44413	15–20-1/2	380-520	10

WARNING

Pump must never be used with hot media at temperatures above 60°C (140°F)

210 Siphon Pumps

SPH

Easy to use, polyethylene pumps siphon liquids to lower levels than the height at which the pump is installed

These are easy to prime & start within 6-7 strokes

Pump requires no further operation & keeps working in auto position.

All pumps are equipped with a vent cap on top. Opening the cap stops discharge

To dispense media at levels higher than the pump, pump below needs to be continuously operated

Supplied complete with flexible corrugated discharge tube

RECOMMENDED USE

Water-based fluids, detergents, waxes, soaps, antifreeze, some mild acids, and other liquids compatible with pump construction materials

Pump should only be used with light weight & non-flammable liquids

DO NOT USE WITH

Any media not compatible with materials used in the pump construction

VARIANTS

SPH/1	SPH/2	SPH/3
		
WETTED COMPONENTS Polyethylene	**WETTED COMPONENTS** Polyethylene & Polypropylene	**WETTED COMPONENTS** Polyethylene & Polypropylene

FLUIDS



WARNING

- Pumps must never be used with hot media at temperatures above 60°C (140°F)
- These pumps must never be used with concentrated acids, Acetone, Benzene etc.

ORDERING INFORMATION

CAT NR.	ORD NR.	FLOW RATE		BUNG	FITS	DISCHARGE HOSE LENGTH		BOX QTY.
		(LPM)	(GPM)			(INCH)	(MM)	
★SPH/1	44400	6.5	2	1-1/2" for use with pails	5-20 litre / 5 US gal. pails	21.69	551	120
★SPH/2	44401	17.5	5	2" for use with drums	205 litre / 55 US gal. drums	46.45	1180	25
★SPH/3	44402	21	7	2" for use with drums	205 litre / 55 US gal. drums	47.70	1212	25

★Best Seller

211 Siphon Pumps Portable

SPH-10

NEW!

Portable & easy to use hand operated pumps for clean, quick, hassle free transferring or evacuating of a wide variety of media including light oils, water based media, Diesel, Kerosene & Gasoline

Comes complete with 2 × 2.7' (820 mm) long PVC hose attached to a bulb

Suitable for automotive maintenance, professional mechanic shops & garages

Available in two variants:
- Standard
- With back flow valve - Prevents unwanted reverse flow of liquid

WETTED COMPONENTS
Polyprolene, HDPE & PVC

DO NOT USE WITH
Any media not compatible with materials used in pump construction

HOW TO USE

STEP - 1
Ensure that the indicator arrow on the rubber ball is facing down

STEP - 2
Insert suction hose into source container and ensure it is submerged in fluid. Cover discharge end with your thumb & squeeze rubber pump to initiate fluid flow

STEP - 3
Put the discharge hose in the target container to start fluid transfer

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
SPH/10	44515	Standard	40
SPH/10NR	44516	With back flow valve	40

FLUIDS

OIL | WATER | GASOLINE | DIESEL | KEROSENE

212 Transfer Pumps

NEW!

Polypropylene construction

Portable hand operated pump for clean, quick & hassle free transferring of low viscosity fluids, including water and oil

Small & lightweight, these fit easily in a tool box or trunk of a car

Comes with air hose hence can also be used as an air pump for inflating beach balls, cycle tyres etc.

Suitable for use in garages, homes, cars, boats and can also be used with standard US gallon containers

RECOMMENDED USE
Light oils and water based media

QUICK-CONNECT ADAPTOR DESIGN

For quick connect & greater holding power, eliminating mess caused by loose hose

Easily dis-connect hose: Press the adaptor inwards

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
BLG/6Q	44524	With Quick Connect Adaptor	20
BLG/5Q	44523	With Quick Connect Adaptor	20
BLG/5	44522	With Hose Connector	20

VARIANTS

BLG/6Q	BLG/5	BLG/5Q
a. For fluid transfer b. Pump with hose & quick connect fitting	a. For fluid & air transfer b. Pump with air hose & connectors c. Can be used as an air pump to inflate bicycle tires, football etc.	a. For fluid & air transfer b. Pump with air hose, connectors & quick connect fitting c. Press the fitting inwards to connect and disconnect hose from pump outlet d. Can be used as an air pump to inflate bicycle tires, football etc.

2 IN ONE PUMP (BLG-5 & BLG-5Q)

Pump can transfer light viscosity fluids when attached to 2 x 50" long clear hoses

Pump can be used as an air pump by simply attaching air hose & air nozzles for different purposes

TRANSFER PUMP GETS CONVERTED TO AIR PUMP

Attach the air hose and three attachments with specific usage

VALVE ASSEMBLY

- Used as an attachment valve for connecting needle nozzle & tapper nozzle
- Used for inflating cycle tyres with pressure upto 50 PSI

NEEDLE NOZZLE
Used for inflating volley balls, footballs, basket balls etc.

TAPER NOZZLE
Used for inflating swimming tubes and beach balls etc.

213 Brass Transfer Pumps

BLG

Portable hand pumps for clean, quick, hassle free transferring or evacuating of a wide variety of media including Engine Oil, Coolants, Transmission Fluid, Power Steering Fluid, Oils, Diesel, Water, Antifreeze etc.

Non corroding premium brass construction & hand removable NBR caps

Small & lightweight, these fit easily in a tool box or the trunk of a car

Self priming

Fully serviceable with no threaded parts

For use on cars, boats, motorcycles, ATV's, lawn & garden equipment etc.

VARIANTS

BLG/1

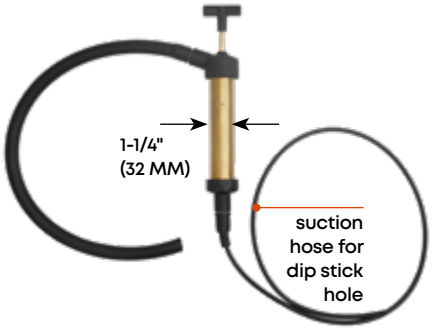

Complete with
a. 24" (600 mm) of 1/2" (12 MM) dia. discharge hose
b. 40" (1000 mm) of 1/4" (6 MM) dia. of suction hose

Used for
- Draining out oil from crank case or ATF through dipstick hole; from under the hood & not under the car
- Cleaning sludge accumulation from oil filter case
- Removing water from radiator to add antifreeze or to service thermostat or pump
- Draining stopped sinks
- Transferring fluids from one container to another, without lifting
- Pumping water out of small boats

BLG/2

Complete with
a. 60" (1500 mm) of 1/2" (12 mm) dia. discharge hose

Ideal for use as
- A Transfer / Bilge pump with Oils, Diesel, Water, Antifreeze etc.

ORDERING INFORMATION

CAT NR.	ORD NR.	OVERALL LENGTH		BOX QTY.
		(INCH)	(MM)	
BLG/1	44520	10-1/2	265	20
BLG/2	44521	17	430	15

SPECIFICATIONS

FLOW RATE	UPTO 100 ML / STROKE	UPTO 3.30 OZ. / STROKE
WORKING TEMPERATURE	MAX. 60° C	MAX. 140°F

214 Diaphragm / Bilge Pumps

DPP-20



Hand Operated Diaphragm pump; designed to work in any position- vertical, horizontal, at an angle or even upside down

Can be mounted anywhere: on a wall, wooden base, on a drum etc.

Use as a Bilge pump to evacuate standing bilge water

Pump handle can be fitted in line or at 90° to the inlet & outlet ports, which makes installation very easy

WETTED COMPONENTS

Polyacetal, Thermoplastic Polyurethane, Stainless Steel & PVC

RECOMMENDED USE

Water, Sea Water, Diesel, Bio Diesel, Kerosene, Gasoline, Mineral Oils, Heating Oils, Synthetic Oils, Engine Oils, Antifreeze, emulsions & liquids with small bodies in suspension

DO NOT USE WITH

Urea, food grade media or any media not compatible with the pump components

SPECIFICATIONS

FLOW RATE	UPTO 16.6 LPM	UPTO 4.40 GPM
WORKING TEMPERATURE	-10°C to +40°C	14°F to 104°F

FLUIDS

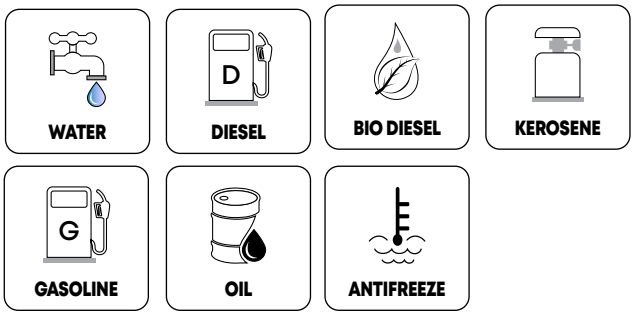

VARIANTS

DPP/20	DPP/20A	DPP/20B
Pump supplied complete with a. Suction & discharge hose (1" I.D. x 2m) b. Delivery nozzle c. Hose clamps d. Drum attachment kit for converting pump for mounting on drums with a 2" opening, complete with suction drum hose (3/4"I.D. x 1.25 m) e. Connecting links & strainer	**Pump with** a. Suction & discharge hose (1" I.D. x 2 m long) b. Delivery nozzle c. Hose clamps	**Pump only with** a. Inlet & outlet hose 1" (25 mm) b. Barb ports

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
★ DPP/20	44500	4
★ DPP/20A	44501	4
★ DPP/20B	44502	4

★ Best Seller

215 Quart/Gallon Fluid Pump

QGFP

NEW!



The Groz US Quart/Gallon Fluid Pump is suitable for use in automobiles, trucks, RVs, boats, motorcycles, and other everyday applications

Thread Compatibility
Pump features two thread sizes that easily fit most US quart/gallon containers

Durable Construction
Polypropylene plunger rod & pump body with steel spring

Downstroke Operation
Fluid is discharged when the plunger rod is pushed down, ensuring ease of use and reduced fatigue.

Pump includes
a. 4-21/64" (110 mm) clear tube
b. 7-7/8" (200 mm) clear tube making the pump useful on containers of varying heights
c. 17" (430 mm) discharge hose

WETTED COMPONENT
Polypropylene & Steel

RECOMMENDED USE
Engine Oil, Transmission Fluid, Gear Oil, Hydraulic Oil & Antifreeze/Coolant

SPECIFICATIONS

FLOW RATE	UPTO 5 ML /STROKE	UPTO 0.16 OZ. /STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
QGFP/1	42015	100

216 Tyre Sealant Pump

TSP-03

Hand operated Tire Sealant Pump for pumping Tire Sealant from 5 to 6-1/2 US gallon pails directly into tubeless tyres

Powder coated pump body with aluminum die cast adjusting flange & pump handle

Includes adjusting collar to pre-set amount dispensed per stroke

Powder coated 12" (310 mm) steel drum cover

Complete with 5' (1500 mm) braided PVC hose fitted with quick connect coupler and return valve

WETTED COMPONENT
Steel, Aluminum, NBR, PVC

SPECIFICATIONS

FLOW RATE	UPTO 230 ML / STROKE	UPTO 8 OZ. / STROKE

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
TSP/03	44199	10

217 Adhesive Can

OC-AG

NEW!

High performance adhesive oil dispensing cans, perfect for cleaner & faster gluing of leather, insulation material, upholstery etc.

Black powder coated steel body with aluminium die-cast head & zinc plated spout

Use with puncture pin for opening blocked nozzles and brush tip (available as spare)

WETTED COMPONENT
Aluminium, Viton & Steel

RECOMMENDED USE
Neoprene glue, oil products, Adhesives & Most Non-Corrosive Fluids

DO NOT USE WITH
Water-based adhesives.

OC/1/AC

BRSH/OC/AG

ORDERING INFORMATION

CAT NR.	ORD NR.	CAPACITY		SPOUT LENGTH		BOX QTY.
		(ML)	(OZ.)	(INCH)	(MM)	
OC/1/AG	41844	500	16	4	100	50
BRSH/OC/AG	41856	Brush Tip				-

218 Caulking Gun

CGN

NEW!

The Groz Caulking Gun is built for convenience & durability

Lightweight frame for comfort during long use

6:1 thrust ratio provides easy dispensing for acrylic and silicone caulks

Ergonomic handle reduces fatigue and improves grip

Smooth rod delivers consistent flow with minimal effort

Drip-free design prevents sealant waste and ensures clean finishing

Built-in spout cutter and seal puncture tool offer quick setup

For use with 10 oz. cartridges

Suitable for sealing window frames, doors, sink and trims

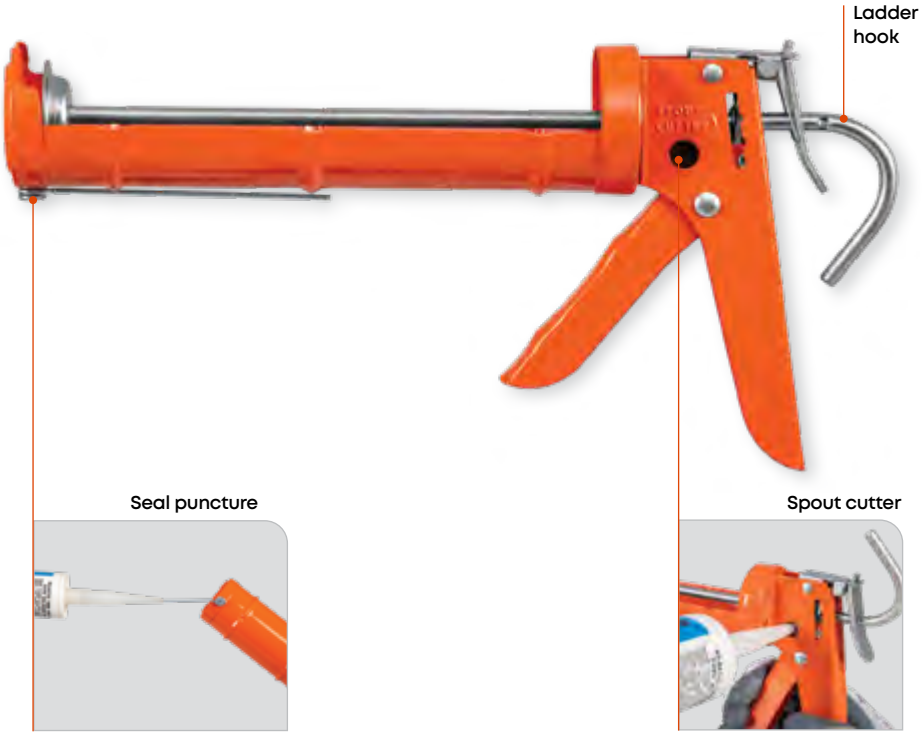

ORDERING INFORMATION

CAT NR.	ORD NR.
CGN/10	48090

219 Mechanical Fuel Meters

FM-100

World class Mechanical Fuel Meter, extremely compact, yet easy to read

Nutating Disc Mechanism offers high tolerance to fuel contamination

Robust aluminum die cast construction

3 Port Design
The meter can be used:
a. In–Line
b. At 90 Degrees
Inlet & outlet ports at right angle

Register cap can be easily removed & rotated to every 90° orientation for convenient read out

Easy user re-calibration

For use with electric fuel pumps or gravity flow (with a minimum gravity head of 4')

Available in litre/US gallon version in a choice of 3/4" or 1" threads

WETTED COMPONENTS
Aluminum, Poly Butylene Terephthalate (PBT), Viton, Stainless Steel

RECOMMENDED USE
Diesel, Gasoline, Low to Medium Viscosity Oils

DO NOT USE WITH
Water based media

SPECIFICATIONS

FLOW RATE	15-75 LPM	4 -20 GPM
ACCURACY*	± 2%	
REPEATABILITY*	± 1%	
MAX. WORKING PRESSURE	50 PSI	3.5 BAR
WORKING TEMPERATURE RANGE	-10°C TO 65°C	14°F TO 150°F
MAX. RESETTABLE BATCH TOTALIZER	9999.9 Litres or 999.9 US gallons	
MAX. NON RESETTABLE BATCH TOTALIZER	999999 Litres or 99999.9 US gallons	
LEAST COUNT / RESOLUTION	0.10 Litres or 0.10 US gallons	

* Tested in laboratory conditions
Note: Not to be used to measure media for resale

ORDERING INFORMATION

CAT NR.	ORD NR.	MEASUREMENT	THREADS	BOX QTY.
FM-100/3-4/BSP	45680	Litres	3/4" BSP (F)	12
FM-100/3-4/N	45681	Litres	3/4" NPT (F)	12
FM-100G/3-4/N	45682	US Gallons	3/4" NPT (F)	12
✱FM-100/0-1/BSP	45683	Litres	1" BSP (F)	12
FM-100/0-1/N	45684	Litres	1" NPT (F)	12
✱FM-100G/0-1/N	45685	US Gallons	1" NPT (F)	12

✱Best Seller

FLUIDS

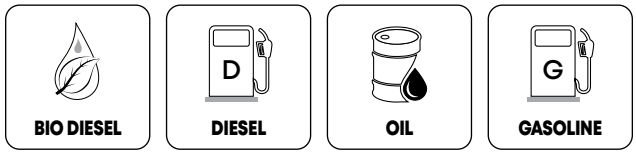

220 Mechanical Fuel Meter In-line

MFM-M10

NEW!

Heavy-duty high-accuracy flow meter with mechanical register

Robust aluminium die cast construction

Oval gear mechanism Meter is designed for both in-line applications & gravity flow

Flexibility of installation options; can be mounted horizontally or vertically; no flow conditioning required

Meter construction enables fast and easy on-site servicing without removal from the application

WETTED COMPONENTS
Aluminium, NBR, Graphite

DO NOT USE WITH
Water based media

RECOMMENDED USE
Diesel, Kerosene, Fuel oils

SPECIFICATION

	LITRE VERSION	US GALLON VERSION
ACCURACY	±1%	±1%
FLOW RATE	Upto 120 LPM	Upto 32 GPM
REPEATABILITY	±0.3%	±0.3%
MAX. VISCOSITY	1000 CPS	1000 CPS
MAX. PRESSURE	220 PSI (15 Bar)	220 PSI (15 Bar)
MAX. RESETTABLE BATCH TOTAL	9999 litre	9999 US gallon
MAX. NON-RESETTABLE BATCH TOTALIZER	9999999	9999999
LEAST COUNT	1 Litre	1 US Gallon
INLET/OUTLET	1" BSP (F)	1" NPT (F)

ORDERING INFORMATION

CAT NR.	ORD NR.	MEASURES IN	THREADS	BOX QTY.
MFM/M10/BSP	45601	Litre	1" BSP	10
MFM/M10G/N	45614	US Gallon	1" NPT	10

FLUIDS

221 Mechanical Diesel Meters

FM-10

High accuracy diesel meter with mechanical register

Nutating disc mechanism offers high tolerance to fuel contamination

Robust aluminum die cast construction

Meter is designed for both in-line applications & gravity flow (with a minimum gravity head of 4')

Ideal for use with electric fuel pumps

Register cap can be easily removed & rotated to every 90° orientation for display reading

Easy user re-calibration

Available in litre/US gallon version

WETTED COMPONENTS
Aluminium, Buthil Tereftalat, Nitrile Rubber

RECOMMENDED USE
Diesel, Bio diesel, Low to medium viscosity oils

DO NOT USE WITH
Gasoline, Water based media

SPECIFICATIONS

FLOW RATE	20-120 LPM	5-32 GPM
ACCURACY*	± 1%	
REPEATABILITY*	± 0.30%	
LEAST COUNT /RESOLUTION	0.10 Litres or 0.10 US Gallons	
MAX. WORKING PRESSURE	Upto 145 PSI	Upto 10 BAR
BURST PRESSURE	435 PSI	30 BAR
PRESSURE LOSS	3 PSI	0.20 BAR
WORKING TEMPERATURE RANGE	-10°C TO 60°C	14°F TO 140°F
MAX. RESETTABLE BATCH TOTALIZER	999.9 Litres or 99.9 US Gallons	
MAX. NON RESETTABLE BATCH TOTALIZER	9,99,999 Litres or 99999.9 US Gallons	
MAX. VISCOSITY OF MEDIA	2000 cst	

* Tested in laboratory conditions
Note: Not to be used to measure media for resale

Display can be changed by rotating the card in its housing thus ensuring greater versatility in positioning

ORDERING INFORMATION

CAT NR.	ORD NR.	MEASUREMENT	THREADS	BOX QTY.
* FM/10/0-1/BSP	45640	Litres	1" BSP (F)	12
FM/10/0-1/N	45642	Litres	1" NPT (F)	12
* FM/10G/0-1/N	45641	US Gallons	1" NPT (F)	12

* Best Seller

FLUIDS

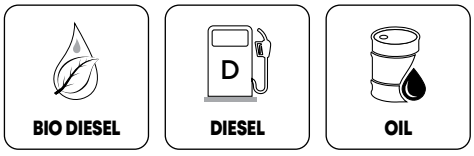

GROZ

222 Mechanical Fuel Meter Oval Gear

FM-OV10

NEW!

High accuracy Fuel meter with mechanical register

Oval gear mechanism offers high tolerance to fuel contamination

Robust aluminium die cast construction

Meter is designed for in-line applications, Ideal for use with electric fuel pumps

Easy user re-calibration

Available in litre/US gallon version

WETTED COMPONENTS
Aluminium, NBR, PP

DO NOT USE WITH
Water based media

RECOMMENDED USE
Diesel, Bio-diesel, Kerosene Low to Medium Viscosity Oils

SPECIFICATION

	LITRE VERSION	US GALLON VERSION
ACCURACY	±1%	±1%
FLOW RATE	Upto 120 LPM	Upto 32 GPM
REPEATABILITY	±0.3%	±0.3%
MAX. VISCOSITY	1000 cps	1000 cps
MAX. PRESSURE	220 PSI (15 Bar)	220 PSI (15 Bar)
MAX. RESETTABLE BATCH TOTAL	9999.9 Litre	9999 US Gallon
MAX. NON-RESETTABLE BATCH TOTALIZER	99999999 Litre	999.9 US Gallons
LEAST COUNT	0.1 Litre	0.1 US Gallon
INLET/OUTLET	1" BSP (F)	1" NPT (F)

ORDERING INFORMATION

CAT NR.	ORD NR.	MEASURES IN	THREADS	BOX QTY.
FM/OV-10/BSP	49550	Litre	1" BSP	10
FM/OV-10G/N	49552	US Gallon	1" NPT	10

FLUIDS

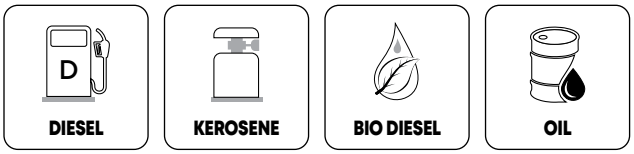

223 Digital Oval Gear Fuel Meters

FM-25

10-100 LPM | 435 PSI | GEARED

Heavy duty, high accuracy electronic fuel meter

Electronic display using 2 × 1.5V Alkaline Batteries

Oval gear mechanism that provides high accuracy over a wide range of fluids with reduced loss of head.

Aluminium body with built in suction filter

Measures in litres, Quarts, Pints & US Gallons

Easy user recalibration

Meter comes factory calibrated for use with Diesel

WETTED COMPONENTS
Polyoxymethylene, Aluminium, Steel, Neodymium

RECOMMENDED USE
Diesel, Oils, Antifreeze

DO NOT USE WITH
Water based media, acids etc

FLUIDS
DIESEL | OIL | ANTIFREEZE

SPECIFICATIONS

FLOW RATE	10-100 LPM	2.64-26.4 GPM
ACCURACY*	± 0.5%	
REPEATABILITY*	± 0.2%	
MAX WORKING PRESSURE	435 PSI	30 BAR
WORKING TEMPERATURE RANGE	-10°F TO 60°F	-14°C TO 140°C
PARTIAL TOTAL	0.001 to 99999 units	
MAX RESETTABLE TOTAL	9,99,99 units (5 digits × 100 indicator)	
MAX NON-RESETTABLE TOTAL	9,99,99,999 units (8 digits × 100 indicator)	
LEAST COUNT/ RESOLUTION	Upto 0.001 units	
VISCOSITY	Upto 2000 cst	

* Tested in laboratory conditions
Note: Not to be used to measure media for resale

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET / OUTLET	BOX QTY.
FM/25/3-4/BSP	45648	3/4" BSP (F)	10
FM/25/3-4/N	45649	3/4" NPT (F)	10
FM/25/0-1/BSP	45653	1" BSP (F)	10
FM/25/0-1/N	45654	1" NPT (F)	10

224 Digital Fuel Meter In-line

MFM-D10

NEW!

Heavy-duty high-accuracy flow meter with Electronic register

Robust aluminium die cast construction

Oval gear mechanism Meter is designed for both in-line applications & gravity flow

Measure in Litres, US Gallons & Quarts

Flexibility of installation options (e.g. can be mounted horizontally or vertically; no flow conditioning required)

Meter construction enables fast and easy on-site servicing without removal from the application

WETTED COMPONENTS
Aluminium, NBR, Graphite

DO NOT USE WITH
Water based media

RECOMMENDED USE
Diesel, Kerosene, Fuel oils

SPECIFICATION

ACCURACY	±0.5%
FLOW RATE	Upto 120 LPM (32 GPM)
REPEATABILITY	±0.03%
MAX. VISCOSITY	1000 CPS
MAX. PRESSURE	220 PSI (15 Bar)
UNITS	Litres, US Gallons, US Quarts
MAX. RESETTABLE BATCH TOTAL	9999999
MAX. NON-RESETTABLE BATCH TOTALIZER	9999999
LEAST COUNT	0.001 Litre / US Gallon
INLET/OUTLET	1" BSP (F) / NPT (F)

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
MFM/D10/BSP	49540	1" BSP (F)	25
MFM/D10/N	49541	1" NPT (F)	25

FLUIDS

225 Digital Fuel Meter - Professional

FM-2000

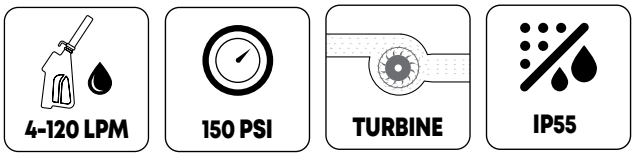

Digital Turbine meter for low viscosity fluids, easy to install in line or for end of the line applications

Polyamide Turbine measuring mechanism

Electronic Display using one 3.7V Li-ion battery (CR2450)

Aluminium body and sealed electronic card make it suitable for use in severe weather conditions

Display can be rotated in 4 different positions

Bi-Directional
Either ports can be used as Inlet / Outlet

Measures in Litres, Quarts, Pints & US Gallons

Easy user re calibration

Bi - Directional

Display can be changed by rotating the card in its housing thus ensuring great versatility in positioning

WETTED COMPONENTS
Aluminum, Polyamide & Stainless Steel

RECOMMENDED USE
Diesel, Gasoline, Bio Diesel

DO NOT USE WITH
Oils

FLUIDS

SPECIFICATIONS

FLOW RATE	4-120 LPM	1-30 GPM
ACCURACY*	± 1%	
REPEATABILITY*	± 0.25%	
MAX WORKING PRESSURE*	150 PSI	10 BAR
WORKING TEMPERATURE RANGE	-4°F TO 158°F	-20°C TO 70°C
UNITS OF MEASURE	Pints, Quarts, Liters, US Gallons	
PARTIAL TOTAL	0.001 to 99999 units	
MAX RESETTABLE TOTAL	9,99,999 units (6 digits with × 100 indicator)	
MAX NON-RESETTABLE TOTAL	9,99,999 units (6 digits with × 100 indicator)	
LEAST COUNT/ RESOLUTION	UPTO 0.001 units	
VISCOSITY	UPTO 5.35 cst	

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
FM/2000/0-1/BSP	45655	1" BSP (F) × 1" BSP (F)	20
FM/2000/0-1/N	45656	1" NPT (F) × 1" NPT (F)	20

* Tested in laboratory conditions
Note: Not to be used to measure media for resale

226 Digital DEF Meter Professional

WM-2000

Digital Turbine Meter with Poly Propylene construction, designed especially for use with DEF, water etc.

Designed for
a. In-Line application
b. End of the line application
c. Use with a dispensing nozzle

Poly Propylene body & sealed electronic card makes it suitable for use in severe weather conditions
Polyamide turbine measuring mechanism

Electronic display using one 3V lithium ion battery (CR 2450)

Display can be rotated in 4 different positions

Bi-Directional
Either ports can be used as Inlet / Outlet

Measures in Litres, Quarts, Pints & US Gallons

Easy user re calibration

WETTED COMPONENTS
Poly Propyleane, Polyamide, Stainless Steel

RECOMMENDED USE
Urea, DEF, Windshield fluids, water & water based media

DO NOT USE WITH
Fuels and Oils

Display can be changed by rotating the card in its housing thus ensuring great versatility in positioning

FLUIDS

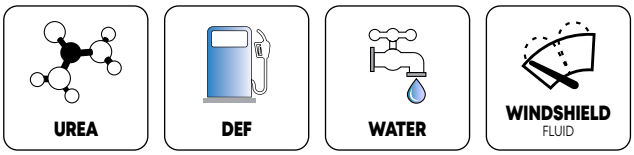

SPECIFICATIONS

FLOW RATE	UPTO 4-120 LPM	1-30 GPM
ACCURACY*	± 1%	
REPEATABILITY*	± 0.25%	
MAX WORKING PRESSURE	UPTO 150 PSI	10 BAR
WORKING TEMPERATURE RANGE	-4°F TO 158°F	-20°C TO 70°C
UNITS OF MEASURE	PINTS, QUARTS, LITERS, US GALLONS	
PARTIAL TOTAL	0.001 TO 99999 UNITS	
MAX RESETTABLE TOTAL	9,99,999 (6 digits × 100 indicator) UNITS	
MAX NON-RESETTABLE TOTAL	9,99,999 (6 digits × 100 indicator) UNITS	
LEAST COUNT/ RESOLUTION	UPTO 0.001 UNITS	

* Tested in laboratory conditions
Note: Not to be used to measure media for resale

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
WM/2000/0-1/BSP	45673	1" BSP (F)	20
WM/2000/0-1/N	45674	1" NPT (F)	20

227 Stainless Steel Fuel Nozzle Swivel

SWV-SS

50 PSI

For use with DEF, Urea, Windshield fluids & Other water based media

Stainless Steel SS 304 construction

Hose barb 3/4" (20 mm) at one end 3/4" male threads on the other

0.55" (14 mm) ID designed for minimal back pressure & reduction in flow

WETTED COMPONENTS
Stainless Steel SS 304

RECOMMENDED USE
Urea, DEF, Water & Windshield Fluid

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET	OUTLET	BOX QTY.
SWV/SS/HB/3-4/B	43892	3/4" (20 mm) Hose Barb	3/4" BSPT (M)	50
SWV/SS/HB/3-4/N	43893	3/4" (20 mm) Hose Barb	3/4" NPT (M)	50

FLUIDS

UREA | DEF | WATER | WINDSHIELD FLUID

228 Dual Plane Fuel Nozzle Swivels

SWV-2P

50 PSI

Swivels are installed between fuel nozzle & hose to reduce strain, provide flexibility & long life to hose

Provide 360° rotation for free movement facilitating flexibility to refuel vehicles from any direction

Aluminium die cast construction with male threaded end made from brass

Laminar flow design for higher fuel flow

Dual 'O' ring seal for long service life

Compatible with fuels containing alcohol

WETTED COMPONENTS
Aluminium, Brass, Viton

RECOMMENDED USE
Diesel, Kerosene, Gasoline, Bio-Diesel

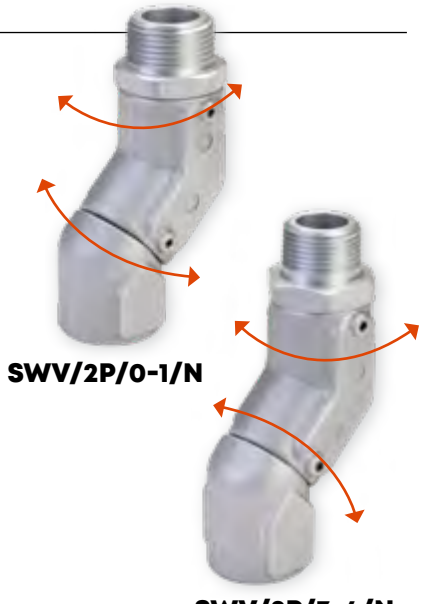

SWV/2P/0-1/N

SWV/2P/3-4/N

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
SWV/2P/3-4/BSP	43887	3/4" BSP (M) x 3/4" BSP (F)	50
SWV/2P/0-1/BSP	43888	1" BSP (M) x 1" BSP (F)	50
SWV/2P/3-4/N	43885	3/4" NPT (F) × 3/4" NPT (M)	50
SWV/2P/0-1/N	43886	1" NPT (F) × 1" NPT (M)	50

FLUIDS

D DIESEL | BIO DIESEL | KEROSENE | G GASOLINE

229 Fuel Control Nozzles Manual



For use with manual & electric fuel pumps

All metal construction with the body, discharge spout, trigger & guard made from aluminium

Manual Flow Control
Comes with a continuous flow switch for unattended dispensing

Designed for minimal back pressure

6-5/16" (160 mm) long Spout

Available in a choice of straight or curved spout, both with and without swivel

WETTED COMPONENTS
Aluminum, Steel, Nylon, Nitrile Rubber, Zinc*
*on models fitted with Hose Barb

RECOMMENDED USE
Diesel, Kerosene & Gasoline

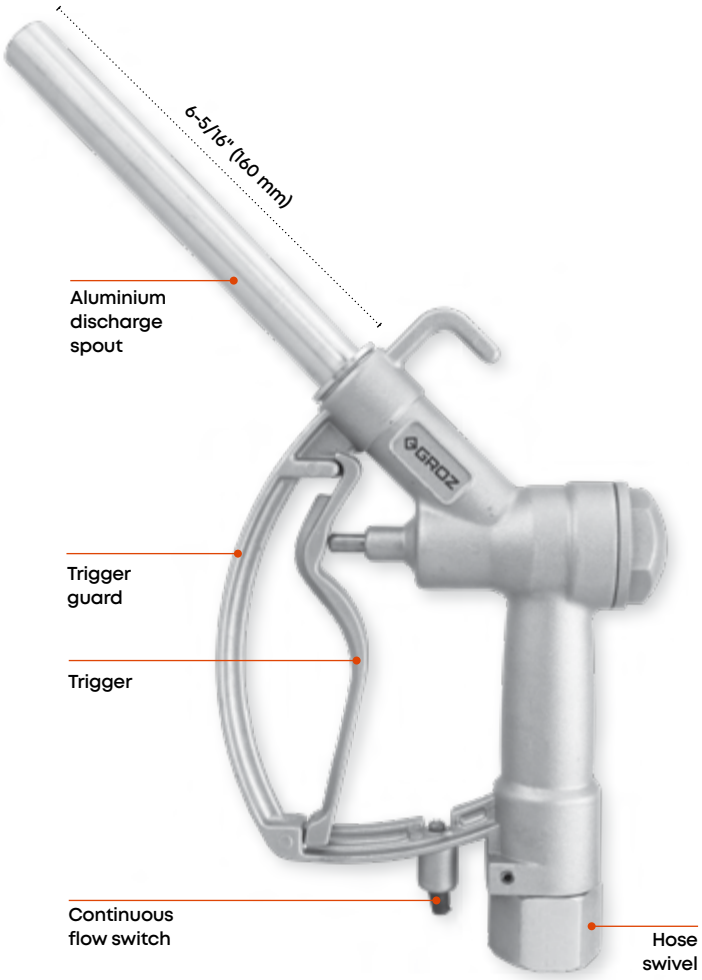

SPECIFICATIONS

FLOW RATE	UPTO 75 LPM	UPTO 20 GPM
MAX. WORKING PRESSURE	UPTO 50 PSI	UPTO 3.45 BAR

FLUIDS

VARIANTS

NOZZLE WITH SWIVEL		NOZZLE WITHOUT SWIVEL	
With Straight Spout	With Curved Spout	With Straight Spout	With Curved Spout

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	FOR USE WITH	INLET THREADS	SPOUT DIA. (OD)		SPOUT DIA. (ID)		MAX. FLOW RATE		BOX QTY.
						(INCH)	(MM)	(INCH)	(MM)	LPM	GPM	
BSP THREADS		NPT THREADS										
NOZZLES WITH SWIVEL - STRAIGHT SPOUT												
FCN/S/3-4/3-4/BSP	45580	FCN/S/3-4/3-4/N	45590	Diesel & Gasoline	3/4" (F)	3/4	19	0.61	15.6	57	15	20
FCN/S/0-1/0-1/BSP	45581	FCN/S/0-1/0-1/N	45591	Diesel	1" (F)	1	25	0.86	22	75	20	20
NOZZLES WITH SWIVEL - CURVED SPOUT												
FCN/S/3-4/3-4/C/BSP	45583	FCN/S/3-4/3-4/C/N	45593	Diesel & Gasoline	3/4" (F)	3/4	19	0.61	15.6	57	15	20
FCN/S/0-1/0-1/C/BSP	45584	FCN/S/0-1/0-1/C/N	45594	Diesel	1" (F)	1	25	0.86	22	75	20	20
FCN/S/0-1/3-4/C/BSP	45585	FCN/S/0-1/3-4/C/N	45595	Diesel & Gasoline	1" (F)	3/4	19	0.61	15.6	57	15	20
NOZZLES WITHOUT SWIVEL - STRAIGHT SPOUT												
FCN/3-4/3-4/BSP	45605	FCN/3-4/3-4/N	45596	Diesel & Gasoline	3/4" (F)	3/4	19	0.61	15.6	57	15	20
FCN/0-1/0-1/BSP	45606	FCN/0-1/0-1/N	45597	Diesel	1" (F)	1	25	0.86	22	75	20	20
FCN/0-1/3-4/BSP	45607	FCN/0-1/3-4/N	45598	Diesel & Gasoline	1" (F)	3/4	19	0.61	15.6	57	15	20
NOZZLES WITHOUT SWIVEL - CURVED SPOUT												
FCN/3-4/3-4/C/BSP	45623	FCN/3-4/3-4/C/N	45626	Diesel & Gasoline	3/4" (F)	3/4	19	0.61	15.6	57	15	20
FCN/0-1/0-1/C/BSP	45624	FCN/0-1/0-1/C/N	45627	Diesel	1" (F)	1	25	0.86	22	75	20	20
FCN/0-1/3-4/C/BSP	45625	FCN/0-1/3-4/C/N	45628	Diesel & Gasoline	1" (F)	3/4	19	0.61	15.6	57	15	20

230 Fuel Control Nozzles Automatic

110 LPM

50 PSI

LISTED

For use with electric fuel pumps

Dual Mode - Manual & Automatic
Sensor built into the discharge spout outlet automatically shuts off supply once fuel level in the tank reaches that of the outlet discharge spout

Heavy duty cast aluminum body, trigger & guard from thermoplastic & protective vinyl grip on the nozzle body

Available both with & without swivel

WETTED COMPONENTS

Aluminium, Viton, Steel*
* only on models with swivel

RECOMMENDED USE

Diesel, Kerosene, Leaded & Unleaded Gasoline

SPECIFICATIONS

FLOW RATE	UPTO 110 LPM	UPTO 29 GPM
MAX. WORKING PRESSURE	UPTO 50 PSI	UPTO 3.45 BAR

FLUIDS

D DIESEL

KEROSENE

G GASOLINE

VARIANTS

NOZZLE WITHOUT SWIVEL		NOZZLE WITH SWIVEL	
With Straight Spout	With Curved Spout	With Straight Spout	With Curved Spout

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	FOR USE WITH	FLOW RATE		SPOUT DIA (OD)		SPOUT DIA (ID)	SPOUT TYPE	SPOUT LENGTH		SPRING ON SPOUT	COLOR OF SLEEVE	BOX QTY.
				(LPM)	(GPM)	(INCH)	(MM)	(MM)		(INCH)	(MM)			
NOZZLE WITHOUT SWIVEL														
WITH STRAIGHT SPOUT														
✱ FCNA/3-4/N*	45570	3/4" NPT (F)	Diesel & Gasoline	60	15.87	13/16	21	17	Straight	7	180	No	Black	12
WITH CURVED SPOUT														
✱ FCNA/3-4A/N	45576	3/4" NPT (F)	Diesel & Gasoline	60	15.87	13/16	21	16	Curved	6.3	160	Yes	Black	12
FCNA/3-4B/N	45577	3/4" NPT (F)	Diesel & Gasoline	60	15.87	15/16	24	19.5	Curved	6.3	160	Yes	Black	12
FCNA/0-1/N	45571	1"NPT (F)	Diesel	100	26.45	1-1/16	27	21	Curved	5-1/2	140	Yes	Black	12
FCNA/0-1T/GN/N	45566	1" NPT (F)	Diesel	110	29.05	1-3/16	30	25	Curved	5-1/2	140	Yes	Green	12
FCNA/0-1TH/GN/N	45609	1" NPT (F)	Diesel	110	29.05	1-3/16	30	25	Curved	5-1/2	140	Yes	Green	12
NOZZLE WITH SWIVEL														
WITH STRAIGHT SPOUT														
FCNA/S/3-4/BSP	45572	3/4" BSP (F)	Diesel & Gasoline	60	15.87	13/16	21	17	Straight	7	180	No	Black	12
WITH CURVED SPOUT														
FCNA/S/3-4A/BSP	45578	3/4" BSP (F)	Diesel & Gasoline	60	15.87	13/16	21	16	Curved	6.3	160	Yes	Black	12
FCNA/S/3-4B/BSP	45579	3/4" BSP (F)	Diesel & Gasoline	60	15.87	15/16	24	19.5	Curved	6.3	160	Yes	Black	12
FCNA/S/0-1/BSP	45574	1" BSP (F)	Diesel	100	26.45	1-1/16	27	21	Curved	5-1/2	140	Yes	Black	12
FCNA/S/0-1T/GN/BSP	45587	1" BSP (F)	Diesel	110	29.05	1-3/16	30	25	Curved	5-1/2	140	Yes	Green	12

✱ **Best Seller**

*Non-UL listed

231 Auto Shut-Off Safety Fuel Nozzles

LISTED

Fuel Dispensing nozzles designed to dispense a wide variety of fuels

For use with electric fuel pumps

Heavy duty cast aluminium body

Trigger & guard from thermoplastic & protective vinyl grip on the nozzle body

Grip available in a variety of colours for instant identification of fuel type

The Spout is reinforced with thick aluminium bushing/cuff that retains spout spring and keeps spout in place on the fuel tank minimizing chances of the nozzle falling off the tank

Includes splash guard

This nozzle is designed with special safety features. The nozzle automatically shuts off:

1. When the Fuel tank is full (fuel level in the tank reaches that of the outlet discharge spout)
2. When the Pump is switched off (Pressure at inlet of the nozzle goes below the operating pressure)
3. If nozzle has an accidental fall
4. When the nozzle is lifted from the tank (Nozzle spout is raised above the horizontal line)

WETTED COMPONENTS

Aluminium, Viton

RECOMMENDED USE

Diesel, Kerosene, Leaded & Unleaded Gasoline

SPECIFICATIONS

FLOW RATE	UPTO 100 LPM	UPTO 26.45 GPM
MAX. WORKING PRESSURE	UPTO 50 PSI	UPTO 3.45 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	FOR USE WITH	SPOUT TYPE	SPRING ON SPOUT	INLET THREAD	SPOUT DIA. (OD)		SPOUT DIA. (ID)		MAX. FLOW RATE		BOX QTY.
					(INCH)	(INCH)	(MM)	(INCH)	(MM)	(LPM)	(GPM)	
FCNA/3-4A/CG/N	45558	Diesel, Gasoline	Curved with spring , cuff & Splash Guard	Yes	3/4	13/16	21	0.63	16	60	15.87	12
FCNA/0-1T/CG/N	45559	Diesel	Curved with spring , cuff & Splash Guard	Yes	1	1-3/16	30	1	25	100	26.45	12

VARIANTS

FCNA/3-4A/CG/N	FCNA/0-1T/CG/N
For use with Diesel & Gasoline	For use with Diesel

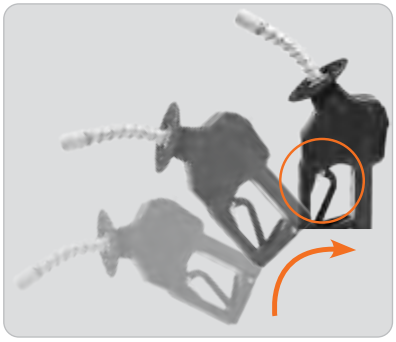

When raised or lifted above the horizontal line, the nozzle automatically shuts-off

FLUIDS

D DIESEL | KEROSENE | G GASOLINE

232 Fuel Control Nozzles Automatic - V Series

NEW!

50 PSI

For use with electric fuel pumps

Dual Mode - Manual & Automatic Sensor built into the discharge spout outlet automatically shuts off supply once fuel level in the tank reaches that of the outlet discharge spout

Heavy duty cast aluminum body, trigger & guard from thermoplastic & protective vinyl grip on the nozzle body

FLUIDS

D DIESEL | KEROSENE

WETTED COMPONENTS

Aluminium, Viton

RECOMMENDED USE

Diesel & Kerosene

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	FOR USE WITH	SPOUT DIA (OD)		SPOUT DIA (ID)		FLOW RATE		SPOUT LENGTH		BOX QTY.
				(INCH)	(MM)	(INCH)	(MM)	LPM	GPM	(INCH)	(MM)	
FCNA/60/3-4B/BSP	49560	3/4" BSP	Diesel & Gasoline	15/16	24	3/4	19	60	16	6-11/16	170	12
FCNA/120/0-1T/BSP	49562	1" BSP	Diesel	1-1/8	29	1	25	120	32	6-11/16	170	12

233 DEF Control Nozzle Manual

FCN-NY



For use with DEF, urea, windshield fluids & other water based media

Nylon construction with stainless steel internal parts & viton seal

Nozzle spout with notches to avoid the gun from slipping from the tank during delivery

Hose barb 3/4" (20 mm) at inlet

Manual control. Also includes continuous flow switch for unattended dispensing

Designed for minimal back pressure & reduction in flow

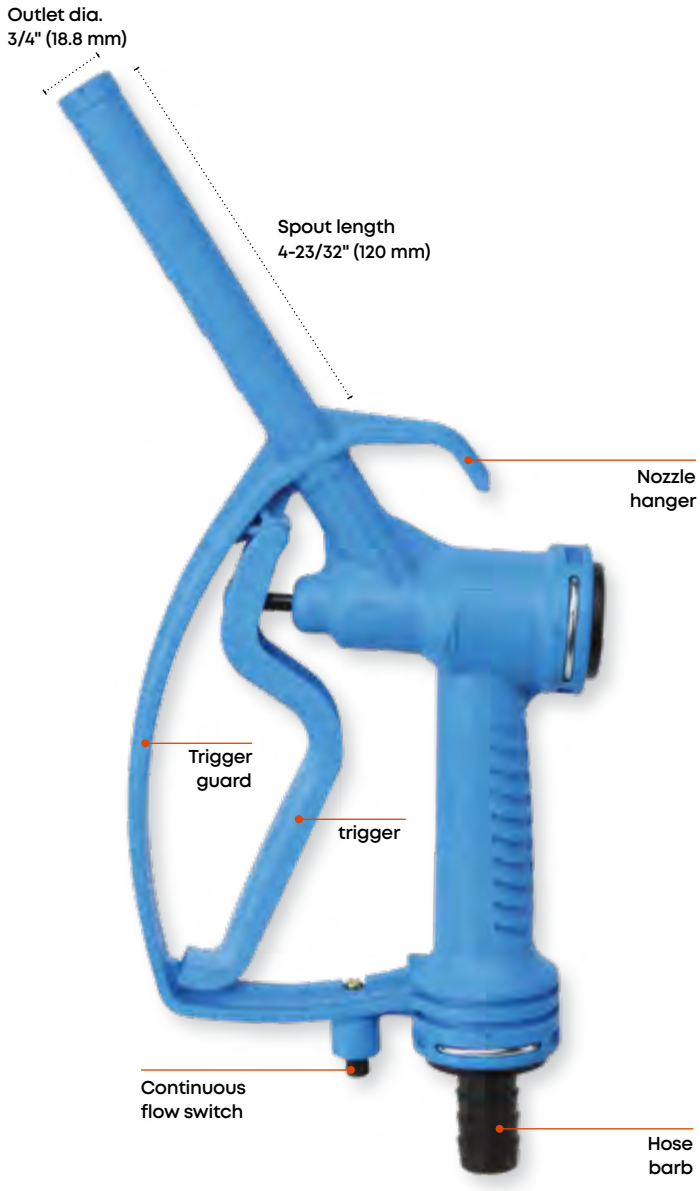

WETTED COMPONENTS

Nylon (Nylon 6, 30% glass Filled), Stainless Steel, Viton

RECOMMENDED USE

Diesel Exhaust Fluid & Urea

SPECIFICATIONS

FLOW RATE	UPTO 20-90 LPM	UPTO 5-23.8 GPM
MAX. WORKING PRESSURE	UPTO 72.5 PSI	UPTO 5 BAR

FLUIDS





ORDERING INFORMATION

CAT NR.	ORD NR.	INLET	SPOUT DIA. (OD)		SPOUT DIA. (ID)		BOX QTY.
			(INCH)	(MM)	(INCH)	(MM)	
FCN/NY/HB/3-4	45589	3/4" (20 mm) Hose Barb	3/4	18.8	0.57	14.6	20

234 DEF Control Nozzle Automatic

FCNA-SS

For use with DEF, Urea, Windshield fluids & Other based media

Heavy duty stainless steel cast body with polyamide cover

Sensor built into the discharge spout automatically shuts off the supply once fluid level in the tank reaches that of the outlet discharge spout

Built-In stainless steel swivel for ease of use

WETTED COMPONENTS

SS 304, N41

RECOMMENDED USE

Water based media, Urea, E85 & DEF

SPECIFICATIONS

FLOW RATE	UPTO 45 LPM	UPTO 11.9 GPM
MAX. WORKING PRESSURE	UPTO 50 PSI	UPTO 3.45 BAR

FLUIDS

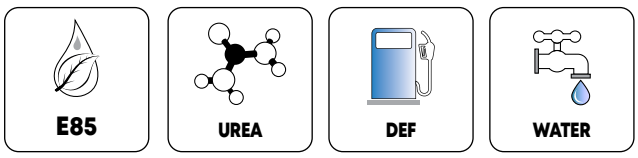

ORDERING INFORMATION

CAT NR.	ORD NR.	SPOUT	INLET	SPOUT DIA. (ID)		SPOUT DIA. (OD)		BOX QTY.
				(INCH)	(MM)	(INCH)	(MM)	
FCNA/S/SS/3-4	45567	Curved	3/4" (20 mm) Hose Barb	0.63	16	0.73	18.5	12

235 Fuel Filters

50 PSI

A range of Fuel Filters to suit different types of fuels in agricultural & industrial applications

Durable & lightweight design for easy installation on mobile & stationary fuel tanks and on gasoline & diesel fuel pumps

Rust & weather resistant for years of trouble free usage

Translucent filter bowl gives a visible check of the filter element & permits removal of water contaminants from the bowl

Drain valve is operated by a simple turn to release accumulated water & contaminants

The 10 micron paper filter element filters even small particles of rust, scale, grit, dirt, sand and lint at a gravity flow of 19 LPM (5 GPM) with a 24"(600 mm) head. The filter element has 366 square inches of filtering surface which results in more particle retention which means cleaner fuel and fewer repairs of costly engines.

Replacement filter elements are available as spares for each type below

Available in 3 versions

a. Fuel Filter for Gasoline, Gasohol, Diesel & Kerosene (FFL-01)
b. Fuel Filter for Bio Diesel (FFL-01BD)
c. Fuel Filter for Diesel & Kerosene (FFL-02)

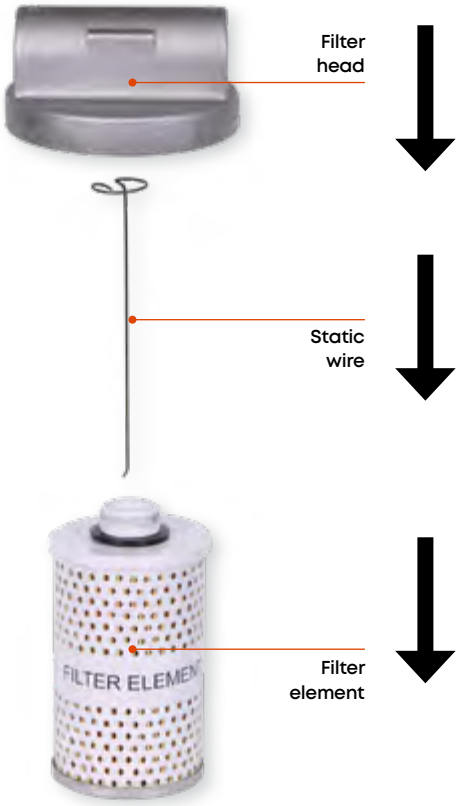

SPECIFICATIONS

MAX. WORKING PRESSURE	UPTO 50 PSI	UPTO 3.45 BAR

Fuel Filter Installation

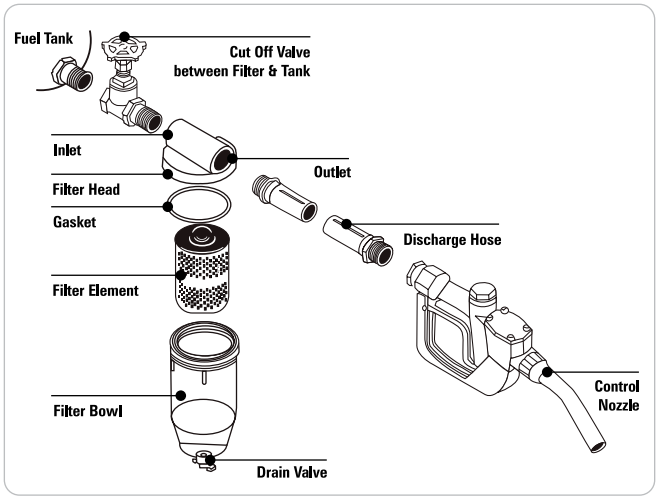

FLUIDS

FUEL FILTERS WITH SEE-THROUGH BOWL (FFL-01)

WETTED COMPONENTS

Aluminium, Isoplast, NBR, Steel, Paper element, Nylon

RECOMMENDED USE

Gasoline, Diesel fuel, Fuel Oil & related additives including Methyl, Ethyl & Isopropyl Alcohol, Bio-Diesel blends upto 20%

DO NOT USE WITH

Water based products, Aviation fuels, racing fuels etc.

FLUIDS

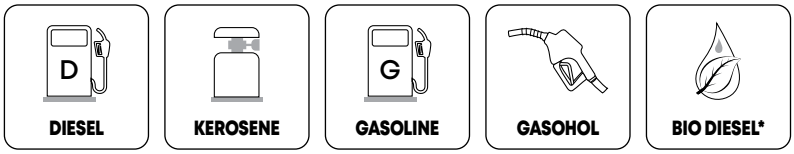

*Blends upto 20%

REPLACEMENT PARTS

FF/FFL/10-ST
Replacement Filter Element & Seal kit

FF/FFL/10-WB/ST
Replacement Water Block Filter Element & Seal Kit

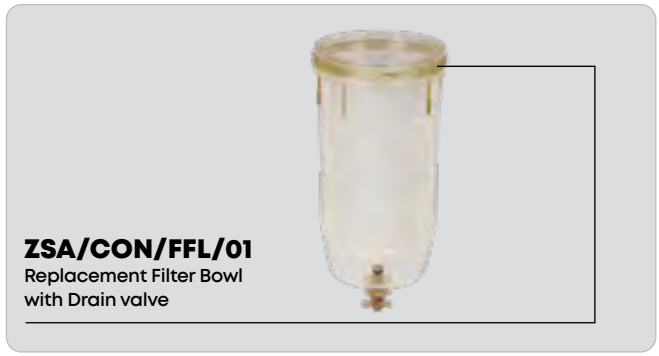

ZSA/CON/FFL/01
Replacement Filter Bowl with Drain valve

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET/OUTLET	BOX QTY.
FUEL FILTER WITH 10 MICRON FILTER ELEMENT			
FFL-01/3-4/B	45950	3/4" BSP (F)	30
FFL-01/3-4/N	45951	3/4" NPT (F)	30
★ FFL-01/B	44314	1" BSP (F)	30
★ FFL-01/N	44315	1"NPT (F)	30
FUEL FILTER WITH 10 MICRON WATER BLOCK FILTER			
FFL-01/3-4WB/B	45952	3/4" BSP (F)	30
FFL-01/3-4WB/N	45953	3/4" NPT (F)	30
FFL-01/WB/B	44316	1" BSP (F)	30
FFL-01/WB/N	44317	1" NPT (F)	30
REPLACEMENT FILTER ELEMENT			
FF/FFL/10-ST	44389	Contaminant Filter	200
FF/FFL/10-WB/ST	44399	Water Block Filter	200
REPAIR PARTS			
ZSA/CON/FFL/01	44354	-	50

★ Best Seller

Fuel Filters (Continued)

FUEL FILTERS WITH SEE-THROUGH BOWL (FFL-01BD)

Fuel Filter for use with Bio Diesel

Includes 10 micron fuel filter element

See-through bowl permits visual monitoring of fuel flow

Ideal for use with 100% Bio-Diesel & several other fuels and fuel based products

WETTED COMPONENTS
Aluminium, Isoplast, Viton, Steel, Paper element, Nylon

RECOMMENDED USE
100% Bio-Diesel, Gasoline, Diesel fuel, Fuel Oil & related additives including Methyl, Ethyl & Isopropyl Alcohol

DO NOT USE WITH
Water based products, Aviation fuels, racing fuels etc

REPLACEMENT PARTS

FF/FFL/10BD/ST
Replacement Filter Element & Viton Seal kit

FLUIDS

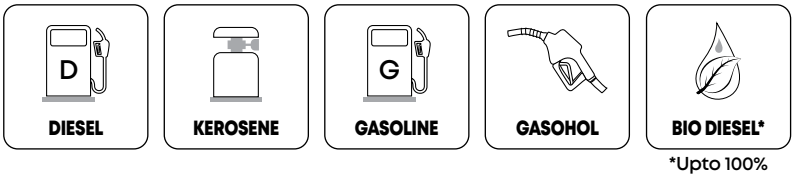

*Upto 100%

ORDERING INFORMATION

CAT NR.	ORD NR.	FILTER ELEMENT	INLET/ OUTLET	BOX QTY.
FUEL FILTER				
FFL-01/BD/BSP	44318	10 microns	1" BSP (F)	30
FFL-01/BD/N	44319	10 microns	1" NPT (F)	30
REPLACEMENT FILTER ELEMENT				
FF/FFL/10BD/ST	44336	10 microns	-	200
REPAIR PARTS				
ZSA/CON/FFL/01	44354	Spare Filter Bowl	-	-

FUEL FILTERS
(FFL-02)

Fuel Filter for use with Diesel & Kerosene

Includes 10 micron fuel filter element

Translucent Polypropylene bowl gives a visual check of the filter element & permits removal of sediment and water in the bowl

Water block filter element also available that separates water from fuel

WETTED COMPONENTS

Aluminium,Polypropylene, NBR, Steel, Paper element, Nylon, Brass

RECOMMENDED USE

Diesel Fuel & Kerosene

DO NOT USE WITH

Water based products, Gasohol, Aviation fuels, racing fuels etc

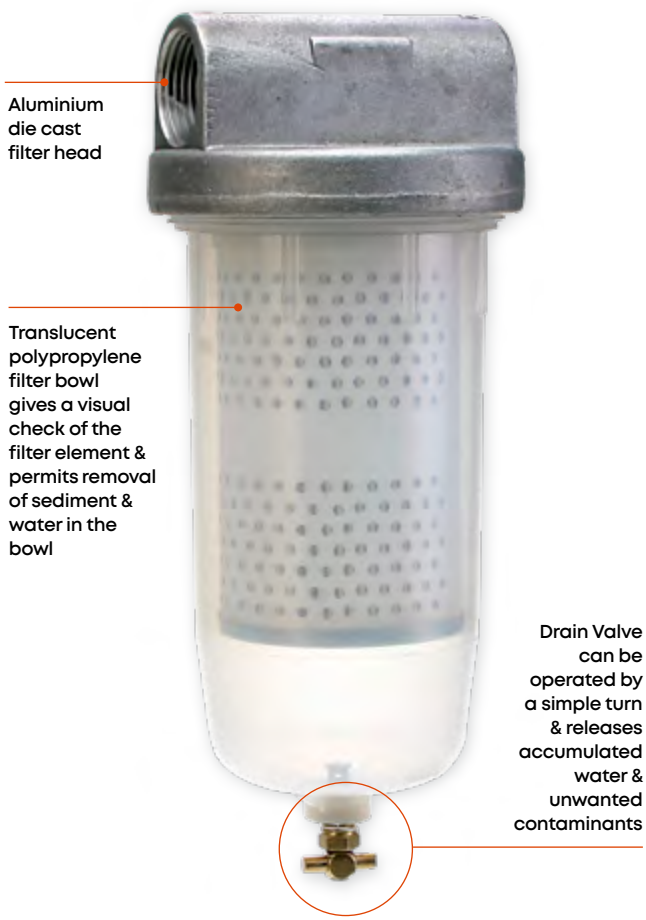

REPLACEMENT FILTER ELEMENT

FLUIDS



ORDERING INFORMATION

CAT NR.	ORD NR.	FILTER ELEMENT	INLET/ OUTLET	BOX QTY.
FUEL FILTER				
* FFL-02/B	44390	10 microns	1" BSP (F)	30
FFL-02/N	44391	10 microns	1" NPT (F)	30
FFL-02WB/B	44392	10 microns water block filter	1" BSP (F)	30
FFL-02WB/N	44393	10 microns water block filter	1" NPT (F)	30
REPLACEMENT FILTER ELEMENT				
FF/FFL/10	44395	10 micron filter	-	200
FF/FFL/10-WB	44397	10 micron water block filter	-	200

* Best Seller

236 Fuel Filters - Spin on Cartridge Style

FFS-10

94 LPM

50 PSI

High Flow Fuel Filter, complete with 10 micron Spin-On style filter cartridge

Aluminium Die Cast Head, vacuum impregnated for leak-proof operation

Fits spin on cartridges with 1-1/2"-16 UNF threads
Designed for use on both mobile & stationary fuel tanks and on gasoline & diesel fuel pumps
Ideal for use in construction & agricultural applications

Removes particulate contaminants such as dirt, dust & rust

Replacement Spin-On Filter cartridges available as spare

FFS/10/N

RECOMMENDED USE

Gasoline, Ethanol & Methanol blend upto 10%, Diesel Fuel

DO NOT USE

With water based products, Aviation Fuels, Race Fuels etc.

SPECIFICATIONS

FLOW RATE	UPTO 94 LPM	UPTO 25 GPM
MAX. WORKING PRESSURE	UPTO 50 PSI	UPTO 3.45 BAR

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET/OUTLET	BOX QTY.
FUEL FILTER WITH 10 MICRON FILTER			
FFS/10/3-4/BSP	45904	3/4" BSP (F)	20
FFS/10/3-4/N	45905	3/4" NPT (F)	20
FFS/10/BSP	45900	1" BSP (F)	20
FFS/10/N	45901	1" NPT (F)	20
FUEL FILTER WITH 10 MICRON WATER BLOCK FILTER			
FFS/10WB/3-4/BSP	45906	3/4" BSP (F)	20
FFS/10WB/3-4/N	45907	3/4" NPT (F)	20
FFS/10WB/BSP	45902	1" BSP (F)	20
FFS/10WB/N	45903	1" NPT (F)	20
REPLACEMENT CARTRIDGE			
FF/FFS/10	45910	Contaminant Filter	20
FF/FFS/10-WB	45911	Water Block Filter	20

FF/FFS/10

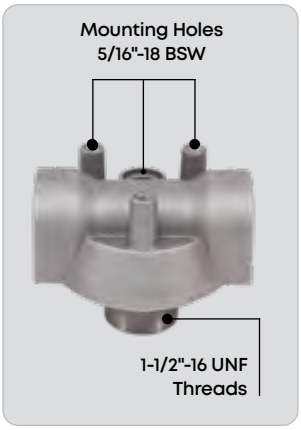

FLUIDS

D DIESEL

G GASOLINE

GASOHOL

237 Filter Wrench

FW-FFL

Easy to use filter wrench for removing filter bowl when changing filter element

Weather resistant re-inforced nylon construction won't damage the bowl like metal oil filter wrenches

Wire through hole provided for attaching to fuel tank

Specially designed to fit GROZ FFL-01 & FFL-02 fuel filter bowl.

Also fits filters from several other makers such as:
Goldenrod Model 495 & 496, Baldwin Model B10AL, National Spencer Model NS-10, John Deere TY15192 & TY15677 etc.

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
FW/FFL-02	44394	50

238 Breakaway Valve

BKV

Inline breakaway valve designed to be installed between the fuel dispenser & nozzle

In case of drive-off, breakaway valve allows the nozzle end of the hose to get separated from the dispenser end of the hose

The dual poppets inside the breakaway valve closes when drive off happens, trapping the fuel inside the hose at both ends thereby avoiding fuel spillage and possible damage to environment

Tolerant of pulsing and line shocks due to sturdy yet lightweight aluminium design body

PVC sleeve provides better grip and handling

Designed to pull apart at Max. 1500N/350 lbs. pull force

Small & light weight with minimal flow restriction

WETTED COMPONENTS
Aluminium, Nylon & Viton

3/4" Breakaway Valve

1" Breakaway Valve

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE	MAX FLOW RATE	MAX PULL FORCE	BOX QTY.
BKV/3-4/N	43875	3/4"	60 LPM	1500 N/350 lbs	
BKV/0-1/N	43876	1"	90 LPM	1500 N/350 lbs	

FLUIDS

D **DIESEL**

G **GASOLINE**

239 Anti-static Fuel Hose & Kits

HOS | HOS-HF | FDK

Working temperature
-20°C to 60°C (-4°F to 140°F)

RECOMMENDED USE
Diesel, Kerosene, Gasoline

Anti Static Fuel Hose

Fuel Dispensing Kit
(Fuel Hose with Nozzle)

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH (FEET)	LENGTH (METER)	HOSE ID (INCH)	HOSE ID (MM)	THREAD	FOR PUMP	BOX QTY.
ANTI-STATIC FUEL HOSE								
ZSA/HOS/FPM/12	44077	12	-	3/4	-	3/4" NPT (M)	FPM-12 FPM-24 FPM-115 FPM-220	10
ZSA/HOS/FPM/12-14	44073	14	-	3/4	-	3/4" NPT (M)		7
ZSA/HOS/FPM/12-20	44074	20	-	3/4	-	3/4" NPT (M)		5
ZSA/HOS/FPM/12-4M/BSP	47190	-	4	-	19	3/4" BSP (M)		10
ZSA/HOS/FPM/12-6M/BSP	47191	-	6	-	19	3/4" BSP (M)		5
ZSA/HOS/FPM/12/HF	44078	12	-	1	-	1" NPT (M)	FPM/12/HF	10
ZSA/HOS/FPM/12/HF-14	44079	14	-	1	-	1" NPT (M)		7
ZSA/HOS/FPM/12/HF-20	44089	20	-	1	-	1" NPT (M)		5
ZSA/HOS/FPM/12/HF-4M/BSP	47194	-	4	-	25	1" BSP (M)		10
ZSA/HOS/FPM/12/HF-6M/BSP	47195	-	6	-	25	1" BSP (M)		5
ANTI-STATIC FUEL HOSE WITH MANUAL NOZZLE								
FDK/3/3-4/N	44094	10	3/4	-	-	3/4" NPT (M)	-	10
FDK/3/0-1/N	44095	10	1	-	-	1" NPT (M)	-	10

240 Non Grounded Fuel Hoses

HOS-EDP | HOS-EDPHF

Working temperature
-20°C to 70°C (-4°F to 160°F)

RECOMMENDED USE
Diesel, Kerosene

ORDERING INFORMATION

CAT NR.	ORD NR.	LENGTH (FEET)	HOSE ID (INCH)	THREAD	BOX QTY.
BSP THREAD					
HOS/EDP/4M/HF/BSP	47158	14	1	1" BSP (M)	8
HOS/EDP/6M/HF/BSP	47160	20	1	1" BSP (M)	6
NPT THREAD					
HOS/EDP/14	44096	14	3/4	3/4" NPT (M)	8
HOS/EDP/20	44097	20	3/4	3/4" NPT (M)	6
HOS/EDP/14/HF	44098	14	1	1" NPT (M)	8
HOS/EDP/20/HF	44099	20	1	1" NPT (M)	6

Other lengths can be custom manufactured

06

DRUM HANDLING

- DRUM DOLLIES
- DRUM CARTS
- DRUM HANDLING ACCESSORIES

241 4 Wheel Drum Dolly

BDL-140

Extra heavy duty drum dolly

Suitable for convenient movement of 205 litre (55 gallon) drums in shop floors & rough workshop environments

Heavy duty 3 mm (11 gauge) steel sheet construction with premium powder coated finish

Design incorporates wide steel cross bases for full braces support

Overall Height
6-1/2" (165 mm)

Holds drums of diameter 23" (584 mm)

Available in 2 choices

a. **With Phenolic Castors**
   3" (75 mm) dia. × 1-1/4" (32 mm) wide
b. **With Cast Iron Castors**
   3" (75 mm) dia. × 1-3/8" (35 mm) wide

BDL-140

BDL-140S

ORDERING INFORMATION

CAT NR.	ORD NR.	CASTORS	LOAD BEARING CAPACITY		BOX QTY.
			(KG)	(LBS)	
★ BDL/140	44379	Phenolic	400	900	2
★ BDL/140S	44373	Cast Iron	545	1200	2

★ **Best Seller**

242 Band Dollies

BDL-105 | BDL-120 | BDL-120S | BDL-60 | BDL-130 | BDL-130S

Heavy Duty Drum Dollies

Welded 3 mm (11 gauge) steel sheet construction with premium powder coated finish

Design incorporates strong steel braces

Adjustable clamping bolt design allows the dolly to be adjusted easily for varying barrel/ pail diameters

Removable castors with a choice of phenolic or cast iron castors 2-13/32" (61 mm) dia. × 27/32" (21 mm) wide for use in rough workshop environment

VARIANTS

	BDL-105	BDL-120	BDL-120S
CASTORS	4 Phenolic Castors	4 Phenolic Castors	4 Cast Iron Castors
DRUM DIA	10-1/4" to 11-9/32" (260 to 287 mm)	13-1/2" to 14-1/4" (343 to 362 mm)	13-1/2" to 14-1/4" (343 to 362 mm)
SUITABLE FOR PAILS OF	25-50 lbs. / 20 kg / 5 gal. pails	120 lbs. / 50 kg / 16 gal. pails	120 lbs. / 50 kg / 16 gal. pails
	BDL-60	**BDL-130**	**BDL-130S**
CASTORS	4 Phenolic Wheel Castors	5 Phenolic Castors	5 Cast Iron Castors
DRUM DIA	15" to 15-3/4" (381 to 400 mm)	18" to 19" (457 to 482 mm)	18" to 19" (457 to 482 mm)
SUITABLE FOR PAILS OF	60 kg pails	30 gal. containers	30 gal. containers

ORDERING INFORMATION

CAT NR.	ORD NR.	LOAD BEARING CAPACITY		BOX QTY.
		(KG)	(LBS)	
BDL/105	44369	90	200	10
* BDL/120	44371	90	200	8
* BDL/120S	44372	136	300	8
BDL/60	44398	90	200	6
BDL/130	44356	114	250	5
BDL/130S	44357	170	374	5

* Best Seller

243 Drum Trolleys Heavy Duty

Rugged build with outstanding features make these trolley ideal for use in workshops & industrial floors for transfer of large drums & buckets

Manufactured from heavy gauge 4 mm thick steel sheet for increased strength & durability

3" (75 mm) ground clearance for smooth movement over uneven surfaces in workshop environment

6" (150 mm) wide polyurethane front wheels with nylon rim for reduced wear & tear

Heavy duty rear castors with toe locks for higher safety & stability

Available in 2 sizes

a. Trolley for 50 kg / 120 lb. drums
b. Trolley for 180 kg / 210 litre / 55 gal. drums. Can be used just as a trolley for safe movement of oil drums or a complete dispensing system with hose reel & pneumatic pump

TRL/50	TRL/180H
For 50 kg / 120 lbs Drum	For 180 kg / 205 Litres / 55 US gal. Drum
Load capacity: 80 kg (170 lbs)	Load capacity: 300 kg (660 lbs)

Drum clamping attachment

Control gun holder

Clamps for holding pump when not in use

Plate for mounting a hose reel

Cup for secure holding of pump inlet & collecting dripping oil

Heavy Duty 4 mm thick steel sheet

6" (150 mm) polyurethane wheels with nylon rim

Removable handle used for moving the trolley

Removable handle used as a drum loader

Removable handle used as a drum wrench

Lock position

Un-lock position

Heavy Duty castors with toe lock

Trolley being used as a dispensing system with Ratio Pump & Hose Reel installed

ORDERING INFORMATION

CAT NR.	ORD NR.	SUITABLE FOR	BOX QTY.
TRL/50	44430	50 kg / 120 lb. drums	1
TRL/180H	44431	180 kg / 55 gal. / 205 litre drums	1

244 Drum Cart Heavy Duty

CART

Tough built carts for convenient movement of drums in workshops and industrial environments

Manufactured from heavy gauge thick steel sheet in premium powder coated finish

Upto 3" (75 mm) ground clearance for smooth movement over uneven surfaces, a common feature in workshop environments

10" dia front wheels.

VARIANTS

a. Pneumatic (Air filled) wheels
b. Phenolic wheels

5" nylon rear castors with toe lock for high safety & stability

Heavy duty, adjustable metallic chain secures drum to the cart and prevents any accidental tipping off during movement

Unit comes flat packed in knocked down condition for ease of transport

Available in 2 Variants

	CART/120P	CART/400P
	For 50 kg / 60 Litres Drum	For 180 kg / 205 Litres Drum
	Cart	**Cart with rear base for mounting hose reel**
SUITABLE FOR	FOR 50 KG / 60 LITRE / 120 LB. PAILS	FOR 180 KG / 205 LITRE / 55 US GAL. / 400 LB. DRUMS
STEEL SHEET THICKNESS	1/4" (6.35 MM)	1/2" (12 MM)
GROUND CLEARANCE	3" (75 MM)	2" (50 MM)
MAX LOAD CAPACITY	175 KG (385 LBS)	350 KG (770 LBS)
HOLD DRUMS	DIA. UPTO 18" (450 MM)	DIA. UPTO 25-5/8" (650 MM)

CART/400P
Cart for safe movement of drums or complete dispensing systems with hose reel & pneumatic pump (Sold as cart only)

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	SUITABLE FOR	BOX QTY.
PNEUMATIC WHEELS		PHENOLIC WHEELS			
CART/120P	44436	CART/120	44435	For 50 kg / 60 litre / 120 lb. pails	1
CART/400P	44438	CART/400	44437	For 180 kg / 205 litre / 55 gal. / 400 lb. drums	1

245 Drum Trolley

TRL-30

NEW!

Tough built trolley for convenient movement of drums in workshops and industrial environments

Suitable for use with 20-30 kg drums

Ideal for transporting oil / grease barrels, as well as installing air operated pump assemblies

Comfortable Cushion grip for convenient operation

Steel construction with premium powder coated finish

Heavy duty wheels for use in rigorous workshop environment

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
TRL/30	44434	1

246 Drum Trolley Heavy Duty

TRL-120

NEW!

Heavy-duty, thick gauge steel construction

Powder coated for prevention against rust and corrosion

Built-tough for convenient movement of 50-60 kg (120 lbs.) drums

Can be used to mount an oil pump to make a complete oiling system

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
TRL/120	44446	1

247 Drum Trolley Low Profile

TRL-55

Low Profile Drum Trolley

Drum platform only 1/2" (12 mm) off the floor, facilitating easy loading & unloading

Extra heavy duty construction, from 5 mm (6 gauge) steel sheet, with a loading capacity of 545 kgs (1200 lbs)

Fully powder coated finish

Removable pivoting handle includes drum tipper for easy loading

2 large Phenolic front wheels 5-3/4" dia. (146 mm) × 1-7/8" (47 mm) wide & one back phenolic swivel wheel 3" (75 mm) dia. × 1-3/8" (35 mm) wide

Trolley can accommodate drums up to a dia. of 26" (660 mm)

Unit comes flat packed in semi-knocked down condition for ease of transport

ORDERING INFORMATION

CAT NR.	ORD NR.	SUITABLE FOR	BOX QTY.
TRL/55	44396	205 litre (55 US gal.) drums	1

248 Drum Trolley Adjustable

TRL-60

A choice of 2 easy to use drum trolleys with adjustable mechanism

Suitable for use with 25-50 lbs. / 5 US gal. / 20 litre drums to larger drums upto 120 lbs / 16 US gal. / 60 litre capacity

Ideal for transporting oil / grease barrels, as well as installing air operated pump assemblies

Steel construction with premium powder coated finish

Heavy duty wheels for use in rigorous workshop environment

Unit comes flat packed in semi-knocked down condition for ease of transport

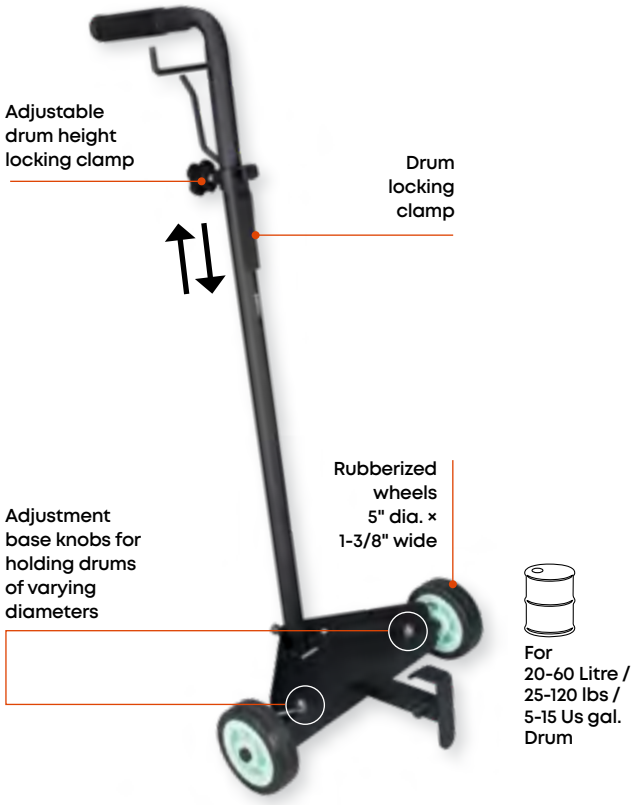

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
TRL/60	44377	4

249 Drum Cradles

DRC-133 DRC-135 DRC-137

Tilting Drum Cradle
Tips, rotates, moves & stores
400 lbs. / 180kg / 205 litre / 55 US gal. drums

Large 2-1/2" (63 mm) non-sparking wheels make it suitable for use in flammable environments

Fully powder coated finish

Equipped with self storing lever bar

Maximum load 600 lbs. / 273 kgs

Unit comes flat packed in semi-knocked down condition for ease of transport

VARIANTS

	DRC-133	DRC-135	DRC-137
TYPE	Movable	Movable	Stationary
WHEELS	2 Rigid & 2 Swivel	4 Rigid	Without wheels
AXLE	Yes	Yes	No

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
DRC/133	44367	3
* DRC/135	44374	3
DRC/137	44375	3

* Best Seller

Just Tip


Tilt


Drain

250 Drum Bung Converters

A range of drum bung converters for use on different types of drums & IBC's

Available in 3 types

a. Tri-Sure Adaptor
2" Fine Male threads found on Most pumps / drum bungs to 2" Male threads for use on drums with female Tri Sure threads

b. Mauser Adaptor
2" Fine Male threads found on Most pumps / drum bungs to 2" Male threads for use on drums with female Mauser threads (popular on many IBC's / Totes)

c. Coarse Thread Adaptor
2" Fine Male threads found on Most pumps / drum bungs to 2" Male coarse threads for use on plastic drums with coarse female threads

BUNG/P/TS

BUNG/P/MS

BUNG/P/2B

ORDERING INFORMATION

CAT NR.	ORD. NR.	THREADS	BOX QTY.
BUNG/P/TS	44166	2" (F) to Tri Sure adapter	50
♦ BUNG/P/MS	44128	2" (F) to Mauser adapter	50
BUNG/P/2B	44386	2" (F) to Coarse thread adapter	50

♦ New

251 Drum Wrench

DRW

An easy & convenient tool to open almost all types of drums

Manufactured from cast aluminum (LM25), hardened & tempered for increased strength

Ends of the wrench are designed to fit perfectly onto most 2" & 3/4" drum plugs

Compact design for easy storage

For opening hex plugs

For opening 2" drum plugs

For opening 3/4" drum plugs

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
★ DRW/AL-01	44385	100

★ Best Seller

252 Drum Faucets / Taps With Bucket Hangar

FAU

Polyethylene construction

Available in 2 sizes
- For 3/4" openings &
- For 2" threaded openings on 210 litre / 55 US gal. drums

Facilitate convenient dispensing of media under gravity flow with the drum laid horizontally

2" faucet comes with a sight glass port for mounting of sight glass to check fluid level

FAU/0-2

Can be pad locked

Sight glass (not included) shows level of oil left in the drum

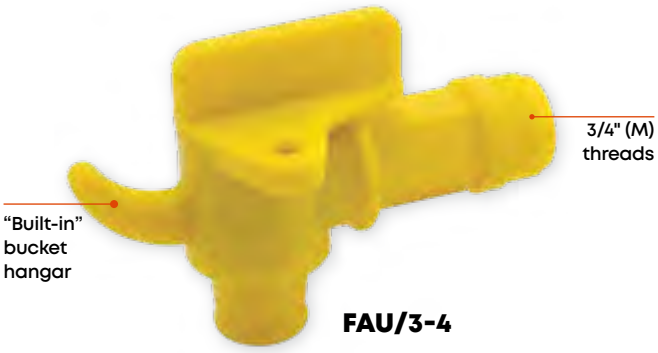

FAU/3-4

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
FAU/3-4	44387	For 3/4" openings	25
FAU/0-2	44420	For 2" openings	10
LI/FAU	44421	Sight glass for drum faucet 2"	1

253 Drum Faucets / Taps

Polyethylene construction

Available in two sizes:

1. **3/4" size.** For use on 3/4" opening on drums
2. **2" size.** For use on 2" opening on drums. Comes with 3 EPDM sealing gaskets - thin, medium and thick. Faucet can be adjusted to dispensing positions without thread damage or leakage

Provision to pad lock

Can be used on plastic and metallic drums in industrial and commercial establishments

RECOMMENDED USE

Non-corrosive fluids, lightweight oils, mild chemicals, water, water based fluids, detergents etc.

FAU/50

FAU/25

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
FAU/25	45050	For 3/4" openings	25
FAU/50	45051	For 2" openings	10

254 Drum Faucet / Tap Food Grade

Manufactured from food grade approved polyethylene

Fits the 3/4" opening on drums.

Recommended for use on non-flammable liquids and chemicals to dispense liquids via gravity

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
FAU/25CL	45052	25

255 Drum Level Indicators

DLI

An easy & cost effective means to check level of fluid remaining in a drum / tank

Fits on the small 3/4" hole on drums leaving the 2" opening free for installing pumps

Planetary gear mechanism float connected with a string moves down as the liquid level goes down in the drum

Commonly used on oil & fuel drums, the float has a polyethylene construction which allows it to be used with a wide range of liquids including water, coolants etc.

Available in both litre & gallon versions

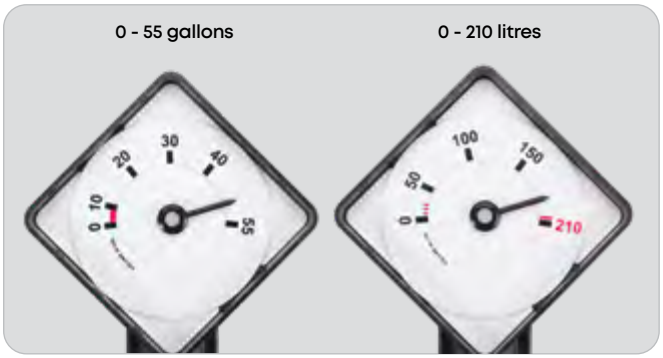

NOTE

This is not a precise measuring device. Gauge is only to give an approximate / indicative level of liquid in the drum to know when to arrange for a new drum

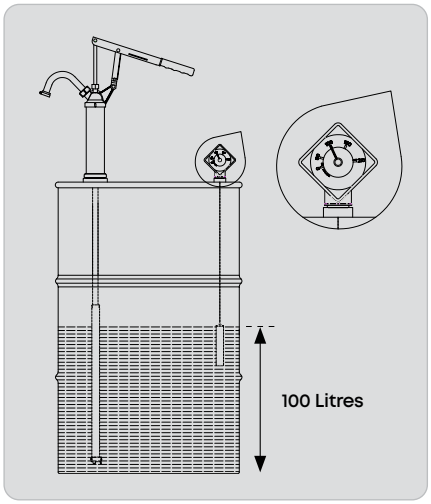

ORDERING INFORMATION

CAT NR.	ORD NR.	SCALE	BOX QTY.
DLI/3-4/N	48001	Litres	36
DLI/3-4G/N	48003	US Gallons	36

07

AIR HANDLING

- AIR FILTERS, REGULATORS & LUBRICATORS
- AIR BLOW GUNS
- TYRE INFLATOR GAUGES

256 Air Regulators

AR

100% FACTORY TESTED

220 PSI MAX. PRESSURE

ISO 6953-1

0°C TO 60°C

7-145 PSI PRESSURE ADJUSTMENT RANGE

Regulators are used to maintain a steady outlet pressure, unaffected by variations or fluctuations in the inlet pressure

Regulators step down the air line pressure & can be set at any desired pressure below the inlet air pressure

Aluminum die cast, these are designed with a non raising "Press to Lock" adjusting knob for locking at any set pressure

Regulators work on a diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet

Can be installed in any position & need not be vertically mounted

WETTED COMPONENTS

Aluminum, Brass, Steel, Acetal, Stainless Steel & Nitrile

SPECIFICATIONS

MAX. PRESSURE	220 PSI	15 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F
PRESSURE ADJUSTMENT RANGE	7-145 PSI	0.5-10 BAR

OPTIONAL CONFIGURATION

Custom options for the following pressure adjustment ranges:

3 - 28 PSI (0.2 - 2 BAR)
3 - 58 PSI (0.2 - 4 BAR)
8 - 100 PSI (0.5 - 7 BAR)



NOTE

Also available Tamper Proof Regulators which are set at one non adjustable outlet pressure

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		PRESSURE GAUGE PORT	HEIGHT		WIDTH		BOX QTY.
BSP THREADS		NPT THREADS			(INCH)	CFM	LPM	(INCH)	(INCH)	(MM)	(INCH)	(MM)	
R13604	60000	R13904	60050	Miniature	1/8	17	480	1/8	3.19	81	1.57	40	150
✶ R13614	60001	R13914	60051	Miniature	1/4	21	600	1/8	3.19	81	1.57	40	150
R14614	60002	R14914	60052	Intermediate	1/4	56	1600	1/8	5.31	135	2.16	55	40
R14624	60003	R14924	60053	Intermediate	3/8	88	2500	1/8	5.31	135	2.16	55	40
✶ R15634	60004	R15934	60054	Standard	1/2	140	4000	1/8	6.50	165	2.75	70	40
R17644	60005	R17944	60055	Heavy Duty	3/4	175	5000	1/4	6.97	177	3.54	90	20
R17654	60006	R17954	60056	Heavy Duty	1	210	6000	1/4	6.97	177	3.54	90	20

✶ Best Seller **Inlet Pressure 105 PSI (7 BAR), Supply Pressure 90 PSI (6 BAR) and Pressure Drop 17 PSI (1 BAR)

257 Air Filters

AF

100% FACTORY TESTED

145 PSI MAX. PRESSURE

ISO 5782-1

0°C TO 60°C

Air Filters are used to separate dust, dirt, moisture & other contaminants from compressed air

Die Cast aluminum filter head, polycarbonate bowl with a steel bowl guard & high performance sintered bronze filtering element

Press type semi-automatic drain with 'night -time' feature: automatically drains off the bowl once compressed air supply to filter is switched off

Designed with a separator & shield for efficient moisture separation

WETTED COMPONENTS

Aluminum, Bronze, Steel, Acetal, Polycarbonate, Stainless Steel & Nitrile

SPECIFICATIONS

MAX. PRESSURE	145 PSI	10 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F

INTERNALS

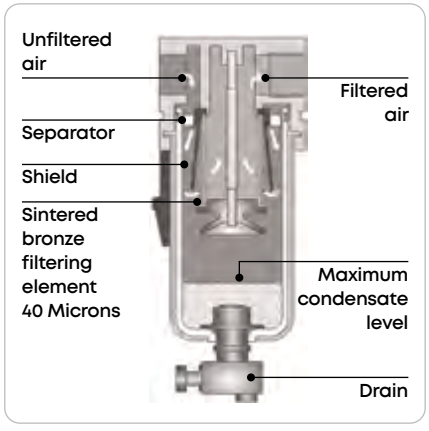

WARNING

Polycarbonate bowls may get damaged and possibly fail if exposed to synthetic Oils, Thinner, Solvents, Trichloroethylene, Kerosene or other aromatic hydrocarbons

OPTIONAL CONFIGURATION

Custom options for filtering element:

5 Micron
25 Micron
50 Micron
100 Micron

Drain type options include auto drain



ORDERING INFORMATION

CAT NR.	ORD. NR.	CAT NR.	ORD. NR.	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		BOWL SIZE		HEIGHT (h)		WIDTH (w)		BOX QTY.
BSP THREADS		NPT THREADS			(INCH)	CFM	LPM	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
F13603-S	60100	F13903-S	60150	Miniature	1/8	11	310	0.3	9	4.45	113	1.57	40	100
★ F13613-S	60101	F13913-S	60151	Miniature	1/4	28	800	0.3	9	4.45	113	1.57	40	100
F14613-S	60102	F14913-S	60152	Intermediate	1/4	49	1400	1.08	32	5.51	140	2.16	55	60
F14623-S	60103	F14923-S	60153	Intermediate	3/8	80	2250	1.08	32	5.51	140	2.16	55	60
★ F15633-S	60104	F15933-S	60154	Standard	1/2	125	3500	1.5	44	6.77	172	2.75	70	30
F17643-S	60105	F17943-S	60155	Heavy Duty	3/4	175	5000	5.6	165	10.24	260	3.54	90	20
F17653-S	60106	F17953-S	60156	Heavy Duty	1	230	6500	5.6	165	10.24	260	3.54	90	20

★ Best Seller

** Inlet Pressure 90 PSI (6 BAR) and Pressure Drop 4.5 PSI (0.3 BAR)

258 Air Filters Metal Bowl

AF-M

100% FACTORY TESTED

290 PSI MAX. PRESSURE

ISO 5782-1

0°C TO 60°C

Air Filters are used to separate dust, dirt, moisture & other contaminants from compressed air.

Die cast aluminum filter head & bowl with a high performance sintered bronze filtering element.

Designed with a Separator & Shield for efficient moisture separation.

Press type Semi-Automatic Drain with 'Night -time' feature: automatically drains off the bowl once compressed air supply to filter is switched off

Metal Bowl makes these good for use in Chemical plants, Paint shops, pharmaceutical plants, foundries etc. where ambient air may contain chemicals, such as acetone, benzene, kerosene, gasoline, carbon tetrachloride, ethylene dichloride, toluene etc.

These are also recommended for high pressure applications and for use with air compressor systems using fire resistant lubricants.

WETTED COMPONENTS:
Aluminum, Bronze, Steel, Stainless Steel & Nitrile

OPTIONAL CONFIGURATION
Custom options for filtering element:

5 Micron
25 Micron
50 Micron
100 Micron

Drain type options include auto drain

SPECIFICATIONS

MAX. PRESSURE	290 PSI	20 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F

ORDERING INFORMATION

CAT NR.	ORD. NR.	CAT NR.	ORD. NR.	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)		BOWL SIZE		HEIGHT (h)		WIDTH (w)		BOX QTY
BSP THREADS		NPT THREADS			(INCH)	CFM	LPM	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
F13613-MS	60130	F13913-MS	60180	Miniature	1/4	28	800	0.3	9	4.53	115	1.57	40	60
F14613-MS	60129	F14913-MS	60185	Intermediate	1/4	49	1400	2.17	64	7.4	188	2.16	55	60
F14623-MS	60131	F14923-MS	60181	Intermediate	3/8	80	2250	2.17	64	7.4	188	2.16	55	60
F15633-MS	60132	F15933-MS	60182	Standard	1/2	125	3500	3.0	90	8.82	224	2.75	70	30
F17643-MS	60133	F17943-MS	60183	Heavy Duty	3/4	175	5000	5.6	165	10.43	265	3.54	90	20
F17653-MS	60134	F17953-MS	60184	Heavy Duty	1	230	6500	5.6	165	10.43	265	3.54	90	20

259 Coalescing Filters / Mist Separators

Coalescing Filters, also referred to as Mist Separators are used to remove sub micronic oil, water droplets and solid contaminants from compressed air.

These are used for efficient filtration of compressed air (99.99%), removing fine oil particles and droplets of sizes upto 0.01 microns.

Used primarily in chemical plants, food processing, paint shops, air gauging & other precision pneumatic systems

Die cast aluminum filter head, polycarbonate bowl with a steel bowl guard & high performance Borosilicate filtering element.

Designed with a Separator for efficient moisture separation

Available in 2 configurations

a. Compressed air filtered upto 0.10 microns
b. Compressed air filtered upto 0.01 microns

WETTED COMPONENTS

Aluminum, Borosilicate, Steel, Acetal, Polycarbonate, Stainless Steel & Nitrile

SPECIFICATIONS

MAX. PRESSURE	145 PSI	10 BAR
AMBIENT TEMPERATURE	5°C TO 50°C	41°F TO 122°F

OPTIONAL CONFIGURATION

Drain type options include an internal & an external auto drain

WARNING

- Polycarbonate bowls may get damaged and possibly fail if exposed to synthetic oils, thinner, solvents, trichloroethylene, kerosene or other aromatic hydrocarbons
- Coalescing Filters must be installed after a standard Air Filter with 5 micron filter element

Borosilicate Coalescing
Filter Element



ORDERING INFORMATION

CAT NR.	ORD. NR.	CAT NR.	ORD. NR.	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		BOWL SIZE		HEIGHT (h)		WIDTH (w)		BOX QTY.
BSP THREADS		NPT THREADS			(INCH)	CFM	LPM	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
COALESCING AIR FILTERS (0.10 MICRONS)														
FS13603-S	60800	FS13903-S	60850	Miniature	1/8	11	300	0.3	9	4.45	113	1.57	40	100
FS13613-S	60801	FS13913-S	60851	Miniature	1/4	25	700	0.3	9	4.45	113	1.57	40	100
FS14613-S	60802	FS14913-S	60852	Intermediate	1/4	43	1200	1.08	32	5.51	140	2.16	55	60
FS14623-S	60803	FS14923-S	60853	Intermediate	3/8	57	1600	1.08	32	5.51	140	2.16	55	60
FS15633-S	60804	FS15933-S	60854	Standard	1/2	124	3500	1.5	44	6.77	172	2.75	70	30
COALESCING AIR FILTERS (0.01 MICRONS)														
FS13602-S	60820	FS13902-S	60870	Miniature	1/8	7	200	0.3	9	4.45	113	1.57	40	100
FS13612-S	60821	FS13912-S	60871	Miniature	1/4	11	300	0.3	9	4.45	113	1.57	40	100
FS14612-S	60822	FS14912-S	60872	Intermediate	1/4	28	800	1.08	32	5.51	140	2.16	55	60
FS14622-S	60823	FS14922-S	60873	Intermediate	3/8	32	900	1.08	32	5.51	140	2.16	55	60
FS15632-S	60824	FS15932-S	60874	Standard	1/2	48	1350	1.5	44	6.77	172	2.75	70	30
FS17642-S*	60825	FS17942-S	60875	Heavy Duty	3/4	71	2000	5.6	165	10.24	260	3.54	90	20
FS17652-S*	60826	FS17952-S	60876	Heavy Duty	1	78	2200	5.6	165	10.24	260	3.54	90	20

*Max. Pressure Limited to 8 BAR (116 PSI)
**Inlet Pressure 90 PSI (6 BAR) & Pressure Drop 4.5 PSI (0.3 BAR)

260 Air Lubricators

AL

100% FACTORY TESTED

145 PSI MAX. PRESSURE

ISO 6301-1

0°C TO 60°C

Air Lubricators are used to feed lubricants to pneumatic equipment.

These maintain a constant oil-to-air density over a wide range of flow.

The Groz L1 series Lubricators are Fog/Micro-mist type, upto 50' pipe runs

Die Cast Aluminum Head, polycarbonate bowl with a steel bowl guard. Head is fitted with Oil drop indicator, Oil drop controller & Oil filling plug

WETTED COMPONENTS

Aluminum, Bronze, Steel, Acetal, Polycarbonate, Stainless Steel & Nitrile

Note

Designed for best performance with 32 grade oil

INTERNALS

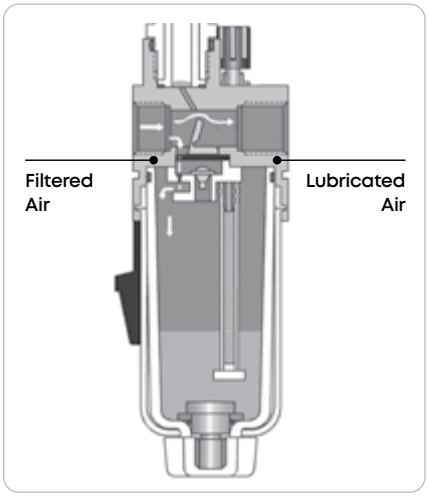

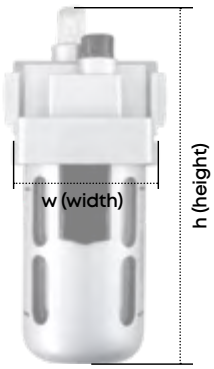

SPECIFICATIONS

MAX. PRESSURE	145 PSI	10 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F

WARNING

Polycarbonate bowls may get damaged and possibly fail if exposed to synthetic oils, thinner, solvents, trichloroethylene, kerosene or other aromatic hydrocarbons

ORDERING INFORMATION

CAT NR.	ORD. NR.	CAT NR.	ORD. NR.	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		BOWL SIZE		HEIGHT (h)		WIDTH (w)		BOX QTY.
BSP THREADS		NPT THREADS			(INCH)	(CFM)	LPM	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
L1360	60200	L1390	60250	Miniature	1/8	16	450	0.68	20	5.31	135	1.57	40	100
★ L1361	60201	L1391	60251	Miniature	1/4	48	1350	0.68	20	5.31	135	1.57	40	100
L1461	60206	L1491	60256	Intermediate	1/4	58	1650	1.98	57	6.18	157	2.16	55	60
L1462	60202	L1492	60252	Intermediate	3/8	106	3000	1.98	57	6.18	157	2.16	55	60
★ L1563	60203	L1593	60253	Standard	1/2	200	5650	5.13	152	7.48	190	2.75	70	30
L1764	60204	L1794	60254	Heavy Duty	3/4	255	7200	6.8	200	10.75	273	3.54	90	20
L1765	60205	L1795	60255	Heavy Duty	1	318	9000	6.8	200	10.75	273	3.54	90	20

★ Best Seller **Inlet Pressure 90 PSI (6 BAR) & Pressure Drop 7.5 PSI (0.5 BAR)

261 Air Lubricators Metal Bowl

AL-M

100% FACTORY TESTED

290 PSI MAX. PRESSURE

ISO 6301-1

0°C TO 60°C

Air Lubricators are used to feed lubricants to pneumatic equipment.

These maintain a constant oil-to-air density over a wide range of flow.

The Groz L1-M series Lubricators are Fog/Micro Mist type, upto 50' pipe runs

Die cast aluminum head & bowl. Head is fitted with oil drop indicator, Oil drop controller & oil filling plug

Metal Bowl makes them good for use in Chemical Plants, Paint Shops, Pharmaceutical Plants, Foundries etc. where ambient air may contain chemicals, such as acetone, benzene, kerosene, gasoline, carbon tetrachloride, ethylene dichloride, toluene etc.

These are also recommended for high pressure applications and for use with air compressor systems using fire resistant lubricants

WETTED COMPONENTS

Aluminum, Bronze, Steel, Stainless Steel & Nitrile

Note

Designed for best performance with 32 grade oil

SPECIFICATIONS

MAX. PRESSURE	290 PSI	20 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F

ORDERING INFORMATION

CAT NR.	ORD. NR.	CAT NR.	ORD. NR.	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		BOWL SIZE		HEIGHT (h)		WIDTH (w)		BOX QTY.
BSP THREADS		NPT THREADS			(INCH)	CFM	LPM	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
L1361-M	60230	L1391-M	60280	Miniature	1/4	48	1350	0.68	20	5.31	135	1.57	40	100
L1461-M	60235	L1491-M	60285	Intermediate	1/4	58	1650	3.38	100	8.07	205	2.16	55	60
L1462-M	60231	L1492-M	60281	Intermediate	3/8	106	3000	3.38	100	8.07	205	2.16	55	60
L1563-M	60232	L1593-M	60282	Standard	1/2	200	5650	6.8	200	9.45	240	2.75	70	30
L1764-M	60233	L1794-M	60283	Heavy Duty	3/4	255	7200	6.8	200	11	280	3.54	90	20
L1765-M	60234	L1795-M	60284	Heavy Duty	1	318	9000	6.8	200	11	280	3.54	90	20

**Inlet Pressure 90 PSI (6 BAR) & Pressure Drop 7.5 PSI (0.5 BAR)

262 Filter-Regulator Combination

FRC

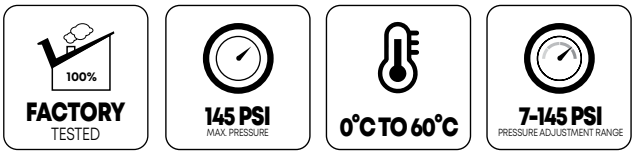

The Filter-Regulator Combination is one of the most popular air preparation units. Air filter & regulator are assembled together to form a single unit

Air Filter is used to separate dust, dirt, moisture & other contaminants from compressed air

Die cast aluminum body, polycarbonate bowl with a steel bowl guard & a high performance sintered bronze filtering element

Press type Semi-Automatic Drain with 'Night -time' feature: automatically drains off the bowl once compressed air supply to filter is switched off

Designed with a separator & shield for efficient moisture separation.

It is combined with a regulator which maintains a steady outlet pressure, unaffected by variations/fluctuations in the inlet pressure

Regulators have a non raising "press to lock" adjusting knob for locking at any set pressure. Regulators work on a diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet

WETTED COMPONENTS

Aluminum, Bronze, Brass, Steel, Acetal, Polycarbonate, Stainless Steel & Nitrile

OPTIONAL CONFIGURATION

Custom built include the following pressure adjustment ranges:
3 - 28 PSI (0.2 - 2 BAR)
3 - 58 PSI (0.2 - 4 BAR)
8 - 100 PSI (0.5 - 7 BAR)

Custom options for filtering element:
5 Micron
25 Micron
50 Micron
100 Micron

Drain type options include an auto drain

SPECIFICATIONS

MAX. PRESSURE	145 PSI	10 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F
PRESSURE ADJUSTMENT RANGE	7-145 PSI	0.5-10 BAR

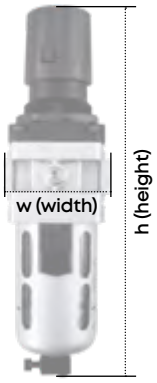

WARNING

Polycarbonate bowls may get damaged and possibly fail if exposed to Synthetic Oils, Thinner, Solvents, Trichloroethylene, Kerosene or other aromatic hydrocarbons

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		BOWL SIZE		HEIGHT (h)		WIDTH (w)		BOX QTY.
BSP THREADS		NPT THREADS			(INCH)	(CFM)	(LPM)	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
FRC136034-S	60300	FRC139034-S	60350	Miniature	1/8	14	400	0.3	9	6.69	170	1.57	40	60
★ FRC136134-S	60301	FRC139134-S	60351	Miniature	1/4	20	550	0.3	9	6.69	170	1.57	40	60
FRC146134-S	60302	FRC149134-S	60352	Intermediate	1/4	63	1800	1.08	32	8.66	220	2.17	55	40
FRC146234-S	60303	FRC149234-S	60353	Intermediate	3/8	77	2200	1.08	32	8.66	220	2.17	55	40
★ FRC156334-S	60304	FRC159334-S	60354	Standard	1/2	106	3000	1.5	44	11.02	280	2.76	70	20
FRC176434-S*	60305	FRC179434-S*	60355	Heavy Duty	3/4	149	4250	5.6	165	14.6	370	3.54	90	10
FRC176534-S*	60306	FRC179534-S*	60356	Heavy Duty	1	193	5500	5.6	165	14.6	370	3.54	90	10

★ Best Seller

*Pressure gauge port is 1/4" - on all others it is 1/8"
**Inlet Pressure 105 PSI (7 BAR). Set Pressure 90 PSI (6 BAR). Pressure Drop 17 PSI (1 BAR)

263 Filter-Regulator Combination Metal Bowl

FRC-M

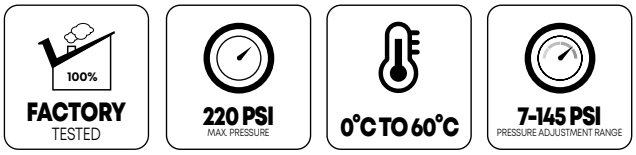

The Filter-Regulator Combination is one of the most popular Air Preparation units. Air Filter & Regulator are assembled together to form a single unit.

Air Filter is used to separate dust, dirt, moisture & other contaminants from compressed air.

Filter has a die cast aluminium body & bowl fitted with a high performance sintered bronze filtering element

Metal Bowl makes these good for use in Chemical Plants, Paint Shops, Pharmaceutical Plants, Foundry etc. Where ambient air may contain chemicals such as Acetone, Benzene, Kerosene, Gasoline, Carbon Tetrachloride, Ethylene Dichloride, Toluene etc.

Also recommended for high pressure applications and for use with air compressor systems using fire resistant lubricants

Regulators have a Non Raising "Press to Lock" adjusting knob for locking at any set pressure. Regulators work on a Diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet

WETTED COMPONENTS

Aluminum, Bronze, Steel, Acetal, Brass, Stainless Steel & Nitrile

OPTIONAL CONFIGURATION

Custom built include the following pressure adjustment ranges:
3 - 28 PSI (0.2 - 2 BAR)
3 - 58 PSI (0.2 - 4 BAR)
8 - 100 PSI (0.5 - 7 BAR)

Custom options for filtering element:
5 Micron
25 Micron
50 Micron
100 Micron

Drain type options include an auto drain

SPECIFICATIONS

MAX. PRESSURE	220 PSI	15 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F
PRESSURE ADJUSTMENT RANGE	7-145 PSI	0.5-10 BAR

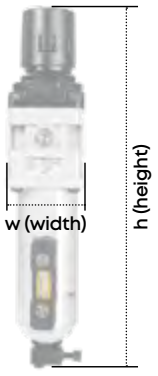

ORDERING INFORMATION

CAT NR.	ORD. NR.	CAT NR.	ORD. NR.	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		BOWL SIZE		HEIGHT (h)		WIDTH (w)		BOX QTY.
BSP THREADS		NPT THREADS			(INCH)	(CFM)	(LPM)	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
FRC136134-MS	60330	FRC139134-MS	60380	Miniature	1/4	20	550	0.3	9	6.77	172	1.57	40	40
FRC146134-MS	60329	FRC149134-MS	60379	Intermediate	1/4	63	1800	2.17	64	10.43	265	2.17	55	40
FRC146234-MS	60331	FRC149234-MS	60381	Intermediate	3/8	77	2200	2.17	64	10.43	265	2.17	55	40
FRC156334-MS	60332	FRC159334-MS	60382	Standard	1/2	106	3000	3.0	90	13	330	2.76	70	15
FRC176434-MS*	60333	FRC179434-MS*	60383	Heavy Duty	3/4	149	4280	5.6	165	14.6	370	3.54	90	10
FRC176534-MS*	60334	FRC179534-MS*	60384	Heavy Duty	1	193	5500	5.6	165	14.6	370	3.54	90	10

*Pressure gauge port is 1/4" - on all others it is 1/8"
**Inlet Pressure 105 PSI (7 BAR). Set Pressure 90 PSI (6 BAR). Pressure Drop 17 PSI (1 BAR)

264 Filter Regulator & Lubricator 2 piece

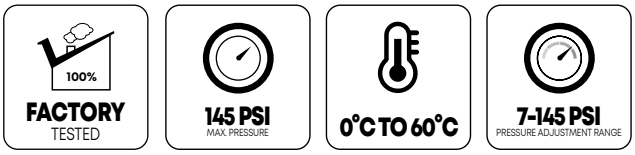

Space saving 2 pc Modular Filter-Regulator Combination & Lubricator is by far the most popular Air Preparation unit.

The Filter-Regular Combination & Lubricator are attached in series

Available in 2 types

1. **Modular Series**
   Complete with piping adaptors and wall mounting bracket. Piping adaptors make individual components easily removable/ mountable without disturbing the pipeline
2. **Compact Series**
   Complete with wall mounting bracket but without piping adaptors

Air Filter is used to separate dust, dirt, moisture & other contaminants from compressed air. Filter has a Die Cast Aluminum body, polycarbonate bowl with a steel bowl guard & a high performance Sintered Bronze Filtering element. Filter is designed with a Separator & shield for efficient moisture separation.

Regulators maintain a steady outlet pressure, unaffected by variations/ fluctuations in the inlet pressure. Regulators have a Non Raising "Press to Lock" adjusting knob for locking at any set pressure. Regulators work on a Diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet

Air Lubricators are used to feed lubricants to pneumatic equipments. These maintain a constant oil-to-air density over a wide range of flow. Lubricators are Fog/MicroMist type, upto 50' pipe runs. Designed for best performance with 32 grade oil. These have a Die Cast Aluminum Head, polycarbonate bowl with a steel bowl guard. The head is fitted with Oil drop indicator, Oil drop controller & Oil filling plug

WETTED COMPONENTS

Aluminum, Bronze, Brass, Steel, Acetal, Polycarbonate, Stainless Steel & Nitrile

OPTIONAL CONFIGURATION

Custom built include the following pressure adjustment ranges:
3 - 28 PSI (0.2 - 2 BAR)
3 - 58 PSI (0.2 - 4 BAR)
8 - 100 PSI (0.5 - 7 BAR)

Custom options for filtering element:
5 Micron
25 Micron
50 Micron
100 Micron

Drain type options include an auto drain



SPECIFICATIONS

MAX. PRESSURE	145 PSI	10 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F
PRESSURE ADJUSTMENT RANGE	7-145 PSI	0.5-10 BAR

VARIANTS

MODULAR SERIES	COMPACT SERIES
Modular & Vertical Mounting	Vertical Mounting

ORDERING INFORMATION

	CAT NR.	ORD. NR.	CAT NR.	ORD. NR.
	BSP THREADS		NPT THREADS	
	MODULAR SERIES			
★	FRCLM136134-S	60400	FRCLM139134-S	60450
	FRCLM146134-S	60420	FRCLM149134-S	60470
	FRCLM146234-S	60401	FRCLM149234-S	60451
★	FRCLM156334-S	60402	FRCLM159334-S	60452
	FRCLM176434-S	60403	FRCLM179434-S	60453
	FRCLM176534-S	60404	FRCLM179534-S	60454
	COMPACT SERIES			
◆ ★	FRCLM136134-S/W	60900	FRCLM139134-S/W	60905
◆	FRCLM146134-S/W	60901	FRCLM149134-S/W	60906
◆	FRCLM146234-S/W	60902	FRCLM149234-S/W	60907
◆ ★	FRCLM156334-S/W	60903	FRCLM159334-S/W	60908
◆	FRCLM176434-S/W	60904	FRCLM179434-S/W	60909
◆	FRCLM176534-S/W	60911	FRCLM179534-S/W	60910

★ Best Seller ◆ New

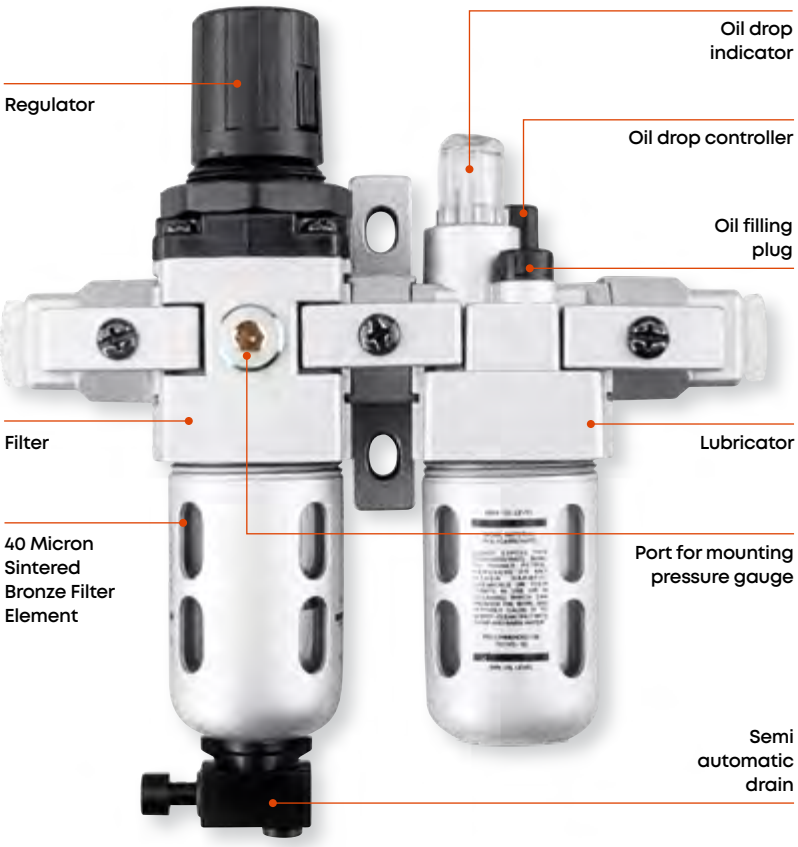

WARNING

Polycarbonate bowls may get damaged and possibly fail if exposed to Synthetic Oils, Thinner, Solvents, Trichloroethylene, Kerosene or other aromatic hydrocarbons

DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		PRESSURE GAUGE PORT SIZE	BOWL SIZE (FILTER)		BOWL SIZE (LUBRICATOR)		HEIGHT (h)		WIDTH (w)		BOX QTY.
	(INCH)	(CFM)	(LPM)	(INCH)	(OZ.)	(ML)	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
Miniature	1/4	18	500	1/8	0.3	9	0.68	20	6.69	170	5.75	146	40
Intermediate	1/4	53	1500	1/8	1.08	32	1.93	57	8.66	220	7.17	182	20
Intermediate	3/8	63	1800	1/8	1.08	32	1.93	57	8.66	220	7.17	182	20
Standard	1/2	99	2800	1/8	1.5	44	5.17	152	11.02	280	8.66	220	10
Heavy Duty	3/4	123	3500	1/4	5.6	165	6.80	200	14.6	370	10.63	270	4
Heavy Duty	1	140	4000	1/4	5.6	165	6.80	200	14.6	370	10.63	270	4
Miniature	1/4	18	500	1/8	0.3	9	0.68	20	6.69	170	3.62	92	40
Intermediate	1/4	53	1500	1/8	1.08	32	1.93	57	8.66	220	4.88	124	20
Intermediate	3/8	63	1800	1/8	1.08	32	1.93	57	8.66	220	4.88	124	20
Standard	1/2	99	2800	1/8	1.5	44	5.17	152	11.02	280	6.14	156	10
Heavy Duty	3/4	123	3500	1/4	5.6	165	6.80	200	14.6	370	7.8	200	4
Heavy Duty	1	140	4000	1/4	5.6	165	6.80	200	14.6	370	7.8	200	4

**Inlet Pressure 105 PSI (7 BAR). Set Pressure 90 PSI (6 BAR). Pressure Drop 17 PSI (1 BAR)

265 Filter Regulator & Lubricator - 2 Piece Metal Bowl

100% FACTORY TESTED

220 PSI MAX. PRESSURE

0°C TO 60°C

7-145 PSI PRESSURE ADJUSTMENT RANGE

Space saving 2 pc Modular Filter-Regulator Combination & Lubricator is by far the most popular air preparation unit.

The Filter-Regular Combination & Lubricator are attached in series

Available in 2 types:

1. **Modular Series**
   Complete with piping adaptors and wall mounting bracket. Piping adaptors make individual components easily removable/ mountable without disturbing the pipeline
2. **Compact Series**
   Complete with wall mounting bracket but without piping adaptors

Air Filter is used to separate dust, dirt, moisture & other contaminants from compressed air. Filter has a Die Cast Aluminum body, polycarbonate bowl with a steel bowl guard & a high performance Sintered Bronze Filtering element. Filter is designed with a Separator & shield for efficient moisture separation.

Regulator maintains a steady outlet pressure, unaffected by variations/ fluctuations in the inlet pressure. Regulators have a Non Raising "Press to Lock" adjusting knob for locking at any set pressure. Regulators work on a Diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet

Air Lubricators are used to feed lubricants to pneumatic equipments. These maintain a constant oil-to-air density over a wide range of flow. Lubricators are Fog/MicroMist type, upto 50' pipe runs. Designed for best performance with 32 grade oil

Metal Bowl makes these good for use in Chemical Plants, Paint Shops, Pharmaceutical Plants, Foundry etc. Where ambient air may contain chemicals such as Acetone, Benzene, Kerosene, Gasoline, Carbon Tetrachloride, Ethylene Dichloride, Toluene etc.

WETTED COMPONENTS

Aluminum, Bronze, Brass, Steel, Acetal, Stainless Steel & Nitrile

OPTIONAL CONFIGURATION

Custom built include the following pressure adjustment ranges:
3 - 28 PSI (0.2 - 2 BAR)
3 - 58 PSI (0.2 - 4 BAR)
8 - 100 PSI (0.5 - 7 BAR)

Custom options for filtering element:
5 Micron
25 Micron
50 Micron
100 Micron

Drain type options include an auto drain

SPECIFICATIONS

MAX. PRESSURE	220 PSI	15 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F
PRESSURE ADJUSTMENT RANGE	7-145 PSI	0.5-10 BAR

VARIANTS

MODULAR SERIES	COMPACT SERIES
Modular & Vertical Mounting	Vertical Mounting

ORDERING INFORMATION

	CAT NR.	ORD. NR.	CAT NR.	ORD. NR.
	BSP THREADS		NPT THREADS	
	MODULAR SERIES			
★	FRCLM136134-MS	60430	FRCLM139134-MS	60480
	FRCLM146134-MS	60429	FRCLM149134-MS	60479
	FRCLM146234-MS	60431	FRCLM149234-MS	60481
★	FRCLM156334-MS	60432	FRCLM159334-MS	60482
	FRCLM176434-MS	60433	FRCLM179434-MS	60483
	FRCLM176534-MS	60434	FRCLM179534-MS	60484
	COMPACT SERIES			
◆ ★	FRCLM136134-MS/W	60830	FRCLM139134-MS/W	60840
◆	FRCLM146134-MS/W	60831	FRCLM149134-MS/W	60841
◆	FRCLM146234-MS/W	60832	FRCLM149234-MS/W	60842
◆ ★	FRCLM156334-MS/W	60833	FRCLM159334-MS/W	60843
◆	FRCLM176434-MS/W	60834	FRCLM179434-MS/W	60844
◆	FRCLM176534-MS/W	60835	FRCLM179534-MS/W	60845

★ Best Seller ◆ New

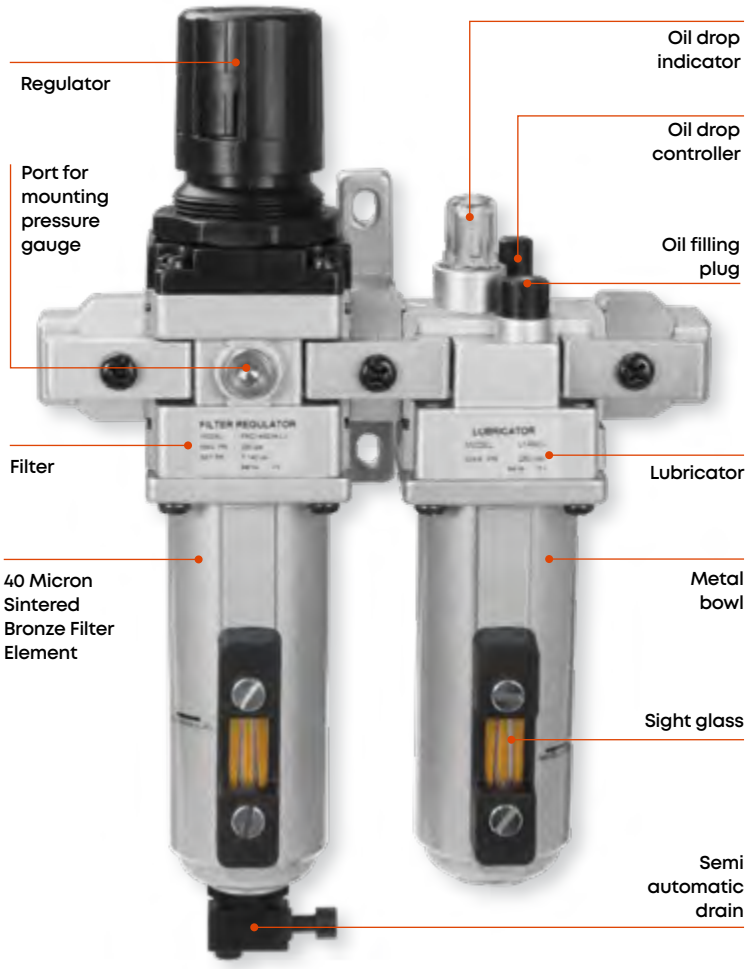

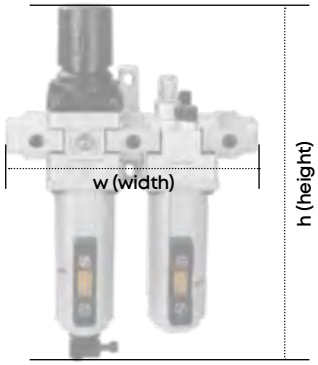

	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		PRESSURE GAUGE PORT SIZE	BOWL SIZE (FILTER)		BOWL SIZE (LUBRICATOR)		HEIGHT (h)		WIDTH (w)		BOX QTY
		(INCH)	(CFM)	(LPM)	(INCH)	(OZ.)	(ML)	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
	Miniature	1/4	18	500	1/8	0.3	9	0.68	20	6.69	170	5.75	146	30
	Intermediate	1/4	53	1500	1/8	2.15	64	3.38	100	10.43	265	7.17	182	10
	Intermediate	3/8	63	1800	1/8	2.15	64	3.38	100	10.43	265	7.17	182	10
	Standard	1/2	99	2800	1/8	3.0	90	6.8	200	13	330	8.66	220	10
	Heavy Duty	3/4	123	3500	1/4	5.6	165	6.8	200	14.5	370	10.63	270	4
	Heavy Duty	1	140	4000	1/4	5.6	165	6.8	200	14.5	370	10.63	270	4
	Miniature	1/4	18	500	1/8	0.3	9	0.68	20	6.69	170	3.62	92	30
	Intermediate	1/4	53	1500	1/8	2.15	64	3.38	100	10.43	265	4.88	124	10
	Intermediate	3/8	63	1800	1/8	2.15	64	3.38	100	10.43	265	4.88	124	10
	Standard	1/2	99	2800	1/8	3.0	90	6.8	200	13	330	6.14	156	10
	Heavy Duty	3/4	123	3500	1/4	5.6	165	6.8	200	14.5	370	7.8	200	4
	Heavy Duty	1	140	4000	1/4	5.6	165	6.8	200	14.5	370	7.8	200	4

**Inlet Pressure 105 PSI (7 BAR). Set Pressure 90 PSI (6 BAR). Pressure Drop 17 PSI (1 BAR)

266 Filter Regulator & Lubricator 3 piece

100% FACTORY TESTED

145 PSI MAX. PRESSURE

0°C TO 60°C

7-145 PSI PRESSURE ADJUSTMENT RANGE

The Filter-Regulator-Lubricator is a 3 pc assembly of all 3 individual components. The 3 components are attached in series using spacers. Comes complete with wall mounting bracket

Available in 2 types:

1. **Modular Series**
   Complete with piping adaptors and wall mounting bracket. Piping adaptors make individual components easily removable/ mountable without disturbing the pipeline
2. **Compact Series**
   Complete with wall mounting bracket but without piping adaptors

Air Filter is used to separate dust, dirt, moisture & other contaminants from compressed air. Filter has a Die Cast Aluminum body & bowl with a high performance Sintered Bronze Filtering element. Filter is designed with a Separator & shield for efficient moisture separation.

Regulator maintains a steady outlet pressure, unaffected by variations/ fluctuations in the inlet pressure. Regulators have a Non Raising "Press to Lock" adjusting knob for locking at any set pressure. Regulators work on a Diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet

Air Lubricators are used to feed lubricants to pneumatic equipments. These maintain a constant oil-to-air density over a wide range of flow. Lubricators are Fog/MicroMist type, upto 50' pipe runs.
Designed for best performance with 32 grade oil. These have a Die Cast Aluminum head & bowl.The head is fitted with Oil Drop Indicator, Oil drop controller & Oil Filling Plug.

WETTED COMPONENTS

Aluminum, Bronze, Brass, Steel, Acetal, Polycarbonate, Stainless Steel & Nitrile

OPTIONAL CONFIGURATION

Custom built include the following pressure adjustment ranges:
3 - 28 PSI (0.2 - 2 BAR)
3 - 58 PSI (0.2 - 4 BAR)
8 - 100 PSI (0.5 - 7 BAR)

Custom options for filtering element:
5 Micron
25 Micron
50 Micron
100 Micron

Drain type options include an auto drain

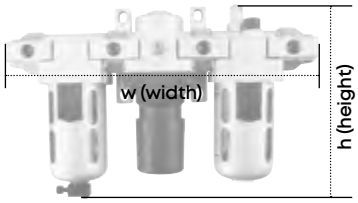

WARNING

Polycarbonate bowls may get damaged and possibly fail if exposed to Synthetic Oils, Thinner, Solvents, Trichloroethylene, Kerosene or other aromatic hydrocarbons

SPECIFICATIONS

MAX. PRESSURE	145 PSI	10 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F
PRESSURE ADJUSTMENT RANGE	7-145 PSI	0.5-10 BAR

VARIANTS

MODULAR SERIES	COMPACT SERIES
Modular & Vertical Mounting	Vertical Mounting

ORDERING INFORMATION

CAT NR.	ORD. NR.	CAT NR.	ORD. NR.
BSP THREADS		NPT THREADS	
MODULAR SERIES			
★ FRLM136134-S	60500	FRLM139134-S	60550
★ FRLM146134-S	60520	FRLM149134-S	60570
★ FRLM146234-S	60501	FRLM149234-S	60551
★ FRLM156334-S	60502	FRLM159334-S	60552
★ FRLM176434-S	60503	FRLM179434-S	60553
★ FRLM176534-S	60504	FRLM179534-S	60554
COMPACT SERIES			
◆ ★ FRLM136134-S/W	60521	FRLM139134-S/W	60571
◆ FRLM146134-S/W	60522	FRLM149134-S/W	60572
◆ FRLM146234-S/W	60523	FRLM149234-S/W	60573
◆ ★ FRLM156334-S/W	60524	FRLM159334-S/W	60574
◆ FRLM176434-S/W	60525	FRLM179434-S/W	60575
◆ FRLM176534-S/W	60526	FRLM179534-S/W	60576

★ Best Seller ◆ New

	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		PRESSURE GAUGE PORT SIZE	BOWL SIZE (FILTER)		BOWL SIZE (LUBRICATOR)		HEIGHT (h)		WIDTH (w)		BOX QTY.
		(INCH)	(CFM)	(LPM)	(INCH)	(OZ.)	(ML)	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
	Miniature	1/4	18	500	1/8	0.3	9	0.68	20	6.69	170	7.87	200	30
	Intermediate	1/4	53	1500	1/8	1.08	32	1.93	57	8.66	220	9.84	250	15
	Intermediate	3/8	63	1800	1/8	1.08	32	1.93	57	8.66	220	9.84	250	15
	Standard	1/2	99	2800	1/8	1.5	44	5.17	152	11.02	280	12.00	305	10
	Heavy Duty	3/4	123	3500	1/4	5.6	165	6.8	200	14.6	370	14.6	370	5
	Heavy Duty	1	140	4000	1/4	5.6	165	6.8	200	14.6	370	14.6	370	5
	Miniature	1/4	18	500	1/8	0.3	9	0.68	20	6.69	170	5.7	146	30
	Intermediate	1/4	53	1500	1/8	1.08	32	1.93	57	8.66	220	7.5	192	15
	Intermediate	3/8	63	1800	1/8	1.08	32	1.93	57	8.66	220	7.5	192	15
	Standard	1/2	99	2800	1/8	1.5	44	5.17	152	11.02	280	9.48	241	10
	Heavy Duty	3/4	123	3500	1/4	5.6	165	6.8	200	14.6	370	11.8	300	5
	Heavy Duty	1	140	4000	1/4	5.6	165	6.8	200	14.6	370	11.8	300	5

**Inlet Pressure 105 PSI (7 BAR). Set Pressure 90 PSI (6 BAR). Pressure Drop 17 PSI (1 BAR)

267 Filter Regulator & Lubricator -3 piece Metal Bowl

100% FACTORY TESTED

220 PSI MAX. PRESSURE

0°C TO 60°C

7-145 PSI PRESSURE ADJUSTMENT RANGE

The Filter-Regulator-Lubricator is a 3 pc assembly of all 3 individual components. The 3 components are attached in series using spacers. Comes complete with wall mounting bracket

Available in 2 types:

1. **Modular Series**
   Complete with piping adaptors and wall mounting bracket. Piping adaptors make individual components easily removable/ mountable without disturbing the pipeline
2. **Compact Series**
   Complete with wall mounting bracket but without piping adaptors

These come complete with wall mounting brackets

Air Filter is used to separate dust, dirt, moisture & other contaminants from compressed air. Filter has a Die Cast Aluminum body & bowl with a high performance Sintered Bronze Filtering element. Filter is designed with a Separator & shield for efficient moisture separation

Regulator maintains a steady outlet pressure, unaffected by variations/ fluctuations in the inlet pressure. Regulators have a Non Raising "Press to Lock" adjusting knob for locking at any set pressure. Regulators work on a Diaphragm operated, relieving type mechanism with pressure compensated by balanced poppet

Air Lubricators are used to feed lubricants to pneumatic equipments. These maintain a constant oil-to-air density over a wide range of flow. Lubricators are Fog/MicroMist type, upto 50' pipe runs. Designed for best performance with 32 grade oil. These have a Die Cast Aluminum head & bowl .The head is fitted with Oil Drop Indicator, Oil drop controller & Oil Filling Plug.

Metal Bowl makes them good for use in Chemical plants, Paint shops, pharmaceutical plants, foundry etc. where ambient air may contain chemicals, such as acetone, benzene, kerosene, gasoline, carbon tetrachloride, ethylene dichloride, toluene etc. These are also recommended for high pressure applications and for use with air compressor systems using fire resistant lubricants

WETTED COMPONENTS

Aluminum, Bronze, Brass, Steel, Acetal, Stainless Steel & Nitrile

OPTIONAL CONFIGURATION

Custom built include the following pressure adjustment ranges:
3 - 28 PSI (0.2 - 2 BAR)
3 - 58 PSI (0.2 - 4 BAR)
8 - 100 PSI (0.5 - 7 BAR)

Custom options for filtering element:
5 Micron
25 Micron
50 Micron
100 Micron

Drain type options include an auto drain

SPECIFICATIONS

MAX. PRESSURE	220 PSI	15 BAR
AMBIENT TEMPERATURE	0°C TO 60°C	32°F TO 140°F
PRESSURE ADJUSTMENT RANGE	7-145 PSI	0.5-10 BAR

VARIANTS

MODULAR SERIES	COMPACT SERIES
Modular & Vertical Mounting	Vertical Mounting

ORDERING INFORMATION

	CAT NR.	ORD. NR.	CAT NR.	ORD. NR.
	BSP THREADS		NPT THREADS	
	MODULAR SERIES			
★	FRLM136134-MS	60530	FRLM139134-MS	60580
	FRLM146134-MS	60529	FRLM149134-MS	60579
	FRLM146234-MS	60531	FRLM149234-MS	60581
★	FRLM156334-MS	60532	FRLM159334-MS	60582
	FRLM176434-MS	60533	FRLM179434-MS	60583
	FRLM176534-MS	60534	FRLM179534-MS	60584
	COMPACT SERIES			
◆ ★	FRLM136134-MS/W	60860	FRLM139134-MS/W	60880
◆	FRLM146134-MS/W	60861	FRLM149134-MS/W	60881
◆	FRLM146234-MS/W	60862	FRLM149234-MS/W	60882
◆ ★	FRLM156334-MS/W	60863	FRLM159334-MS/W	60883
◆	FRLM176434-MS/W	60864	FRLM179434-MS/W	60884
◆	FRLM176534-MS/W	60865	FRLM179534-MS/W	60885

★ Best Seller ◆ New

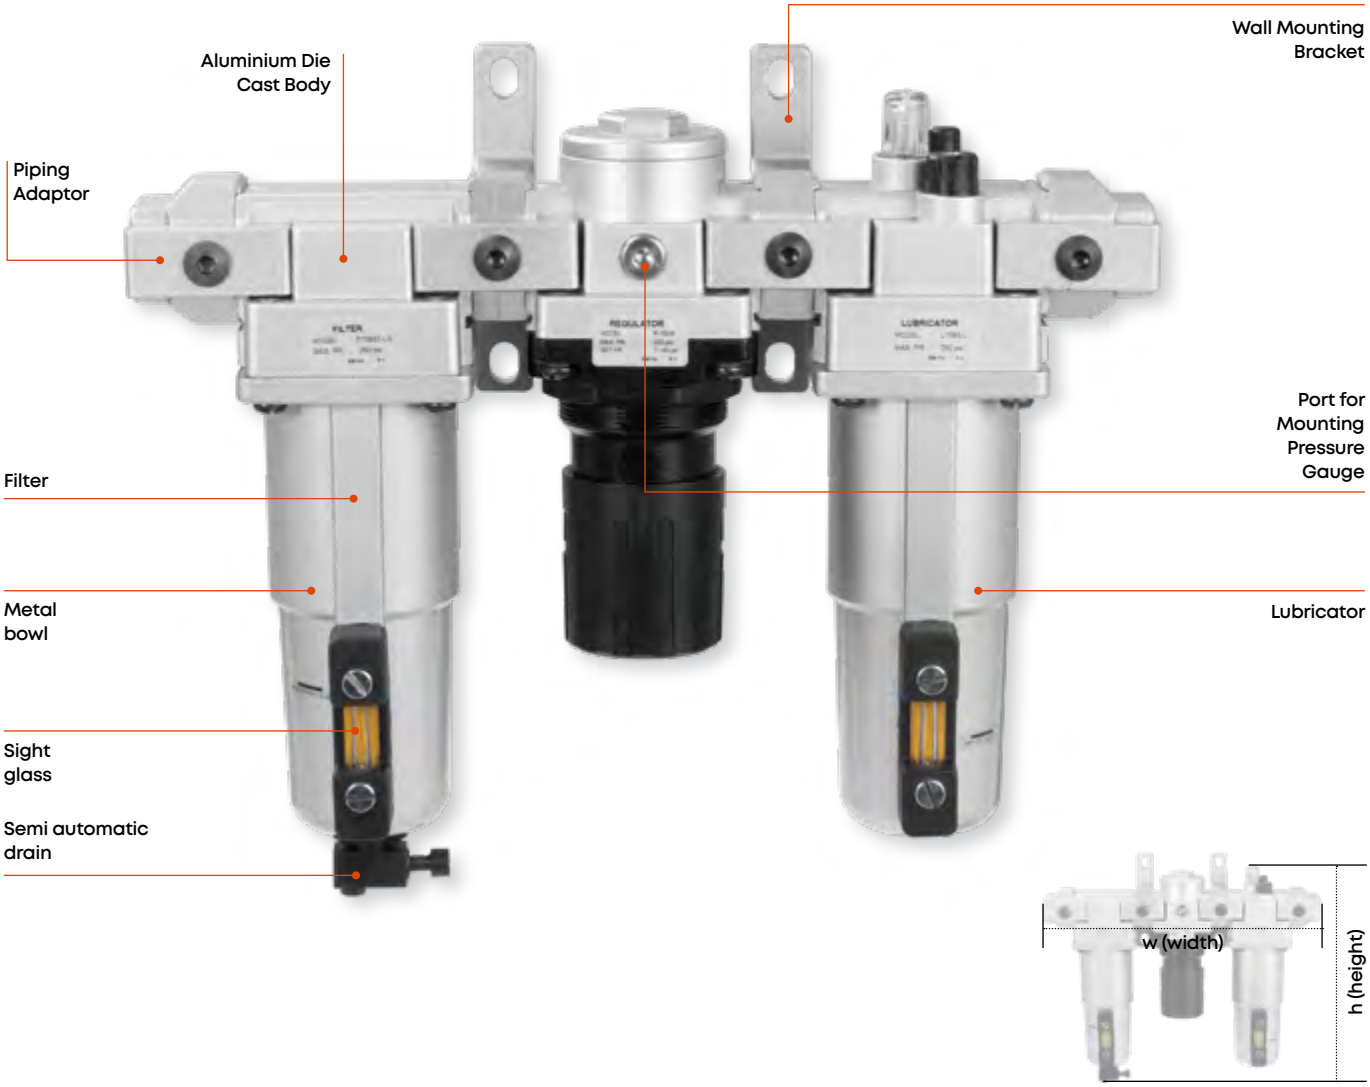

	DESCRIPTION	PORT SIZE	FLOW RATE (MAX)**		PRESSURE GAUGE PORT SIZE	BOWL SIZE (FILTER)		BOWL SIZE (LUBRICATOR)		HEIGHT (h)		WIDTH (w)		BOX QTY.
		(INCH)	(CFM)	(LPM)	(INCH)	(OZ.)	(ML)	(OZ.)	(ML)	(INCH)	(MM)	(INCH)	(MM)	
	Miniature	1/4	18	500	1/8	0.30	9	0.68	20	6.69	170	7.87	200	30
	Intermediate	1/4	46	1300	1/8	2.15	64	3.38	100	10.43	265	9.84	250	15
	Intermediate	3/8	71	2000	1/8	2.15	64	3.38	100	10.43	265	9.84	250	15
	Standard	1/2	106	3000	1/8	3.0	90	6.8	200	13.0	330	12.00	305	10
	Heavy Duty	3/4	123	3500	1/4	5.6	165	6.8	200	14.6	370	14.6	370	5
	Heavy Duty	1	175	5000	1/4	5.6	165	6.8	200	14.6	370	14.6	370	5
	Miniature	1/4	18	500	1/8	0.30	9	0.68	20	6.69	170	5.7	146	30
	Intermediate	1/4	46	1300	1/8	2.15	64	3.38	100	10.43	265	7.5	192	15
	Intermediate	3/8	71	2000	1/8	2.15	64	3.38	100	10.43	265	7.5	192	15
	Standard	1/2	106	3000	1/8	3.0	90	6.8	200	13.0	330	9.48	241	10
	Heavy Duty	3/4	123	3500	1/4	5.6	165	6.8	200	14.6	370	11.8	300	5
	Heavy Duty	1	175	5000	1/4	5.6	165	6.8	200	14.6	370	11.8	300	5

**Inlet Pressure 105 PSI (7 BAR). Set Pressure 90 PSI (6 BAR). Pressure Drop 17 PSI (1 BAR)

268 Precision Regulators

PR

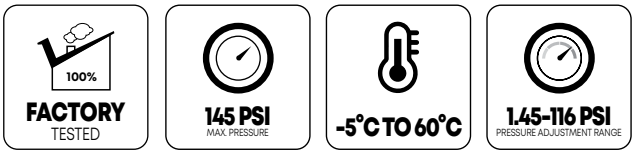

Precision Regulators are designed to provide a precise & constant pressure output from a fluctuating supply pressure. Suited for any process that requires very precise regulation of air pressure, these are sensitive to within 0.2% of Full Span with a repeatability of within +/-0.50% of full span. Precision Regulators are Diaphragm operated with a relieving type Exhaust.

STANDARD CONFIGURATION

Pressure Adjustment Range of 1.45 – 116 PSI (0.1 to 8 BAR)

OPTIONAL CONFIGURATION

Custom built include the following Pressure Adjustment Ranges

a. 0.725 - 29 PSI (0.05 to 2 BAR) - Miniature
b. 1.45 - 29 PSI (0.1 to 2 BAR) - Standard
c. 1.45 - 58 PSI (0.1 to 4 BAR) - Standard

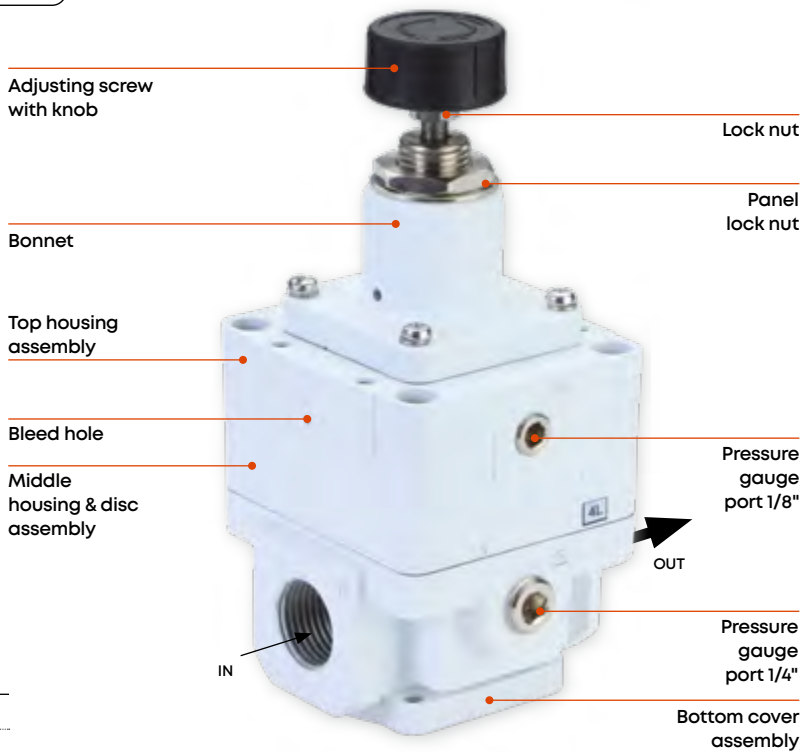

SPECIFICATIONS

MAX. PRESSURE	220 PSI	15 BAR
AMBIENT TEMPERATURE	-5°C TO 60°C	23°F TO 140°F
PRESSURE ADJUSTMENT RANGE	1.45-116 PSI	0.1-8 BAR

COMPARISON OF PRECISION REGULATORS WITH GENERAL PURPOSE AIR REGULATORS

PARAMETER	PRECISION REGULATOR	GENERAL PURPOSE REGULATOR
Sensitivity: Reduced pressure repeatability / variation under no-flow condition	0.5 to 1 PSI	2 to 4 PSI
Regulator's ability to control back pressure accurately	Begins to relieve at 0.5 - 2 PSI over pressure	Begins to relieve at 5 - 10 PSI over pressure
Regulator's ability to maintain set pressure under varying flow, input pressure, temperature conditions	High	Standard
Constant Bleed of small volume of air to the atmosphere to maintain stability	Yes	No

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	DESCRIPTION	PORT SIZE	FLOW RATE		MINIMUM SUPPLY PRESSURE		PRESSURE GAUGE PORT SIZE	AIR CONSUMPTION		HEIGHT		WIDTH		BOX QTY.
BSP THREADS		NPT THREADS			(INCH)	(CFM)	(LPM)	(PSI)	(BAR)	(INCH)	(CFM)	(LPM)	(INCH)	(MM)	(INCH)	MM	
PR13613	60040	PR13913	60090	Miniature	1/4	42	1200	Set Pressure + 7.25	Set Pressure + 0.5	1/8	0.22	6	5.16	131	2.13	54	150
PR15633	60041	PR15933	60091	Standard	1/2	265	7500	Set Pressure + 14.5	Set Pressure + 1	1/8 & 1/4	0.35	9.5	6.1	155	2.76	70	40

269 Safety Lockout Valves

LKV

Hand Operated Knob type 3 way valve with two positions –
Supply (SUP) and Exhaust (EXH)

The three ports are

a. **Air Inlet**
   For connecting compressed air supply
b. **Air Outlet**
   To connect the FRL unit
c. **Air Exhaust**
   Exhausts into the atmosphere

Lockout Valves are used during maintenance and service of air operated equipment

Unlike ball valves which can just be opened or closed with no way to release the system back pressure, safety lock out valves equipped with an exhaust port provide the back pressure to exhaust into the atmosphere.

Before servicing, knob should be turned to EXH position to block compressed air supply to the FRL unit and relieve all downstream air pressure. Knob can be locked using an external padlock preventing accidental actuation during maintenance

Modular construction allows these valves to be used with Groz Air Control Units using spacers

Threaded both at the inlet and outlet

Available as valve only or as an instant connect kit comprising one each safety lock out valve and spacer

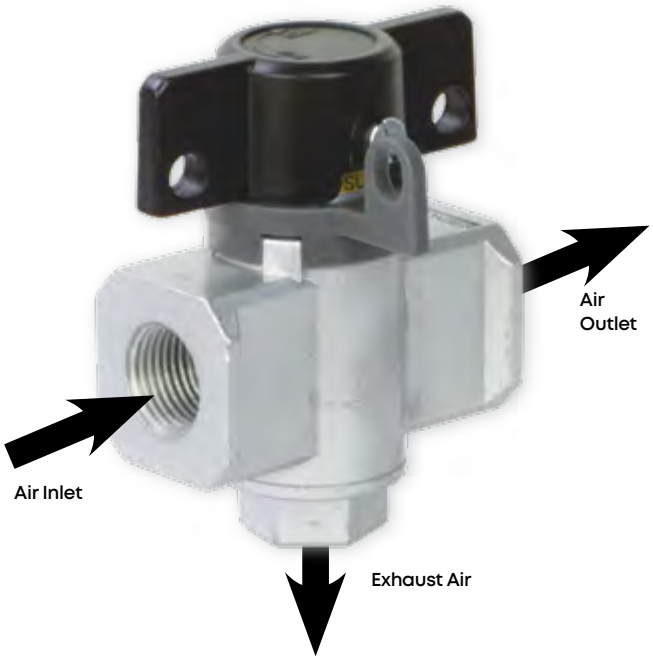

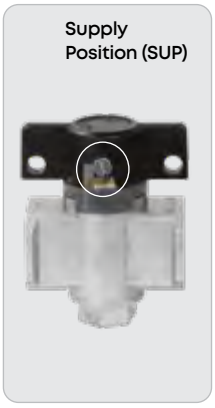

WETTED COMPONENTS

Aluminium, Brass, Nitrile

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	DESCRIPTION	PORT SIZE	FLOW RATE (SUP)	FLOW RATE (EXH)	HEIGHT		WIDTH	
BSP		NPT			(INCH)			(INCH)	(MM)	(INCH)	(MM)
SAFETY LOCKOUT VALVE ONLY											
LKV/1361	60721	LKV/1391	60741	Miniature	1/4	1000 LPM (35 CFM)	450 LPM (16 CFM)	2.87	73	1.77	45
LKV/1462	60723	LKV/1492	60743	Intermediate	3/8	2200 LPM (78 CFM)	1100 LPM (39 CFM)	3.35	85	2.17	55
LKV/1563	60724	LKV/1593	60744	Standard	1/2	3250 LPM (115 CFM)	1600 LPM (56 CFM)	3.70	94	2.76	70
SAFETY LOCKOUT VALVE & SPACER KIT											
LKV/1361/ST	60731	LKV/1391/ST	60751	Miniature	1/4	1000	450	2.87	73	2.47	63
LKV/1462/ST	60733	LKV/1492/ST	60753	Intermediate	3/8"	2200	1100	3.35	85	3.35	85
LKV/1563/ST	60734	LKV/1593/ST	60754	Standard	½"	3250	1600	3.70	94	4.00	100

270 Filter Regulator & Lubricator Accessories

SPACER

Spacer Blocks are used to connect 2 components in modular assemblies. These are aluminum die cast & have sealing rings fitted into them on both sides.
The sealing rings make a leak proof connection, without the need to have a threaded fitment

ORDERING INFORMATION

CAT NR.	ORD. NR.	FOR USE WITH MODEL SERIES
A2S01	60650	Miniature - F13, FS13, L13, R13, FRC13
A2S02	60651	Intermediate - F14, FS14, L14, R14, FRC14
A2S03	60652	Standard - F15, FS15, L15, R15, FRC15
A2S04	60653	Heavy Duty - F17, FS17, L17, R17, FRC17

SPACER WITH PORT FOR AIR OUTLET

It is installed before the lubricator. This allows taking out non lubricated air where required

ORDERING INFORMATION

CAT NR.	ORD. NR.	FOR USE WITH MODEL SERIES
A2T01	60654	Miniature - F13, FS13, L13, R13, FRC13
A2T02	60655	Intermediate - F14, FS14, L14, R14, FRC14
A2T03	60656	Standard - F15, FS15, L15, R15, FRC15

WALL MOUNTING BRACKET

Wall Mounting Bracket is a special type of Spacer Block which is 'T' shaped & has holes to mount on the wall. These connect 2 components in modular assemblies & make them wall mountable. Aluminum Die Cast these have sealing rings fitted into them on both sides. The sealing rings make a leak proof connection, without the need to have a threaded fitment

ORDERING INFORMATION

CAT NR.	ORD. NR.	FOR USE WITH MODEL SERIES
A2W01	60640	Miniature - F13, FS13, L13, R13, FRC13
A2W02	60641	Intermediate - F14, FS14, L14, R14, FRC14
A2W03	60642	Standard - F15, FS15, L15, R15, FRC15
A2W04	60643	Heavy Duty - F17, FS17, L17, R17, FRC17

WALL MOUNTING BRACKET WITH PORT FOR AIR OUTLET

Installed before the lubricator. This allows taking out non lubricated air where required

ORDERING INFORMATION

CAT NR.	ORD. NR.	FOR USE WITH MODEL SERIES
A2V01	60657	Miniature - F13, FS13, L13, R13, FRC13
A2V02	60658	Intermediate - F14, FS14, L14, R14, FRC14
A2V03	60659	Standard - F15, FS15, L15, R15, FRC15

PIPING ADAPTERS

Air Preparation components such as Individual Regulators, Filters, Lubricators or assemblies such as Filter-Regulator Assembly or a Filter Regulator Lubricator Assembly always have an IN port & an OUT port. These ports are threaded & air pipe lines can be fitted directly into them.
However by doing so, if any component needs to be removed for maintenance, repair etc., one would need to open up the complete air line. This can be avoided by using Piping Adapters. A piping adapter has a threaded end on one side & sealing rings on the other. The adapters are fitted on both the IN port & the OUT port & the Air line would be screwed into them. The threaded end of the adapter faces the air line & the other end with the sealing ring makes the seal with the component. Piping adapter has an aluminum die cast construction

ORDERING INFORMATION

CAT NR.		CAT NR.		PORT SIZE	FOR USE WITH MODEL SERIES
BSP THREADS		NPT THREADS		(INCH)	
A2P11	60670	A2P15	60672	1/8	Miniature - F13, L13, R13, FRC13, FS13
A2P01	60660	A2P04	60665	1/4	Miniature - F13, L13, R13, FRC13, FS13
A2P12	60671	A2P16	60673	1/4	Intermediate -F14, L14, R14, FRC14, FS14
A2P02	60661	A2P05	60666	3/8	Intermediate - F14, L14, R14, FRC14, FS14
A2P03	60662	A2P06	60667	1/2	Standard - F15, L15, R15, FRC15, FS15
A2P07	60663	A2P09	60668	3/4	Heavy Duty - F17, L17, R17, FRC17, FS17
A2P08	60664	A2P10	60669	1	Heavy Duty - F17, L17, R17, FRC17, FS17

MOUNTING CLAMP FOR INDIVIDUAL FILTERS & LUBRICATORS

These are steel clamps in powder coated finish, used to mount individual Filters & Lubricators. Both Filter & Lubricator units have threaded holes on the head casting into which the clamp fits

ORDERING INFORMATION

CAT NR.	ORD. NR.	FOR USE WITH MODEL SERIES
A2C31	60610	Miniature - F13, FS13, L13
A2C32	60611	Intermediate - F14, FS14, L14
A2C33	60612	Standard - F15, FS15, L15
A2C34	60613	Heavy Duty - F17, FS17, L17

MOUNTING CLAMP FOR REGULATORS & FILTER REGULATOR COMBINATIONS

These clamps are made out of steel in powder coated finish. The clamp has a hole into which the regulator fits in & is secured by the nut provided in the regulator itself

ORDERING INFORMATION

CAT NR.	ORD. NR.	FOR USE WITH MODEL SERIES
A2C01	60600	Miniature - R13, FRC13
A2C02	60601	Intermediate - R14, FRC14
A2C03	60602	Standard - R15, FRC15
A2C04	60603	Heavy Duty - R17, FRC17

Filter Regulator & Lubricator Accessories (continued)

PRESSURE GAUGES

For use with regulators for setting output pressure.

These are graduated both in BARS & PSI with a max. Reading of 200PSI/14 BAR.

Pressure Gauge is graduated in intervals of 5 PSI/0.20 BAR and is accurate to within 5%

These have male threads on the centre back & fit female threads on the regulator

Gauge has a steel casing with clear polycarbonate lens and internal components made from brass

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	PORT SIZE	FOR USE WITH FRL SERIES
BSPT THREADS		NPT THREADS		(INCH)	
A2G02	60630	A2G05	60635	1/8	Miniature, Intermediate & Standard
A2G08	60631	A2G14	60636	1/4	Heavy Duty

DIGITAL AIR PRESSURE GAUGES

For use with Air Regulators for setting air output pressure of filtered air, incombustible & non corrosive gases

Digital readout displays air pressure in a choice of 4 units:
PSI, BAR, MpA & Kg/Cm2

Compared to a mechanical gauge, the digital gauge offers higher accuracy, higher pressure, better resistance to vibration & easier reading (back lit)

Square Body 1-1/4" (30 mm) with Die cast Aluminium centre back male threads

SPECIFICATION

ACCURACY	± 2% of Full Scale
MEASURING RANGE	0 to 150 PSI / 0 to 10 BAR/ 0 to 1.0 MPa / 0 to 10 Kg/Cm2
LEAST COUNT	0.1 PSI / 0.01 BAR / 0.001 MPa / 0.01 Kg/Cm2
WORKING TEMPERATURE	-10°C to +60°C (14°F to 140°F)
WORKING HUMIDITY	35 ~ 85% RH
WATER PROOF RATING	IP65
BATTERY	CR 2032 lithium
BATTERY LIFE (APPROX.)	1 year (usage 5 times a day)

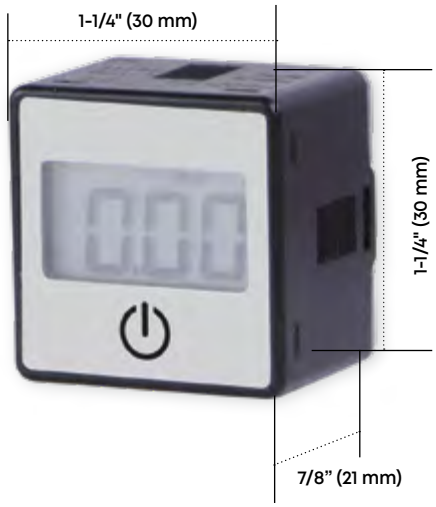

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	FOR USE WITH FRL SERIES	PORT SIZE
BSPT THREADS		NPT THREADS			(INCH)
DPG/L/1-8/B	60632	DPG/L/1-8/N	60637	Miniature, Intermediate & Standard	1/8
DPG/L/1-4/B	60633	DPG/L/1-4/N	60638	Heavy Duty	1/4

REPLACEMENT SINTERED BRONZE FILTER ELEMENTS

ORDERING INFORMATION

CAT NR.	ORD NR.	FOR USE WITH MODEL SERIES	FILTER SIZE
F582002	60680	Miniature - F13, FRC13, FRCLM13 & FRLM13	40 Microns
F582022	60681	Intermediate - F14, FRLM14	40 Microns
F582025	60682	Intermediate - FRC14, FRCLM14	40 Microns
F582042	60683	Standard F15, FRC15, FRCLM15 & FRLM15	40 Microns
F582051	60684	Heavy Duty- F17, FRC17, FRCLM17 & FRLM17	40 Microns
F582000	60685	Miniature - F13, FRC13, FRCLM13 & FRLM13	5 Microns
F582020	60686	Intermediate - F14, FRLM14	5 Microns
F582026	60687	Intermediate - FRC14, FRCLM14	5 Microns
F582040	60688	Standard F15, FRC15, FRCLM15 & FRLM15	5 Microns
F582049	60689	Heavy Duty- F17, FRC17, FRCLM17 & FRLM17	5 Microns

REPLACEMENT BOROSILICATE FILTER ELEMENTS FOR COALESCING FILTERS

ORDERING INFORMATION

CAT NR.	ORD NR.	FOR USE WITH MODEL SERIES	FILTER SIZE
F890003	60696	Miniature - FS13	0.01 Microns
F890030	60697	Intermediate - FS14	0.01 Microns
F890001	60698	Standard - FS15	0.01 Microns
F890047	60699	Heavy Duty - FS17	0.01 Microns
F890004	60693	Miniature - FS13	0.10 Microns
F890036	60694	Intermediate - FS14	0.10 Microns
F890002	60695	Standard - FS15	0.10 Microns

REPLACEMENT BOWL FOR FILTERS / LUBRICATORS

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION
LA2000	60690	Replacement Bowl with O Ring for Miniature Filters / Lubricators
LA2001	60691	Replacement Bowl with O Ring for Intermediate Filters / Lubricators
LA2002	60692	Replacement Bowl with O Ring for Standard & Heavy Duty Filters / Lubricators

271 Automatic Line Drain

Condensate in compressed air causes corrosion in the pneumatic components which severely affect the function of the pneumatic system / any machinery using compressed air

In order to prevent this & give system an increased life, Automatic Line Drain is fitted to the main airline piping to drain the condensate as and when collected. Automatic Line Drain is not a moisture separator. It drains only the condensate collected.

These units can be used with great advantage in pneumatic lines in foundries, textile mills, industrial shop floor, painting, pneumatic lines in process industries, etc.

Float type, hence no electrical connections required. When the condensate level increases, the float moves up & drains the condensate automatically

Cast Aluminum Body
Includes Manual Drain option
Provision for drain tube connection, to take the condensate away from the unit, to keep the working area clean.

WETTED COMPONENTS

Aluminum, Brass, Acetal, Stainless Steel & Nitrile

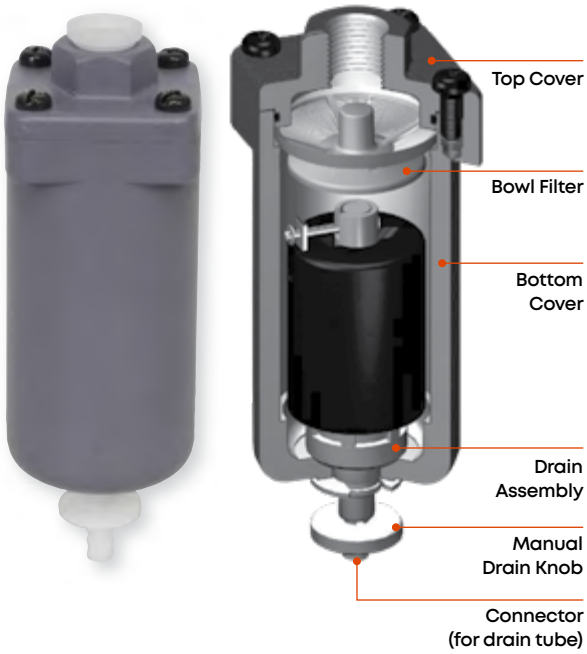

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	DESCRIPTION
NL161	60625	1/4" BSP	60 ml / minute
NL191	60626	1/4" NPT	2 oz. / minute

272 Auto Drain Valve External

As a standard, all Groz Filters have a Manual Drain valve fitted on them. This however can be changed with an Automatic Drain Valve, fitted external to the bowl

The Auto Drain Valve drains the condensate water automatically

In addition to automatic draining, there is also provision in the valve for manual drain off

Unlike an electrical Auto Drain valve, these float type auto Drain Valve operates only when the condensate is collected & drains only the condensate.

ORDERING INFORMATION

CAT NR.	ORD NR.	FOR USE WITH MODEL SERIES
A2D01	60620	Miniature Filters with Polycarbonate bowl
A2D04	60623	Miniature Filters with Metal Bowl
A2D02	60621	Intermediate Filters with Polycarbonate bowl
A2D03	60622	Standard & Heavy Duty Filters with Polycarbonate bowl

273 Air Hose Reel

HRP-AW

Compact Design
Fully enclosed design protects inner spring from water & dirt; guarantees longer life & trouble free operation

Compact size allows use in confined spaces

Auto Roll Up
Slow rewinding mechanism ensures no one gets hurt

Refined Design
Top cover discreetly hides handle. Accessible handle makes it convenient to carry

Hose can be locked at any desired position

180° Swivel Wall Bracket
Bracket can be fixed on wall with screws. Hose reel can swivel 180° on the bracket

Easily Replaceable Hose
Change hose as per need/application

Drive spring is manufactured on stringent quality standards covering hardness material size, moment of force etc. ensuring enhanced life

SPECIFICATION

CASE MATERIAL	Polypropylene	
HOSE LENGTH	15M	50'
HOSE MATERIAL	Hybrid (Nitrile + PVC)	
HOSE I.D.	3/8"	10 MM
INLET/OUTLET THREAD SIZE	1/4" BSPT	
WORKING PRESSURE	217 PSI	15 BAR
BURST PRESSURE	580 PSI	40 BAR
OPERATING TEMPERATURE	-5°C to 45°C	23°F to 113°F



ORDERING INFORMATION

CAT NR.	ORD NR	SIZE (W×D ×H)		BOX QTY.
		(INCH)	(MM)	
HRP/AW/15M/3-8/B	47940	14-7/8 × 7-1/4 × 13-1/4	378 × 185 × 335	1

For Metal Hose Reel
Refer to Page 200

274 Air Blow Guns Professional

100% FACTORY TESTED

50-235 PSI

-10°C TO 70°C

Impact & weather resistant nylon body.
Corrosion resistant stainless steel nozzle & parts

Drop resistant construction

Handle with soft rubber grip for convenience in continuous use

Ergonomic design of the gun helps eliminate the risk of Carpel Tunnel syndrome

Brass threaded Air Inlet ensures that threads do not shear with repeated use.

Variable speed trigger for full control of amount of air dispensed

Silent operation with noise level under 80 db. Confirms to OSHA STD 1910-95 (b) for max. noise level when used with air with 6 BAR (90 PSI) pressure

Max. Blowing Force with minimal air consumption reduces energy cost, saving money each time the gun is used

Confirms to OSHA STD 1-13.1 for safety & are classified as Safety Blow Guns*
*Except ABG/1

ACCESSORIES AVAILABLE

PS/ABG/3
61050
4" (100 mm) dia.
Protective shield for ABG/3 series Air Blow Guns

NZL/RT1/ABG/3
61053
Rubber Tip 1/2" (12.7 mm) for blowing out lines

NZL/RT2/ABG/3
61054
Rubber Tip 1" (25 mm) for blowing out lines

NZL/RT3/ABG/3
61055
Rubber Tip 1-3/8" (35 mm) for blowing out lines

NZL/SIL/ABG/3
61051
Silencer Nozzle with Soft Rubber Tip

NZL/VEN/ABG/3
61052
Venturi Nozzle for Turbo Charging Output

OSHA OK
OSHA STD 1-13.1 FOR SAFETY
Max. Working Pressure 6 Bar (90 PSI)

OSHA OK
OSHA STD 1910-95(b) FOR NOISE
Max. Working Pressure 6 Bar (90 PSI)

VARIANTS

	ABG/1 With Plastic Tip	ABG/2 With snub nose rubber tip	ABG/3 With 4-1/2" (114 mm) long SS nozzle	ABG/4 With 5-1/2" (140 mm) long SS nozzle fitted with silencer and snub nose rubber tip
STANDARD REACH				
	ABG/3A With 13" (330 mm) long SS nozzle	ABG/3B With 20" (508 mm) long SS nozzle	ABG/3C With 39" (990 mm) long SS nozzle	
EXTENDED REACH			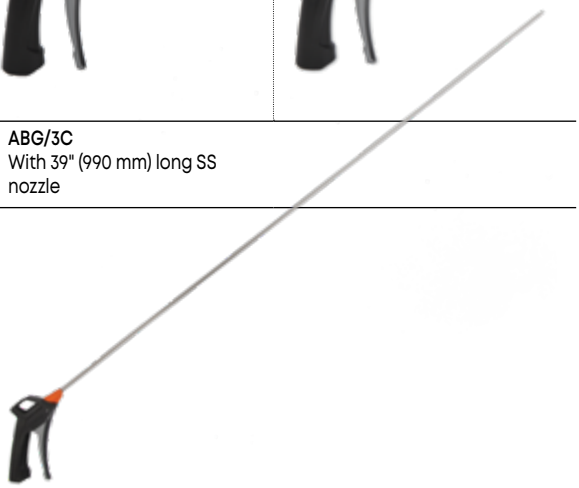	

SPECIFICATIONS

PRESSURE	50-235 PSI	3.5-16 BAR
OPERATING TEMPERATURE	-10°C TO 70°C	-4°F TO 158°F

***Examples of decibel levels and related noises**
82-90 db : Manual Machine Tool, Hand Saw
91-95 db : Electric Drill
96-104 db : Factory Machinery
100-107 db : Snow Blower
125-127 db : Chain Saw

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	NOISE LEVEL AT 100 PSI*	BLOWING FORCE AT 100 PSI		AIR CONSUMPTION AT 100 PSI	BOX QTY.
BSP THREADS		NPT THREADS			KGS	LBS.		
STANDARD REACH								
ABG/1/1-4F/BSP	61000	ABG/1/1-4F/N	61010	77db	0.26	0.57	9.53 CFM	120
ABG/2/1-4F/BSP	61001	ABG/2/1-4F/N	61011	77db	0.38	0.83	15.89 CFM	120
* ABG/3/1-4F/BSP	61002	* ABG/3/1-4F/N	61012	80 db	0.35	0.76	15.18 CFM	60
ABG/4/1-4F/BSP	61003	ABG/4/1-4F/N	61013	75 db	0.31	0.68	13.42 CFM	60
EXTENDED REACH								
ABG/3A/1-4F/BSP	61020	ABG/3A/1-4F/N	61030	80db	0.32	0.70	15.26 CFM	60
ABG/3B/1-4F/BSP	61021	ABG/3B/1-4F/N	61031	77db	0.26	0.57	12.46 CFM	60
ABG/3C/1-4F/BSP	61022	ABG/3C/1-4F/N	61032	74db	0.21	0.47	9.96 CFM	60

* Best Seller

GROZ

275 Air Blow Gun Standard

ABG-10

50-150 PSI

-10°C TO 70°C

Lightweight Air Blow Gun

Impact & weather resistant nylon body with polyacetal trigger.

Brass threaded air inlet ensures that threads do not shear with repeated use
Trigger permits variable speed control

GUARANTEED SAFE: Vent in the gun tip prevents pressure build up beyond 30 PSI ensuring safety & OSHA compliance at all times

SPECIFICATIONS

PRESSURE	50-150 PSI	3.5-10 BAR
OPERATING TEMPERATURE	-10°C TO 70°C	-4°F TO 158°F

VARIANTS

ABG/10 4-1/2" (114 mm) nozzle	ABG/10A 13" (330 mm) nozzle	ABG/10B 20" (508 mm) nozzle	ABG/10/RT1 4-1/2" (114 mm) nozzle with rubber tip 1/2" (12.7 mm)	ABG/10/SIL 4-1/2" (114 mm) nozzle with silencer & star rubber tip
	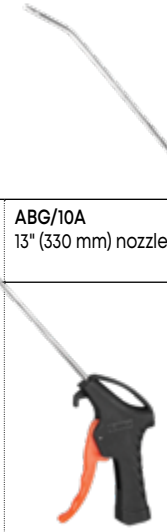	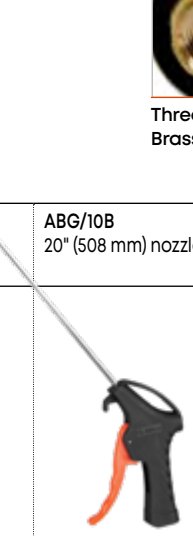		

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.
BSP THREADS		NPT THREADS	
ABG/10/BSP	61185	ABG/10/N	61192
ABG/10A/BSP	61186	ABG/10A/N	61193
ABG/10B/BSP	61187	ABG/10B/N	61194
ABG/10/RT1/BSP	61189	ABG/10/RT1/N	61196
ABG/10/SIL/BSP	61190	ABG/10/SIL/N	61197
KITS			
KIT/ABG/10/5ST/BSP	61191	KIT/ABG/10/5ST/N	61198

5 PC KIT - AIR BLOW GUN ABG-10 WITH 4 ATTACHMENTS

1/2" (12.7 mm) rubber tip	1" (25 mm) rubber tip	1-3/8" (35 mm) rubber tip	Soft rubber star tip nozzle

276 6 Pc Interchangeable Air Blow Gun Kit

ABG-QR

220 PSI | -20°C TO 85°C | 10 CFM*

*@80 PSI

Superior quality air blow gun designed for rugged day-in & day out usage

Interchangeable Design
Quick change between 5 different attachments

Simply rotate spring loaded lock collar in either direction to release or lock the attachment in place

The attachment can be locked at 6 positions for better access

Impact & weather resistant nylon body

Brass threaded air inlet ensures that threads do not shear with repeated use

Variable speed control trigger for full control of amount of air dispensed

Air inlet thread 1/4" NPT

SPECIFICATIONS

MAX. PRESSURE	220 PSI	15 BAR
OPERATING PRESSURE	160 PSI	11 BAR
OPERATING TEMPERATURE	-20°C TO 85°C	-4°F TO 185°F
AIR CONSUMPTION	10 CFM	280 LPM

5 INTERCHANGEABLE ATTACHMENTS

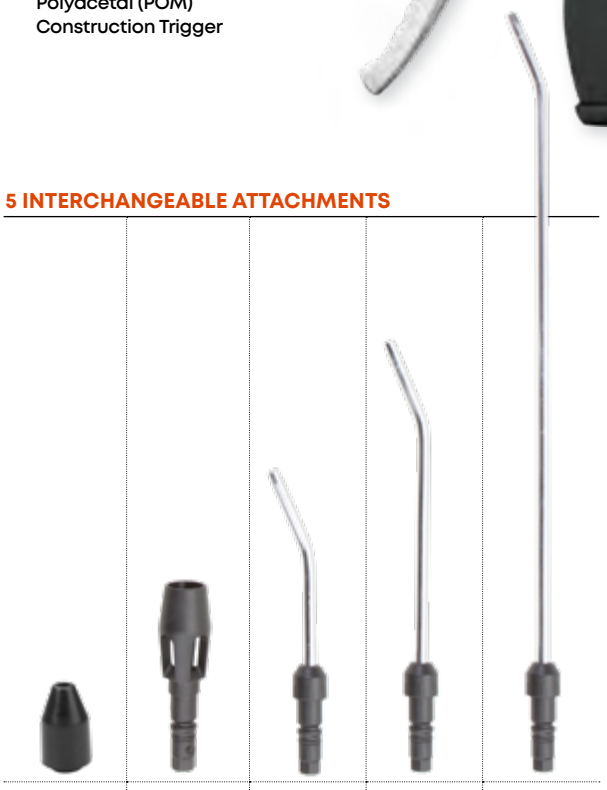

Rubber Tip (NBR) for steel extensions	Turbo wide angle nozzle for high volume	Angled Steel Extension 4" (100 mm)	Angled Steel Extension 5-1/2" (140 mm)	Angled Steel Extension 12-1/2" (320 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
ABG/QR/6ST/N	61095	20

277 7 Piece Air Blow Gun Kit Professional

KIT-ABG

100% FACTORY TESTED

50-235 PSI

-10°C TO 70°C

OSHA OK
OSHA STD 1-13.1
FOR SAFETY
Max. Working Pressure
6 Bar (90 PSI)

OSHA OK
OSHA STD 1910-95(b)
FOR NOISE
Max. Working Pressure
6 Bar (90 PSI)

World's # 1 Professional Air Blow Gun with 6 Interchangeable accessories for unlimited applications!

Kit consists of
Air Blow Gun - Professional (ABG/3)
Impact resistant nylon body with 1/4" (F) threaded brass insert and rust proof stainless steel nozzle

Gun has a soft rubber grip & allows full control on the amount of air blowing out
Silent operation with Noise level under 80 db, the gun is OSHA ok for noise

Vent in the tip prevents pressure from exceeding 30 PSI if tip becomes blocked, making the gun OSHA OK as a Safety Blow gun

Interchangeable accessories include:

1. 4" (100 mm) Protective Shield for safety in use from flying chips etc.
2. 1" (25 mm) Rubber Tip for blowing out lines & cavities
3. 1-3/8" (35 mm) Rubber tip for blowing out lines & cavities
4. Soft Rubber Star Tip Nozzle for use on delicate materials
5. Venturi Nozzle turbo charges output. Great for blowing out bondo dust, drying off & washing parts fast
6. 1/2" (12.7 mm) Rubber Tip for blowing out lines & cavities

SPECIFICATIONS

PRESSURE	50-235 PSI	3.5-16 BAR
OPERATING TEMPERATURE	-10°C TO 70°C	-4°F TO 158°F

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	BOX QTY.
KIT/ABG3/7ST/BSP	61070	1/4" BSP (F)	38
KIT/ABG3/7ST/N	61075	1/4" NPT (F)	38

278 Metal Body Safety Air Blow Gun

PAG

Built Tough
Aluminium die cast body in premium powder coated finish

Ergonomic steel pistol handle for fatigue free usage

Venturi mechanism
Side ports combine free ambient air with costly compressed air creating a larger volume of usable output. Maximum blowing force with minimal air consumption reduces energy cost

Silent operation with noise level under 80db, the gun is OSHA OK for noise

Complete with replaceable soft rubber tip

VALUE



PAYS FOR ITSELF IN ELECTRICITY SAVINGS!
The in-built venturi mechanism uses side ports to combine free ambient air with costly compressed air, creating a much higher volume of usable output

TAMPER-PROOF

NO MORE OSHA FINES!
Tampering doesn't work on this Gun! Many Operators plug or tape vent holes on their blow guns in an effort to increase output. Blocking of venturi side ports on these, greatly reduces the output, thus defeating the tamper incentive & preventing costly safety violations

COMPLIANT

MEETS BOTH OSHA STANDARDS FOR SAFETY & NOISE!
Designed to reduce compressed air pressure to less than 30 PSI when outlet is blocked. Venturi side ports provide safety relief when blow gun outlet is blocked

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	DESCRIPTION	OVERALL LENGTH	
				(INCH)	(MM)
PAG/J/1-4F/B	61130	1/4" BSPT	Soft rubber star tip	5-5/16	135
PAG/J/1-4F/N	61140	1/4" NPT			

279 Metal Air Blow Gun

AP

Aluminium die cast pistol style air blow gun

Variable flow trigger for controlling the air output

Built-in storage hook for safe keeping when not in use

Maximum pressure: 90 PSI

Flow rate: 40 CFM

Kit includes

- Two 6" (150mm) extensions
- Three needle tips,
- Rubber tip
- Quiet flow nozzle
- Xtreme flow nozzle.
  The 6"(150mm) extensions can be threaded together using an adaptor to get a 12"(300mm) extension for hard to reach areas.

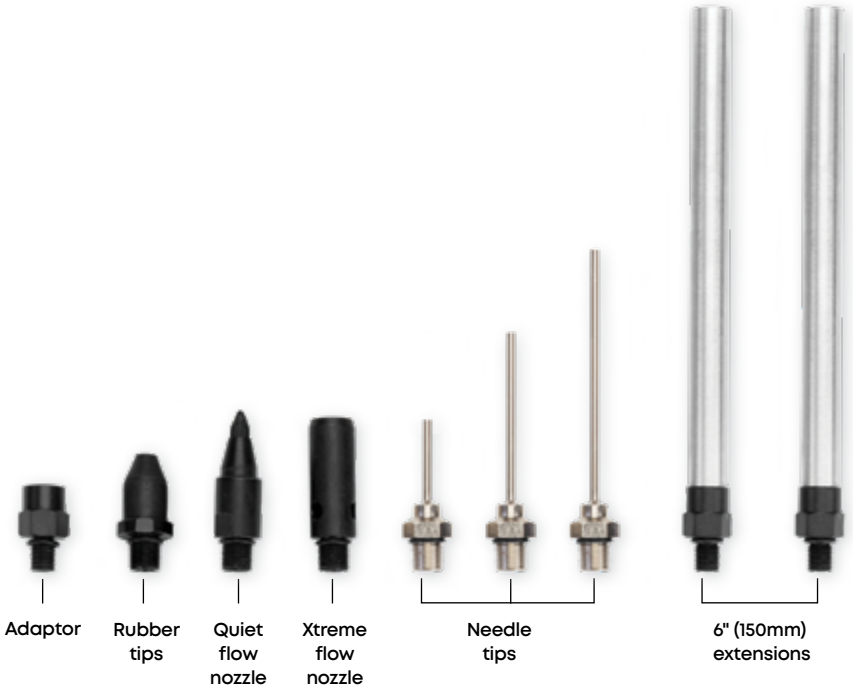

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
METAL AIR BLOW GUN			
AP/J/B	61115	1/4" BSPT	10
AP/J/N	61111	1/4" NPT	10
METAL AIR BLOW GUN - 10 PCS SET			
AP/10ST/B	61116	1/4" BSPT	10
AP/10ST/N	61110	1/4" NPT	10

280 Metal Body Lever Air Blow Gun-Extended Reach

LAG

NEW!

150 PSI

DBA 85

Aluminium die cast lever style air blow gun

Variable flow trigger for controlling the air output

Built-in hanging hook for safe keeping when not in use

Aluminum nozzles with rubber tip

Maximum pressure: 150 PSI

The perfect tool for cleaning inaccessible and hard-to-reach areas

TYPE: X1
Extended reach aluminum tube 6" (150 mm) long with rubber tip

TYPE: X2
Extended reach aluminum tube 12" (300 mm) long with rubber tip

TYPE: X3
Extended reach aluminum tube 24" (600 mm) long with rubber tip

TYPE: X4
Extended reach aluminum tube 36" (914 mm) long with rubber tip

TYPE: X5
Extended reach aluminum tube 48" (1200 mm) long with rubber tip

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	TYPE	AIR INLET	OVERALL LENGTH		BOX QTY.
BSP THREADS		NPT THREADS			(INCH)	(INCH)	(MM)	
LAG/X1/1-4/BSP	61253	LAG/X1/1-4/N	61550	X1	1/4	6	150	150
LAG/X2/1-4/BSP	61254	LAG/X2/1-4/N	61551	X2	1/4	12	300	90
LAG/X3/1-4/BSP	61255	LAG/X3/1-4/N	61552	X3	1/4	24	600	90
LAG/X4/1-4/BSP	61256	LAG/X4/1-4/N	61553	X4	1/4	36	914	90
LAG/X5/1-4/BSP	61257	LAG/X5/1-4/N	61554	X5	1/4	48	1200	90

281 Metal Body Lever Air Blow Gun - Kits

150 PSI

DBA 85

OSHA OK

OSHA STD 1-13.1
FOR SAFETY

Max. Working Pressure
6 Bar (90 PSI)

WITH REVOLUTIONARY VENTURI MECHANISM

Uses side ports to combine free ambient air with costly compressed air, creating a much higher volume of usable output.



VALUE

PAYS FOR ITSELF IN ELECTRICITY SAVINGS!

The in-built venturi mechanism uses side ports to combine free ambient air with costly compressed air, creating a much higher volume of usable output. This feature is unique to the Groz PRO series Metal Body Lever Air Blow Guns



TAMPER-PROOF

NO MORE OSHA FINES!

Many Operators plug or tape vent holes on their blow guns in an effort to increase output. Blocking of venturi side ports on these, greatly reduces the output, thus defeating the tamper incentive & preventing costly safety violations



COMPLIANT

MEET BOTH OSHA STANDARDS FOR SAFETY & NOISE!

Designed to reduce compressed air pressure to less than 30 PSI when outlet is blocked. Venturi side ports provide safety relief when blow gun outlet is blocked. Available with Chip Shield that guards operator from blown debris and prevents operating lever from activating when dropped

6 PIECE GENERAL PURPOSE KIT

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	BOX QTY.
KIT/LAG/6/ST/BSP	61260	1/4" BSP (F)	60
KIT/LAG/6/ST/N	61270	1/4" NPT (F)	60

5 PIECE INDUSTRIAL PURPOSE KIT

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	BOX QTY.
KIT/LAG/5A/ST/BSP	61263	1/4" BSP (F)	60
KIT/LAG/5A/ST/N	61273	1/4" NPT (F)	60

8 PIECE INDUSTRIAL KIT

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	BOX QTY.
KIT/LAG/8/ST/BSP	61261	1/4" BSP (F)	60
KIT/LAG/8/ST/N	61271	1/4" NPT (F)	60

5 PIECE EXTENDED REACH KIT

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	BOX QTY.
KIT/LAG/5B/ST/BSP	61265	1/4" BSP (F)	60
KIT/LAG/5B/ST/N	61275	1/4" NPT (F)	60

5 PIECE GENERAL PURPOSE KIT

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	BOX QTY.
KIT/LAG/5/ST/BSP	61262	1/4" BSP (F)	60
KIT/LAG/5/ST/N	61272	1/4" NPT (F)	60

4 PIECE RUBBER TIP KIT

Ideal for blowing out lines and cavities

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	BOX QTY.
KIT/LAG/4/ST/BSP	61264	1/4" BSP (F)	60
KIT/LAG/4/ST/N	61274	1/4" NPT (F)	60

21 PIECE ALL PURPOSE KIT

ORDERING INFORMATION

CAT NR.	ORD NR.	INLET THREADS	BOX QTY.
KIT/LAG/21/ST/BSP	61266	1/4" BSP (F)	20
KIT/LAG/21/ST/N	61276	1/4" NPT (F)	20

282 Metal Body Lever Air Blow Guns (With Built-In Venturi)

TYPE: A
1/2" (13 mm) rubber tip

TYPE: B
standard

TYPE: C
standard safety

TYPE: D
high flow safety

TYPE: E
safety booster

TYPE: F
safety tamper proof

TYPE: G
1" (25 mm) rubber tip

TYPE: H
1-3/8" (35 mm) rubber tip

TYPE: J
soft rubber star tip



TYPE: PS
nozzle with 4" (100 mm) protective shield

TYPE: K
nylon screen 1-1/4" (32 mm) wide

TYPE: L
nylon tapered tube 3" (75 mm) long

TYPE: M
mini aluminium tip

TYPE: N1
ss needle 1-3/4" (44 mm) long x 0.072" (1.8 mm) dia.

TYPE: N2
SS needle 2-15/32" (62 mm) long x 0.095" (2.4 mm) dia.

TYPE: P
adjustable brass tip

TYPE: S
nozzle with steel wire brush

TYPE: T1
extended reach aluminium tube 3" (75 mm) long

TYPE: T4
extended reach aluminium tube 12" (300 mm) long

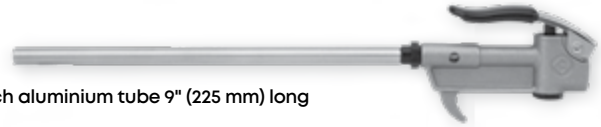

TYPE: T3
extended reach aluminium tube 9" (225 mm) long

TYPE: T2
extended reach aluminium tube 6" (150 mm) long

TYPE: R
extended reach telescopic tip 14" (355 mm) to 24" (610 mm)

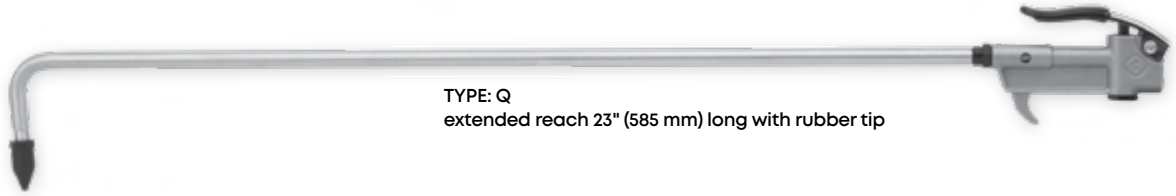

TYPE: Q
extended reach 23" (585 mm) long with rubber tip

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	TYPE	AIR INLET	DESCRIPTION	OVERALL LENGTH		BOX QTY.
BSP THREADS		NPT THREADS			(INCH)		(INCH)	(MM)	
LAG/A/1-4/BSP	61200	LAG/A/1-4/N	61220	A	1/4	1/2" (13 mm) Rubber Tip	5	127	150
LAG/B/1-4/BSP	61201	LAG/B/1-4/N	61221	B	1/4	Standard	4-7/32	107	150
LAG/C/1-4/BSP	61202	LAG/C/1-4/N	61222	C	1/4	Standard Safety	4-9/32	109	150
LAG/D/1-4/BSP	61203	LAG/D/1-4/N	61223	D	1/4	High Flow Safety	5-3/16	132	150
LAG/E/1-4/BSP	61204	LAG/E/1-4/N	61224	E	1/4	Safety Booster	5-5/16	135	150
LAG/F/1-4/BSP	61205	LAG/F/1-4/N	61225	F	1/4	Safety Tamper proof	5	127	150
LAG/G/1-4/BSP	61206	LAG/G/1-4/N	61226	G	1/4	1" (25 mm) Rubber Tip	4-15/16	125	150
LAG/H/1-4/BSP	61207	LAG/H/1-4/N	61227	H	1/4	1-3/8" (35 mm) Rubber Tip	5	127	150
LAG/J/1-4/BSP	61208	LAG/J/1-4/N	61228	J	1/4	Soft Rubber Star Tip	5-5/16	135	150
LAG/PS/1-4/BSP	61209	LAG/PS/1-4/N	61229	PS	1/4	Nozzle with 4" (100 mm) Protective Shield	5-3/32	129	7 2
LAG/K/1-4/BSP	61252	LAG/K/1-4/N	61242	K	1/4	Nylon Screen 1-1/4" (32.5 mm) Wide	5	127	150
LAG/L/1-4/BSP	61210	LAG/L/1-4/N	61230	L	1/4	Nylon Tapered Tube 3" (75 mm) Long	7	179	150
LAG/M/1-4/BSP	61211	LAG/M/1-4/N	61231	M	1/4	Mini Aluminium Rip	4-11/32	110	150
LAG/N1/1-4/BSP	61212	LAG/N1/1-4/N	61232	N1	1/4	SS Needle 1-3/4" (44 mm) long x 0.072" (1.8 mm) Dia.	5-7/8	150	150
LAG/N2/1-4/BSP	61213	LAG/N2/1-4/N	61233	N2	1/4	SS Needle 2-15/32" (62 mm) long x 0.095" (2.4 mm) Dia.	6-11/16	170	150
LAG/P/1-4/BSP	61214	LAG/P/1-4/N	61234	P	1/4	Adjustable Brass Tip	5	125	150
LAG/S/1-4/BSP	61215	LAG/S/1-4/N	61235	S	1/4	Steel Wire Brush for Industrial Cleaning & Drying	8-1/4	210	150
LAG/Q/1-4/BSP	61216	LAG/Q/1-4/N	61236	Q	1/4	Extended Reach 23" (585 mm) Long with Rubber tip	26	660	60
LAG/R/1-4/BSP	61217	LAG/R/1-4/N	61237	R	1/4	Extended Reach Telescopic Tip 14" (355 mm) to 24" (610 mm)	20-3/8	517	90
LAG/T1/1-4/BSP	61218	LAG/T1/1-4/N	61238	T1	1/4	Extended Reach Aluminium Tube 3" (75 mm) Long	6-7/8	175	150
LAG/T2/1-4/BSP	61219	LAG/T2/1-4/N	61239	T2	1/4	Extended Reach Aluminium Tube 6" (150 mm) Long	9-27/32	250	90
LAG/T3/1-4/BSP	61250	LAG/T3/1-4/N	61240	T3	1/4	Extended Reach Aluminium Tube 9" (225 mm) Long	12-13/16	325	90
LAG/T4/1-4/BSP	61251	LAG/T4/1-4/N	61241	T4	1/4	Extended Reach Aluminium Tube 12" (300 mm) Long	15-3/4	400	90

All tips are threaded 1/8" and available as spare

283 Air Couplers & Plugs

250 PSI

Used for instant coupling of grease guns, impact wrenches and other air operated equipment in industrial and automotive applications

Positive action locking mechanism ensures that coupler cannot be detached accidentally

Extra large air passage ensures greater air flow

Automatic air check valve shuts off air instantly when uncoupled, providing leak proof seal

Heavy Duty Steel construction

SPECIFICATIONS

OPERATING PRESSURE	250 PSI	17 BAR

	AIR COUPLER	AIR PLUG	
M STYLE MILTON INTERCHANGE INDUSTRIAL			0.211" (5.35 mm) 
T STYLE TRU FLATE / PARKER INTERCHANGE AUTOMOTIVE			0.085" (2.16 mm) 
A STYLE ARO INTERCHANGE			0.325" (8.25 mm) 
L STYLE LINCOLN INTERCHANGE AUTOMOTIVE			0.792" (20.1 mm) 
N STYLE NITTO INTERCHANGE	–		0.196" (5 mm) 
AMT STYLE UNIVERSAL RETAIL		–	

AIR PLUGS & COUPLER KITS

KIT/AIR/M/ST5

5pc. M style kit includes
- 1pc. Coupler - 1/4" NPT (F)
- 3pc. Plug - 1/4" NPT (M)
- 1pc. Plug - 1/4" NPT (F)

KIT/AIR/M/ST2

2pc. M style kit includes
- 1pc. Coupler - 1/4" NPT (F)
- 1pc. Plug - 1/4" NPT (M)

ORDERING INFORMATION

CAT NR.	ORD NR.	THREAD	TYPE	PACK QTY.
M STYLE				
QCA/M/1-4M/N	60785	1/4" NPT (M)	Coupler	1
QCA/M/1-4F/N	60786	1/4" NPT (F)	Coupler	1
AN/M/1-4M/N	60765	1/4" NPT (M)	Plug	1
AN/M/1-4M/N/ST2	60766	1/4" NPT (M)	Plug	2
AN/M/1-4F/N	60767	1/4" NPT (F)	Plug	1
AN/M/1-4F/N/ST2	60768	1/4" NPT (F)	Plug	2
KIT/AIR/M/N/ST5	60796	5pc kit		
KIT/AIR/M/N/ST2	60795	2pc kit		
T STYLE				
QCA/T/1-4M/N	60787	1/4" NPT (M)	Coupler	1
QCA/T/1-4F/N	60788	1/4" NPT (F)	Coupler	1
AN/T/1-4M/N	60769	1/4" NPT (M)	Plug	1
AN/T/1-4M/N/ST2	60770	1/4" NPT (M)	Plug	2
AN/T/1-4F/N	60771	1/4" NPT (F)	Plug	1
AN/T/1-4F/N/ST2	60772	1/4" NPT (F)	Plug	2
A STYLE				
QCA/A/1-4/M/N	60789	1/4" NPT (M)	Coupler	1
QCA/A/1-4F/N	60790	1/4" NPT (F)	Coupler	1
AN/A/1-4M/N	60773	1/4" NPT (M)	Plug	1
AN/A/1-4M/N/ST2	60774	1/4" NPT (M)	Plug	2
AN/A/1-4F/N	60775	1/4" NPT (F)	Plug	1
AN/A/1-4F/N/ST2	60776	1/4" NPT (F)	Plug	2
L STYLE				
QCA/L/1-4M/N	60791	1/4" NPT (M)	Coupler	1
QCA/L/1-4F/N	60792	1/4" NPT (F)	Coupler	1
AN/L/1-4M/N	60777	1/4" NPT (M)	Plug	1
AN/L/1-4M/N/ST2	60778	1/4" NPT (M)	Plug	2
AN/L/1-4F/N	60779	1/4" NPT (F)	Plug	1
AN/L/1-4F/N/ST2	60780	1/4" NPT (F)	Plug	2
N STYLE				
AN/N/1-4M/B	60781	1/4" BSPT (M)	Plug	1
AN/N/1-4M/B/ST2	60782	1/4" BSPT (M)	Plug	2
AMT STYLE				
QCA/AMT/1-4M/N	60793	1/4" NPT (M)	Coupler	1
QCA/AMT/1-4F/N	60794	1/4" NPT (F)	Coupler	1

284 360° Swivel Air Plug

AN-M

150 PSI

NEW!

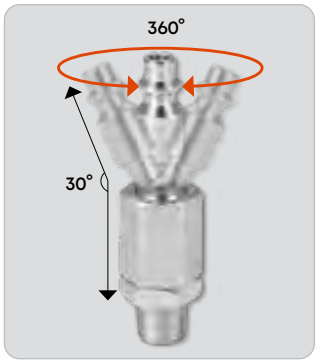

Rotates 360° at 30° intervals

M Style - Milton Interchange Industrial Air Plugs are used for instant coupling of grease guns, impact wrenches and other air operated equipment in industrial and automotive applications

Heavy duty steel construction

In-built 360° swivel for easy manoeuvrability. It prevents kinking & cracking of hose

Positive action locking mechanism ensures that coupler cannot be detached accidentally

Extra large air passage ensures greater air flow



ORDERING INFORMATION

CAT NR.	ORD NR.	THREAD SIZE	BOX QTY.
AN/M/S/1-4M/N	60783	1/4" NPT (M)	10

285 Universal Z-Swivel Adaptor

SWV-Z

150 PSI

NEW!

360° Swivel adaptor ideal for use with air tools such as nail guns, impact wrenches, air hammers, ratchets, drills etc.

Durable steel construction

Provides kink & twist free airline connection for increased hose durability

Swivels 360° at two pivot points for enhanced flexibility and reduced user fatigue

Threaded: 1/4" NPT

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
SWV/Z/1-4M/1-4F/N	61680	10

286 Air Line Accessories - Air Line Fittings

All Steel Construction

Used to connect Air Control Units to Air Inlet port on equipment

Threaded 1/4" (M) x 1/4" (M)

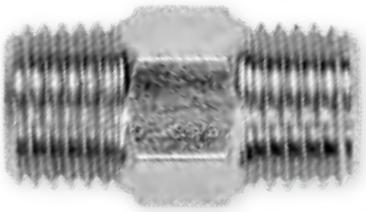

NPL/RP/N

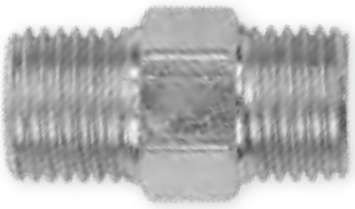

NPL/KP71/K63

ORDERING INFORMATION

CAT NR.	ORD NR.	THREADS	BOX QTY.
NPL/KP71/K63	60704	1/4" BSP (M)	10
NPL/RP/N	60703	1/4" NPT (M)	10

287 Tyre Pressure Gauge

TYG

Compact pocket size air pressure gauge
Pressure range from 10-50 PSI
Metallic wear & tear resistant body
Accuracy ± 1 PSI



Mate the mouth of the tyre pressure gauge with the air valve of the tyre



Press the tyre pressure gauge on the valve

Check the reading on the pressure reading tube that slides out of the tyre pressure gauge

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
TYG/10-50/GRZ	61396	25

288 Tyre Pressure Gauge Pen Style

PTYG

NEW!

Compact Pen type Tyre Pressure Gauge, designed to measure wheel pressure of trucks, SUVs, RVs, ATVs etc.

Ideal for dual wheels & other difficult to reach valves

Steel body with black zinc die cast chuck

Dual Chuck Design
30° Reverse chuck is designed for inner wheels or difficult to reach valves & straight chuck is used for outer wheels

4 sided chrome plated steel read out scale with easy to read graduations

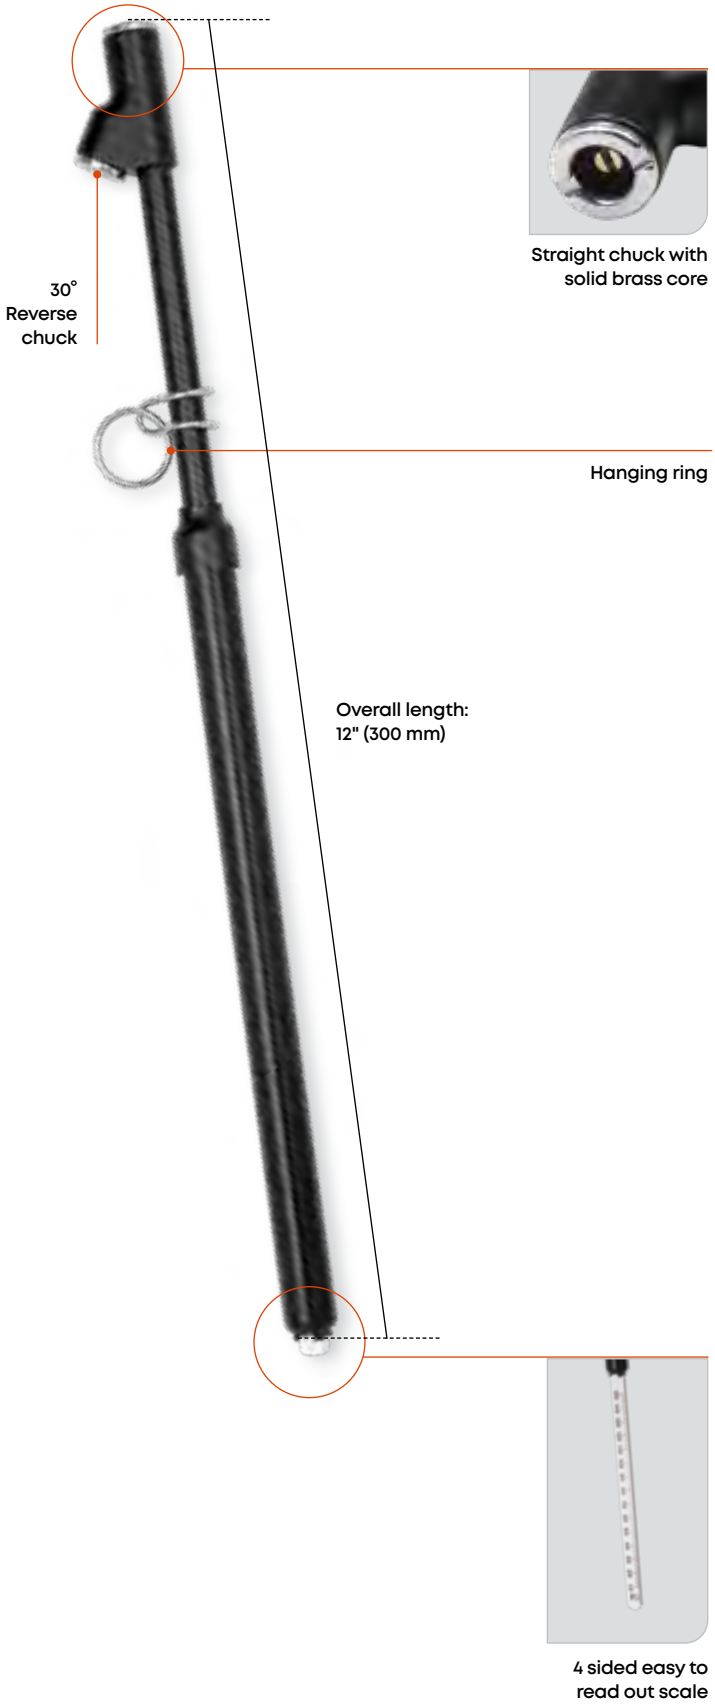

SPECIFICATIONS

PRESSURE RANGE	10-150 PSI	1-11 BAR
ACCURACY	±3 PSI	±0.2 BAR
GRADUATED IN UNITS	PSI, BAR, kPa & kg/cm²	
LEAST COUNT	2 PSI, 0.25 BAR, 20 kPa, 0.25 kg/cm²	

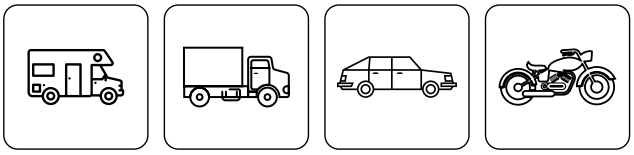

ORDERING INFORMATION

CAT NR.	ORD NR.	OVERALL LENGTH		BOX QTY.
		(INCH)	(MM)	
TYG/10-150/D	61397	12	300	30

289 Tyre Inflator Gauge for Cars

TIG-12

Reliable and sturdy, the
3 in 1 GROZ tyre gauge is designed to:

1. Measure Tyre Pressure
2. Inflate Tyres
3. Deflate Tyres

Tyre deflation is via the deflation valve on the gun body. A simple press of the valve will activate it and reduce pressure.

Available with choice of

a. Analog Gauge
b. Digital Gauge

Aluminium die cast gun with flexible hose & straight chuck suitable for cars & other light vehicles

SPECIFICATIONS

GAUGE TYPE	Digital		Analog	
GAUGE DIAMETER	2-1/2"	63 MM	2-1/2"	63 MM
BACKLIGHT	Yes		-	
AVAILABLE UNIT SELECTION	PSI, BAR, MPa, Kg/cm2		PSI, BAR	
MAX. PRESSURE	UPTO 300 PSI	21 BAR	UPTO 60 PSI	UPTO 4 BAR
ACCURACY	± 1% of Full scale		3-2-3%	
RESOLUTION	0.1 PSI		1 PSI	
POWER SUPPLY	Lithium Battery		-	

VARIANTS

Tyre Inflator with Analog Gauge

Tyre Inflator with Digital Gauge

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
BSP THREADS		NPT THREADS			
TIG/M/12/BSP	61310	TIG/M/12/N	61300	12" (300 mm) flexible hose with straight chuck; Analog Gauge	10
TIG/D/12/BSP	61360	TIG/D/12/N	61350	12" (300 mm) flexible hose with straight chuck; Digital Gauge	10

290 Tyre Inflator Gauges for Trucks

TIG-24

Reliable and sturdy, the
3 in 1 GROZ tyre gauge is designed to:

1. Measure Tyre Pressure
2. Inflate Tyres
3. Deflate Tyres

Tyre deflation is via the deflation valve on the gun body. Simple press of the valve activates it and reduces pressure

Available with choice of:

a. Analog Gauge
b. Digital Gauge

Aluminium die cast gun with flexible hose, rigid extension & dual chuck suitable for attachment on valves of large tyres

VARIANTS

Tyre Inflator with Analog Gauge

Tyre Inflator with Digital Gauge

SPECIFICATIONS

GAUGE TYPE	Digital		Analog	
GAUGE DIAMETER	2-1/2"	63 MM	2-1/2"	63 MM
BACKLIGHT	Yes		-	
AVAILABLE UNIT SELECTION	PSI, BAR, MPa, Kg/cm^2		PSI, BAR	
MAX. PRESSURE	UPTO 300 PSI	UPTO 21 BAR	UPTO 210 PSI	UPTO 15 BAR
ACCURACY	± 1% of Full scale		± 1.6% of Full scale	
RESOLUTION	0.1 PSI		2 PSI	
POWER SUPPLY	Lithium Battery		-	

ORDERING INFORMATION

CAT NR.	ORD NR.	CAT NR.	ORD NR.	DESCRIPTION	BOX QTY.
BSP THREADS		NPT THREADS			
TIG/M/24D/BSP	61330	TIG/M/24D/N	61320	24" (600 mm) flexible hose with dual chuck; Analog Gauge	10
TIG/D/24D/BSP	61380	TIG/D/24D/N	61370	24" (600 mm) flexible hose with dual chuck; Digital Gauge	10

291 Tyre Pressure Gauge Pocket Sized

TPG

NEW!

Compact pocket size Tire Pressure Gauge fits easily onto standard Schrader valve

Pressure Range from 5-60 PSI (0.34-4 Bar)

Metallic wear & tear resistant body with a 2" dial featuring clear & easy to read markings in PSI & Bar

Accuracy +/- 1 PSI

Ideal for use on cars, trucks, motorcycles & bicycles

Inspect the valve for dirt and debris, then insert the tire pressure gauge and check the readings

Press the release valve to reset the pressure

ORDERING INFORMATION

CAT NR.	ORD NR.
TPG/S/5-60	61398

292 Coolant Mixers

The Groz Coolant Mixer ensures accurate and uniform blending of metal cutting fluids, coolants, antifreeze etc with water for supply to machines.

Widely used in industrial applications these are also useful in garages, motor workshops for mixing of detergents, antifreeze etc

Compact Construction with Aluminium body and a Stainless Steel Rotary Disc Valve precision CNC machined for accurate performance over time

Mixer works on a venturi mechanism driven by pressure from water supply

Supplied with brass ball valve and 2 ball check valves to prevent back flow

Units cannot operate under back pressure hence use these to fill up nearby containers

Mixing ratio can be adjusted as required through a simple turn of the knob

Virtually maintenance free these are easy to install and operate.

A time and cost saving alternative to manual blending these are built durable for reliable performance over time

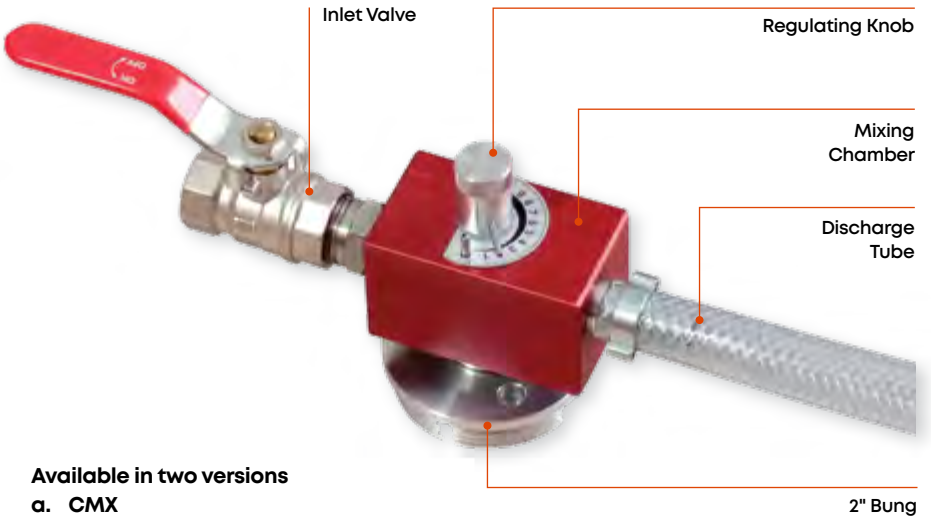

Available in two versions

a. CMX
Coolant/liquid mixers with one piece polypropylene suction tube, 2" bung adaptor & delivery hose. Press fit plastic suction tube can be cut to fit drum height

b. CMX-SS
Coolant/liquid mixers with stainless steel 2pc threaded suction tube & 2" bung adaptor & delivery hose
The Bung adaptor can be tightened anywhere along the suction tube depending upon available drum height

ORDERING INFORMATION

CAT NR.	ORD NR.	SUCTION TUBE O.D.		BOX QTY.
		(INCH)	(MM)	
* CMX/1	61100	0.47	12	10
CMX/2	61101	0.62	16	10
CMX/3	61102	0.47	12	10
* CMX/SS/1	61105	0.86	22	10
CMX/SS/2	61106	0.86	22	10
CMX/SS/3	61107	0.86	22	10

* Best Seller

CMX VARIANTS

	CMX/1	CMX/2	CMX/3
	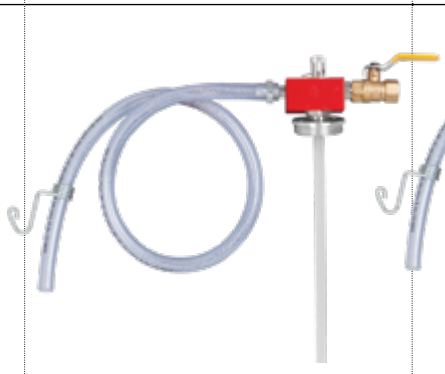	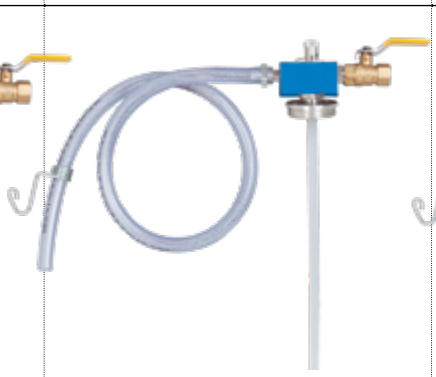	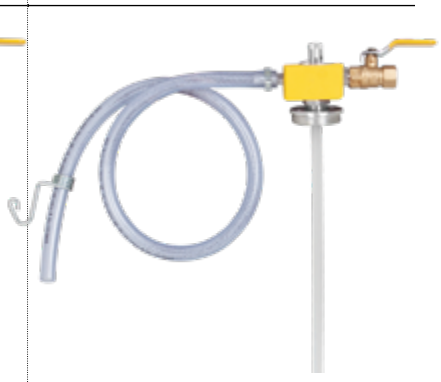
MECHANISM	Venturi Type	Venturi Type	Venturi Type
WATER INLET	1/2" Female	1/2" Female	1/2" Female
MIXING RATIO	0 to 11%	0 to 57 %	0 to 9%
FLOW RATE	1100 Litres / Hour 290 Gallons / Hour	1250 Litres / Hour 330 Gallons / Hour	1100 Litres / Hour 290 Gallons / Hour
WETTED COMPONENTS	Aluminium, Stainless Steel, Brass, Acetal, PVC, Nitrile Rubber & Polypropylene	Aluminium, Stainless Steel, Brass, Acetal, PVC, Nitrile Rubber & Polypropylene	Aluminium, Stainless Steel, Brass, Acetal, PVC, Nitrile Rubber & Polypropylene
RECOMMENDED USE	Cutting / Metal Working Fluids	Antifreeze, Detergents / Soap Solutions	Cutting / Metal Working Fluids

CMX-SS VARIANTS

	CMX/SS/1	CMX/SS/2	CMX/SS/3
	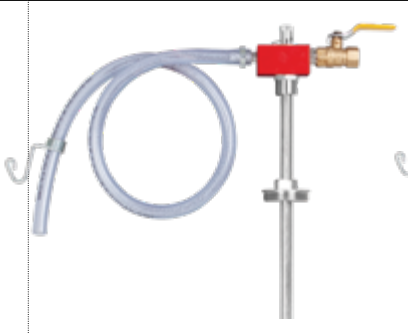		
MECHANISM	Venturi Type	Venturi Type	Venturi Type
WATER INLET	1/2" Female	1/2" Female	1/2" Female
MIXING RATIO	0 to 11%	0 to 57 %	0 to 9%
FLOW RATE	1100 Litres / Hour 290 Gallons / Hour	1250 Litres / Hour 330 Gallons / Hour	1100 Litres / Hour 290 Gallons / Hour
WETTED COMPONENTS	Aluminium, Stainless Steel, Brass, Acetal, PVC, Nitrile Rubber	Aluminium, Stainless Steel, Brass, Acetal, PVC, Nitrile Rubber	Aluminium, Stainless Steel, Brass, Acetal, PVC, Nitrile Rubber
RECOMMENDED USE	Cutting / Metal Working Fluids, Soy & other vegetable esters	Antifreeze, Detergents / Soap Solutions, Soy & other vegetable esters	Cutting / Metal Working Fluids, Soy & other vegetable esters

ALPHABETIC INDEX

A		
Accessories	Air Operated Oil Pumps	176
	Oil Control Guns	175
	Filter Regulator & Lubricator	330
Adhesive Can		271
Air Bleeder Valves		73
Air Blow Guns	7 Piece Air Blow Gun Kit	340
	6 Pc Interchangeable Air Blow Gun Kit	339
	Metal Body - Kits	344
	Professional	336
	Standard	338
	Metal Body	341
	Extendable Reach	343
Air Control Units	Air Regulators	311
	Air Filters	312
	Air Filters - Metal Bowl	313
	Coalescing Filters / Mist Separators	314
	Air Lubricators	316
	Air Lubricators - Metal Bowl	317
	Filter-Regulator Combination	318
	Filter-Regulator Combination Metal Bowl	319
	Filter Regulator & Lubricator 2 piece	320
	Filter Regulator & Lubricator 2 Piece Metal Bowl	322
	Filter Regulator & Lubricator 3 piece	324
	Filter Regulator & Lubricator 3 Piece Metal Bowl	326
	Precision Regulators	328
	Safety Lockout Valves	329
Air Operated Pumps	Transfer Pumps	144
	Double Diaphragm Pumps	164
	Double Diaphragm Pumps Waste Oil	208
	Grease Ratio Pumps 50:1	98
	Oil Ratio Pumps	145
	Stainless Steel Oil Ratio Pump 3:1	149
Air Regulators		311
Air Hose Reel		335
Air/Water Hose Reels		202
Antifreeze Pumps - Lever Action		128
B		
Band Dollies		299
Battery Powered Grease Gun		52
Battery Transfer Pump		260
Battery Operated Fuel Transfer Pump		261
Battery Operated DEF Transfer Pump		262
Bearing Packers		93
Bilge/ Diaphragm Pump		269
Brass Transfer Pumps		268
Brake Bleeder & Vacuum Tester Kit		206
Bucket Greasers		116
Bulk Loaders/Filler Nipples		73
Bung Nuts		142
C		
Caulking Gun		272
Chemical Pump, Propylene		259
Chemical Pump, Nylon		258
Clear Tube Lever Grease Gun		22
Clear Tube Pistol Grip Grease Gun		34
Coalescing Filters		314
Control Valves - Grease	Aluminium Body	111
	Boosters	110
	Heavy Duty	111
	Metered	112
	Professional	109
Couplers	Air Coupler	348
	Button Head Couplers	62
	Hydraulic Grease Coupler Heavy Duty	59
	Hydraulic Grease Coupler Standard	57
	Hydraulic Grease Coupler Professional	57
	Hydraulic Grease Coupler Slim Line	58
	Hydraulic Grease Coupler Machined Jaw	58
	Hydraulic Grease Coupler 360° Swivel	60
	Hydraulic Grease Coupler 90°	60
	Hydraulic Grease Coupler 360° Swivel Slimline	61
	Hydraulic Coupler Air-O	59
	Quick Lock Grease Coupler	55
	Super Grip Quick Connect Grease Coupler	56
D		
DEF Control Nozzle	Automatic	289
	Manual	288
DEF Pumps	Electric DEF Pumps	239
	DEF Transfer Systems	240
	Electric DEF Transfer Pumps	242
	Electric DEF Pumps Stainless Steel	244
	Electric Drum/ IBC Pump	246
	Air Operated DEF Pumps	248
	Electric Drum Pumps	249
	Plastic Lever Pump	250
	Vertical Lift Pump 316 Stainless Steel	251
	Safety Pumps 316 Stainless Steel	252
	Rotary Drum Pump Stainless Steel	254
Diaphragm/Bilge Pump		269

Dispensers	Needle Nose	63
	Seal Off	64
Double Diaphragm Fuel Transfer Pump		238
Double Diaphragm Waste Oil Pump - Air Operated		208
Double Diaphragm - Air Operated		164
Double Lever Grease Gun		28
Drain Pans		142
Drip Pans - V Series		217
Drain Container		217
Drain Container - Heavy Duty		218
"Drive Fit" Grease Fitting Installer		85
Drum Bung Converter		306
Drum Cradle		305
Drum Dolly - 4 Wheels		298
Drum Faucets	With Bucket Hanger	307
	Food Grade	308
Drum Level Indicator		309
Drum Trolley	Heavy Duty	300
	Drum Trolley	303
	Heavy Duty	303
	Low Profile	304
	Adjustable	304
Drum Wrench (Drum Opener)		306
Dual Discharge Pistol Grip Grease Gun		36
Dual Vacuum & Pressure Hand Pump Kit		207
E		
Easy Out Tools		86
Elbows & Greasing Adaptors		84
Electric Oil & Fuel Pump		232
Electric Oil Pump		162
Electronic Oil Control Guns	Professional	170
	Preset	174
Electric Oil Drum Pump		160
Electric Waste Oil Pump		204
Electronic Oil Meter - Professional		168
Extensions - Grease Gun	Flexible / Rigid	72
	Steel Extensions	72
Ezee Flow Pump		137
Ezee Flow Pump Premium		138
Ezee Flow Oil & Fuel Pump		139
Ezee Flow Multi-Fluid Pump		140
Ezee Lube Kit		94
F		
Faucets	Regular	308
	With Bucket Hangar	307
	Food Grade	308
Female Loader Adaptors		124
Fitting - Air Line		351
Fitting - Grease		76
Flexible & Rigid Spouts		186
Flexible/Rigid Grease Gun Extension		72
Flexible Spout Measures		184
Fluid Extractor Pump		205
Follower Plates		123
Foot Operated Grease Pump		118
Front Action Drum Pump		132
Filter Wrench		295
Fuel Filters	Fuel Filters	290
	Fuel Filters - Spin on Cartridge Style	294
Fuel Meters	Mechanical	273
	Mechanical In-line	274
	Mechanical Diesel	275
	Mechanical Oval-Gear	276
	Digital Oval-Gear	277
	Digital In-line	278
	Digital - Professional	279
Fuel Control Nozzles	Automatic	284
	Auto Shut-off	286
	E-Series	287
	Manual	282
Fuel Pump	Electric - Heavy duty	220
	Electric - High Flow	222
	Electric - Continuous Duty	223
	Electric - Continuous Duty High Flow	224
	Open Bowser AC Diesel Refilling System	225
	Mini Bowser Diesel Refilling System	226
	Electric Diesel Pumps	228
	Electric Diesel Pumps V Series	230
	Electric Diesel Pump Heavy Duty	231
	Electric Oil & Fuel Pumps	232
	Lever Action	234
	Rotary Booster Pump - 3:1	235
	Industrial Rotary Drum Pumps	236
	Fuel Transfer Pump Double Diaphragm	238
Flexible Dispensing Spout		186
Funnels	Measuring	187
	Conical	188
	Conical - 4 Pc Set	188
	Super Quick Fill	189
	Radiator / Big Mouth	190
	Multi-purpose	191
	Quick Fill	192
	Extra Long Reach	193
	Multipurpose Funnel Set 3 Pieces	194
	Tractor	195
	Flexible	196
	Flexible Extra Large	196
	Smart	197
G		
Greasing Adaptors & Elbows		84
Grease Coupler - Quick Lock		55
Grease Control Valves	Aluminium Body	111
	Boosters	110
	Heavy Duty	111
	Metered	112
	Professional	109
Grease Feeders		74

Grease Fitting Caps		86
Grease Fitting Installer - Drive Fit		85
Grease Fitting Sets		80
Grease Fitting Unblocker		85
Grease - Professional Grade		64
Grease Gun Extension	Flexible / Rigid	72
	Steel Extension	72
Grease Gun Holders	Steel	66
	Heavy duty	66
	Magnetic	67
Grease Guns	All Weather Pistol grip Grease Gun	38
	Air Operated Grease Guns	48
	Air Operated Grease Guns Dual Mode	50
	Battery Powered Grease Guns	52
	Clear Tube Pistol Grip Grease Gun	34
	Double lever Grease Gun	28
	Grease Tube Dispenser	44
	Lever Grease Gun Clear Tube	22
	Lever Grease Gun Heavy Duty	8
	Lever Grease Gun High Pressure/ High Volume	10
	Lever Grease Gun Dual Piston	12
	Lever Grease Gun Japanese Style	20
	Lever Grease Gun Professional	13
	Lever Grease Gun Pistol/ Lever Handle	24
	Lever Grease Gun Standard	14
	Lever Grease Gun Supa Lite	18
	Lever Grease Gun Super Value	16
	Lever Grease Gun 'V' Series	19
	Lever Oil Gun	21
	Mini Lever Grease Gun	45
	Mini Pistol Grease Gun Deluxe	43
	Mini Pistol Grease Gun Popular	45
	Mini Grease Gun - Push Type	42
	Pistol Grip Grease Gun	32
	Pistol Grip Grease Guns All Weather	38
	Pistol Grip Grease Gun Clear Tube	34
	Pistol Grip Grease Gun Dual Discharge	36
	Pistol Grip Grease Gun High Pressure/ High Volume	30
	Pistol Grip Grease Gun Professional	29
	Pistol Grip Grease Gun Supa Lite	41
	Pistol Grip Grease Gun 'V' Series	40
	Pistol Grip Grease Gun 'Vario'	37
	Push Type Grease Guns	42
	Quick Connect Pistol Grip Grease Gun	45
	Spin-On Grease Guns	26
	USB Rechargeable	51
	'Vario' Premium Pistol Grip Grease Gun	37
Grease Hoses	Regular	68
	Heavy Duty	70
Grease Injector Needle		63
Grease Tube Dispenser		44
Grease Pumps / Bucket Greasers / Greasing System	Heavy Duty	114
	Bucket Greaser With Quick Lock Coupler	115
	Bucket Greaser	116
	Foot Operated	118
	Portable	120
	Filler Pump	121
	Filler Pump - High Pressure	122
	Ratio Pump - High Volume	97
	Ratio Pump - 50:1	98
	Ratio Pump - 60:1	100
	Grease Pump Kits	102
Grease Scoop & Swipe Set		119

H

Hose, Fuel	Anti-static	296
	Non-Grounded	296
Hose Reels	Metal	200
	Plastic	335
Hoses, Grease	Regular	68
	Heavy Duty	70
Hydraulic Couplers	Button Head Couplers	62
	Heavy Duty	59
	Standard	57
	Professional	57
	Slim Line	58
	Machined Jaw	58
	360° Swivel	60
	90°	60
	Swivel Slimline	61
	Air-O	59
	Quick Lock	55
	Super Grip Quick Connect	56

L

Lever Action Antifreeze Pumps		128
Lever Action Oil Pump		126
Lever Grease Guns	Clear Tube	22
	Double Lever	28
	Dual Piston	12
	Oil Gun	21
	Japanese Style	20
	Professional	13
	Piston/ Lever Handle	24
	'V' Series	19
	Heavy Duty	8

	High Pressure/ High Volume	10
	Standard	14
	Super Value	16
	Spin-On	26
	Supa-Lite	18
Low Profile Truck Drains		214
M		
Measures	With Flexible Spout	184
	With Flexible Spout - 5 Pc Set	185
Measuring Jugs		183
Mechanical Oil Control Gun		172
Meters - Fuel & DEF	Mechanical Fuel Meter	273
	Mechanical Fuel Meter In-line	274
	Mechanical Diesel Meters	275
	Mechanical Fuel Meter Oval Gear	276
	Digital Oval Gear Fuel Meters	277
	Digital Fuel Meter In-line	278
	Digital Fuel Meter Professional	279
	Digital DEF Meter Professional	280
Meters - Oil	Electric - Professional	168
	Mechanical	169
N		
Needle Nose Dispensers		63
DEF Control Nozzle	Automatic	289
	Manual	288
Nozzles - Fuel	Automatic	284
	Auto Shut-off	286
	E-Series	287
	Manual	282
O		
Oil Bottle Pump		141
Oil Cans		180
Oil Cans - Squeeze Bottle		184
Oil Control Gun	Regular	166
	Mechanical	172
	With Electronic Meter Professional	170
	With Electronic Preset Meter	174
Oil Control Gun Accessories		175
Oil Lube Dispensers		130
Oil Meters	Electronic - Professional	168
	Mechanical	169
Oil Pumps	Air Operated Transfer Pump	144
	Air Operated Oil Ratio Pump - 1:1	146
	Air Operated Oil Ratio Pump - 3:1	147
	Air Operated Oil Ratio Pump - 5:1	148
	Air Operated Oil Ratio Pump 6.5:1	145
	Lever Action	126
	Lever Action Antifreeze Pumps	128
	Vertical Lift Pump	129
	Oil Lube Dispenser	130
	Front Action Drum Pump	132
	Steel Safety Pump	133
	Rotary Drum Pumps	134
	Rotary Drum Pump Professional	135
	Quart / Litre Stroke Pump	136
	Ezee Flow Pump	137
	Ezee Flow Pump - Premium	138
	Ezee Flow Oil & Fuel Pump	139
	Ezee Flow Multi-Fluid Pump	140
	Oil Bottle Pump	141
	Pump Kits	150
Oil Spigot		177
Oil Pump Accessories - Air Operated		175
P		
Plastic Rotary Pumps		256
Plastic Truck Drain		212
Pumps - Fuel	Electric - Heavy duty	220
	Electric - High Flow	222
	Electric - Continuous Duty	223
	Electric - Continuous Duty High Flow	224
	Open Bowser AC Diesel Refilling System	225
	Mini Bowser Diesel Refilling System	226
	Electric Diesel Pumps	228
	Electric Diesel Pumps V Series	230
	Electric Diesel Pump Heavy Duty	231
	Electric Oil & Fuel Pumps	232
	Lever Action	234
	Rotary Booster Pump - 3:1	235
	Industrial Rotary Drum Pumps	236
	Fuel Transfer Pump Double Diaphragm	238
Pumps - Grease	Heavy Duty	114
	Bucket Greaser With Quick Lock Coupler	115
	Bucket Greaser	116
	Foot Operated	118
	Portable	120
	Filler Pump	121
	Filler Pump - High Pressure	122
	Ratio Pump - High Volume	97
	Ratio Pump - 50:1	98
	Ratio Pump - 60:1	100
	Grease Pump Kits	102
Pumps - Oil	Air Operated Transfer Pump	144
	Air Operated Oil Ratio Pump - 1:1	146
	Air Operated Oil Ratio Pump - 3:1	147
	Air Operated Oil Ratio Pump - 5:1	148
	Air Operated Oil Ratio Pump 6.5:1	145

	Lever Action	126
	Lever Action Antifreeze Pumps	128
	Vertical Lift Pump	129
	Oil Lube Dispenser	130
	Front Action Drum Pump	132
	Steel Safety Pump	133
	Rotary Drum Pumps	134
	Rotary Drum Pump Professional	135
	Quart / Litre Stroke Pump	136
	Ezee Flow Pump	137
	Ezee Flow Pump - Premium	138
	Ezee Flow Oil & Fuel Pump	139
	Ezee Flow Multi-Fluid Pump	140
	Oil Bottle Pump	141
	Pump Kits	150
Pumps - DEF & Speciality	Electric DEF Pumps	239
	DEF Transfer Systems	240
	Electric DEF Transfer Pumps	242
	Electric DEF Pumps Stainless Steel	244
	Electric Drum/ IBC Pump	246
	Air Operated DEF Pumps	248
	Electric Drum Pumps	249
	Plastic Lever Pump	250
	Vertical Lift Pump 316 Stainless Steel	251
	Safety Pumps 316 Stainless Steel	252
	Rotary Drum Pump Stainless Steel	254
	Plastic Rotary Pumps	256
	Chemical Nylon Pump	258
	Chemical Pump Polypropylene	259
	Battery Transfer Pump	260
	Fuel Transfer Pump Battery Operated	261
	DEF Pump Battery Operated	262
	Rechargeable DEF Pump	263
	Siphon Pumps	264
	Siphon Pumps - Portable	265
	Transfer Pump	266
	Brass Transfer Pump	268
	Diaphragm / Bilge Pumps	269
	Quart/ Gallon Fluid Pump	270
	Tire Sealent Pump	271
Precision Oiler		182
Push Type Grease Gun, Mini		42
Q		
Quick Lock Grease Coupler		55
Quick Connect Grease Coupler - Super Grip		56
Quart/ Litre Stroke Pump		136
R		
Rigid & Flexible Grease Gun Extensions		72
Rotary Drum Pumps - Industrial		236
Rotary Drum Pumps		134
Rotary Drum Pump - Professional		135
Rotary Booster Pump 3:1		235
Rotary Pump - Plastic		256
S		
Safety Pumps - Steel		133
Scoop & Swipe Set		119
Seal Off Dispenser		64
Siphon Pumps		264
Siphon Pumps - Portable		265
Smart Funnels		197
Squeeze Bottle Oil Can		184
Spigots, Oil		177
Suction Guns		178
Suction Tubes		143
Steel Safety Pump		133
T		
Thread Tester - Grease Fitting		84
Tire Sealant Pump		271
Tyre Inflator Gauge	For Cars	253
	For Trucks	254
	Pocket Sized	255
Transfer Guns		179
Transfer Pumps		266
Transfer Pumps - Brass		268
Truck Drain- Plastic		212
Truck Drain- Low Profile		214
Trolley Mounted Kits	Grease	102
	Oil	150
U		
USB Rechargeable Battery Grease Gun		51
Universal Z-Swivel Adaptor		350
V		
Vertical Lift Pump - 316 Stainless Steel		251
Vertical Lift Pump		129
W		
Waste Oil Pumps	Electric	204
	Fluid Extractor Pump	205
	Air Operated Double Diaphragm	208
	Evacuation Kits	209

NUMERICAL INDEX

ORD NR.	PAGE NR.
41205	186
41206	186
41207	186
41208	186
41209	186
41224	186
41225	186
41226	186
41227	186
41229	186
41410	180
41411	180
41412	180
41413	180
41414	180
41415	180
41420	180
41421	180
41422	180
41423	180
41424	180
41425	180
41430	180
41431	180
41432	180
41433	180
41434	180
41435	180
41530	180
41531	180
41532	180
41533	180
41534	180
41610	180
41611	180
41612	180
41613	180
41614	180
41615	180
41620	180
41621	180
41622	180
41623	180
41624	180
41625	180
41630	180
41631	180
41632	180
41633	180
41634	180
41635	180
41805	182
41806	184
41807	184
41808	184
41809	184
41810	180
41811	180
41812	184
41813	184
41815	180
41816	180
41820	180
41821	180
41825	180
41826	180
41844	271
41856	271
41883	185
41885	185
41886	185
41900	184
41901	184
41902	184
41903	184
41904	184
41913	184
41920	197
41921	197
41922	197
41930	195
41931	195
41935	188
41936	188
41940	198
41941	198
41943	183
41944	183
41945	183
41946	183
41947	183
41948	183
41949	183
41960	216
41961	216
41965	216
41966	217
41968	216
41971	217
41972	218
41973	218
41980	187
41981	187
41982	187
41983	187
41985	187
41986	187
41987	187
41988	187
41990	183
41991	183
41992	183
42000	196
42004	196
42005	188
42006	194
42010	186
42015	270
42020	183
42021	183
42030	193
42035	189
42036	190
42037	190
42038	191
42039	192
42220	180
42221	180
42222	180
42223	180
42225	180
42226	180
42227	180
42228	180
42230	180
42231	180
42232	180
42233	180
42240	180
42241	180
42242	180
42243	180
42245	180
42246	180
42247	180
42248	180
42250	180
42251	180
42252	180
42253	180
42340	10
42341	10
42342	10
42350	10
42351	10
42352	10
42360	30
42361	30
42362	30
42370	30
42371	30
42372	30
42380	24
42381	24
42382	24
42390	24
42400	14
42401	14
42402	14
42420	14
42421	14
42422	14
42430	14
42431	14
42432	14
42440	14
42441	14
42442	14
42450	14
42451	14
42452	14
42470	14
42471	14
42472	14
42500	16
42501	16
42502	16
42520	16
42521	16
42522	16
42560	16
42561	16
42565	16
42566	16
42580	16
42585	16
42590	16
42591	16
42595	16
42596	16
42607	13
42608	13
42609	13
42623	13
42624	13
42625	13
42630	12
42631	12
42632	12
42640	12
42641	12
42642	12
42700	8
42701	8
42702	8
42720	8
42721	8
42722	8
42723	18
42724	18
42725	18
42726	18
42727	18
42728	18
42740	21
42741	21
42742	21
42745	21
42746	21
42747	21
42750	8
42751	8
42752	8
42753	8
42760	8
42761	8
42762	8
42763	8
42780	8
42785	8
42790	20
42795	28
42796	28
42797	26
42798	26
42799	28
42804	26
42808	26
42809	26
42810	26
42811	26
42812	26
42813	26
42814	26
42912	19
42913	19
42914	19
42926	19
42927	19
42928	19
42954	40
42955	40
42956	40
42973	40
42974	40
42975	40
43000	32
43001	32
43002	32
43015	36
43016	36
43017	36
43020	32
43021	32
43022	32
43040	38
43041	38
43042	38
43045	38
43046	38
43047	38
43048	38
43050	32
43051	32
43052	32
43061	29
43062	29
43063	29
43064	41
43065	41
43066	41
43067	41
43068	41
43069	41
43070	32
43071	32
43072	32
43080	32
43085	32
43088	37
43095	37
43096	37
43098	37
43100	46
43101	46
43105	42
43107	42
43140	44
43141	44
43142	44
43143	44
43145	44
43200	45
43201	45
43202	45
43240	43
43241	43
43242	43
43250	43
43251	43
43252	43
43260	43
43261	43
43262	43
43265	43
43266	43
43267	43
43280	45
43281	45
43282	45
43300	48
43301	48
43302	48
43303	48
43304	48
43305	48
43320	48
43321	48
43322	48
43323	48
43324	48
43325	48
43360	47
43361	47
43362	47
43364	50
43365	50
43366	50
43367	50
43370	47
43371	47
43372	47
43380	48
43381	48
43385	48
43389	48
43400	109
43401	109
43402	109
43403	109
43404	109
43415	112
43416	112
43420	109

ORD NR.	PAGE NR.
43421	109
43422	109
43423	109
43424	109
43445	111
43446	111
43447	111
43448	111
43450	110
43451	110
43452	110
43453	110
43454	110
43460	110
43461	110
43462	110
43463	110
43464	110
43465	110
43466	110
43467	110
43468	110
43469	110
43470	110
43471	110
43472	110
43473	110
43474	110
43480	111
43481	111
43500	57
43501	57
43502	57
43503	57
43504	57
43505	57
43507	57
43508	57
43509	57
43510	57
43511	57
43512	57
43516	57
43517	57
43518	57
43520	59
43521	59
43522	59
43523	59
43524	59
43525	59
43533	61
43534	61
43535	57
43536	57

ORD NR.	PAGE NR.
43537	57
43538	61
43540	59
43541	59
43542	59
43543	55
43544	55
43545	55
43546	55
43547	55
43550	60
43551	60
43552	60
43553	55
43554	55
43560	60
43561	60
43562	60
43563	62
43564	62
43565	62
43566	62
43567	62
43569	62
43570	62
43572	62
43574	62
43575	62
43576	62
43577	62
43578	62
43579	62
43581	57
43582	57
43583	57
43584	57
43585	57
43586	57
43587	56
43588	56
43589	56
43590	58
43591	58
43592	58
43593	58
43594	58
43598	58
43600	68
43601	68
43602	68
43603	68
43604	68
43605	68
43606	68
43610	68

ORD NR.	PAGE NR.
43611	68
43612	68
43613	68
43614	68
43615	68
43616	68
43620	68
43621	68
43622	68
43623	68
43624	68
43625	68
43626	68
43630	68
43631	68
43640	68
43641	68
43650	68
43651	68
43660	68
43661	68
43665	87
43670	68
43671	68
43675	87
43680	68
43681	68
43685	68
43686	68
43687	68
43688	68
43689	68
43690	68
43700	70
43701	70
43702	70
43710	70
43711	70
43712	70
43720	70
43721	70
43722	70
43730	70
43731	70
43740	70
43741	70
43750	70
43751	70
43760	70
43761	70
43770	70
43771	70
43780	70
43781	70
43800	113

ORD NR.	PAGE NR.
43801	113
43802	113
43803	113
43804	113
43810	113
43811	113
43812	113
43813	113
43814	113
43820	113
43821	113
43822	113
43823	113
43824	113
43825	113
43860	55
43861	55
43862	55
43875	295
43876	295
43885	281
43886	281
43887	281
43888	281
43890	175
43891	175
43892	281
43893	281
43897	175
43898	175
43900	76
43901	76
43902	76
43903	76
43970	80
43971	80
43972	80
43973	80
43976	80
43977	80
43978	80
43979	80
43980	80
43981	80
43982	80
43983	80
43984	80
43985	80
43986	80
43991	80
43992	80
43993	80
43994	80
44015	254
44030	135

ORD NR.	PAGE NR.
44031	135
44032	135
44040	220
44041	220
44042	220
44043	220
44045	222
44050	134
44052	134
44058	134
44059	134
44064	134
44073	296
44074	296
44075	142
44076	142
44077	220
44077	296
44078	296
44079	296
44080	236
44081	236
44082	236
44083	236
44084	236
44085	236
44086	236
44087	236
44089	296
44092	134
44094	296
44095	296
44096	296
44097	296
44098	296
44099	296
44100	126
44109	234
44110	132
44113	255
44116	126
44120	128
44125	128
44128	306
44130	129
44131	252
44132	252
44133	133
44134	133
44137	251
44138	251
44139	130
44144	256
44145	256
44150	130

ORD NR.	PAGE NR.
44160	130
44163	130
44164	130
44165	138
44166	306
44180	130
44181	130
44183	137
44186	258
44187	136
44191	256
44192	259
44193	258
44194	238
44195	238
44196	256
44198	235
44199	271
44200	121
44201	235
44203	115
44204	115
44205	115
44206	115
44210	121
44211	121
44212	121
44220	121
44221	121
44222	121
44230	122
44231	122
44250	120
44255	118
44261	118
44277	116
44280	116
44281	116
44282	116
44290	116
44291	116
44292	116
44293	116
44300	143
44301	143
44302	143
44303	143
44304	143
44305	143
44306	143
44307	143
44309	132
44309	143
44310	143
44311	143

ORD NR.	PAGE NR.
44312	143
44313	143
44314	290
44315	290
44316	290
44317	290
44318	290
44319	290
44320	123
44321	123
44322	123
44323	123
44324	123
44325	123
44326	123
44329	123
44330	123
44331	123
44333	123
44334	123
44336	290
44338	236
44338	238
44339	132
44339	135
44339	235
44340	130
44342	178
44343	179
44345	122
44350	177
44351	177
44352	177
44353	177
44354	290
44356	299
44357	299
44360	124
44361	124
44367	305
44369	299
44371	299
44372	299
44373	298
44374	305
44375	305
44377	304
44379	298
44380	142
44381	142
44382	142
44383	142
44384	142
44385	306
44386	306

ORD NR.	PAGE NR.
44387	307
44388	142
44389	290
44390	290
44391	290
44392	290
44393	290
44394	295
44395	290
44396	304
44397	290
44398	299
44399	290
44400	264
44401	264
44402	264
44412	262
44413	263
44414	260
44415	245
44420	307
44421	307
44430	300
44431	300
44434	303
44435	302
44436	302
44437	302
44438	302
44439	261
44440	214
44441	214
44442	214
44446	303
44450	214
44451	214
44452	214
44466	141
44500	269
44501	269
44502	269
44515	265
44516	265
44520	268
44521	268
44522	266
44523	266
44524	266
44601	210
44605	211
44606	211
44690	250
44691	250
44710	164
44720	164

ORD NR.	PAGE NR.
44721	164
44722	164
44725	208
44726	208
44730	164
44731	164
44740	164
44746	208
44747	208
44800	72
44801	72
44802	72
44804	72
44809	72
44810	72
44811	72
44812	72
44817	72
44820	72
44821	72
44822	72
44823	72
44827	72
44830	73
44831	73
44833	73
44834	73
44835	73
44836	73
44837	73
44838	73
44839	73
44840	66
44842	66
44844	67
44845	93
44847	93
44850	63
44851	63
44852	63
44853	63
44854	63
44860	63
44861	63
44862	63
44870	64
44871	64
44872	64
44875	87
44879	63
44880	63
44881	63
44882	63
44885	92
44886	92

ORD NR.	PAGE NR.
44887	92
44890	86
44891	86
44892	85
44893	85
44894	85
44895	84
44896	119
44897	73
44898	73
44899	73
44900	92
44901	92
44902	87
44903	87
44904	87
44905	87
44906	87
44907	87
44908	87
44909	87
44911	87
44912	87
44913	87
44914	87
44916	87
44920	87
44921	87
44922	87
44940	93
44941	67
44942	67
44950	94
44959	95
44960	95
44961	95
44962	96
44963	96
44964	96
45001	175
45010	175
45012	175
45034	175
45035	175
45050	308
45051	308
45052	308
45060	139
45061	140
45070	206
45071	207
45072	205
45140	114
45141	114
45200	178

ORD NR.	PAGE NR.
45205	178
45220	178
45221	178
45250	179
45262	46
45263	46
45270	179
45314	144
45315	248
45316	248
45317	144
45318	144
45319	144
45320	147
45321	147
45322	146
45323	146
45324	148
45325	148
45330	147
45331	147
45332	146
45333	146
45334	148
45335	148
45340	147
45341	147
45342	146
45343	146
45344	148
45345	148
45351	177
45352	177
45355	146
45356	146
45360	149
45363	145
45365	149
45368	145
45380	176
45381	176
45382	176
45385	176
45386	176
45387	176
45390	176
45391	176
45392	176
45393	176
45395	176
45396	176
45397	176
45398	176
45409	98
45410	98

ORD NR.	PAGE NR.
45411	98
45412	98
45415	98
45416	98
45417	98
45422	98
45430	99
45431	99
45432	99
45470	97
45471	97
45472	97
45476	97
45477	97
45478	97
45503	246
45504	246
45505	246
45506	246
45510	223
45512	223
45513	223
45514	223
45517	246
45520	232
45521	232
45522	232
45523	232
45530	228
45531	228
45532	228
45533	228
45534	228
45535	228
45536	228
45537	228
45538	228
45539	228
45540	228
45550	162
45551	162
45555	162
45556	162
45558	286
45559	286
45560	162
45561	231
45563	231
45565	162
45566	284
45567	289
45570	284
45571	284
45572	284
45574	284

ORD NR.	PAGE NR.
45576	284
45577	284
45578	284
45579	284
45580	282
45581	282
45583	282
45584	282
45585	282
45587	284
45589	288
45590	282
45591	282
45593	282
45594	282
45595	282
45596	282
45597	282
45598	282
45601	274
45605	282
45606	282
45607	282
45609	284
45614	274
45621	112
45623	282
45624	282
45625	282
45626	282
45627	282
45628	282
45640	275
45641	275
45642	275
45648	277
45649	277
45653	277
45654	277
45655	279
45656	279
45673	280
45674	280
45675	226
45676	226
45680	273
45681	273
45682	273
45683	273
45684	273
45685	273
45704	166
45705	166
45706	166
45707	166

ORD NR.	PAGE NR.
45708	166
45709	166
45711	166
45712	166
45713	166
45714	166
45721	174
45722	174
45725	166
45726	166
45727	166
45728	166
45790	169
45791	169
45792	169
45802	214
45803	214
45806	214
45807	214
45810	212
45811	212
45817	212
45818	212
45819	212
45820	102
45821	102
45822	102
45823	102
45824	102
45825	102
45826	102
45826	102
45827	102
45829	102
45830	150
45831	150
45832	150
45833	150
45835	150
45836	150
45837	150
45838	150
45840	160
45841	160
45842	160
45843	160
45844	160
45845	160
45846	160
45847	160
45848	246
45849	246
45850	204
45852	204
45860	102

ORD NR.	PAGE NR.
45861	102
45865	102
45866	102
45870	102
45871	102
45875	102
45876	102
45880	100
45881	100
45882	100
45890	100
45891	100
45892	100
45900	294
45901	294
45902	294
45903	294
45904	294
45905	294
45906	294
45907	294
45910	294
45911	294
45950	290
45951	290
45952	290
45953	290
46000	76
46002	76
46003	76
46005	76
46006	76
46020	76
46021	76
46022	76
46023	76
46030	76
46031	76
46032	76
46035	76
46037	76
46040	76
46041	76
46042	76
46044	76
46046	76
46070	76
46071	76
46072	76
46103	76
46104	76
46105	76
46106	76
46113	76
46114	76
46115	76
46116	76
46117	76
46118	76
46200	76
46201	76

ORD NR.	PAGE NR.
46202	76
46220	76
46221	76
46222	76
46223	76
46224	76
46225	76
46230	76
46231	76
46232	76
46240	76
46241	76
46242	76
46300	76
46302	76
46304	76
46400	76
46401	76
46420	76
46421	76
46422	76
46500	76
46501	76
46503	76
46520	76
46521	76
46522	76
46600	76
46601	76
46602	76
46610	76
46611	76
46612	76
46620	76
46630	76
46640	76
46700	86
46701	86
46702	86
46703	86
46704	86
46705	86
46720	86
46721	86
46722	86
46723	86
46724	86
46725	86
46800	84
46801	84
46802	84
46803	84
46804	84
46805	84
46806	84
46900	22
46901	22
46902	22
46903	22
46920	34
46921	34

ORD NR.	PAGE NR.
46922	34
46923	34
46940	178
46945	179
46950	126
46970	27
46990	22
46990	34
46991	22
46991	34
47005	168
47006	168
47020	170
47021	170
47022	170
47023	170
47024	170
47025	170
47040	170
47041	170
47042	170
47043	170
47044	170
47045	170
47158	296
47160	296
47256	51
47320	240
47321	240
47322	240
47323	240
47340	240
47341	240
47342	240
47343	240
47365	52
47380	51
47500	239
47501	239
47502	239
47510	239
47550	244
47551	244
47552	244
47554	244
47555	244
47640	52
47641	52
47642	52
47643	52
47644	52
47645	52
47660	52
47661	52
47662	52
47663	52
47664	52
47665	52
47666	52
47667	52
47668	52

ORD NR.	PAGE NR.
47670	52
47671	52
47672	52
47680	52
47681	52
47682	52
47683	52
47684	52
47685	52
47689	52
47700	74
47701	74
47702	74
47703	74
47704	74
47705	74
47706	74
47707	74
47708	74
47709	74
47750	209
47751	209
47790	74
47801	177
47802	177
47804	177
47805	177
47820	123
47821	123
47822	123
47823	123
47824	123
47825	123
47826	123
47827	123
47829	72
47830	124
47900	200
47901	200
47902	200
47903	200
47920	200
47921	200
47922	200
47923	200
47940	335
47950	200
47951	200
47960	200
47961	200
47962	200
47963	200
47970	200
47971	200
47972	200
47973	200
47980	200
47981	200
47982	200
47983	200
47990	200

ORD NR.	PAGE NR.
47991	200
47992	200
47993	200
48001	309
48003	309
48090	272
48858	146
48859	147
48860	148
48871	146
48872	147
48873	148
48910	102
48911	102
48950	150
48951	150
48952	150
48953	150
48955	150
48956	150
48957	150
48958	150
48960	150
48961	150
48965	150
48966	150
48970	249
48971	249
48972	249
48973	249
48975	246
48976	246
48977	246
48978	246
48980	172
48981	172
48990	172
48991	172
49000	172
49001	172
49010	172
49011	172
49020	172
49021	172
49030	172
49031	172
49040	172
49041	172
49050	172
49051	172
49060	172
49061	172
49500	230
49501	230
49502	230
49510	224
49511	224
49530	225
49531	225
49532	225
49533	225

ORD NR.	PAGE NR.
49540	278
49541	278
49550	276
49552	276
49560	287
49562	287
49610	242
49611	242
49612	242
49613	242
60000	311
60001	311
60002	311
60003	311
60004	311
60005	311
60006	311
60040	328
60041	328
60050	311
60051	311
60052	311
60053	311
60054	311
60055	311
60056	311
60090	328
60091	328
60100	312
60101	312
60102	312
60103	312
60104	312
60105	312
60106	312
60129	313
60130	313
60131	313
60132	313
60133	313
60134	313
60150	312
60151	312
60152	312
60153	312
60154	312
60155	312
60156	312
60180	313
60181	313
60182	313
60183	313
60184	313
60185	313
60200	316
60201	316
60202	316
60203	316
60204	316
60205	316
60206	316

ORD NR.	PAGE NR.
60230	317
60231	317
60232	317
60233	317
60234	317
60235	317
60250	316
60251	316
60252	316
60253	316
60254	316
60255	316
60256	316
60280	317
60281	317
60282	317
60283	317
60284	317
60285	317
60300	318
60301	318
60302	318
60303	318
60304	318
60305	318
60306	318
60329	319
60330	319
60331	319
60332	319
60333	319
60334	319
60350	318
60351	318
60352	318
60353	318
60354	318
60355	318
60356	318
60379	319
60380	319
60381	319
60382	319
60383	319
60384	319
60400	320
60401	320
60402	320
60403	320
60404	320
60420	320
60429	322
60430	322
60431	322
60432	322
60433	322
60434	322
60450	320
60451	320
60452	320
60453	320

ORD NR.	PAGE NR.
60454	320
60470	320
60479	322
60480	322
60481	322
60482	322
60483	322
60484	322
60500	324
60501	324
60502	324
60503	324
60504	324
60520	324
60521	324
60522	324
60523	324
60524	324
60525	324
60526	324
60529	326
60530	326
60531	326
60532	326
60533	326
60534	326
60550	324
60551	324
60552	324
60553	324
60554	324
60570	324
60571	324
60572	324
60573	324
60574	324
60575	324
60576	324
60579	326
60580	326
60581	326
60582	326
60583	326
60584	326
60600	330
60601	330
60602	330
60603	330
60610	330
60611	330
60612	330
60613	330
60620	334
60621	334
60622	334
60623	334
60625	334
60626	334
60630	330
60631	330
60632	330

ORD NR.	PAGE NR.
60633	330
60635	330
60636	330
60637	330
60638	330
60640	330
60641	330
60642	330
60643	330
60650	330
60651	330
60652	330
60653	330
60654	330
60655	330
60656	330
60657	330
60658	330
60659	330
60660	330
60661	330
60662	330
60663	330
60664	330
60665	330
60666	330
60667	330
60668	330
60669	330
60670	330
60671	330
60672	330
60673	330
60680	330
60681	330
60682	330
60683	330
60684	330
60685	330
60686	330
60687	330
60688	330
60689	330
60690	330
60691	330
60692	330
60693	330
60694	330
60695	330
60696	330
60697	330
60698	330
60699	330
60703	351
60704	351
60721	329
60723	329
60724	329
60731	329
60733	329
60734	329

ORD NR.	PAGE NR.
60741	329
60743	329
60744	329
60751	329
60753	329
60754	329
60765	348
60766	348
60767	348
60768	348
60769	348
60770	348
60771	348
60772	348
60773	348
60774	348
60775	348
60776	348
60777	348
60778	348
60779	348
60780	348
60781	348
60782	348
60783	350
60785	348
60786	348
60787	348
60788	348
60789	348
60790	348
60791	348
60792	348
60793	348
60794	348
60795	348
60796	348
60800	314
60801	314
60802	314
60803	314
60804	314
60820	314
60821	314
60822	314
60823	314
60824	314
60825	314
60826	314
60830	322
60831	322
60832	322
60833	322
60834	322
60835	322
60840	322
60841	322
60842	322
60843	322
60844	322
60845	322

ORD NR.	PAGE NR.
60850	314
60851	314
60852	314
60853	314
60854	314
60860	326
60861	326
60862	326
60863	326
60864	326
60865	326
60870	314
60871	314
60872	314
60873	314
60874	314
60875	314
60876	314
60880	326
60881	326
60882	326
60883	326
60884	326
60885	326
60900	320
60901	320
60902	320
60903	320
60904	320
60905	320
60906	320
60907	320
60908	320
60909	320
60910	320
60911	320
61000	336
61001	336
61002	336
61003	336
61010	336
61011	336
61012	336
61013	336
61020	336
61021	336
61022	336
61030	336
61031	336
61032	336
61050	336
61051	336
61052	336
61053	336
61054	336
61055	336
61070	340
61075	340
61095	339
61100	358
61101	358

ORD NR.	PAGE NR.
61102	358
61105	358
61106	358
61107	358
61110	342
61111	342
61115	342
61116	342
61130	341
61140	341
61185	338
61186	338
61187	338
61189	338
61190	338
61191	338
61192	338
61193	338
61194	338
61196	338
61197	338
61198	338
61200	346
61201	346
61202	346
61203	346
61204	346
61205	346
61206	346
61207	346
61208	346
61209	346
61210	346
61211	346
61212	346
61213	346
61214	346
61215	346
61216	346
61217	346
61218	346
61219	346
61220	346
61221	346
61222	346
61223	346
61224	346
61225	346
61226	346
61227	346
61228	346
61229	346
61230	346
61231	346
61232	346
61233	346
61234	346
61235	346
61236	346
61237	346
61238	346

ORD NR.	PAGE NR.
61239	346
61240	346
61241	346
61242	346
61250	346
61251	346
61252	346
61253	343
61254	343
61255	343
61256	343
61257	343
61260	344
61261	344
61262	344
61263	344
61264	344
61265	344
61266	344
61270	344
61271	344
61272	344
61273	344
61274	344
61275	344
61276	344
61300	353
61310	353
61320	354
61330	354
61350	353
61360	353
61370	354
61380	354
61396	351
61397	352
61398	357
61550	343
61551	343
61552	343
61553	343
61554	343
61680	350
70000	64
70002	64
70400	64
71500	64
71502	64
71900	64
72000	64
72002	64
72400	64
61380	328
61390	330
61391	331
61396	326
61400	312
61401	312
61402	312
61403	312
61404	312

ORD NR.	PAGE NR.
61420	312
61421	312
61422	312
61423	312
61424	312
61440	312
61441	312
61442	312
61443	312
61444	312
61450	312
61451	312
61452	312
61453	312
61454	312
61470	312
61471	312
61472	312
61473	312
61474	312
61490	312
61491	312
61492	312
61493	312
61494	312

MERCHANDISING SOLUTIONS

D5

ORD NR. 00504

- Heavy Duty Display Stand with perforated back for hanging packaged products on hooks
- Comes complete with 6" (150 mm) long & 8" (200 mm) long hooks
- Supplied in CKD

D5A

ORD NR. 00515

- Heavy Duty Display Stand with T-slot panels for hanging packaged products on hooks
- Comes with angle adjusting shelves and storage cabinet at the bottom
- Comes complete with 6" (150 mm) long & 8" (200 mm) long hooks
- Supplied in CKD

D1

ORD NR. 45395

- Wall mount Bracket for displaying pumps with a 2" threaded bung
- Powder coated steel construction
- Centre of Bracket has a 2" Female threaded opening which used to mount pumps with 2" bung
- Extremely compact & great for display in showrooms, shops etc. where space is a constraint
- Displaying pumps using the bracket allows customers to touch & feel the quality of the pump
- Does not include product

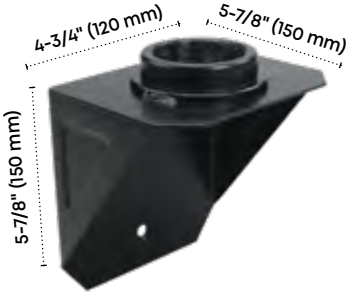

D2

ORD NR. 00501

- Specially fabricated miniature steel drum with the drum top fitted with four 2" Female Threaded openings
- Used for floor display in showrooms. Drum can display 4 pumps
- Displaying pumps using the Drum allows customers to touch & feel the quality of the pump
- Does not include products

industries

we serve

agriculture
automotive
aviation
chemical
construction
cement
DIY
electrical
industrial
marine
mining
oil & gas
plumbing
railway
steel welding
woodworking
workshop

terms & conditions

Intellectual Property: The intellectual property of this catalogue is assigned to all countries of the world. Reproduction, full and/or partial adaptation of it's content (content, images, diagrams, icons, specifications, tables etc.) by any means without prior written permission from GROZ entails a violation of GROZ ENGINEERING TOOLS's copyrights and constitutes an act of unfair competition

Technical Data: All drawings, weights, units, dimensions, the descriptions & illustrations contained in the company's catalogues are only approximate and intended merely to give a general description of the goods described therein.

Specifications: The information contained in this catalogue is as accurate as possible and complies, as far as possible with existing regulations at the time of it's publication – SEPTEMBER 2026. We therefore reserve the right to make modifications in line with modifications to regulations and/ or product specifications, drawings, illustrations for continual improvement. Buyers must ensure that goods are suitable for the purpose intended. Imperial dimensions shown as equivalents to metric and vice-versa are approximate.

Delay in Delivery: Delay in completion of work, delivery or in case of a contract for delivery by installments, delay in delivery of an installment shall not give rise to any liability upon the company whether or not any time of date is given in this respect and shall not entitle the customer to terminate the contract.

Liability: All goods are guaranteed to do the work for which they are designed. If the goods or any part thereof are defective solely as a result of faulty materials or workmanship of the company, the company's liability shall be limited, at it's discretion either to replacing such goods or the defective parts. But no such liability shall arise unless notification of any defect is received by the company in writing within 90 days from the receipt of goods by the buyer and the allegedly defective goods are thereafter returned to the company carriage paid with appropriate pre–notification.

Indemnity: The customer shall indemnify the company against all claims in respect of any loss, injury or damage sustained by a third party arising from the sales of the goods to the buyer how so ever caused and also against all actions, proceedings, costs, claims, demands and expenses made, brought or claimed against the company in respect of the infringement of any patent, trademark or registered design.

CONNECT WITH US!



GROZ

Groz Engineering Tools Pvt. Ltd.
Groz Net Industries

Village Kherki Daula, National Highway-8
Gurugram -122004, Haryana, INDIA
TEL +91.124.282.7700
E-MAIL info@groz-tools.com
URL www.groz-tools.com

The GROZ name, GROZ logo and the mark are trademarks of Groz Engineering Tools Pvt. Ltd., India