CC-07M
FLUID
FLUID
HANDLING
MINI
GROZ
20V
GROZ

contents

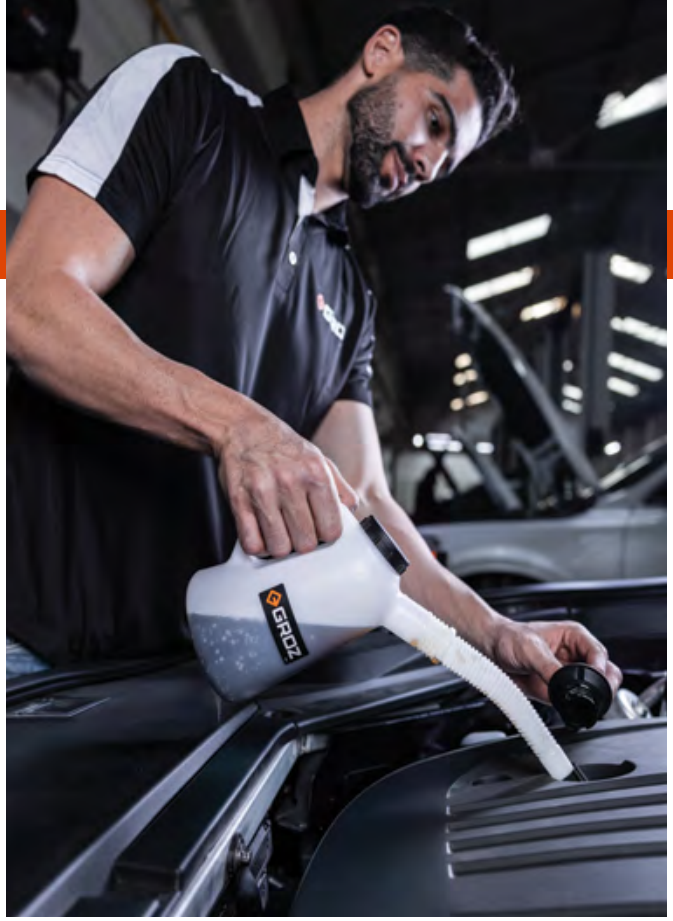

01

greasing

Lever Grease Guns	5
Pistol Grease Guns	7
Mini Grease Guns	9
Air Operated Grease Guns	10
Battery Operated Grease Guns	11
Grease Gun Couplers & Accessories	12
Grease Fittings & Accessories	16
Grease Accessory Kits - Quick Connect	20
Grease Pumps & Accessories	21

02

oiling

Manual Oil Pumps	24
Air Operated Oil Pumps & Accessories	26
Electric Oil Pumps	28
Double Diaphragm Pumps	29
Oil Meters, Nozzles & Accessories	29

03

waste oil

Pumps & Drains 34

04

hose reels

Hose Reels - Metal 36

Hose Reel - Plastic 61

05

fuel handling

Manual Fuel Pumps 37

Electric Fuel Pumps 38

DEF & Speciality Pumps 40

Meters, Nozzles & Accessories 45

06

drum handling

Drum Dollies	**49**
Drum Trolleys	**50**
Drum Accessories	**51**

07

air handling

Filters, Regulators & Lubricators	**52**
FRL Accessories	**55**
Air Blow Guns & Accessories	**57**
Air Hose Reel	**61**
Tyre Inflator Gauges	**62**

LEVER GREASE GUNS

HEAVY DUTY

10,000 PSI (690 BAR)

- Aluminium die cast head with bulk loader valve and air release valve
- Delivers: Up to 1 gm/stroke

G1HD

14oz (400 gms) / 500cc

G10HD

750cc
High capacity

G4HD

450 gms
Popular in Australia & New Zealand

G18HD

600 gms
Popular in Italy

SUPA LITE

10,000 PSI (690 BAR)

G1HD-AL

- Light-weight aluminium barrel
- Aluminium die cast head with bulk loader valve and air release valve
- Delivers: Up to 1 gm/stroke
- Capacity: 14 oz (400 gms)/500cc

25% LIGHTER

SUPER VALUE

6,000 PSI (413 BAR)

- Drop-resistant steel head with bulk loader valve
- Delivers: Up to 1 gm/stroke

G1

14 oz (400 gms) / 500cc

G10

750cc
High capacity

G4

450 gms
Popular in Australia & New Zealand

G11

1000cc
Extra long & very high capacity

PROFESSIONAL

8,000 PSI (550 BAR)

G8

- Aluminium die cast head with bulk loader valve
- Delivers: Up to 1 gm/stroke
- Capacity: 14 oz (400 gms)/500cc

STANDARD

6,000 PSI (413 BAR)

- Delivers: Up to 1 gm/stroke
- Capacity: 14 oz (400 gms)/500cc

G1STD

Steel head

G23

Aluminium powder coated die-cast head

G1DC

Aluminium die-cast head

V SERIES

6,000 PSI (413 BAR)

V1

- Aluminium die cast head fitted with automatic air bleeder valve
- Delivers: Up to 1 gm/stroke
- Capacity: 14 oz (400 gms)/500cc

DUAL PISTON - HIGH VOLUME

6,000 PSI (413 BAR)

G2

- Dual piston design for 3X grease output per stroke
- No loss of Prime
- Convenience of use in cold weather conditions
- **Delivers: Up to 2.4 gm/stroke**

3X ADVANTAGE
Reduce Greasing Time To One-Third!

DUAL GREASE GUN PISTOL/LEVER HANDLE

7,000 PSI (483 BAR)

- Convenience of a Pistol grip with Power of a Lever Handle
- Dual Discharge Ports: Front and top port
- High Volume – High Pressure adjustable mechanism

G77

14 oz (400 gms)/ 500cc

G78

450 gms
Popular in Australia & New Zealand

NEW!

PISTOL MODE

4,500 PSI (310 BAR)
0.65 gm/stroke

LEVER MODE

7,000 PSI (483 BAR)
0.65 gm/stroke

5,500 PSI (380 BAR)
1.1 gm/stroke

Aluminum die cast head fitted with bulk loader & air bleeder valve

Pull button & slide to change mode between High Pressure/High Volume

JAPANESE STYLE

8,000 PSI (550 BAR)

G81

- Aluminium die cast head with threaded port
- For use with JIABARA cartridge
- Delivers: Up to 0.90 gm/stroke
- Capacity: 400 gms

CLEAR TUBE

10,000 PSI (690 BAR)

- Tough & impact resistant polycarbonate barrel
- For quick and convenient identification; eliminating the risk of cross contamination or mixing incompatible greases
- Delivers: Up to 1gm/stroke

G1HD-CL

14 oz (400 gms)

G4HD-CL

450 gms
Popular in Australia & New Zealand



LEVER OIL GUN

G19

- For use with flowable grease and light oils. Especially useful for pumping glue for water-proofing in construction applications
- Delivers: Up to 1 gm/stroke
- Capacity: 14 oz (400 gms)/500cc

HIGH PRESSURE HIGH VOLUME

G200

- Patented design: Switch from High Pressure to High Volume with the slide of a button
- Aluminium die cast head
- Dual piston mechanism
- Dual Discharge Ports: Front and top port
- Ideal for use on heavy farm equipment, construction machinery & cold conditions
- Capacity: 14 oz (400 gms)/500cc

DUAL OPERATING MODE:

High Pressure Setting

12,000 PSI (830 BAR)

Upto 0.6 gm/stroke

High Volume Setting

Upto 3.2 gm/ stroke

2,000 PSI (130 BAR)

PISTOL GREASE GUNS

PROFESSIONAL

7,500 PSI (517 BAR)

G32

- **Patented Feather Touch Design;** max output with minimal effort
- Single piece die cast head & fixed handle for added strength
- Variable Stroke
- Delivers: Upto 0.68 gms/ stroke
- Capacity: 14 oz (400 gms)/500cc

VARIO

5,000 PSI (345 BAR)

- Aluminium die cast head with drop resistant pistol assembly
- Adjustable Stroke Mechanism- easy switch between high Pressure and High Volume modes
- Delivers: Upto 0.84 gm/stroke

G55

14oz (400 gms)/500cc

G65

450 gms Popular in Australia & New Zealand

ALL WEATHER

7,000 PSI (483 BAR)

G70

- Ideal for use in cold weather conditions
- Venturi Mechanism and large grease inlet helps retain prime
- Delivers: Upto 0.68 gm/stroke
- Capacity: 14 oz (400 gms)/500cc

ALL WEATHER - ADJUSTABLE

6,000 PSI (413 BAR)

- Ideal for use in cold weather conditions
- Venturi Mechanism and large grease inlet helps retain prime
- Adjustable Mechanism - easy switch between high pressure and high volume modes
- Delivers: Upto 0.90 gm/stroke

G80

14 oz (400 gms)/500cc

G85

450 gms Popular in Australia & New Zealand

STANDARD

5,000 PSI (345 BAR)

- Aluminium die cast head with block nut
- Delivers: Upto 0.50 gm/stroke

G5

14oz (400 gms)/ 500cc

G4PST

450 gms Popular in Australia & New Zealand

G5PRO

14 oz (400 gms)/ 500cc

Professional model: Head fitted with bulk loader and air release valve.
Grip on movable handle

DUAL DISCHARGE

5,000 PSI (345 BAR)

G31

- Heavy duty Aluminium die cast head
- Dual Discharge ports - front and top port for convenient greasing in inaccessible areas
- Delivers: Up to 0.50 gm/stroke
- Capacity: 14 oz (400 gms)/500cc

1 Top Port

2 Front Port

SUPA-LITE

5,000 PSI (345 BAR)

G31-AL

- Light-weight Aluminium Barrel
- Aluminium die cast head fitted with block nut
- Dual Discharge ports - front and top port for convenient greasing in inaccessible areas
- Delivers: Up to 0.50 gm/stroke
- Capacity: 14oz (400 gms)/500cc

25%
LIGHTER

CLEAR TUBE

5,000 PSI (345 BAR)

- Tough, impact and drop resistant polycarbonate tube with Aluminium die cast adaptors
- For quick and convenient identification of lubricant eliminating the risk of cross contamination or mixing of incompatible greases
- Delivers: Up to 0.50 gm/stroke

G5-CL

14 oz (400 gms) / 500 cc

G4PST-CL

450 gms
Popular in Australia & New Zealand

HIGH PRESSURE - HIGH VOLUME

G500

- Patented design: Switch from 'high pressure' to 'high grease volume' with the simple slide of a button
- Aluminium die cast head with bulk loader valve
- Dual piston mechanism
- Dual Discharge Ports: front & top port
- Ideal for use on heavy farm equipment, construction machinery & in cold conditions

High Pressure Setting

10,000 PSI (690 BAR)

Upto 0.4 gm/stroke

High Volume Setting

Upto 1.3 gm/stroke

2,000 PSI (130 BAR)

'V SERIES'

5,000 PSI (345 BAR)

V5

- Aluminium die cast head fitted with automatic air release valve
- Delivers: Upto 0.50 gm/stroke
- Capacity: 14 oz (400 gms)/500cc

DOUBLE LEVER

7,500 PSI (517 BAR)

- Screw-in cartridge works on special **'Vacuum Technology'** - ensures
  1. Full utilisation of grease in the cartridge
  2. No priming needed
- Delivers: Upto 0.80 gm/stroke

G83F

For use with F type (500 gm) threaded grease cartridges

G83F-MTO

For use with both F type (500 gms) and LS type (400 gms) threaded grease cartridges

THREADED CARTRIDGE ADAPTOR

ADP-CTG

- Polypropylene adaptor converts any standard grease gun to a SPIN-ON style gun
- Adaptor fits onto grease gun head making it compatible with LS style threaded grease cartridges

SPIN-ON GREASE GUNS

- Cartridge works on special **'Vacuum Technology'** ensuring
  1. Full utilisation of grease in the cartridge
  2. No priming needed
- Fast and easy reloading
- No air pockets so no air bleeding needed
- For use with 400 gm LS type threaded grease cartridge.

LEVER MODEL

G48

6,000 PSI (413 BAR)

Delivers: Upto 0.90 gm/stroke

PISTOL MODEL

G48P

5,000 PSI (345 BAR)

Delivers: Upto 0.50 gm/stroke

Threaded port for screwing cartridge

MINI GREASE GUNS

MINI PUSH TYPE

1,000 PSI (69 BAR)

- Lubricate hammer mechanism in Impact Wrenches with flush type grease fittings
- Comes with needle nozzles: 0.028" (0.7 mm), 0.039" (1.0 mm) & 0.055" (1.4 mm)
- Delivers: Upto 0.3 gms/stroke
- Capacity: 3oz (85 gms)
- For use with bulk grease only

G3P

Black powder coated finish

Steel barrel for regular greasing applications

G3P-CL

Clear Tube

Tough, impact and drop resistant clear tube barrel for quick identification of grease

MINI PISTOL - POPULAR

3,000 PSI (207 BAR)

G15

- Tool box size gun with a push type operating mechanism
- Delivers: Upto 0.40 gms/ stroke
- For use with 3 oz (85 gms) grease cartridge only

MINI LEVER

6,000 PSI (413 BAR)

G14

- Tough grease gun for hard to reach places
- Delivers: 0.55 gms/strokes
- For use with 3oz (85 gms) grease cartridge

MINI PISTOL - DELUXE

3,500 PSI (240 BAR)

- Dual Discharge ports- Top port for convenient greasing in inaccessible areas
- Delivers: Upto 0.40 gms/stroke
- For use with 3 oz (85 gms) grease cartridge

G16

Black powder coated finish

G16-ZN

Zinc plated finish

G16-CL

Clear tube

G16-MR

For marine applications aluminium barrel with Stainless steel-304 handle, end cap & links

PUSH TYPE

- Toolbox size gun used for greasing Impact Wrenches, Lawn Mowers, Chain Saws, Trailers etc.
- Works on a push type mechanism with bulk grease only
- Delivers: Upto 0.90gm/shot

G6P

30cm³

G7P

125cm³

QUICK GREASE FILLER GUN

Filler gun for quick filling high viscosity grease in cylinders of central lubrication system

SG-GR-C

NEW!

MINI

Capacity:
14 oz. (400 gms)
/550 cc bulk

SG-GR

REGULAR

Capacity:
14 oz. (400 gms)
/700 cc bulk

SG-GR-TC

NEW!

WITH PLUG CAP

Capacity:
14 oz. (400 gms)
/700 cc bulk

GREASE TUBE DISPENSER

- Ideal for precise greasing in narrow spaces
- Precision milled parts with spring operated pumping system
- Comes with 2 applicators:
  1. Fine applicator: for fine line greasing
  2. Coarse applicator: for thick greasing
- Delivers upto 0.25gm/stroke (0.5 oz/57 strokes)
- Ideal for lubricating: Pedals, Hubs, Bottom Brackets, Headsets & Impact Wrenches
- Also available with 3.5 oz (100 gms) multipurpose grease tube

G5P

G5P/GRS

G5P-JB **NEW!**

For use with 80cc Jiabara cartridge. Popular in Japan

AIR OPERATED GREASE GUNS

DUAL MODE

6,000 PSI (413 BAR)

- Fully automatic free flow & single shot grease discharge in ONE GUN
- Designed for applications requiring frequent greasing such as in automotive workshops, manufacturing facilities etc.
- **Pressure Ratio - 40:1**
- Air compressor volume: 1 CFM @ 6 BAR

- **Delivers:**
  1. **In One shot mode:** Upto 0.90 gm/stroke
  2. **In continuous mode:** Upto 400 gm/minute

SCAN TO WATCH

APGG1

Capacity: 14 oz (400 gms)/500cc

APGG4

Capacity: 450 gms suitable for Australia & New Zealand

STANDARD

4,800 PSI (330 BAR)

INTERMITTENT MODEL

- Grease discharge with every press of trigger
- **Delivers: Upto 0.90 gms/stroke**
- **Pressure Ratio - 40:1**

PGG1

Capacity: 14 oz (400 gms)/500cc

PGG4

Capacity: 450 gms Popular in Australia & New Zealand

AUTOMATIC / CONTINUOUS MODEL

- Continuous Grease discharge with the trigger pressed
- **Delivers: Upto 400 gms/ minute**

AGG1

Capacity: 14 oz (400 gms)/500cc

AGG4

Capacity: 450 gms Popular in Australia & New Zealand

HIGH POWER

6,000 PSI (413 BAR)

G64

- One shot grease gun
- For use in factory maintenance, farm, fleet service or for use from vehicle air brake compressors
- **Pressure Ratio - 50:1**
- **Delivers: 0.68 gm/shot**

BATTERY POWERED

10,000 PSI (690 BAR)

BGG

- Powerful 20V high torque Motor
- **2 Speed Design:** Easy switch between high pressure & high volume setting

High Pressure Setting	High Volume Setting
10,000 PSI (690 BAR)	5,000 PSI (345 BAR)
Upto 85 gm (3oz.)/ minute	Upto 300 gm (10.5oz.)/ minute

Lithium-ion
4,000
mAh battery

Dispenses upto **26** **Cartridges** in free flow

Flow Rate upto **300** **gms/min.**

NEW!

Pre Set Grease Discharge
14 pre-set positions to dispense exact amount of grease, eliminating the need of a grease meter

Position	Grease Dispensed (OZ.)	Grease Dispensed (GMS)
1	0.02	0.61
2	0.04	1.30
3	0.05	1.70
4	0.09	2.8
5	0.10	3
6	0.13	3.9
7	0.15	4.4
8	0.18	5.2
9	0.21	6
10	0.22	6.4
15	0.28	8.2
20	0.45	13
25	0.57	16.3
50	1.1	32

Rotate knob to set at pre-defined grease discharge

- Offered in a choice of configurations for use with
  a. 14oz / 400 gms grease cartridges
  b. 450 gms cartridges
  popular in Australia & New Zealand
- Also available with adaptor for F type & LS type threaded cartridges & Jiabara cartridges

NOW AVAILABLE BATTERY ADAPTORS

ADP/RB/DMM/BGG

Compatible with batteries of 3 brands

DEWALT — **20V BATTERY**

metabo — **14.4V & 18V SERIES BATTERY**

Milwaukee — **18V BATTERY**

ADP/RB/PHMB/BGG

Compatible with batteries of 4 brands

Panasonic — **18-20V BATTERY**

HiKOKI — **18-20V BATTERY**

makita — **18-20V BATTERY**

BOSCH — **18-20V BATTERY**

USB RECHARGEABLE

8,000 PSI (550 BAR)

RGG

- World's 1st USB Rechargeable Battery Grease Gun
- Eliminates the need for compatible batteries and chargers
- Delivers: 87 gm (3 oz) / min

Lithium-ion
2,000
mAh battery

Dispenses upto **07** **Cartridges** in free flow


Replacement Hose

3 Jaw Coupler

Charging Cable Included

QUICK LOCK

8,000 PSI (550 BAR)

Quick disconnect coupler for convenient operation

Engagement at 6 points

HC21

Regular

HC21L

Extra long

HC21-90 **NEW!**

90° Angled

- Right-angled design enables greasing in tight, hard to reach & confined spaces.
- Perfect for pivot joints, hydraulic linkages, and compact machinery

SUPER GRIP QUICK CONNECT

5,000 PSI (345 BAR)

HC23

Compact & easy access coupler works with a 'Forward Push' mechanism for engaging & dis-engaging

STANDARD

3,000 PSI (207 BAR)

For hand operated grease guns only

HC10 Without Ball Check

HC11 With Ball Check

Also available in 54 pcs Set

PROFESSIONAL

6,000 PSI (413 BAR)

For hand operated grease guns only

HC14 With Ball Check

HC18 Without Ball Check

Also available in 54 pcs Set

SLIM LINE

6,000 PSI (413 BAR)

For hand operated grease guns only

HC19

Without Ball Check

MACHINED JAW

6,000 PSI (413 BAR)

For hand operated grease guns only

HC24

Without Ball Check

One piece construction

HEAVY DUTY

10,000 PSI (690 BAR)

For hand & air operated grease guns

HC12

With Ball Check

GREASE GUN SWIVEL

3,500 PSI (240 BAR)

SWV

Extension swivel threaded 1/8" M × 1/8" F

360° SWIVEL COUPLER

3,000 PSI (207 BAR)

HCSW11

Convenient access into narrow, inaccessible greasing joints

SPECIALITY COUPLERS

7,500 PSI (517 BAR)

HCP

AIR-O
Use with grease control valves

1,000 PSI (69 BAR)

HCR

RIGHT ANGLED -90˚
Useful in restricted/ confined spaces

7,000 PSI (483 BAR)

HCSW

SWIVELLING - 360˚
With Ball Check

BUTTON HEAD COUPLERS

3,000 PSI (207 BAR)

BHC10

SWIVELLING
5/8"(16 mm) Button Head Grease Fittings

PCN1

FIXED PUSH-ON
5/8"(16 mm) Button Head Grease Fittings

HOC1

HOOK ON
5/8"(16 mm) Button Head Grease Fittings

4,000 PSI (276 BAR)

PCN3

MEDIUM DUTY PUSH-ON
5/8"(16 mm) Button Head Grease Fittings

PCN2

HEAVY DUTY PUSH-ON
7/8"(22 mm) Button Head Grease Fittings

HEAVY DUTY GREASE GUN HOLDER

GGH03

Suitable for use with almost all sizes of grease guns

GREASE GUN HOLDER

GGH01

Suitable for 14 oz (400 gm) grease guns

GREASE GUN HOSES

3,500 PSI (240 BAR)

GHC

- Thermoplastic construction
- Burst Pressure: Upto 11600 PSI (800 BAR)
- For hand grease guns only

STANDARD LENGTHS:
6" (150 mm)
8" (200 mm)
9" (225 mm)
10" (250 mm)
12" (300 mm)
18" (450 mm)
20" (500mm)



d1: Inner dia. 0.14" (3.6 mm)
d2: Outer dia. 0.33" (8.5 mm)

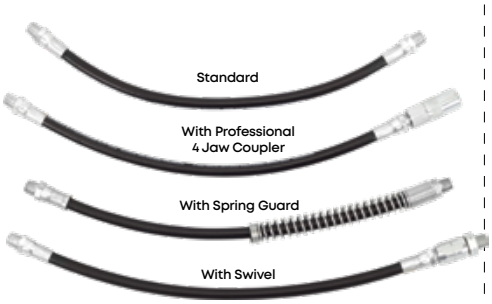

GREASE GUN HOSES HEAVY DUTY

5,800 PSI (400 BAR)

GHCHP

- Polyamide inner tubing with polyurethane sheathing reinforced diagonally in highly tear resistant polyester
- Burst Pressure: Upto 13,775 PSI (960 BAR)
- For hand and air operated grease guns

STANDARD LENGTHS:
12" (300 mm)
18" (450 mm)
20" (500mm)
Others can be customized



d1: Inner dia. 0.16" (4.1 mm)
d2: Outer dia. 0.425" (11 mm)

MAGNETIC GREASE GUN HOLDER

NEW!

GGH-M

- Grease Gun holder with magnet pull on both sides
- N52 Neodymium magnets on the back plate affix onto any metallic surface
- Two magnets on the front surface hold grease guns securely
- Suitable for barrel diameters up to 2-1/4" (57.15 mm)
- For use with 14 oz. (400 gm) grease guns

Magnetic Drip Cup:
To collect any dripping lubricant

MULTI-PURPOSE EP GREASE

Drop Point: 356°F (180°C)
NLGI #2 GC-LB

GRS-CC

Calcium complex grease with strong anti-wear properties for high-pressure applications in industrial, automotive & home usage

NEW!

3 oz (85 gm) | 14 oz (400 gms)

MARINE EP GREASE

Drop Point: 554°F (290°C)
NLGI #2 GC-LB

GRS-CS

Water resistant calcium sulfonate marine grease. Unique additives with special adhesive properties provide maximum lubrication even under most severe applications

NEW!

3 oz (85 gms) | 14 oz (400 gms)

HEAVY DUTY EP GREASE

Drop Point: 500°F (260°C)
NLGI #2 GC-LB

GRS-PU

- Polyurea, washout-proof heavy-duty grease
- All temperature stable with strong adhesive properties makes it ideal for severe duty applications trucks, combines, construction equipment, lawn and ground equipment, & in industrial and automotive applications

NEW!

3 oz (85 gms) | 14 oz (400 gms)

FLEXIBLE/RIGID GREASE GUN EXTENSIONS

5,000 PSI (345 BAR)

FRC

- 13" (330 mm) rigid steel extension with flexible hose extension
- Comes complete with coupler

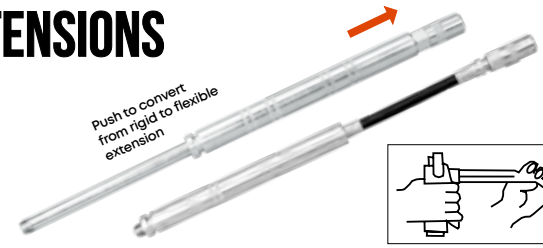



Switches with one hand

GREASE GUN EXTENSIONS

6,000 PSI (413 BAR)

GBP

BENT
6", 8", 18"

GSP

STRAIGHT
4", 5", 6" 8"

GREASE INJECTOR NEEDLES

6,000 PSI (413 BAR)

GIN/00
16 Gauge

GIN/01
18 Gauge



GIN/02
21 Gauge

GIN/03
SAFETY with aluminium holder

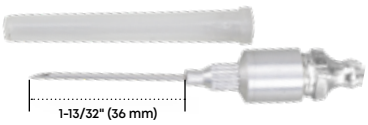

SEAL OFF DISPENSER

SOD

Useful for lubricating cars with grease plugs

Replacement tip available as spare

EASY OUT TOOLS

Dual purpose tool for
a. Removing worn out grease fittings
b. Tap holes for installing grease fittings

ESO-1

For fittings with hex size — 5/8" & 3/8". Tap rethreads 1/4" - 28

ESO-2

For fittings with hex size 3/8" & 7/16" (11 mm)
Tap rethreads 1/8" - 27

BULK LOADERS

BLV-02

9/16" (14.7 mm)

BLV-01

9 mm

BLV-06

1/2"

BLV-04

5/16"

AIR BLEEDER VALVES

ARV

Manual

SA-ARV

Automatic

NEEDLE NOSE DISPENSERS

6,000 PSI (413 BAR)

DNN/1-8

Needle Length:
19/32" (15 mm)

Needle Dia:
0.187" (4.76 mm)

DNN/1-1-2

Needle Length:
1-1/2" (38 mm)

Needle Dia:
0.156" (3.96 mm)

DNN/1-8/S

Needle Length:
19/32" (15 mm)

Needle Dia:
0.187" (4.76 mm)

DNN/6

Needle Length:
6" (150 mm)

Needle Dia:
0.156" (3.96 mm)

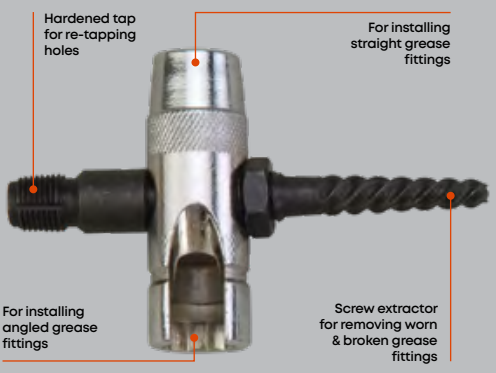

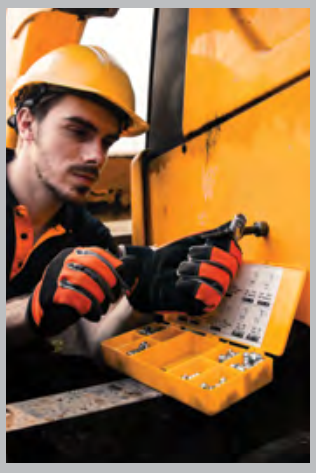

BEARING PACKERS

BEP625

- Rapid Action Bench Type
- Used with grease guns

BEARING	MIN	MAX
OUTER DIA	1/2" (12 mm)	6" (150 mm)
HEIGHT	3/8" (10 mm)	2" (50 mm)

BEP01

- Bearing Packer With Threaded Center Post
- Used with grease guns

BEARING	MIN	MAX
OUTER DIA	1/2" (12 mm)	5" (125 mm)
HEIGHT	1/4" (6 mm)	2" (50 mm)

BEP10

- Hand Bearing Packer
- Simple hand press mechanism
- Requires no grease gun or pump to pack grease into bearings

Place bearing on piston Maximum bearing dia. 3-1/2" (90mm)

Press the cap until the old grease is forced out and new grease shows on the bearing

BEARING	MIN	MAX
OUTER DIA	1-3/4" (45 mm)	3-1/2" (90 mm)

GREASE FEEDERS

	GFD-PP	GFP-PA	GFD-PAN	GFD-BA
Provides single point controlled lubrication for bearing housings. Eliminate difficulties due to over or under greasing				
DOME	Polycarbonate	Polycarbonate	Polycarbonate	Tempered borosilicate with stainless steel cap
BASE	Nylon	Die Cast Aluminium	Die Cast Aluminium with Nickel Plating	Aluminium
TEMPERATURE	-23°C to 121°C (-10°F to 250°F)	-23°C to 121°C (-10°F to 250°F)	-23°C to 121°C (-10°F to 250°F)	-23°C to 232°C (-10°F to 450°F)
APPLICATION	Static Non Vibratory Conditions	Dynamic applications involving vibration & shocks	Corrosive environment: Dynamic applications involving vibrations & shock: chemical plants, food industry etc.	Very high temperature applications: nuclear plants, steel mills, lumber drying kilns etc.
BOWL CAPACITY	1 oz, 2 oz, 6 oz	1 oz, 2 oz, 6 oz	1 oz, 2 oz, 6 oz	4 oz

GREASE FITTINGS & ACCESSORIES

GREASE FITTINGS

6,000 PSI (413 BAR)
SAE J534 Heat Treated
IATF 16949 Approved Manufacturing

- Available in a range of raw material:
- EN-1A, Steel, 303 Stainless Steel, Brass Monel etc.
- Steel fittings are zinc plated with a guaranteed salt spray life of over 72 hrs
- Fitting profile & dimensions are accurately controlled & conform to SAE, DIN, BS, JIS & IS standards

STEEL FITTINGS - METRIC
6.0 x 1 mm
8.0 X 1 mm
8.0 X 1.25 mm
10.0 X 1 mm
10.0 X 1.5 mm

STEEL FITTINGS - SAE
1/4"-28 SAE-LT
1/8"-27 Pipe Threads
1/4" - 18 Pipe Threads

BSPT PIPE THREADS
1/8" × 28 BSPT
1/4" x 19 BSPT

PARALLEL THREADS
UNF
BSF

SELF FORMING THREADS
1/8" - 27
1/4" - 28

DRIVE FITTINGS
Drive Fittings

BUTTON HEAD FITTINGS
Parallel Threads
Taper Threads

STAINLESS STEEL
1/4" - 28 SAE-LT
1/8" - 27 Pipe Thread
1/8" - 18 Pipe Thread
1/8" x 28 BSPT Taper Thread
M6 × 1.0 mm
M8 × 1.0 mm
M10 × 1.0 mm

GREASE FITTING STRAIGHT

GREASE FITTING ANGLED - 30°

GREASE FITTING ANGLED - 45°

GREASE FITTING ANGLED - 65°

GREASE FITTING ANGLED - 90°

BUTTON HEAD GREASE FITTINGS

SELF FORMING THREADS

DRIVE FITTINGS

GREASE FITTING CAPS

CAP GFT

STANDARD
Length: 0.94" (24 mm)

EXTRA LONG
Length: 1.69" (43 mm)

GREASE FITTINGS THREAD TESTER

THT

Designed to sort grease fittings with 21 most popular thread types:

THREAD TYPE	SIZE			
NPT	1/8"	1/4"	3/8"	
METRIC	M6 × 1	M6 × 0.75		
METRIC	M8 × 1	M8 × 1.25		
METRIC	M10 × 1	M10 × 1.5		
BSPT	1/8"	1/4"		
UNF/ANF	1/4"	5/16"	3/8"	
BSW	1/4"	5/16"	1/2"	3/8"
BSF	3/16"	1/4"	5/16"	

'DRIVE FIT' GREASE FITTINGS INSTALLER

FTS/01

For driving in straight fittings

FTA/01

For driving in angled fittings

GREASE FITTING UNBLOCKER

GFU

- Useful tool to open clogged grease fittings and loosen hardened grease fittings
- To use: Tap with a hammer to force light oil through the coupler into grease joint breaking up and removing dirt & debris

GREASE ADAPTORS & ELBOWS

6,000 PSI (413 BAR)

ADP

- Used to adapt a threaded fitting to a different sized thread.
- Available in straight, 45° and 90° configuration

GREASE FITTING SETS

GFT/KIT/SS/SAE-40

40 pcs - SAE
1/8"-27 PTF
1/4"-28 SAE-LT

Stainless steel

GFT/KIT/BSPT-50

50 pcs - BSPT
1/8"-28 BSPT
1/4"-19 BSPT

GFT/KIT/SAE-80

80 pcs - SAE
1/8"-27 PTF
1/4"-28 SAE-LT

GFT/GC/KIT/SAE-100

100 pcs - SAE
1/8"-27 PTF
1/4"-28 SAE-LT
Grease Fitting Caps

GFT/KIT/SAE-110

110 pcs - SAE
1/8"-27 PTF
1/4"-28 SAE-LT



GFT/KIT/M-44

44 pcs - METRIC
M6 × 1
M8 × 1
M10 × 1

GFT/KIT/M-80

80 pcs - METRIC
M6 × 1
M8 × 1
M10 × 1

GFT/ESO/KIT/M-101

101 pcs - METRIC
M6 × 1
M8 × 1
M10 × 1
Easy Out Tools

GFT/KIT/M-110

110 pcs - METRIC
M6 × 1
M8 × 1
M10 × 1

GFT/KIT/M-110A

110 pcs - METRIC
M6 × 1
M8 × 1
M10 × 1

KIT/GK/SAE-60

60 pcs - SAE
1/8"-27 PTF
1/4"-28 SAE-LT
HC/14 coupler
HC/12 coupler
HC/R coupler
DNN

KIT/GK/M-60

60 pcs - METRIC
M6 × 1
M8 × 1
M10 × 1
1/8"-27 PTF
1/4"-28 SAE-LT
HC/14 coupler
HC/12 coupler
HC/R coupler
DNN

GFT/KIT/ULT/SAE-65

65 pcs - SAE
1/8"-27 PTF
1/4"-28 SAE-LT
Easy Out Tools
Grease Fitting Caps
HC/14 coupler
THT

GFT/GC/KIT/M-100

100 pcs - METRIC
M6 × 1
M8 × 1
M10 × 1
Grease Fittings Caps

GFT/ESO/KIT/SAE-101

101 pcs - SAE
1/8"-27 PTF
1/4"-28 SAE-LT
Easy Out Tools

GFT/KIT/ULT/SM-65

65 pcs - SAE + METRIC
1/8"-27 PTF
1/4"-28 SAE-LT
M6 × 1
M8 × 1
Easy Out Tools
Grease Fitting Caps
HC/14 coupler
THT

GFT/KIT/UNBS/140

140 pcs - BSPT + UNF
1/4"-28 SAE-LT
5/16" - 24 UNF
1/8" - 28 BSPT

GFT/TW/ESO/KIT/SAE-194

194 pcs - SAE
1/8"-27 PTF
1/4"-28 SAE-LT
Easy Out Tools
Grease Fitting Caps

GFT/TW/ESO/KIT/SAE-134

134 pcs - SAE
1/8"-27 PTF
1/4"-28 SAE-LT
Easy Out Tools

QUICK CONNECT ADAPTORS

Connect or disconnect with a snap

1,000 PSI (69 BAR)

DNN/1-8/90/Q

Quick Connect Right Angled Needle Nose Dispenser

6,000 PSI (413 BAR)

HC/14/4/90/Q

Quick Connect Right Angled Grease Coupler

1,000 PSI (69 BAR)

GIN/01/Q

Quick Connect
Grease Injector
Needle

1,000 PSI (69 BAR)

RLA-01

Recessed Lube
Adaptor

1,000 PSI (69 BAR)

ALA-01

90˚ Angled Lube
Adaptor

1,000 PSI (69 BAR)

ANN-4

Needle Nose Adaptor

1,000 PSI (69 BAR)

AQD

Needle Nose Adaptor

1,000 PSI (69 BAR)

ANN/1-1-2

Narrow Needle Nose
Adaptor

6,000 PSI (413 BAR)

GBP/6/HC/14/4/Q

Coupler to Coupler
Extension

6,000 PSI (413 BAR)

HC/SW/3/Q

360˚ Swivel Coupler

1,000 PSI (69 BAR)

SOD/01/Q

Jaw Type Coupler to Seal
Off Dispenser

3,000 PSI (207 BAR)

POC-1Q

Jaw Type Coupler to
Button Head Coupler

1,000 PSI (69 BAR)

HC/R/01/Q

Regular Coupler to Right
Angled Coupler

3,500 PSI (241 BAR)

GHC/GIN/Q

Quick Connect Grease
Hose & Needle

3,500 PSI (241 BAR)

GHC-12/SPR/W/ADP

Quick Connect Hose

AQD/UF

Quick Disconnect
Adaptors

Supplied with a small & large
locking sleeve to fit all couplers

5,000 PSI (345 BAR)

HC-90Q

Quick Connect
90˚ Compact Coupler

EZEE LUBE KIT

GAK-7

- **Quick connect accessories**
- Convert any grease gun fitted with jaw type coupler into 'Quick Link' accessory for quick and effective lubrication

Kit Constituents

RLA/01
Recessed
Lube Adaptor

GIN/01
1-1/2" × 18 gauge
Grease Injector Needle

ALA/01
90° Angled
Lube Adaptor

ANN/1-1-2
1-1/2" (38 mm)Narrow
Needle Nose Adaptor

SOD/01/Q
Seal Off Dispenser

HC/R/01/Q
Right Angled Coupler

GHC-12/SPR/W/ADP
16" (400 mm)
Hose

PREMIUM GREASING ACCESSORY KIT

GAK-P

8 of the most useful Greasing accessories that cover most greasing applications, packed in a top quality premium blow mould case

Kit Constituents

ALA/01
90° Angled
Lube Adaptor

RLA/01
Recessed
Lube Adaptor

ANN/1-1-2
1-1/2" (38 mm)Narrow
Needle Nose
Adaptor

HC/90/Q
90° Compact
Coupler

GIN/01
1-1/2"×18 gauge
Grease Injector Needle

SWV/1-8M/1-8F
Grease Gun
Swivel
(1/8" M×1/8" F)

HC/21
Quick Lock
Grease Coupler



GHC-12/SPR
12" (300 mm)
Grease Hose
with Spring

STANDARD GREASING ACCESSORY KIT

GAK-E

Greasing kits with 11 of the most popular accessories packed in a top quality premium blow mould case

Kit Constituents

ANN/4
4" (100mm)
Needle Nose
Adaptor

DNN/1-1-2/GFT
1-1/2" (38 mm)
Narrow Needle
Nose Dispenser

DNN/1-8/GFT
19/32" (15 mm) Needle
Nose Dispenser

HC/R/01/GFT
90° Hydraulic
Coupler

GIN/01
1-1/2"×18 gauge
Grease Injector
Needle

SOD/01/GFT
Seal Off Dispenser

HC/11/4
4 Jaw Standard
Hydraulic Coupler

HC/SW/11/4
360° Slim Line
Swivel Coupler

GSP/4
4" (100 mm)
Steel Extension

GBP/6
6" (150 mm)
Steel Extension

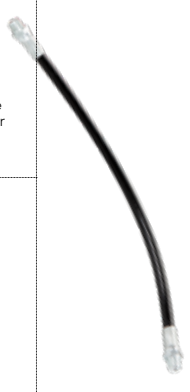

GHC-12
12" (300 mm)
Grease Hose

AIR OPERATED GREASE RATIO PUMP 50:1

1.1 KG (2.42 LB)/MINUTE

- Pump dispenses grease at pressures upto 50 times the air inlet pressure
- Max. Outlet Pressure: 7,500 PSI (500 BAR)
- Max. Air Pressure: 150 PSI/10 BAR
- Air Motor: 2-1/2" (63 mm)

GP0
Fits 12.5 kg drums

GP1 & GP4
Fits 20-30 kg/ 25-50 lbs pails

GP2
Fits 50-60 kg/ 120 lbs pails

GP3
Fits 180 kg / 400 lbs drums

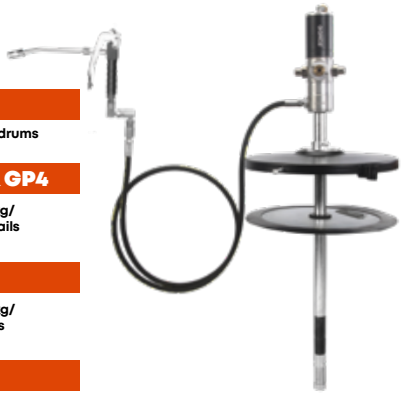

BGRP
Bucket Capacity: 15 kg, 30 kg, 50 kg

AIR OPERATED GREASE RATIO PUMP 60:1

1.1 KG (2.42 LB)/MINUTE

- Pump dispenses grease at pressures upto 60 times the air inlet pressure
- Maximum Outlet Pressure: 9,000 PSI (620 BAR)
- Max. Air Pressure: 150 PSI/10 BAR
- Air Motor: 2-3/4" (70 mm)

GP1-601
Fits 20-30 kg/ 25-50 lbs pails

GP2-601
Fits 50-60 kg/ 120 lbs pails

GP3-601
Fits 180 kg/ 400 lbs drums

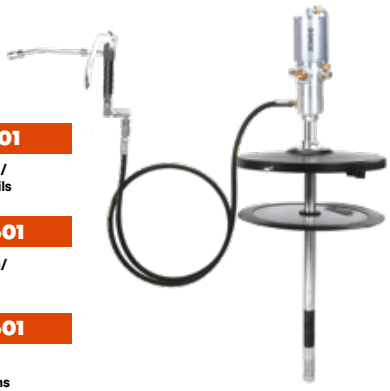

HIGH VOLUME GREASE RATIO PUMP 50:1

3.3 KG (7.2 LB)/MINUTE

- Stall free, ice free motor
- Air motor : 3" (76 mm)
- Working Pressure: 30-150 PSI (2-10 BAR)
- Max Outlet Pressure: 7,500 PSI (500 BAR)

GPH1
Fits 20-30 kg/ 25-50 lbs pails

GPH2
Fits 50-60 kg/ 120 lbs pails

GPH3
For 180 kg/ 400 lbs drums

GREASE CONTROL VALVES

7,500 PSI (517 BAR)

Available with & without Z swivels

APG-04
Steel body

APG-HD
Heavy Duty Steel body

BOOSTER GREASE CONTROL VALVES

10,000 PSI (690 BAR)

- Built in pressure boost mechanism
- Available with & without Z swivels

APG
Steel Body

APG-PR
Steel Body with pressure release valve

APG-NS
Aluminium Body

GREASE CONTROL VALVE - METERED

7,500 PSI (517 BAR)

APG-GM

- Digital Oval Gear Meter
- Measures in kg & lbs
- Grease flow: 0.1-2.5 kg/minute (0.2-5.5 lbs/minute)

HIGH PRESSURE GREASE SWIVELS

6,000 PSI (413 BAR)

HFC-Z
360° unrestricted, 3 axes movement

HFC-R
90°, 2 axes movement

HFC-S
Single axis swivelling

PORTABLE GREASING SYSTEM

GS-5

- Foot Charged: Single foot press provides upto 30 shots of grease
- Bucket Capacity: 5 kg

SCAN TO WATCH

High Pressure Setting	High Volume Setting
10,000 PSI (690 BAR)	-
Delivers 0.45 gm/stroke	Delivers 1.25 gm/stroke

FOOT OPERATED BUCKET GREASE PUMP

8,700 PSI (600 BAR)

- Hands-free, Fatigue-free greasing solution
- **Delivers: Upto 2 gm/stroke**
- Bucket Capacity: 10 kg (22 lbs)

FOP-10A

FOP-10Q

With quick lock coupler

BUCKET GREASERS

VGP

For quick & effortless greasing in applications requiring bulk and frequent greasing

VARIABLE HANDLE SETTING

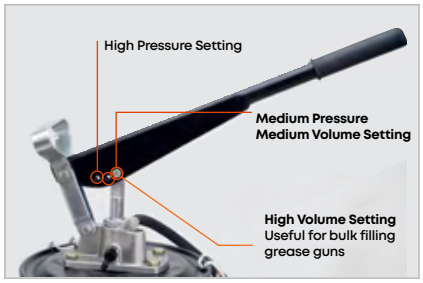

WITHOUT WHEELS

3 KG | 6 KG | 10 KG | 15 KG

WITH WHEELS

6 KG | 10 KG | 15 KG | 20 KG | 30 KG

High Pressure Setting	Medium Pressure Setting	High Volume Setting
4,000 PSI (275 BAR)	3,000 PSI (206 BAR)	2,000 PSI (137 BAR)
Delivers 4 gm/stroke	Delivers 7 gm/stroke	Delivers 9 gm/stroke

VGP-Q

- Available with Quick Lock Coupler
- Quick lock-on, convenient & quick disengagement even under high pressure.

17mm profile gives easy access

NEW!

6 KG | 10 KG

SCAN TO WATCH

GREASE PUMP HEAVY DUTY

NEW!

VGP-HD

- Oval bucket with integrated & unbreakable foot rest
- Sizes: 6 kg & 10 kg
- For use with grease upto NLGI 3

VARIABLE HANDLE SETTING

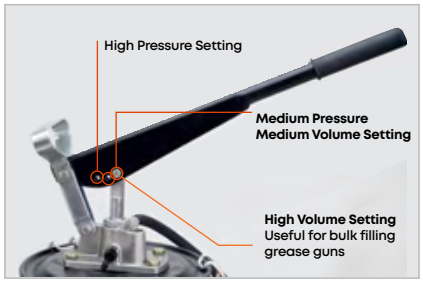

High Pressure Setting	Medium Pressure Setting	High Volume Setting
6,000 PSI (413 BAR)	4,500 PSI (310 BAR)	3,000 PSI (206 BAR)
Delivers 3 gm/stroke	Delivers 5 gm/stroke	Delivers 6 gm/stroke

GREASE FILLER PUMP

28 GM/STROKE

- Simple solution to load grease guns from grease pails
- Suitable for use with upto NLGI-2 grease

GFP-02
Fits 12.5 kg pails

GFP-03
Fits 20-30 kg (35 lbs) pails

GFP-04
Fits 50-60 kg (120 lbs) pails

HIGH PRESSURE GREASE PUMP

3.500 PSI (240 BAR)

GFP-HP
For high pressure greasing where airline connection and power are not available

GFP/HP-02
Fits 12.5 kg pails

GFP/HP-03
Fits 20 kg (25-50 lb) pails

FEMALE LOADER ADAPTORS

ADP/9147
Used with 9mm straight & American tapered 0.58" Bulk loader valves

SFA/1-4/N
Used with American tapered 0.58" Bulk loader valves

FOLLOWER PLATES

FLP

Rubber Lined follower plates

Follower plate for suction filling grease guns

All steel Follower plates

SCOOP & SWIPE SET

GSW

STEP 1
Use the Scooper to draw sizable amount of grease from the bucket

STEP 2
Use the swipe to clean the Scoop from inside

STEP 3
Use the swipe to clean the Scoop from outside

TROLLEY MOUNTED KITS - GREASE

7,500 PSI (500 BAR)

- Ideal for use in workshops & shop floors providing complete portability for everyday lubrication needs
- Grease Output: 1.1kg/minute (2.42 lbs/minute)

TMK-GP2
For 50-60 kg (120 lbs) pails

TMK1-GP3
For 180 kg (400 lbs) drums

TMK2-GP1
For 20-30 kg (35 lbs) pails

TMK-GP1
For 20-30 kg (35 lbs) pails

TMK-GP3H
For 180 kg (400 lbs) drums

TMK1-GP3H
For 180 kg (400 lbs) drums

TMK2-GP2
For 50-60 kg (120 lbs) pails

02 oiling

OIL PUMPS - MANUAL

LEVER ACTION OIL PUMPS

UPTO 300 ML (10 OZ.) /STROKE

- Lever Action Pumps complete with telescopic suction tube for use on 50-205 litre (15-50 US gallon) drums
- Built in 1-1/2" & 2" bung
- Use with: Oils, Oil Based Fuels, Diesel & Kerosene

LBP04

- Powder coated steel barrel
- Zinc die-cast piston
- Brass piston rings
- NBR seals
- Steel suction tube

LBP04-CL

- Polycarbonate clear tube barrel with steel piston
- NBR piston rings & seals
- Steel suction tube
- Clear tube provides visibility to fluid contamination

EBP02

- Steel body
- NBR piston rings
- PVC suction tube

LEVER ACTION ANTIFREEZE PUMPS

UPTO 300 ML (10 OZ.) /STROKE

- Lever Action Pumps complete with telescopic pipe for use on 50-205 litre (15-50 US gallon) drums
- Built in 1-1/2" & 2" bung
- Use with 100% Antifreeze, Thinners, Chemicals, Oil Based Media & Automotive additives

LBP06

- Powder coated steel body
- Zinc die-cast piston
- Brass piston rings
- Viton seals steel suction tube

LBP96

- Powder coated steel body
- Zinc die cast piston
- Brass piston rings
- Viton seal
- Complete with non drip nozzle & bucket hanger
- Steel suction tube

VERTICAL LIFT PUMP

UPTO 750 ML (26 OZ.) /STROKE

VLP01

- Self priming high volume pump
- Aluminum die cast head, steel plunger rod & PTFE seals
- For use on 205 litres (55 US gallon) drums
- Use with High viscosity Petroleum media, Lacquer Thinners etc.

STEEL SAFETY PUMPS

UPTO 165 ML (5.5 OZ.) /STROKE

- For use with combustible & flammable media
- Carbon Steel pump body with PTFE piston & sealing gasket
- Bonding & grounding wires prevent hazardous static charge
- In built flame arrestor
- Use with Gasoline, Diesel, Kerosene, Lacquer, Thinners, Acetone, Benzene, Naptha, Urea etc.

VLP-5

Fits 20-30 litre (5 US gallon) pails

FM APPROVED

VLP-55

Fits 205 litre (55 US gallon) drums

FM APPROVED

FRONT ACTION DRUM PUMP

UPTO 250 ML (9 OZ.) /STROKE

A2

- Low height design with pump submerged in container for ease of operation
- Variable handle setting for use with light or heavy fluids
- Complete with delivery hose & nozzle
- For use on 205 litres (55 US gallon) drums
- Use with Oils upto SAE 90, Diesel, Kerosene etc.

ROTARY DRUM PUMP

UPTO 250 ML (9 OZ.) /ROTATION

GNB-25

- Cast iron pump body with machined vanes
- For use on 50-205 litres (15-55 US gallon) drums
- Pump Weight: 6.6 kg (14.5 lbs)
- Use with Diesel, Kerosene & Oils

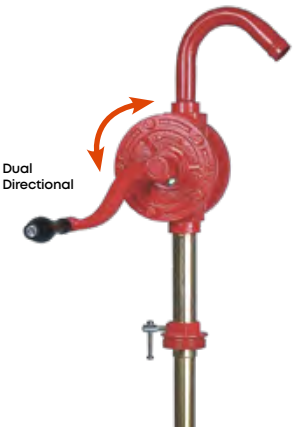

PROFEESIONAL ROTARY DRUM PUMP

UPTO 200 ML (7 OZ.) /ROTATION

RB1

- Aluminum Die Cast pump with zinc die cast rotor & vanes
- Horizontal outlet for installing filter/meter
- For use on 50-205 litres (15-55 US gallon) drums
- Use with Gasoline, Diesel, Kerosene Lubricating Oils upto SAE60 & 100% Antifreeze

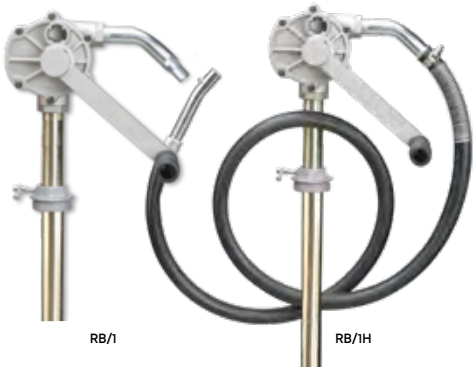

QUART/LITRE STROKE PUMP

1 LITRE (1 US QUART) / ROTATION

QSP

- Heavy duty pump dispenses exactly 1 litre or 1 US quart per rotation
- Precision Rack & Pinion Mechanism
- Pump complete with
  1. Spring loaded drain back tube
  2. Lockable handle
  3. 2" bung adaptor with lock nut
  4. Telescopic suction tube for use on 50-205 litre (15-55 US gal.) drums
- Use with Gear & Lube Oil, Diesel, Kerosene & Petroleum based media

EZEE FLOW PUMP

1 LITRE (1 US QUART) /18 STROKES

EZF-DS

- Designed for use on 20-25 litre / 5 US gallon containers with plastic pull out (Rieke® spout) or 2" external threads
- Polyethylene head with nozzle holder
- Pump length can be extended upto 4"
- 7 adaptors for use with most metal & plastic containers
- Complete with 48" long spring embedded hose fitted with steel spout with non drip
- Use with Light Oils, Diesel, Antifreeze & Glycerine

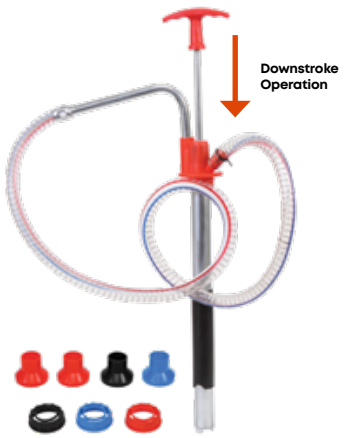

EZEE FLOW PUMP PREMIUM

0.9 LITRE (0.9 US QUART) / 14 STROKES

EZF-PR

- Designed for use on 20-25 litre / 5 US gallon containers with 2" bung
- **Downstroke Operation**
- High density polyethylene head with nozzle holder & drum filler plug
- Pump length can be extended upto 4" (100 mm)
- Complete with 48" long spring embedded hose fitted with steel spout with non drip
- Use with Light Oils, Diesel, Antifreeze & Glycerine

OIL LUBE DISPENSERS

BLP

- Pump with steel drum cover & 4' (48") PVC hose with nozzle
- Delivers: 60 ml (2.14 oz)/stroke
- For use with
  1. 5 US gal. oil pails
  2. 16 US gal. oil pails

- Designed for transferring transmission differentials & heavier oils
- Aluminium die cast head & adjustable flange

OLP

- Pump with inbuilt steel bucket
- Delivers: 100 ml (3.4 oz) / stroke
- Available in 3 sizes with & without wheels:
  1. 12 litre
  2. 16 litre
  3. 30 litre

DRIP PANS

DP

- Fits onto any 2" threaded opening on drum, barrel or tank
- Useful for returning over flown media back into drum & also acts as a base for holding containers

CAST IRON BODY
For use with pumps with suction tube dia. upto 33.5 mm

CAST ALUMINIUM BODY
Works with any pump with 2" bung

SUCTION TUBES

- Suction tubes, for use with all types of drum pumps
- Available in Telescopic or Rigid style in different length & threads

Telescopic

3 Piece Rigid

BUNG NUTS

Cast iron bung nuts / adaptors for use on 2" drums

AIR OPERATED OIL PUMPS & ACCESSORIES

RATIO PUMPS

- All metal fully CNC machined construction
- 2-1/2" (63 mm) dia. air motor
- Pump Outlet: 1/2" BSP (F) or 1/2" NPT (F)
- Available in stub version or with suction tube suitable for 50-60 litre drums & 205 litre drums
- All pumps supplied with bung adaptor

OP11

1:1
Low to Medium viscosity oils upto SAE 80 for transfer over distances upto 5 meters

Delivers:
Upto 40 LPM
(10.5 GPM)

OP31

3:1
Medium to High viscosity oils (upto SAE 130) for transfer over distances upto 30 meters

Delivers:
Upto 14 LPM
(3.70 GPM)

OP51

5:1
High viscosity oils (upto SAE 240) for transfer over long distances upto 50 meters

Delivers:
Upto 18 LPM
(4.76 GPM)

STAINLESS STEEL RATIO PUMPS 3:1

UPTO 14 LPM (3.7 GPM)

OPSS

- **Stainless steel pump for use with water based Fluids, Coolants, Detergents, Water etc.**
- Working Pressure: 30-150 PSI (2-10 BAR)
- Complete with suction tube and 2" bung for use with 205 litre (55 US gallon) drums

OIL RATIO PUMP 6.5:1

UPTO 18 LPM (4.76 GPM)

OPH

- Industrial Grade Pneumatic Pump
- **3" (76 mm) dia Stall & Ice free motor**
- Pump Outlet: 1/2" NPT (F) or 1/2" BSP (F)
- Stub pump with 2 additional suction tubes
- Ideal for use with oils upto SAE 240 for transfer over long distances (60 metres)

AIR OPERATED TRANSFER PUMP

UPTO 35 LPM (9.24 GPM)

ATP

- Pump complete with:
  1. Pre-set Air Pressure Regulator: Factory set at 7-8 PSI (0.5 BAR)
  2. 1/4" spring loaded safety valve prevents excessive pressure build-up
  3. 2 pc suction tube for use on 50-205 litre (15-50 US gallon) drums
  4. 6' × Ø1" (25 mm) discharge hose & spout
- Use with: Diesel, Kerosene, Oil, Water & Corrosive media
- Available with steel or SS suction tubes

WARNING

For the pump to operate, drum must be sealed ensuring no air outlet to maintain pressure.

TROLLEY MOUNTED KITS - OIL

- Ideal for use in workshops & shop floors providing complete portability for everyday lubrication needs
- Available in choice of NPT & BSPT thread

FOR 205 LITRE (55 GAL.) DRUMS

TMK-OP3

TMK-OP3H

FOR 50-60 LITRE (16 US GAL.) PAILS

TMK2-OP3

TMK-OP5H

TMK-OPH

TMK1-OP3

TMK2-OP5

TMK1-OP3H

TMK1-OP5

TMK1-OP5H

MOUNTING BRACKET

- For installing pumps
- 2" (F) threaded bung

FOOT VALVE

- Aluminium construction
- Used as a non return valve at the bottom of a suction tube
- Sizes: 3/4" & 1"

BUNG NUT

- 2" Drum Bungs
- Sizes available:
  1. ID 30mm
  2. ID 36mm
  3. ID 42mm

HYDRAULIC HOSES

- Rubber Hoses (SAE 100 R1) for use with Air Operated Oil Pumps
- Crimped with steel fittings with 1/2"(M) threads on both ends
- Working Pressure: 2,200 PSI (150 BAR)

OIL PUMPS - ELECTRIC

ELECTRIC OIL DRUM PUMP

UPTO 16 LPM (4.2 GPM)

SCAN TO WATCH

EDR-OL

- Compact & lightweight AC Powered: 100V -240V, 50/60 Hz
- Suitable for use on 205 litres (55 US gal.) drums or 1000-1250 litres (275-330 US gal.) IBC's /Totes

- **Duty Cycle: 15 Minute ON / 30 Minutes OFF**
- Use with Motor Oil, Hydraulic Oil & Lubricants

Electric Oil Pump

Electric Oil Pump - Metered

ELECTRIC OIL PUMPS

- Self priming, geared pump
- Ideal for use with oils upto SAE 90
- **Duty Cycle: 30 Minute ON / 30 Minutes OFF**
- Available in AC & DC versions

OPM

AC REGULAR FLOW	DC REGULAR FLOW
115V 15 LPM (4 GPM)	12V 13.2 LPM (3.5 GPM)
220V 11.5 LPM (3 GPM)	

OPM-HF

AC HIGH FLOW
115V 30 LPM (8 GPM)
220V 23 LPM (6 GPM)

AC PUMP

DC PUMP

DOUBLE DIAPHRAGM PUMPS

- Designed for applications requiring large volume transfer in a very short time
- Self Priming: High suction lift even at dry start up
- Ability to run dry: No close fittings or sliding parts at risk
- Explosion proof: Used with compressed air these are safe pumps
- Submersible: Pump can be submerged in liquid by running exhaust line above liquid level

AODD

AODD/1-4/FPT/N

Size: 1/4"

Polypropylene Casing

PTFE Diaphragm

Flow Rate: 0 - 11 LPM (0 - 2.90 GPM)

For use with:
Windshield washer fluid, Antifreeze, Caustic soda, Sulfuric acid (up to 75%), Plating Solution, Photograph developing liquid, Benzene, Hydrogen Peroxide, Waste water etc.

AODD/1-2/BAH/N

Size: 1/2"

Aluminium Casing

Hytrel® Diaphragm

Flow Rate:
0 - 50 LPM (0 - 13.22 GPM)

For use with:
Diesel fuel, Kerosene, Lubricants, Gear oil, Engine oil, Waste oil, Brake fluid, Naphtha , Mold lubricants, Antifreeze and Waste water

AODD/1-2/FPT/N

Size: 1/2"

Polypropylene Casing

PTFE Diaphragm

Flow Rate:
0 - 45 LPM (0 - 11.90 GPM)

For use with:
Windshield washer fluid, Antifreeze, Caustic soda, Sulfuric acid (up to 75%), Plating Solution, Photograph developing liquid, Benzene , Hydrogen Peroxide, Waste water etc.

AODD/1-2/FPS/N

Size: 1/2"

Polypropylene Casing

Santoprene® Diaphragm

Flow Rate:
0 - 45 LPM (0 - 11.90 GPM)

For use with:
DEF, Antifreeze, Ethanol, Ammonium hydroxide and Waste water

AODD/3-4/BAH/N

Size: 3/4"

Aluminium Casing

Hytrel® Diaphragm

Flow Rate:
0 - 110 LPM (0 - 29.1 GPM)

For use with:
Diesel fuel, Kerosene, Lubricants, Gear oil, Engine oil, Waste oil, Brake fluid, Naphtha, Mold lubricants, Antifreeze and Waste water

AODD/3-4/BPS/N

Size: 3/4"

Polypropylene Casing

Santoprene® Diaphragm

Flow Rate:
0 - 110 LPM (0 - 29.1 GPM)

For use with:
DEF, Antifreeze, Ethanol, Ammonium hydroxide and Waste water

AODD/0-1/BAH/N

Size: 1"

Aluminium Casing

Hytrel® Diaphragm

Flow Rate:
0 - 110 LPM (0 - 29.1 GPM)

For use with:
Diesel fuel, Kerosene, Lubricants, Gear oil, Engine oil, Waste oil, Brake fluid, Naphtha, Mold lubricants, Antifreeze and Waste water

ELECTRONIC OIL METER - PROFEESIONAL

1-30 LPM (0.3-8 GPM)

OM2000

- **Oval Gear Mechanism**
- Accuracy: ±0.50%
- Meter Inlet / Outlet threaded 1/2" (F)
- Measures in Litres, US Gallons, US Quarts & Pints
- For use with Oils upto SAE 140

MECHANICAL OIL METER

1-30 LPM (0.3-8 GPM)

OM10

- **Oval Gear Mechanism**
- Accuracy: ±1%
- Meter Inlet / Outlet threaded 1/2" (F)
- Measures in Litres & Quarts
- For use with Oils with :
- Viscosity upto 2000 cSt, Diesel and Biodiesel

MANUAL OIL CONTROL GUN

1-30 LPM (0.3-8 GPM)

OGN

- Aluminium die cast construction
- Built-in continuous flow switch
- Inlet Threads: 1/2" (F)
- For use with oils with viscosity upto SAE 140

Steel Extension

Steel Extension & Manual Non-Drip Nozzle

Steel Extension & Automatic Non-Drip Nozzle

Hose & Manual Non-Drip Nozzle

Hose & Automatic Non-Drip Nozzle

Hose Extension with Bent Steel Pipe & Manual Non-Drip Nozzle

Hose Extension with Bent Steel Pipe & Automatic Non-Drip Nozzle

ELECTRONIC OIL CONTROL GUN

1-30 LPM (0.3-8 GPM)

OGN-OM2000

- Aluminium die cast Oil Control Gun with Oval Gear Digital Meter (OM-2000)
- Max. Working Pressure: Upto 1,000 PSI (70 BAR)

With Steel Extension & Manual Non Drip Nozzle

With Steel Extension & Automatic Non-Drip Nozzle

With Hose & Manual Non-Drip Nozzle

With Hose & Automatic Non-Drip Nozzle

With Hose Extension, Bent Steel Pipe & Manual Non-Drip Nozzle

With Hose Extension, Bent Steel Pipe & Automatic Non-Drip Nozzle

MECHANICAL OIL CONTROL GUN

1-30 LPM (0.3-8 GPM)

OGN-OM10

- Aluminium die cast Oil Control Gun with Mechanical Meter (OM-10)
- Max working pressure: Upto 1,000 PSI (70 BAR)

With Steel Extension & Manual Non-Drip Nozzle

With Steel Extension & Automatic Non-Drip Nozzle

With Hose & Manual Non-Drip Nozzle

With Hose & Automatic Non-Drip Nozzle

With Hose Extension, Bent Steel Pipe & Manual Non-Drip Nozzle

With Hose Extension, Bent Steel Pipe & Automatic Non-Drip Nozzle

ELECTRONIC PRESET OIL CONTROL GUN

1-30 LPM (0.3-8 GPM)

OM300

- Dual Mode - Manual & Pre-set (dispenses set quantity of media and stops)
- **Oval Gear Mechanism**
- Accuracy: ±0.50%
- Measures in Litres, US Quarts, Pints and US Gallons
- Use with Oils with viscosity upto 5000cst, Diesel & Biodiesel

OIL GUN HOSE EXTENSION

2,320 PSI (160 BAR)

HOS

- Flexible oil hose extension for use with oil control guns
- Length: 14" (350 mm)
- Hose Inner Dia: 1/2" (12.7 mm)
- Fittings: 1/2" (M) × 1/4" (M)

SUCTION GUNS

- Designed for use with gear oils to get them both into and out of gear boxes, transfer cases and differentials
- Suitable for use with non corrosive liquids

SG10

Aluminium Die Cast Head

Capacity: 500 ml (16oz)

Capacity: 700 ml (24 oz)

SG10-CL

Clear tube helps identify fluid contamination

Capacity 400 ml (14 oz)

SG11

Plated steel head

Capacity: 500 ml (16 oz)

SG1000

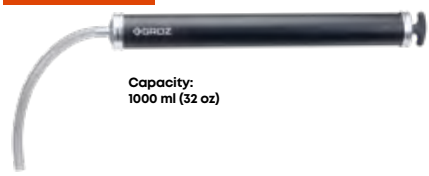

Capacity: 1000 ml (32 oz)

TRANSFER GUNS

- Dual Action Gun: Draws in & pumps out liquid in a single stroke
- Safe solution for transferring media unsafe for human contact
- 8' of vinyl hose (4' with each valve)

SCAN TO WATCH

SG20

- Aluminium barrel with aluminium die cast head
- Capacity: 350 ml (12 oz.)
- Use with: Oils, Antifreeze, water etc.

SG21

- Steel barrel with aluminium die cast head
- Capacity: 500 ml (16 oz.)
- Use with: Oils & Spirits

SG21-CL

- Clear Tube Barrel helps identify fluid contamination
- Capacity: 450 ml (15 oz.)
- Use with: Oils, Non-corrosive liquids, spirits & coolants

NON DRIP NOZZLES

NDN

Automatic Non Drip Nozzle: Inlet 1/4" (F)

Automatic Non Drip Tip: Inlet 9/16"-18 UNF

Manual Non Drip Nozzle: Inlet 1/4" (F)

OIL METER SWIVEL

2,320 PSI (160 BAR)

SWV

- Swivel Adaptor for Oil Meters / Hose End Guns
- Threaded: 1/2" (M) × 1/2" (F)

OIL SPIGOTS

800 PSI (55 BAR)

- Spigots are used as a dispenser with air operated pumps and also to construct Oil Bars
- Spring loaded dispensing mechanism

OBT-01

Steel Body
with wall mount

OBT-02

Steel Body
without wall mount

OBT-03

Steel Body
Non-locking style
Nitrile Seal

OBT-03WF

Aluminium Body
Non-locking style
Viton Seal

SMART FUNNELS

- Polypropylene construction
- Anti-splash & spill proof
- With wire mesh screen, dust cover & flexible spout

FNL-8

Capacity:
1.7 Litre (1.7 Qt.)

FNL-9

Capacity:
3 Litre (3 Qt.)

FNL-9B

- Capacity:
  3 Litre (3 Qt.)
- Complete with 2" bung for attachment on drums

UNIVERSAL OIL FUNNEL

FNL-UV

- Universal funnel with unique & innovative design: spring loaded, glass filled plier is adjustable for openings from 1" (25 mm) upto 3-1/8" (80 mm)
- No Spill, No Mess, Hands Free

SETTING THE FUNNEL

Thread funnel into the clamp ring

Start refilling the fluid into the engine

ALSO AVAILABLE



Funnel with seal piercing filter

FUNNEL - SET OF 4

FNL-4ST

- Polypropylene construction
- Set of 4 funnels with:

Dia. (D)		Capacity	
Inch	mm	ml	oz
5	125	430	15
4	100	245	8.5
3	75	120	4.2
2	50	40	1.4



MULTIPURPOSE AUTOMOTIVE FUNNEL 3 PC SET

NEW!

FNL-3ST

- Versatile set of funnels for use with transfluids, power steering fluids, gas/oil & additives
- Features no-mess splash guards
- Sizes: 10-3/4", 6-1/2" & 5-1/2"

CONICAL FUNNELS

Polypropylene construction

FNL-6

Capacity: 650 ml

FNL-7

Capacity: 1800 ml

FOLDABLE FUNNEL

NEW!

FNL-FX

- High grade PVC construction
- No mess spill-proof design
- Folds into any shape to drain & refill fluids
- After use - wipe, roll & put back in your tool box
- Available in 2 sizes:
  - Regular: 14-9/16" (370 mm) × 6-11/16" (170 mm)
  - XL: 13-25/64" (340 mm) × 9-29/64" (240 mm) comes with magnet

Regular

XL

SQUEEZE BOTTLE OIL CAN

SQZ

- Low density polyethylene translucent body
- Available Capacity:

ml	oz
125	4
250	8
500	16
1000	32

FUEL & OIL FUNNEL

FNL-11

- High flow fuel & oil funnel with large mouth for easy pouring
- Polypropylene construction
- Capacity: 4.7 litre /1.2 US gallon

Filter Screen



FLEXIBLE SPOUT MEASURES COLOUR CODED KIT - PROFESSIONAL

NEW!

MSR-PRO

- 5 pc set
- High-density polyethylene construction
- Designed with a colour coded system to streamline multiple fluid transfer and prevents lubricant mix-up
- Lid Colours - Blue, Red, Yellow, Green, and Black
- Threaded nut for convenient assembly of spout
- Available Capacity:

5	6	8

LITRE/US QUART

FLEXIBLE SPOUT MEASURES

MSR

- High density polyethylene construction
- Available Capacity:

1	2
3	5
6	8

LITRE/US QUART

STACKABLE MEASURING JUGS

NEW!

JUG-S

- Heavy-duty, clear and transparent polypropylene body
- Food grade polymer makes these useful in the food industry too.
- Resistant to acids, bases and chemicals these are autoclavable at 121°C (250°F).
- Available capacity:

32	64	1	2
OUNCE		LITRE	

Shipped in Nested Form

HEAVY DUTY MEASURING JUGS

JUG

- Heavy duty clear and transparent polypropylene body
- Available capacity:

ml	oz
100	3
250	8
600	20
1000	32
2000	64
5000	160

PRECISION OILER

POL-5

- Designed to lubricate the smallest, narrowest and hardest to reach places
- Solid Aluminium body with steel needle
- Useful in Automotive, Model making, Engineering, Watch and Jewellery making, Repair shops, DIY applications around the home

FLEXIBLE DISPENSING SPOUT

NEW!

FDS

- Convenient solution for quick and drip-free transfer of fluids
- Fits most US gallon & US quart plastic containers
- Min. length: 5-45/64" (145 mm)
- Max. length: 10-3/64" (255 mm)

- Thread size
  1. US Gallon: 1-1/2" (38 mm)
  2. US Quarts: 1-7/64" (28 mm)

MEASURING FUNNEL

SCAN TO WATCH

MFNL

- Funnel & measure built into one
- Funnel with graduations used to transfer measured quantity of fluids
- Capacity:
  a. 2 litre /2 US quart
  b. 5 litre /5 US quart

Funnel only

Funnel with Base

Funnel with Base and Dust Cap

OIL CANS

- Body seamless drawn from tin coated sheet
- Choice of Steel & Brass pump with rigid or flexible spout
- Spare spouts available

PT SERIES

125 ml
180 ml

200 ml
300 ml

400 ml
500 ml

700 ml
1000 ml

OC SERIES

*Now also available with corrugated flex steel spout

500 ml
1000 ml

180 ml
500 ml

ADHESIVE OIL CAN

OC-AG **NEW!**

- Used for clean & faster gluing of leather, insulation material, upholstery etc.
- Comes with an additional brush tip for added versatility and puncture pin for opening blocked nozzles

500 ml
(16 OZ.)

- Recommended Use: Neoprene glue, oil products, Adhesives

03 waste oil

PUMPS & DRAINS

ELECTRIC WASTE OIL PUMP

EWOP

- Self priming ZAMAC body with flexible impeller design for pumping high viscosity fluids at high flow rates
- **Duty Cycle: 45 Min ON/ 45 Min OFF**
- USE with: Used Oil, Engine Oil, Transmission Oil, Hydraulic Oil, Water, Ethylene Glycol

Empties 68 litres in 3 min

AC

115V
60 HZ
23 LPM (6 GPM)

220V
50 HZ
23 LPM (6 GPM)

DC

12V
17 LPM (4.5 GPM)

WASTE OIL DRAIN PRESSURISED

WOD-68

- Suitable for draining of motor, engine, gearbox & differential oils, transmission & power steering fluids
- Tank includes a pre-set air regulator for use with compressed air upto 150 PSI (10 BAR)
- Adjustable Bowl
- Tank Capacity: 68 litres / 18 US gallons

WASTE OIL DRAIN

NEW!

WODP

- Heavy-duty polyethylene blow molded tank with polyethylene injection molded bowl & aluminium tube
- Suitable for draining of motor, engine, gearbox & differential oils, transmission & power steering fluids
- **Sizes:**
  - 30 litres (8 US gallons)
  - 68 litres (18 US gallons)

AIR OPERATED DOUBLE DIAPHRAGM PUMPS - V SERIES

AODD-25-BAH

- Size: 1"
- Casing: Aluminium
- Diaphragm: Hytrel
- Flow Rate: Upto 140 LPM (37 GPM)
- Recommended Use: Diesel, Kerosene, Lubricants, Gear oil, Engine oil, Waste oil, Brake fluid, Naphtha, Mold lubricants, Antifreeze & Waste water

AODD-15-BAH

- Size: 1/2"
- Casing: Aluminium
- Diaphragm: Hytrel
- Flow Rate: Upto 58 LPM (15.3 GPM)
- Recommended Use: Diesel, Kerosene, Lubricants, Gear oil, Engine oil, Waste oil, Brake fluid, Naphtha, Mold lubricants, Antifreeze & Waste water

AODD-15-BPS

- Size: 1/2"
- Casing: Polypropylene
- Diaphragm: Santoprene
- Flow Rate: Upto 55 LPM (14.5 GPM)
- Recommended Use: Antifreeze, Ethanol, Ammonium Hydroxide & Waste Water

AODD-50-BAH

NEW!

- Size: 2"
- Casing: Aluminium
- Diaphragm: Hytrel
- Flow Rate: Upto 670 LPM (177 GPM)
- Recommended Use: Diesel, Kerosene, Lubricants, Gear oil, Engine oil, Waste oil, Brake fluid, Naphtha, Mold lubricants, Antifreeze & Waste water

LOW PROFILE TRUCK DRAINS

- Rugged steel construction for heavy duty workshop use
- Use with: Diesel, Kerosene, Lubrication Oils, Non-corrosive media, Waste Fluids, Motor Oil, Transmission Fluids, Coolants etc.

TD68

Capacity:
68 litres (18 US gallons)

TD90

Capacity:
90 litres (23.7 US gallons)

- **Gravity Drain**

- **Truck Drain with Manual Pump**
- **Pump Flow Rate:**
- **Upto 1 Litre (0.25 gal) / 5 strokes**

- **Truck Drain with a choice of**
- **12V DC, 115V AC or 220V AC Electric Pumps**
- **Pump Flow Rate: Upto 23 LPM (6 GPM)**

PLASTIC DRAINS

TD17

- Capacity: 65 litres (17 US Gallons)
- Use with: Diesel, Kerosene, Lubricating oils (upto SAE 90), Non Corrosive Media, Waste Motor oil, Transmission Fluids, Coolants etc.

- **Gravity Drain**

- **Truck Drain with Manual Pump**
- **Pump Flow Rate:**
- **Upto 1 litre (0.25 US gal) / 5 strokes**

- **Truck Drain with a choice of 12V DC, 115V AC or 220V AC Electric Pumps**
- **Pump Flow Rate: Upto 23 LPM (6 GPM)**

DRAIN CONTAINER

ODP-15

- Capacity:
  14.25 litres (15 US Quarts)
- For used Oil, Gasoline & Antifreeze

DRAIN PANS

- High density polyethylene construction

ODP/8 NEW!

- For use with waste oil
- Capacity: 8 litres (2 Gallons)

ODP/8GN NEW!

- For use with Antifreeze
- Capacity: 8 litres (2 US Gallons)

ODP-16

- For use with waste oil
- Capacity: 16 litres (4-1/4 US Gallons)

ODP-16GN

- For use with Antifreeze
- **Capacity: 16 litres (4-1/4 Gallons)**

WASTE OIL EVACUATION KITS

KIT-AODD

Suitable for use in workshops & garages for removing used oil from drains & delivery into oil sump tanks

	SIZE - 1/2"	SIZE - 1"
Flow Rate	0-50 LPM	0-110 LPM
Casing	Aluminium	Aluminium
Diaphragm	Hytrel	Hytrel
Max. Particle Size	1/32" (1 mm)	1/16" (2 mm)

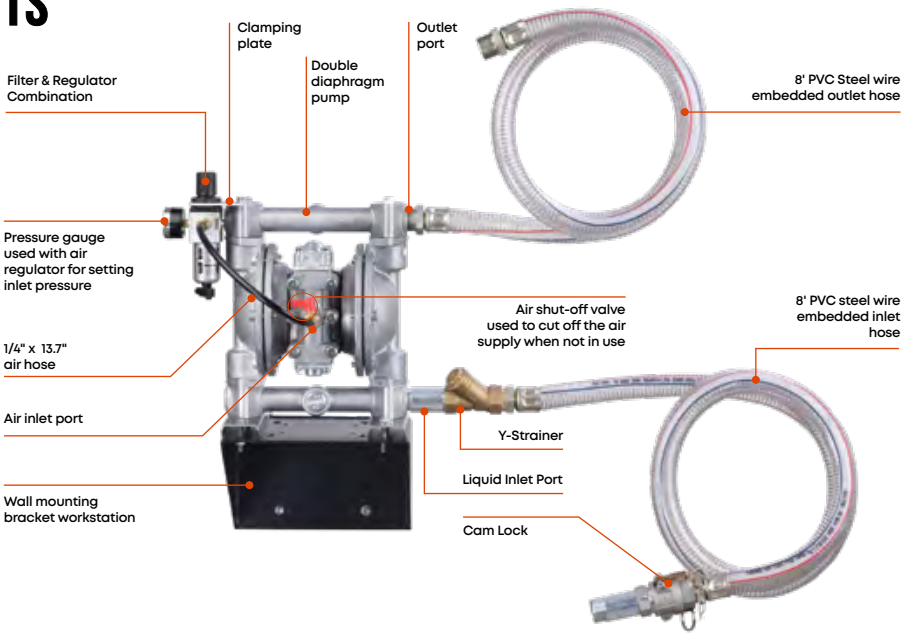

04 hose reels

HOSE REELS

- All metal hose reels
- **Cassetted Spring Design:** for protecting the spring against corrosion and increased safety during repairs
- **Multiple Position Guide Arm:** for floor, wall or truck mounting option
- Floor mounting bracket & wall mounting bracket also available
- Available with 10m or 15m hose

HR-AW

Air/Water

- Low Pressure Hose Reels
- Max. Pressure: Upto 300 PSI (21 BAR)
- Single Arm
- Available in a choice of Inlet Threads: 3/8" or 1/2"

HR-OL

Oil

- Medium Pressure Hose Reel
- Max. Pressure: Upto 2,000 PSI (138 BAR)
- Dual Arm
- Available in a choice of Inlet Threads: 3/8" or 1/2"

HR-GR

Grease

- High Pressure Hose Reel
- Max. Pressure: Upto 5,800 PSI (400 BAR)
- Dual Arm
- Available in a choice of Inlet Threads: 1/4" or 3/8"

HOSE REEL - AIR/WATER E-SERIES

NEW!

HRE-AW

- All metal hose reel
- Auto retractable design for ease of use
- Weather-resistant enclosed design
- Rubber reinforced hose – stays flexible in cold conditions
- Available in 3/8" & ½" Inlet thread
- Hose length: 10 & 15 m

We also make plastic hose reels. Check out details on page no. 61

05 fuel handling

FUEL PUMPS - MANUAL

INDUSTRIAL ROTARY DRUM PUMPS

UPTO 38 LPM (10 GPM)

- **Heavy duty cast iron construction**
- High quality sintered powder metal rotor
- Graphite vanes & seals
- Includes 2" bung & telescopic steel suction tube with strainer

RBP-3V/F

Use with Class I & Class II flammable & combustible liquids such as Gasoline, Naphtha, Alcohols & other solvents

FM APPROVED

RBP-3V/H/F

Use with Class I & Class II flammable & combustible liquids such as Gasoline, Naphtha, Alcohols & other solvents

FM APPROVED

RBP-3V

Use with Diesel, Kerosene & Petroleum based fluids

RBP-3V/H

Use with Diesel, Kerosene & Petroleum based fluids

RBP-3V/H/MT

Use with Diesel, Kerosene

ROTARY BOOSTER PUMP 3:1

EMPTIES 205 L (55 US GAL.) DRUM IN UNDER 3 MINUTES

- Die cast Aluminium construction
- Built-in gears - One turn of the handle turns the rotor 3 times
- Includes 2" bung & 3 pc steel suction tube
- Use with: Diesel, Kerosene, Gasoline

RB-3

With metal outlet spout

RB-3H

With 8' (1.8 m) delivery hose & metal nozzle

DOUBLE DIAPHRAGM TRANSFER PUMP

UPTO 800 ML/STROKE

DPP-1

- Die cast Aluminium pump
- Stainless steel piston & fuel resistant hi-nitrile diaphragm
- Telescopic steel suction tube & 8' (1.8 m) × 3/4" anti-static rubber hose with die-cast nozzle
- Use with: Diesel, Kerosene, Gasoline & Light Oils

LEVER ACTION FUEL PUMP

UPTO 300 ML (10 OZ.)/STROKE

LBP-85

- All steel construction
- Includes 2" bung & telescopic suction tube
- Fits 50-205 litre (15-55 US gallon) drums
- Use with: E85 Fuel, Bio Diesel, Diesel, Kerosene, Light Oils

FUEL PUMPS - ELECTRIC

DIESEL PUMPS

UPTO 46 LPM (12 GPM)

EDP

- Portable 1/4 HP Electric Fuel Pump
- Ideal for use on construction sites, farms etc.
- Non corroding aluminium die cast body
- Self Priming Vane Pump
- **Duty Cycle: 30 Minutes ON / 30 Minutes OFF**
- Available in: 12V & 24V DC (as pump only or Battery Kit)

Pump only
Base Mount Style

Pump with Battery Kit

Pump Kit:
Drum Mount Style

DIESEL PUMPS HEAVY DUTY

UPTO 46 LPM (12 GPM)

EDP-HD

- Non corroding Aluminium Die Cast Body
- Self Priming Vane Pump
- Designed for use in extreme heat
- Ideal for use on excavators, on farms, automotive & industrial applications
- **Duty Cycle: 45 Minutes ON / 45 Minutes OFF**
- Available in: 12V & 24V DC
- Includes pump, 2m long battery cable, delivery hose, manual fuel nozzle & suction hose with strainer
- Use with: Diesel, Kerosene

DIESEL PUMP 12V DC

NEW!

UPTO 46 LPM (12 GPM)

DP

- Heavy duty cast iron construction
- Self priming vane pump
- Bypass valve keeps motor safe even if outlet is closed
- **Duty cycle: 30 min ON / 30 min OFF**
- Use with: Diesel & Kerosene

Pump Only

Base Mount

Drum Mount

FUEL PUMP HEAVY DUTY

UPTO 57 LPM (15 GPM)

FPM

- Portable Electric Geared Fuel Pump
- Ideal for use on construction sites, farms, industrial & automotive application.
- Non corroding Aluminium Die Cast Body
- **Duty Cycle: 30 Minutes ON / 30 Minutes OFF**
- Available in: 12V & 24V DC; 110V & 220V AC
- Use with: Gasoline, Diesel, Kerosene, Bio-Diesel

FUEL PUMP HIGH FLOW

UPTO 75 LPM (20 GPM)

FPM-HF

- Heavy duty 12V DC Electric Geared Fuel Pump
- Ideal for use on construction sites , farms etc.
- Non corroding Aluminium Die Cast Body
- **Duty Cycle: 30 Minutes ON / 30 Minutes OFF**
- Use with: Gasoline, Diesel, Kerosene, Bio-Diesel

OIL & FUEL PUMP

UPTO 40 LPM (10.5 GPM)

EOP

- Portable Electric Fuel Pump with 0.43 HP Motor
- Ideal for light industrial, automotive, heating & marine applications
- Non corroding POM Body
- Continuous Duty
- Available in: 12V & 24V DC; 110V & 220V AC
- Use with: Diesel Light Oils, Kerosene, Water, Antifreeze, Windshield fluid

FUEL PUMP CONTINUOUS DUTY

UPTO 57 LPM (15 GPM)

CDP

- Diesel Pump for use on stationary tanks
- Non corroding aluminium body
- Self Priming Vane Pump
- Available in: 115V & 220V AC versions
- Use with: Diesel and Kerosene

FUEL PUMP CONTINUOUS DUTY HIGH FLOW

NEW!

UPTO 80 LPM (22 GPM) **IP54**

CDP-HF

- Aluminium die-cast construction
- Self priming vane pump with steel rotor & in-built bypass valve
- Available in:
  1. 110V AC, 60 Hz. Motor
  2. 220V AC, 50 Hz. Motor
- For use with stationary tanks on -site fixed fuel transferring systems etc.
- Use with: Diesel & Kerosene

MINI BOWSER DIESEL REFILLING SYSTEM

UPTO 44 LPM (11 GPM)

CBN

- Compact system for stationary diesel refilling applications
- Continuous Duty
- Complete with:
  a. 1/2 HP Electric fuel pump
  b. Mechanical fuel meter ±1%,
  c. Auto shut off fuel nozzle with swivel
  d. Nozzle holder, 10-1/2' x 1" ID anti static fuel hose & hose hangar
- Available in: 115V & 220V AC
- Use with: Diesel & Kerosene

OPEN BOWSER AC DIESEL REFILLING SYSTEM

NEW!

OBN-AC

- Continuous duty
- Complete diesel dispensing system with a meter, pump, nozzle, suction, dispensing hose & strainer
- Use with Diesel & Kerosene

Available in 2 variants

	220V AC, 50 Hz	110V AC, 60 Hz
Regular Flow	60 LPM (15.8 GPM)	60 LPM (15.8 GPM)
High Flow	80 LPM (21 GPM)	80 LPM (21 GPM)

DEF & SPECIALITY PUMPS

ELECTRIC STAINLESS STEEL PUMPS

IP54

UPTO 56 LPM (15 GPM)

DEFP-SS

- SS304 Stainless steel durable construction
- Centrifugal Vane Pumping Mechanism for enhanced suction lift even when run dry
- Totally enclosed motor for safe operation
- Continuous Duty
- Available in: 115 AC & 220V AC
- Use with: DEF, Urea, Antifreeze, Detergents etc.

ELECTRIC PUMPS

UPTO 34 LPM (9 GPM) **IP55**

- Diaphragm Transfer pump
- Polypropyle construction
- Duty Cycle: 30 Mins ON / 30 Mins OFF
- Available in: 220V & 110V AC; 12V DC
- Use with: DEF, Urea, Antifreeze, Detergents etc.

DEFP-12

DEFP-115

TRANSFER SYSTEMS

UPTO 34 LPM (9 GPM)

- Ready to use kits
- Use with: DEF, Urea, Water, Antifreeze

KIT-IBC

Tote Mounting Kit

*Tote not included

KIT-DRM

Drum Mounting Kit

*Drum not included

ELECTRIC DEF TRANSFER PUMP

NEW!

UPTO 40 LPM (10.5 GPM)

EOP-DEF

- Electric DEF pump with inbuilt anti-siphon valve
- Durable double insulated construction
- **Meets ISO 22241 standard**

- Complete with
  1. Power cables
  2. Telescopic suction tube with filter: 13" to 38"
  3. Delivery hose
  4. Manual dispensing nozzle
  5. Built-in drum connection threaded 2"

VARIANTS

- 110V AC
- 220V AC
- 12V DC
- 24V DC

AIR OPERATED TRANSFER PUMPS

UPTO 30 LPM (8 GPM)

PAOP

- Includes 2" bung & telescopic suction tube
- Fits 50-205 L (15-55 US gallon) drums
- Available as pump only & pump with delivery hose and nozzle
- Use with: DEF, Antifreeze, Water, Oils, Windshield Fluid, Herbicides & Pesticides

LEVER ACTION PISTON PUMP

UPTO 350 ML (12 OZ.) / STROKE

PLP-10

- Ergonomic design for fatigue free use
- Use with: DEF, Antifreeze, Windshield Fluid, Water, Oils, Herbicides & Pesticides

Lever Handle Convenient Up-Down Movement



Double Blade Airtight Design

Swivel Bung Adaptor

Superior fracture resistant, non-kink hose

Hose Clamp with Hose Holder

ELECTRIC DRUM PUMP

UPTO 16 LPM (4.2 GPM)

EDR-205

- Dual Power Pump works on AC & DC supply
- Telescopic suction tube suitable for 50-205 litre (15-55 US gallon) drums
- Use with: Motor Oil, Hydraulic Oil, Diesel, Kerosene, DEF, Water & Water based fluids, Antifreeze, Windshield Fluid, Agricultural chemicals etc. (Max. 100 cst)
- Duty Cycle
  15 minutes ON/15 minutes OFF



Power Input

Nozzle holder

BATTERY TRANSFER PUMP

UPTO 10 LPM (2.6 GPM)

BOP-5A

- Self priming pump with 3V DC motor
- Pump is operated by sliding the actuation button on top
- Ideal for transferring small quantities of media into boats, garages & small shops
- **Battery Capacity: One set of batteries delivers upto 1000 litres (264 US gallons)**
- Use with:
  Diesel, Kerosene, Water, Light Oil, DEF, Antifreeze, Detergents, Water

2×D Batteries (not included)

DRY CELL DEF PUMP

UPTO 9 LPM (2.3 GPM)

BOP-50

- Self priming pump with 3V DC motor
- Convenient to operate trigger for full control on fluid outflow
- No spillage even when the electric switch is ON
- **Battery Capacity: Fully charged battery can dispense 1000 litres (264 US gallons)**
- Use with:
  Gasoline, DEF, Diesel, Kerosene, Antifreeze, Windshield Fluid, Detergents

2×D Batteries (not included)

ELECTRIC DRUM / IBC PUMP

UPTO 28 LPM (7.4 GPM)

EDR-55

- Electric drum pump for dispensing DEF
- Duty Cycle: 15 minutes ON / 15 minutes OFF
- Fits 205 litres (55 US gallon) drums or 1000-1250 litres (275-330 US gallon) IBC's

AVAILABLE IN 2 CONFIGURATIONS

With 12V DC

100-240V AC

RECHARGEABLE PUMP

UPTO 11.5 LPM (3 GPM)

BOP-60

- Rechargeable battery operated pump with Control Nozzle for:
- a. Full control on fluid outflow
- b. No spillage even when switch is ON
- **Power Source:** 2900mAh rechargeable Lithium-ion battery (USB cable included)
- **Battery Capacity:** Fully charged battery can dispense upto 300 litres (79 US gallons)
- Use with: Gasoline, Diesel, Kerosene, DEF, Water, Antifreeze, Agricultural Chemicals etc.

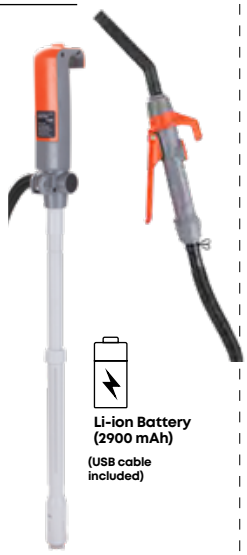

Li-ion Battery (2900 mAh)

(USB cable included)

BATTERY FUEL TRANSFER PUMP AUTO SHUT OFF

UPTO 9 LPM (2.4 GPM)

BOP-10

- 12V DC battery operated pump
- In-built auto shut off sensor in the nozzle prevents overflow & wastage of fuel
- **Hands free operation**
- Use with: Diesel, Kerosene, Light Oil, Dirty Water

SUBMERSIBLE DIESEL PUMP

UPTO 15 LPM (4 GPM) AT 1M HEIGHT

SDP

- 12V DC Powered Submersible Pump
- Pump motor covered with water tight and rust-proof PVC casing making it useful as a submersible unit
- **Duty Cycle: 60 Mins On / 60 Minutes Off**
- Use with: Diesel, Kerosene, Water, Light Oils & DEF

NYLON CHEMICAL PUMPS

- Self priming vertical lift pumps
- Nylon construction with stainless steel plunger rod & PTFE seals
- Use with: Oil, Bio Diesel, Water, DEF, Antifreeze, Urea, Windshield Fluid, Lacquers & Thinners

CMP-12

FLOW RATE
Upto 400 ml (14 oz) / stroke

For use on 205 litre (55 US gallon) drum

CMP-12S

FLOW RATE
Upto 190 ml (6.3 oz) / stroke

For use on 25 litre drums

316 SS VERTICAL LIFT PUMP

UPTO 600 ML (20OZ.) / STROKE

VLP-SS

- Stainless Steel body with PTFE piston
- In-built lock nut for grounding wires
- Flow control tubes to regulate flow
- Includes Bung adapter for use with Metal & Plastic Drums
- Use with: Thinners, Acetone, Benzene, Naphtha, Fuels, Oils, Urea, DEF, Photographic Chemicals, Solvents etc.

POLYPROPYLENE CHEMICAL PUMP

UPTO 400 LITRES (14 OZ.) / STROKE

CMP-10

- Polypropylene construction with steel plunger rod & viton seals
- Complete with 2" polypropylene bung adaptor for use on 205 litre (55 US gallon) drums
- Use with: Detergents, Antifreeze, Windshield Fluid, Glycerine, Mild acids, Most petroleum based media

STAINLESS STEEL ROTARY DRUM PUMP

UPTO 4 LITRES (1 US GALLON)/ 20 TURNS

GNB-SS

- 304 Stainless Steel & PTFE construction
- 2" bung adaptor
- Fits 50-205 litre (15-55 US gallon) drums
- Use with: Water based media, antifreeze, acids, chemicals, lacquer, thinner, Urea, DEF

PLASTIC ROTARY PUMPS

UPTO 5 LITRES (1.3 US GAL.)/ 20 TURNS

ERP-01

STANDARD

- PPCP rotor with PPCP handle & viton seals
- 2" bung adaptor
- Use with: Light Oils & Antifreeze

PRP-01

PROFESSIONAL

- Ryton rotor with 40% glass filled PP handle & viton seals
- 2" bung adaptor
- Use with: Acids, Chemicals, antifreeze, Water based media, DEF, Urea, Benzene, Glycerine etc.

PRP-02

DEF

- Polypropylene rotor with 40% glass filled PP handle & viton seals
- 2" bung adaptor
- Use with DEF & Urea

PRP-10

HEAVY-DUTY

- Ryton rotor with aluminium die cast handle & PTFE seals
- 2" CI bung adaptor
- Use with: Esters, Alcohols, Acetone, Bases, Hydrocarbon, Water, Antifreeze, Urea, DEF

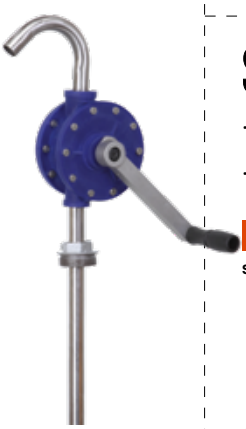

SIPHON PUMPS

UPTO 9 LPM (2.4 GPM)

- Polyethylene pumps siphon liquids to lower levels than the height at which pump in installed
- Easy to prime pumps start within 6-7 strokes and keep working in auto mode
- Vent cap to stop fluid outflow
- Use with: Antifreeze, Water based fluids, Detergents, Soaps & Mild acids

SPH-1

Flow Rate:
Upto 6.5 LPM (2 GPM)

For use on 5-20 litre (5 US gallon) pails

SPH-2

Flow Rate:
Upto 17.5 LPM (5 GPM)

For use on 205 litre (55 US gallon) drums

SPH-3

Flow Rate:
Upto 21 LPM (7 GPM)

For use on 205 litre (55 US gallon) drums

TIRE SEALANT PUMP

UPTO 230 ML (8 OZ.) / STROKE

TSP-03

- Hand operated Pump for pumping Tire Sealant from 5 to 6-1/2 US gallon pails directly into tubeless tyres
- Complete with 5' (1500 mm) braided PVC hose fitted with quick connect coupler and return valve

SIPHON PUMPS

NEW!

- Transfer pump for water, gasoline, kerosene & diesel
- Includes 2 × 2.7' (825 mm) PVC hose

SPH-10

Standard Pump

SPH-10NR

With back flow valve
Prevents unwanted reverse flow of liquid

QUART/GALLON FLUID PUMP

UPTO 5 ML (0.16 OZ.) / STROKE

QGFP

NEW!

- Versatile tool for use on both US quart/ US gallon containers
- Specially designed double threaded cap for use on US quart/US gallon containers
- Use with engine oils, transmission fluids, gear oils, antifreeze, or coolants

TWO-IN-ONE TRANSFER PUMP

- Polypropylene construction
- For clean, quick & hassle free transferring of low viscosity fluids, including water and oil

NEW!

BLG-6Q

- For fluid transfer
- Pump with hose
- Quick Connect

BLG-5

- For fluid & air transfer
- With air hose & connectors
- Can be used as an air pump to inflate bicycle tires, football etc.

BLG-5Q

- For fluid & air transfer
- With air hose, connectors & quick connect fitting
- Press the fitting inwards to connect and disconnect hose from pump outlet
- Quick Connect

PLASTIC LEVER PUMP

PLP-20

- Polypropylene pump with stainless steel piston rod & viton seal
- 1-1/2" & 2" bung adaptors
- Telescopic suction tube for use on 50-205 litre (15-55 US gallon drums)
- Variable Handle Setting
  1. Low: Upto 270 ml (9oz.)/stroke
  2. Medium: Upto 350 ml (12 oz.)/stroke
  3. High: Upto 430 ml (15 oz.)/ stroke

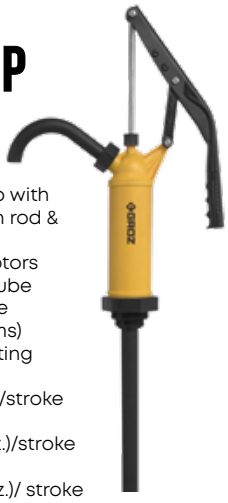

BRASS TRANSFER PUMPS

- Portable hand pumps for clean, quick, hassle free transferring or evacuating of a wide variety of media
- Small & lightweight, these fit easily in a tool box or the trunk of a car
- Use with: Engine Oil, Coolants, Transmission Fluid, Power Steering Fluid, Oils, Diesel, Water, Antifreeze etc.

BLG-1

Complete with
24" (600 mm) discharge hose &
40" (1000 mm) suction hose

Flow Rate
Upto 100ml (3.30 oz)/stroke

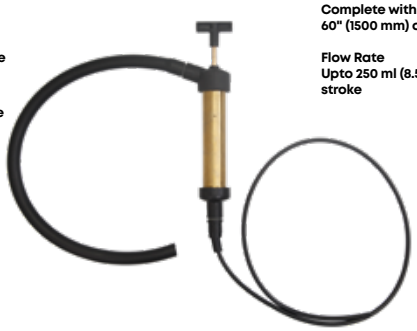

BLG-2

Complete with
60" (1500 mm) discharge hose

Flow Rate
Upto 250 ml (8.50 oz)/ stroke

316 SS SAFETY PUMPS

FM APPROVED

UPTO 200 ML (7 OZ.) / STROKE

VLPSS-FM

- 304 Stainless Steel & PTFE construction
- Built-in flame arrestor
- Bonding and grounding wires prevent static charge
- Fits 50-205 L (15-55 gl.) Drums
- Use with: Gasoline, Diesel, DEF, Naptha, Diesel & Kerosene etc.

For detailed compatibility chart write to use info@groz-tools.com

DIAPHRAGM / BILGE PUMP

UPTO 16.6 LPM (4.4 GPM)

- Designed to work in any position- vertical, horizontal, at an angle or even upside down
- Constructed from minimal parts, the pump is virtually maintenance free

DPP-20

Pump with
a. Suction & discharge hose (1" I.D. x 2 m)
b. Delivery nozzle
c. Hose clamps
d. Drum attachment kit
e. Connecting links & strainer

DPP-20A

Complete with suction & discharge hose (1" I.D. x 2 m long), delivery nozzle & hose clamps

DPP-20B

Pump only with 1" (25 mm) inlet & outlet hose barb ports

MECHANICAL FUEL METER

ACCURACY: ±2%
NUTATING DISC MECHANISM

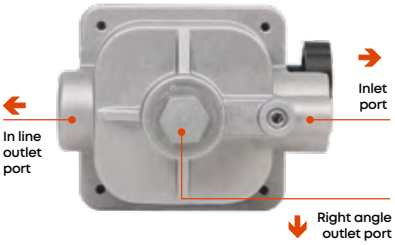

FM100

- Robust aluminium construction
- **Flow Rate: 15-75 LPM (4-20 GPM)**
- Register cap can be easily removed & rotated to every 90° orientation for display reading
- Use with: Diesel, Gasoline, Low to Medium Viscosity Oils

VERSATILE MOUNTING OPTIONS

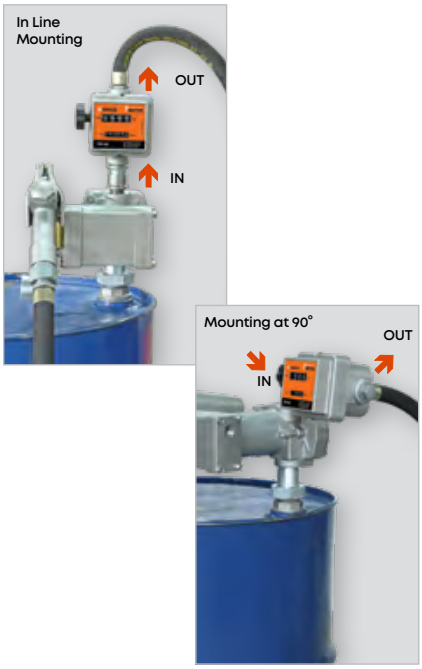

MECHANICAL DIESEL METER

ACCURACY: ±1%
NUTATING DISC MECHANISM

FM10

- Aluminium construction
- Designed for inline application and gravity flow
- Register cap can be removed and rotated to 90° angles
- **Flow Rate: 20-120 LPM (5-32 GPM)**
- Use with: Diesel, Bio-diesel & light oils

MECHANICAL FUEL METER IN-LINE

NEW!

ACCURACY: ±1%
OVAL GEAR MECHANISM

MFM-M10

- Aluminium construction
- **Flow Rate: 20-120 LPM (5-32 GPM)**
- Max Working Pressure: 300 PSI (20 BAR)
- Max. Resettable Batch Total: 9999 unit
- Least Count: 1 litre / 1 US gallon
- Inlet/Outlet: 1" BSP(F) / NPT(F)
- Designed for in-line application and gravity flow
- Use with: Diesel, Kerosene & Fuel oil
- Available in 2 versions: Litre & US Gallon

MECHANICAL FUEL METER

NEW!

ACCURACY: ±1%
OVAL GEAR MECHANISM

FM-OV10

- Aluminium construction
- **Flow Rate: 20-120 LPM (5-32 GPM)**
- Max Working Pressure: 145 PSI (10 BAR)
- Max. Resettable Batch Total: 999.9 unit
- Least Count: 1 US gallon
- Inlet/Outlet: 1" BSP(F) / NPT(F)
- Meter is designed for in-line applications, Ideal for use with electric fuel pumps
- Use with: Diesel, Kerosene, Bio-Diesel, Low-Medium Viscosity Oil
- Available in 2 versions: Litre & US Gallon

PROFESSIONAL DIGITAL FUEL METER

ACCURACY: ±1%
TURBINE MECHANISM

IP55

FM2000

- Digital turbine meter for in-line or end of line applications
- Bi-directional - Either ports can be used as inlet/outlet
- Measures in litres, US quarts, pints & US gallons
- **Flow Rate: 4-120 LPM (1-30 GPM)**
- Use with: Diesel, Gasoline, Bio-diesel

DIGITAL FUEL METER

ACCURACY: ±0.5%
OVAL GEAR MECHANISM

FM25

- Digital meter for highly accurate readings
- Comes factory calibrated for use with diesel with reduced loss of head
- Measures in litres, US quarts, pints & US gallons
- **Flow Rate: 10-100 LPM (2.64-26.4 GPM)**
- Use with: Diesel, Oils, Antifreeze

DIGITAL FLOW METER IN-LINE

NEW!

ACCURACY: ±0.5%
OVAL GEAR MECHANISM

MFM-D10

- Aluminium construction
- **Flow Rate: 20-120 LPM (5-32 GPM)**
- Max Working Pressure: 300 PSI (20 BAR)
- Max. Resettable Batch Total: 9999999 unit
- Least Count: 0.001 US gallon
- Inlet/Outlet: 1" NPT (F)
- Designed for in-line application and gravity flow
- Measures in M^3, litres, US gallons & kg
- Use with: Diesel, Kerosene & Fuel oil

PROFESSIONAL DIGITAL DEF METER

ACCURACY: ±1%
TURBINE MECHANISM

WM2000

- Digital turbine meter designed for in-line, end of the line applications or use with a dispensing nozzle
- Polypropylene body & sealed electronic card make it weather-proof
- Measures in litres, US quarts, pints & US gallons
- **Flow Rate: 4-120 LPM (1-30 GPM)**
- Use with: Urea, DEF, Windshield Fluids, Water & Water based media

Bi-Directional

MANUAL FUEL CONTROL NOZZLES

50 PSI (3.45 BAR)

FCN

- Aluminium construction
- Manual Flow Control: Comes with a continuous flow switch for unattended dispensing
- **Flow Rate: Upto 75 LPM (20 GPM)**
- Available in two inlet sizes (with & without Swivel):
  1. 3/4" for use with Diesel & Gasoline
  2. 1" for use with Diesel

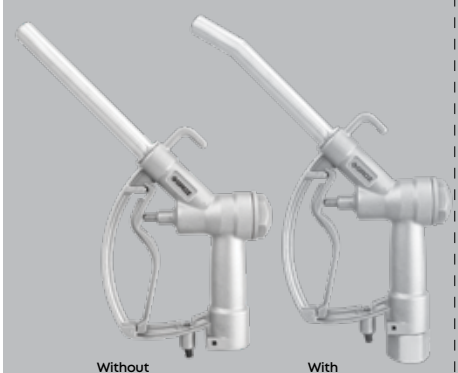

Without Swivel | With Swivel

AUTOMATIC FUEL CONTROL NOZZLES

50 PSI (3.45 BAR)

UL LISTED

FCNA

- Heavy duty Aluminium body with thermoplastic trigger & guard
- **Dual Mode - Manual & Automatic:** Sensor in the discharge spout automatically shuts off supply once fuel level in the tank reaches level of outlet spout
- **Flow Rate: Upto 110 LPM (29 GPM)**
- Available in two inlet sizes (with & without Swivel):
  1. 3/4" for use with Diesel & Gasoline
     Flow Rate: Upto 60 LPM (16 GPM)
  2. 1" for use with Diesel
     Flow Rate: Upto 110 LPM (29 GPM)

Straight Spout | Curved Spout

AUTOMATIC FUEL CONTROL NOZZLE - V SERIES

NEW!

50 PSI (3.45 BAR)

FCNA-E

- Aluminium body with thermoplastic trigger & guard
- Use with: Diesel, Gasoline & Kerosene
- Available in 2 inlet sizes (with & without Swivel):
  1. 3/4" for use with Diesel & Gasoline
     Flow Rate: Upto 60 LPM (16 GPM)
  2. 1" for use with Diesel
     Flow Rate: Upto 120 LPM (32 GPM)

DUAL PLANE FUEL NOZZLE SWIVELS

50 PSI (3.45 BAR)

SWV-2P

- Aluminium die cast construction
- Laminar flow design for higher fuel flow
- 360° rotation for free movement facilitating flexibility to refuel vehicles from any direction
- Available in 2 thread size: 3/4" & 1"
- Use with: Diesel, Kerosene, Gasoline, Bio-Diesel etc.

FUEL DISPENSING KIT

FDK

- Gravity feed fuel dispensing kit comprising 3 m (10') hose fitted with manual fuel control nozzle with swivel

STAINLESS STEEL NOZZLE SWIVELS

50 PSI (3.45 BAR)

SWV-SS

- Stainless Steel SS 304 construction
- 3/4" (20 mm) hose barb at one end and 3/4" male threads on the other
- 0.55" (14 mm) ID designed for minimal back pressure
- Use with: Urea, DEF, Water & Windshield Fluids

FUEL HOSE ANTI-STATIC

ZSA-HOS

- Anti static fuel hose complete with end connections
- Use with: Diesel, Kerosene, Gasoline

FUEL HOSE NON-GROUNDED

HOS-EDP

- Use with: Diesel, Kerosene, Gasoline

AUTO SHUT OFF SAFETY FUEL NOZZLE

50 PSI (3.45 BAR)

FCNA-CG

- Heavy duty cast aluminium body with thermoplastic trigger & guard
- Nozzle automatically shuts off:
  a. When fuel tank is full
  b. When pump is switched off accidentally
  c. Accidental fall of nozzle
  d. Nozzle is lifted from the tank
- Available in two inlet sizes:
  1. 3/4" for use with Diesel & Gasoline
     Flow Rate: Upto 60 LPM (16 GPM)
  2. 1" for use with Diesel
     Flow Rate: Upto 100 LPM (26.45 GPM)

MANUAL DEF CONTROL NOZZLE

50 PSI (3.45 BAR)

FCN-NY

- Nylon construction with stainless steel internal parts & viton seals
- Manual Control. Also includes continuous flow switch for unattended dispensing
- 3/4" hose barb at inlet
- **Flow Rate: Upto 20-90 LPM (5-23.8 GPM)**
- Use with: Urea, DEF Water

AUTOMATIC DEF CONTROL NOZZLE

50 PSI (3.45 BAR)

FCNA-SS

- Heavy duty stainless steel body with polyamide cover
- In-built sensor in outlet spout automatically shuts off supply once fluid level in tank reaches that of the outlet spout
- Complete with stainless steel swivel with 3/4" hose barb
- **Flow Rate: 45 LPM (11.9 GPM)**
- Use with: Urea, DEF, Water & E85 Fuels

PORTABLE FUEL FILTER

13 LPM (3.45 GPM)

FUF-13

- Designed to filter out water, contaminants and debris upto 100 micron from fuels & light oils
- Patented vertical filter design free flow of fluids without pressure on the filter screen like in horizontal filters
- Teflon coated maintenance free filter screen
- Rugged polypropylene body with carbon additive makes the funnel conductive which grounds static electricity that may be produced when handling fluids
- Use with: Diesel, Kerosene, Gasoline & Light Oils

FUEL FILTERS SPIN-ON CARTRIDGE STYLE

50 PSI (3.45 BAR)

FFS-10

- **Flow Rate: Upto 94 LPM (25 GPM)**
- High flow fuel filter with 10 micron spin-on type filter cartridge
- Aluminum die cast head fits on 1-1/2" -16 UNF threaded cartridges
- For use on both mobile & stationary fuel tanks in agricultural and construction sites
- Available in 3/4" & 1" inlets
- Use with: Gasoline, Diesel, Ethanol & Methanol blend upto 10%

FUEL FILTERS

50 PSI (3.45 BAR)

- Durable lightweight design for installation on mobile and stationary fuel tanks and on diesel & gasoline fuel pumps
- Standard filters come with 10 micron filter element
- Spare filters for removing particulate & water available

FFL-01BD

- ISO plast see-through bowl
- Viton Seals
- Available in 1" inlet size
- For use with 100% Bio-diesel, Gasoline, Diesel, Fuel oils, methyl, ethyl & isopropyl alcohols

FFL-01

- ISO plast see through bowl
- NBR Seal
- Available in 3/4" & 1" inlet sizes
- For Gasoline, Gasohol, Diesel, Kerosene & Bio-Diesel (blends upto 20%)

FFL-02

- Translucent polypropylene bowl
- NBR Seals
- Available in 1" inlet size
- For Diesel, Kerosene & Gasoline

FILTER WRENCH

FW-FFL

- Weather resistant, re-inforced, Nylon wrench used for removing filter bowl without damage when changing filter elements
- Fits GROZ FFL-01, FFL-02 and several other filters

BREAKAWAY VALVE

BKV

- Designed to be installed between the fuel dispenser & nozzle
- Tolerant of pulsing and line shocks due to sturdy yet lightweight aluminium design body
- PVC sleeve provides better grip and handling
- Designed to pull apart at Max. 1500N/ 350 lbs. pull force
- Small & light weight with minimal flow restriction
- Use with: Diesel & Gasoline

3/4" Breakaway Valve

1" Breakaway Valve

06 drum handling

DRUM DOLLIES

DRUM DOLLIES

- Heavy duty 3 mm (11 gauge) steel sheet construction suitable for convenient transportation of 205 litres (55 US gallon) drums
- Hold drums of diameter 23" (584 mm)

BDL-140

Phenolic Castors: 3"×1-1/4" (75×32 mm)
Load Bearing Capacity: 400 kg (900 lbs)

BDL-140S

Cast Iron Castors: 3"×1-3/8" (75×35 mm)
Load Bearing Capacity: 545 kg (1200 lbs)

BAND DOLLIES

- Welded 3 mm (11 gauge) steel sheet construction with premium powder coated finish
- Can be adjusted easily for varying barrel/pail diameters

BDL-60

Castors: 4 Phenolic Castors
Drum Dia.: 15" to 15-3/4" (381-400 mm)
Suitable for: 60 kg pails
Load Bearing Capacity: 90 kg (200 lbs)

BDL-105

Castors: 4 Phenolic Castors
Drum Dia.: 10-1/4" to 11-9/32" (260-287 mm)
Suitable for: 25-50 lbs./20 kg/5 US gal. pails
Load Bearing Capacity: 90 kg (200 lbs)

BDL-120

Castors: 4 Phenolic Castors
Drum Dia.: 13-1/2" to 14-1/4" (343 to 362 mm)
Suitable for: 120 lbs./50 kg/16 US gal. pails
Load Bearing Capacity: 90 kg (200 lbs)

BDL-120S

Castors: 4 Cast Iron Castors
Drum Dia.: 13-1/2" to 14-1/4" (343 to 362 mm)
Suitable for: 120 lbs./50 kg/16 US gal. pails
Load Bearing Capacity: 136 kg (300 lbs)

BDL-130

Castors: 5 Phenolic Castors
Drum Dia.: 18" to 19" (457 to 482 mm)
Suitable for: 130 US gal. containers
Load Bearing Capacity: 114 kg (250 lbs)

BDL-130S

Castors: 5 Cast Iron Castors
Drum Dia.: 18" to 19" (457 to 482 mm)
Suitable for: 130 US gal. containers
Load Bearing Capacity: 170 kg (374 lbs)

DRUM CRADLES

- Tips, rotates, moves & stores 400 lbs. / 180kg / 205 litre / 55 US gal. drums
- Large 2-1/2" (63 mm) non-sparking wheels for use in flammable environments
- Maximum load 600 lbs. / 273 kgs

DRC-133

Type: Movable
2 Rigid & 2 Swivel Wheels
Axle: Yes

DRC-135

Type: Movable
4 Rigid Wheels
Axle: Yes

DRC-137

Type: Stationary
Without wheels
Axle: No

DRUM TROLLEYS

- Manufactured from heavy gauge 4 mm thick steel sheet
- 3" (75 mm) ground clearance for smooth movement over uneven surfaces in workshop environments 6" (150 mm) wide polyurethane front wheels with nylon rim for reduced wear & tear

TRL-50

Trolley for 50 kg/ 120 lb. drums

Load Capacity: 80 kg (170 lbs.)

TRL-180H

Trolley for 180 kg/ 55 US gal./ 205 litre drums

Load Capacity: 300 kg (660 lbs.)

Removable handle used for moving the trolley

Removable handle used as a drum loader

Removable handle used as a drum wrench

DRUM CARTS

- Tough Built carts for moving drums on shop floor
- Fitted with 10" dia. front wheels & 5" dia. nylon rear wheels
- Wheels available in a choice of Pneumatic or Phenolic

CART-120

For 50 kg / 60 litre / 120 lb pails

CART-400

For 180 kg / 205 litre / 400 lb / 55 US gal. drums

DRUM TROLLEY HEAVY DUTY

NEW!

TRL-120

- Heavy-duty, thick gauge steel construction
- Powder coated for prevention against rust and corrosion
- Built-tough for convenient movement of 50-60 kg (120 lbs.) drums
- Can be used to mount an oil pump to make a complete oiling system

DRUM TROLLEY

TRL-30

- Tough built trolley for convenient movement of 20-30kg drums in workshops and industrial environments
- Ideal for transporting oil / grease barrels, as well as installing air operated pump

LOW PROFILE DRUM TROLLEY

TRL-55

- Made from 5 mm (6 gauge) sheet, with a loading capacity of 545 kgs (1200 lbs)
- For drums up to a dia. of 26" (660 mm)

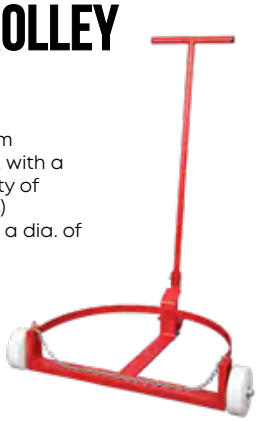

ADJUSTABLE DRUM TROLLEY

TRL-60

- Adjustable drum trolley for use with 25-50 lbs. / 5 US gal. / 20 litre drums to larger drums upto 120 lbs / 16 US gal. / 60 litre capacity
- Heavy duty wheels for use in rigorous workshop environment

DRUM WRENCH

DRW

- Cast aluminum (LM25), construction
- Designed to fit perfectly onto most 2" & 3/4" drum plugs

For opening hex plugs

For opening 2" drum plugs

For opening 3/4" drum plugs

DRUM LEVEL INDICATOR

DLI

- An easy & cost effective means to check level of fluid in a drum / tank
- Fits on the small 3/4" hole leaving the 2" opening on drums free for installing pump
- Planetary gear mechanism float connected with a string moves down as the liquid level goes down in the drum.
- For use on 55 gal/205 litre drums
- Use with oil, fuel, water, coolants etc.

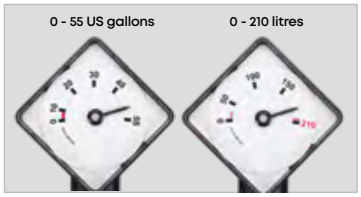



DRUM BUNG CONVERTERS

BUNG/P/TS

2" (F) TRI-SURE ADAPTOR

2" Fine Male threads found on most pumps / drum bungs to 2" Male threads for use on drums with female Tri Sure threads

BUNG/P/MS

2" (F) MAUSER ADAPTOR

2" Fine Male threads found on Most pumps / drum bungs to 2" Male threads for use on drums with female Mauser threads (popular on many IBC's / Totes)

BUNG/P/2B

2" (F) COARSE THREAD ADAPTOR

2" Fine Male threads found on Most pumps / drum bungs to 2" Male coarse threads for use on plastic drums with coarse female threads

DRUM FAUCETS/ TAPS WITH BUCKET HANGER

FAU/0-2

For 2" openings

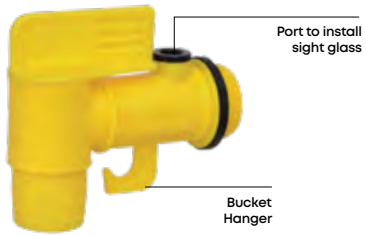

FAU/3-4

For 3/4" openings



DRUM FAUCETS/ TAPS - FOOD GRADE

FAU/25/CL

- **For 3/4" openings**
- **For use with non-flamnable liquids and chemicals**

DRUM FAUCETS/ TAPS

- Can be used on plastic & metal drums
- Use with non-corrosive media, light oils, water, mild-chemical etc.

FAU/50

For 2" openings

FAU/25

For 3/4" openings

07 air handling

FILTERS, REGULATORS & LUBRICATORS

AIR REGULATORS

220 PSI (15 BAR) **ISO 6953-1**

- Regulators step down the air line pressure and can be set at any desired pressure below the inlet air pressure
- Pressure adjustment range: 7-145 PSI (0.5-10 BAR)
- Factory Tested: 100%
- Mounting: Modular & Panel

R13
- Type: Miniature
- Port Size: 1/8", 1/4"
- Max Flow Rate: 600 LPM (21CFM)

R14
- Type: Intermediate
- Port Size: 1/4", 3/8"
- Max Flow Rate: 2,500 LPM (88 CFM)

R15
- Type: Standard
- Port Size: 1/2"
- Max Flow Rate: 4,000 LPM (140 CFM)

R17
- Type: Heavy Duty
- Port Size: 3/4" & 1"
- Max Flow Rate: 6,000 LPM (210 CFM)

PRECISION REGULATORS

220 PSI (15 BAR) **ISO 6953-1**

- Designed to provide precise and constant pressure output from a fluctuating supply pressure
- Sensitive to within 0.2% of full span with repeatability of within +/-0.50% of full span
- Pressure adjustment range: 1.45-116 PSI (0.1-8 BAR)
- Factory Tested: 100%
- Mounting: Modular & Panel

PR13
- Type: Miniature
- Port Size: 1/4"
- Max Flow Rate: 1,200 LPM (42CFM)

PR15
- Type: Standard
- Port Size: 1/2"
- Max Flow Rate: 7,500 LPM (265 CFM)

AIR FILTERS

145 PSI (10 BAR) **ISO 5782-1**

- Filters are used to separate dust, dirt, moisture & other contaminants from compressed air
- Die-cast aluminium head, polycarbonate bowl with steel bowl guard
- Includes 40 microns sintered bronze filter element
- Press type semi-automatic drain that automatically drains out the bowl once compressed air supply is switched off
- Factory Tested: 100%

F13
- Type: Miniature
- Port Size: 1/8" & 1/4"
- Max. Flow Rate: 800 LPM (28 CFM)
- Threaded type : Steel bowl guard

F14
- Type: Intermediate
- Port Size: 1/4" & 3/8"
- Max. Flow Rate: 2,250 LPM (80 CFM)
- Bayonet type : Steel bowl guard

F15
- Type: Standard
- Port Size: 1/2"
- Max. Flow Rate: 3,500 LPM (125 CFM)
- Bayonet type Steel bowl guard

F17
- Type: Heavy Duty
- Port Size: 3/4" & 1"
- Max. Flow Rate: 6,500 LPM (230 CFM)
- Bayonet type Steel bowl guard

AIR FILTERS METAL BOWL

290 PSI (20 BAR) **ISO 5782-1**

- Filters are used to separate dust, dirt, moisture & other contaminants from compressed air
- Aluminium die-cast filter head & bowl
- Includes 40 microns sintered bronze filter element
- Press type semi-automatic drain that automatically drains out the bowl once compressed air supply is switched off
- Suitable for use in chemical plants, foundries etc where ambient air may contain chemicals such as acetone, benzene, kerosene, ethylene dichloride etc.
- Factory Tested: 100%

F13-M
- Type: Miniature
- Port Size: 1/8" & 1/4"
- Max. Flow Rate: 800 LPM (28 CFM)

F14-M
- Type: Intermediate
- Port Size: 1/4" & 3/8"
- Max. Flow Rate: 2,250 LPM (80 CFM)

F15-M
- Type: Standard
- Port Size: 1/2"
- Max. Flow Rate: 3,500 LPM (125 CFM)

F17-M
- Type: Heavy Duty
- Port Size: 3/4" & 1"
- Max. Flow Rate: 6,500 LPM (230 CFM)

COALESCING FILTERS

145 PSI (10 BAR) **ISO 8573-1**

- Also referred to as Mist Separators, these are used to remove submicronic oil, water droplets and solid contaminants from compressed air
- Used for efficient filtration of compressed air (99.99%) removing fine oil particles upto 0.01 microns
- Die cast aluminium head, polycarbonate bowl with steel bowl guard
- Borosilicate filter element: 0.10 microns & 0.01 microns
- Used primarily in Chemical plants, Medical, Food Processing, Paint Shops, Air gauging & other precision pneumatic systems

FS13-A
- Filter: 0.10 Microns
- Type: Miniature
- Port Size: 1/8" & 1/4"
- Max. Flow Rate: 700 LPM (25 CFM)

FS13-B
- Filter: 0.01 Microns
- Type: Miniature
- Port Size: 1/8" & 1/4"
- Max. Flow Rate: 300 LPM (11 CFM)

FS14-A
- Filter: 0.10 Microns
- Type: Intermediate
- Port Size: 1/4" & 3/8"
- Max. Flow Rate: 1,600 LPM (57 CFM)

FS14-B
- Filter: 0.01 Microns
- Type: Intermediate
- Port Size: 1/4" & 3/8"
- Max. Flow Rate: 900 LPM (32 CFM)

FS15-A
- Filter: 0.10 Microns
- Type: Standard
- Port Size: 1/2"
- Max. Flow Rate: 3,500 LPM (124 CFM)

FS15-B
- Filter: 0.01 Microns
- Type: Standard
- Port Size: 1/2"
- Max. Flow Rate: 1,350 LPM (48 CFM)

FS17-B
- Filter: 0.01 Microns
- Type: Heavy Duty
- Port Size: 3/4" & 1"
- Max. Flow Rate: 2,200 LPM (78 CFM)

AIR LUBRICATORS

145 PSI (10 BAR) **ISO 6301-1**

- Air Lubricators are used to feed lubricants to pneumatic equipment. These maintain a constant oil-to-air density over a wide range of flow
- Fog/Micro mist type, upto 50' pipe runs
- Die cast aluminium head, polycarbonate bowl with steel bowl guard
- Head fitted with oil drop indicator, controller & oil filling plug
- Factory Tested: 100%

L13
- Type: Miniature
- Port Size: 1/8" & 1/4"
- Max. Flow Rate: 1,350 LPM (48 CFM)

L14
- Type: Intermediate
- Port Size: 1/4" & 3/8"
- Max. Flow Rate: 3,000 LPM (106 CFM)

L15
- Type: Standard
- Port Size: 1/2"
- Max. Flow Rate: 5,650 LPM (200 CFM)

L17
- Type: Heavy Duty
- Port Size: 3/4" & 1"
- Max. Flow Rate: 9,000 LPM (318 CFM)

AIR LUBRICATORS METAL BOWL

290 PSI (20 BAR) **ISO 6301-1**

- Air Lubricators are used to feed lubricants to pneumatic equipment. These maintain a constant oil-to-air density over a wide range of flow
- Fog/Micro mist type, upto 50' pipe runs
- Die cast aluminium head, polycarbonate bowl with steel bowl guard
- Head fitted with oil drop indicator, controller & oil filling plug
- Factory Tested: 100%

L13M
- Type: Miniature
- Port Size: 1/8" & 1/4"
- Max. Flow Rate: 1,350 LPM (48 CFM)

L14M
- Type: Intermediate
- Port Size: 1/4" & 3/8"
- Max. Flow Rate: 3,000 LPM (106 CFM)

L15M
- Type: Standard
- Port Size: 1/2"
- Max. Flow Rate: 5,650 LPM (200 CFM)

L17M
- Type: Heavy Duty
- Port Size: 3/4" & 1"
- Max. Flow Rate: 9,000 LPM (318 CFM)

FILTER REGULATOR COMBINATION

145 PSI (10 BAR)

- The Filter-Regulator Combination is one of the most popular air preparation units. The 2 are assembled together to form a single unit
- Filter: Die cast aluminium head, polycarbonate bowl with steel bowl guard & 40 microns sintered bronze element. Semi automatic drain
- Regulator: Non raising "press to lock" adjusting knob for locking at any set pressure. Pressure adjustment range upto 7-145 PSI (0.5-10 BAR)
- Factory Tested: 100%

FRC13
- Type: Miniature
- Port Size: 1/8" & 1/4"
- Max. Flow Rate: 550 LPM (20 CFM)

FRC14
- Type: Intermediate
- Port Size: 1/4" & 3/8"
- Max. Flow Rate: 2,200 LPM (77 CFM)

FRC15
- Type: Standard
- Port Size: 1/2"
- Max. Flow Rate: 3,000 LPM (106 CFM)

FRC17
- Type: Heavy Duty
- Port Size: 3/4" & 1"
- Max. Flow Rate: 5,500 LPM (193 CFM)

FILTER - REGULATOR COMBINATION - METAL BOWL

220 PSI (15 BAR)

- The Filter-Regulator Combination is one of the most popular air preparation units. The 2 are assembled together to form a single unit
- Filter: Die cast aluminium body and bowl & fitted with 40 microns sintered bronze element. Semi automatic drain
- Regulator: Non raising "press to lock" adjusting knob for locking at any set pressure. Pressure adjustment range upto 7-145 PSI (0.5-10 BAR)
- Metal Bowl makes them good for use in chemical plants, paint shops, pharmaceutical plants, foundries etc. where ambient air may contain chemicals, such as acetone, benzene, kerosene, gasoline, toluene, etc.
- Factory Tested: 100%

FRC13-M

- **Type: Miniature**
- **Port Size: 1/4"**
- **Max. Flow Rate: 550 LPM (20 CFM)**

FRC14-M

- **Type: Intermediate**
- **Port Size: 1/4" & 3/8"**
- **Max. Flow Rate: 2,200 LPM (77 CFM)**

FRC15-M

- **Type: Standard**
- **Port Size: 1/2"**
- **Max. Flow Rate: 3,000 LPM (106 CFM)**

FRC17-M

- **Type: Heavy Duty**
- **Port Size: 3/4" & 1"**
- **Max. Flow Rate: 5500 LPM (193 CFM)**

FILTER - REGULATOR & LUBRICATOR - 2 PC

145 PSI (10 BAR)

- Space saving 2 piece Filter-Regulator combination and Lubricator
- Filter: Die cast aluminium body and bowl; fitted with 40 microns sintered bronze element. Semi automatic drain
- Regulator: Non raising "press to lock" adjusting knob for locking at any set pressure. Pressure adjustment range upto 7-145 PSI (0.5-10 BAR)
- Lubricator: Used to feed lubricants to pneumatic equipment. These maintain a constant oil-to-air density over a wide range of flow. Fog/Micro mist type, upto 50' pipe runs
- Factory Tested: 100%
- Available in two types:
  a. Modular: complete with piping adaptors and wall mounting bracket. Easily remove and replace individual components without disturbing the pipeline
  b. Compact: complete with wall mounting bracket but no piping adaptors

MODULAR SERIES

COMPACT SERIES

FRCLM-13

- **Type: Miniature**
- **Port Size: 1/4"**
- **Max. Flow Rate: 500 LPM (18 CFM)**

FRCLM-14

- **Type: Intermediate**
- **Port Size: 1/4" & 3/8"**
- **Max. Flow Rate: 1,800 LPM (63 CFM)**

FRCLM-15

- **Type: Standard**
- **Port Size: 1/2"**
- **Max. Flow Rate: 2,800 LPM (99 CFM)**

FRCLM-17

- **Type: Heavy Duty**
- **Port Size: 3/4" & 1"**
- **Max. Flow Rate: 4,000 LPM (140 CFM)**

FILTER - REGULATOR & LUBRICATOR - 2 PC METAL BOWL

220 PSI (15 BAR)

- Filter: Die cast aluminium body and bowl; fitted with 40 microns sintered bronze element. Semi automatic drain
- Regulator: Non raising "press to lock" adjusting knob for locking at any set pressure. Pressure adjustment range upto 7-145 PSI (0.5-10 BAR)
- Lubricator: Used to feed lubricants to pneumatic equipment. Fog/Micro mist type, upto 50' pipe runs
- Metal Bowl makes them good for use in chemical plants, paint shops, pharmaceutical plants, foundries etc. where ambient air may contain chemicals, such as acetone, benzene, kerosene, gasoline, toluene, etc.
- Factory Tested: 100%
- Available in two types:
  a. Modular: complete with piping adaptors and wall mounting bracket.
  b. Compact: complete with wall mounting bracket but no piping adaptors

MODULAR SERIES

COMPACT SERIES

FRCLM-13M

- **Type: Miniature**
- **Port Size: 1/4"**
- **Max. Flow Rate: 500 LPM (18 CFM)**

FRCLM-14M

- **Type: Intermediate**
- **Port Size: 1/4" & 3/8"**
- **Max. Flow Rate: 1,800 LPM (63 CFM)**

FRCLM-15M

- **Type: Standard**
- **Port Size: 1/2"**
- **Max. Flow Rate: 2,800 LPM (99 CFM)**

FRCLM-17M

- **Type: Heavy Duty**
- **Port Size: 3/4" & 1"**
- **Max. Flow Rate: 4,000 LPM (140 CFM)**

FILTER - REGULATOR & LUBRICATOR - 3 PC

145 PSI (10 BAR)

- 3 piece Filter-Regulator combination and Lubricator
- Filter: Die cast aluminium body and bowl fitted with 40 microns sintered bronze element. Semi automatic drain
- Regulator: With pressure adjustment range upto 7-145 PSI (0.5-10 BAR)
- Lubricator: Used to feed lubricants to pneumatic equipment. These maintain a constant oil-to-air density over a wide range of flow. Fog/Micro mist type, upto 50' pipe runs
- Factory Tested: 100%
- Available in two types:
- Modular: complete with piping adaptors and wall mounting bracket. Easily remove and replace individual components without disturbing the pipeline
- Compact: complete with wall mounting bracket but no piping adaptors

MODULAR SERIES

COMPACT SERIES

FRLM-13

- Type: Miniature
- Port Size: 1/4"
- Max. Flow Rate: 500 LPM (18 CFM)

FRLM-14

- Type: Intermediate
- Port Size: 1/4" & 3/8"
- Max. Flow Rate: 2,000 LPM (71 CFM)

FRLM-15

- Type: Standard
- Port Size: 1/2"
- Max. Flow Rate: 3,000 LPM (106 CFM)

FRLM-17

- Type: Heavy Duty
- Port Size: 3/4" & 1"
- Max. Flow Rate: 5,000 LPM (175 CFM)

FILTER - REGULATOR & LUBRICATOR - 3 PC METAL BOWL

220 PSI (15 BAR)

- 3 piece Filter-Regulator combination and Lubricator
- Filter: Die cast aluminium body and bowl fitted with 40 microns sintered bronze element. Semi automatic drain
- Regulator: With pressure adjustment range upto 7-145 PSI (0.5-10 BAR)
- Lubricator: Used to feed lubricants to pneumatic equipment. These maintain a constant oil-to-air density over a wide range of flow. Fog/Micro mist type, upto 50' pipe runs
- Factory Tested: 100%
- Available in two types:
  a. Modular: complete with piping adaptors and wall mounting bracket. Easily remove and replace individual components without disturbing the pipeline
  b. Compact: complete with wall mounting bracket but no piping adaptors

MODULAR SERIES

COMPACT SERIES

FRLM-13M

- Type: Miniature
- Port Size: 1/4"
- Max. Flow Rate: 500 LPM (18 CFM)

FRLM-14M

- Type: Intermediate
- Port Size: 1/4" & 3/8"
- Max. Flow Rate: 2,000 LPM (71 CFM)

FRLM-15M

- Type: Standard
- Port Size: 1/2"
- Max. Flow Rate: 3,000 LPM (106 CFM)

FRLM-17M

- Type: Heavy Duty
- Port Size: 3/4" & 1"
- Max. Flow Rate: 5,000 LPM (175 CFM)

FRL ACCESSORIES

SPACER

Spacer Blocks are used to connect 2 components in modular assemblies

SPACER WITH PORT FOR AIR OUTLET

It is installed before the lubricator. This allows taking out non lubricated air where required

PIPING ADAPTERS

A piping adapter has a threaded end on one side & sealing rings on the other. The adapters are fitted on both the IN port & the OUT port & the Air line would be screwed into them

WALL MOUNTING BRACKET

- Wall Mounting Bracket is a special type of Spacer Block which is 'T' shaped & has holes to mount on the wall
- These connect 2 components in modular assemblies and make them wall mountable

WALL MOUNTING BRACKET
WITH PORT FOR AIR OUTLET

Installed before the lubricator. This allows taking out non lubricated air where required

MOUNTING CLAMP
FOR INDIVIDUAL FILTERS & LUBRICATORS

These are steel clamps in powder coated finish, used to mount individual Filters & Lubricators.

MOUNTING CLAMP
FOR REGULATORS & FILTER REGULATOR COMBINATIONS

These clamps are made out of steel in powder coated finish.

PRESSURE GAUGES

- For use with Regulators for setting Output Pressure.
- Available in Digital & Analog version in a chocie of 1/8" & 1/4" threads

AUTO DRAIN VALVE EXTERNAL

- The Auto Drain Valve drains the condensate water automatically.
- In addition to automatic draining, there is also provision in the valve for manual draining

SAFETY LOCKOUT VALVES

- Lockout valves are used during maintenance & service of air operated equipment
- Available in two types
  1. Safety Lockout Valve
  2. Safety Lockout Valve with Spacer Kit

LKV13

- **Type: Miniature**
- **Port Size: 1/4"**
- **Max Flow Rate: 1,000 LPM (35CFM)**

LKV14

- **Type: Intermediate**
- **Port Size: 3/8"**
- **Flow Rate: 2,200 LPM (78CFM)**

LKV15

- **Type: Standard**
- **Port Size: 1/2"**
- **Flow Rate: 3,250 LPM (115CFM)**



AUTOMATIC LINE DRAIN

Automatic Line Drain is fitted to the main airline piping to drain the condensate as and when collected

NL161

Threads: 1/4" BSP
Condensate Discharge Capacity;
60 ml / minute

NL191

Threads: 1/4" NPT
Condensate Discharge Capacity;
2 oz / minute

REPLACEMENT
SINTERED BRONZE FILTER ELEMENTS

Available in a choice of 5, 25, 40, 50 & 100 microns

REPLACEMENT
BOROSILICATE FILTER ELEMENTS

Available in a choice of 0.01 & 0.10 microns

REPLACEMENT BOWL
FOR FILTERS/ LUBRICATORS

AIR BLOW GUNS PROFESSIONAL

50-235 PSI (3.5 - 16 BAR)

ABG

Industry's leading Air Blow Gun range with nylon body, stainless steel nozzle, variable flow control, threaded brass inlet and ergonomic dual injection moulded handle

OSHA OK

OSHA STD 1-13.1 FOR SAFETY

OSHA OK

OSHA STD 1910-95(b) FOR NOISE

STANDARD REACH

ABG/1
Plastic Tip

ABG/3
4-1/2" (114 mm) long SS nozzle

ABG/2
Snub nose rubber tip

ABG/4
5-1/2" (140 mm) long SS nozzle fitted with silencer and snub nose rubber tip

EXTENDED REACH

ABG/3A
13" (330 mm) long SS nozzle

ABG/3B
20" (508 mm) long SS nozzle

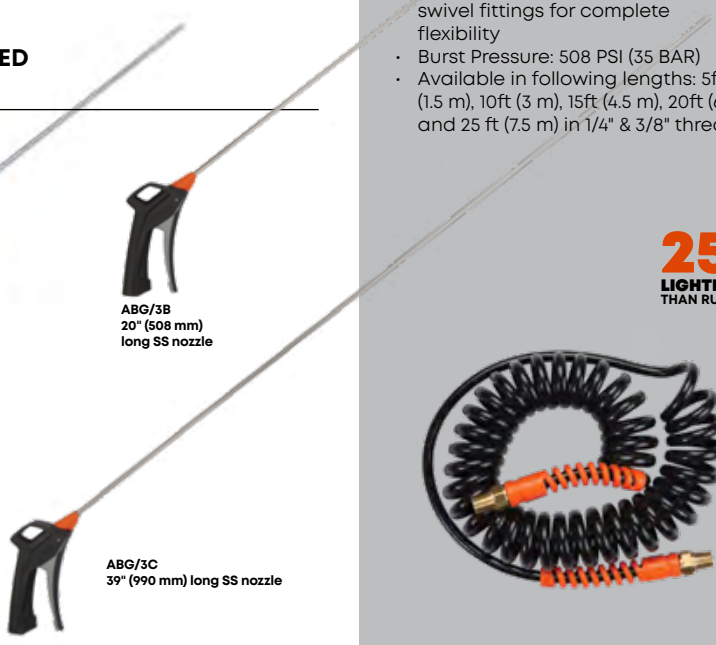

ABG/3C
39" (990 mm) long SS nozzle

POLYURETHANE RECOIL HOSES

145 PSI (10 BAR)

PUH

- One coiled end and one straight end
- Both ends fitted with polyacetal bend restrictors with solid brass swivel fittings for complete flexibility
- Burst Pressure: 508 PSI (35 BAR)
- Available in following lengths: 5ft (1.5 m), 10ft (3 m), 15ft (4.5 m), 20ft (6 m) and 25 ft (7.5 m) in 1/4" & 3/8" threads

25%
LIGHTER
THAN RUBBER

AIR BLOW GUN STANDARD

50-150 PSI (3.5 - 10 BAR)

ABG-10

- Lightweight Air Blow Gun
- Impact and weather resistant nylon body with polyacetal trigger

OSHA OK

OSHA STD 1-13.1 FOR SAFETY

OSHA OK

OSHA STD 1910-95(b) FOR NOISE

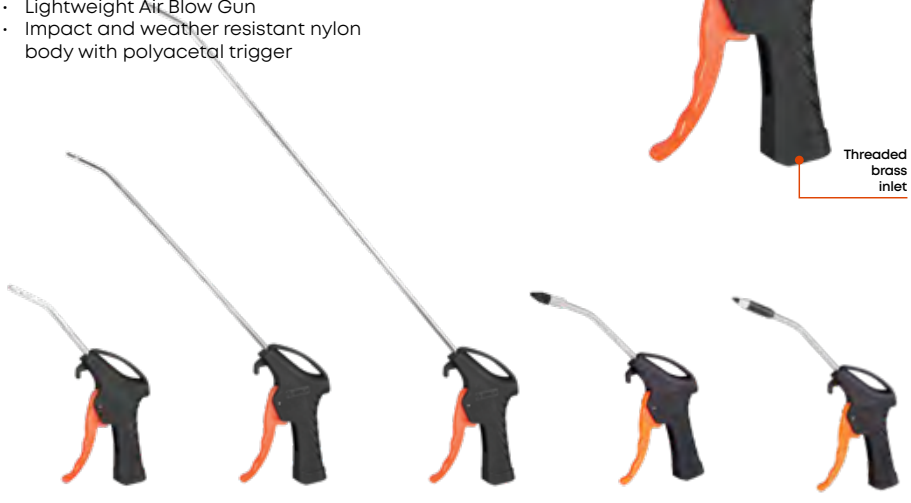

ABG/10
4-1/2" (114 mm) Nozzle

ABG/10A
13" (330 mm) Nozzle

ABG/10B
20" (508 mm) Nozzle

ABG/10/RTI
4-1/2" (114 mm) Nozzle with Rubber Tip 1/2" (12.7 mm)

ABG/10/SIL
4-1/2" (114 mm) Nozzle With Silencer & Star Rubber Tip

Also available as a kit with 4 attachments



1/2" (12.7 mm) rubber tip

1-3/8" (35 mm) rubber tip

1" (25 mm) rubber tip

Soft rubber star tip nozzle

AIR BLOW GUN KIT
6 PC INTERCHANGEABLE

ABG-QR

- Impact & weather resistant nylon body
- Brass threaded air inlet is shear resistant

Comes with 5 interchangeable attachments

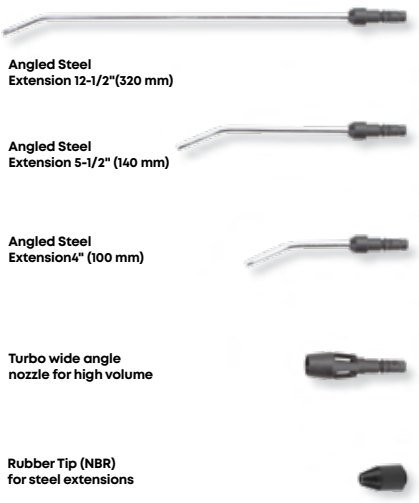

SAFETY AIR BLOW GUN
METAL BODY

PAG

- Aluminium die cast body
- Ergonomic steel pistol handle for fatigue free usage

AIR BLOW GUN
METAL BODY

AP

- Aluminium die cast pistol style air blow gun
- Variable flow trigger for controlling the air output
- Built-in storage hook for safe keeping when not in use
- Maximum pressure: 90 PSI
- Flow rate: 40 CFM

Kit Constituents

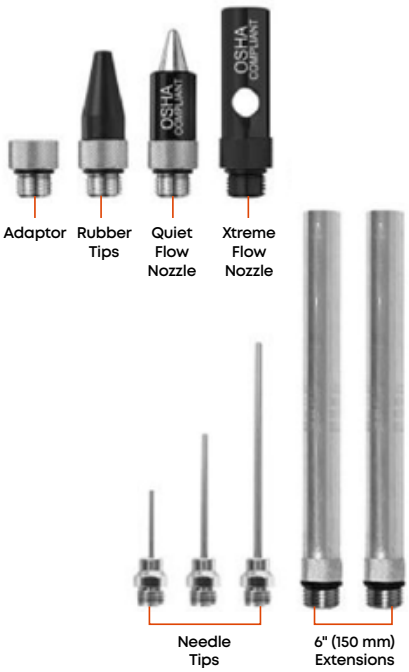

AIR BLOW GUN KIT
PROFESSIONAL - 7 PC

KIT-ABG

Kit includes:

- Air Blow Gun
- 4" (100 mm) Protective Shield for safety in use from flying chips etc.
- 1" (25 mm) Rubber Tip for blowing out lines & cavities
- 1-3/8" (35 mm) Rubber tip for blowing out lines & cavities
- Soft Rubber Star Tip Nozzle for use on delicate materials
- Venturi Nozzle turbo charges output. Great for blowing out bondo dust, drying off & washing parts fast
- 1/2" (12.7 mm) Rubber Tip for blowing out lines & cavities

LEVER AIR BLOW GUN KITS
METAL BODY

KIT-LAG

Available in several configurations

LEVER AIR BLOW GUNS

METAL BODY WITH BUILT-IN VENTURI

OSHA OK

LAG

TYPE: A
1/2" (13 mm) rubber tip

TYPE: B
Standard

TYPE: C
Standard safety

TYPE: D
High flow safety

TYPE: E
Safety booster

TYPE: F
Safety tamper proof

TYPE: G
1" (25 mm) rubber tip

TYPE: H
1-3/8" (35 mm) rubber tip

TYPE: J
Soft rubber star tip

TYPE: PS
Nozzle with 4" (100 mm) protective shield

TYPE: K
Nylon screen 1-1/4" (32 mm) wide

TYPE: L
Nylon tapered tube 3" (75 mm) long

TYPE: M
Mini aluminum tip

TYPE: N1
SS needle 1-3/4" (44 mm) long x 0.072" (1.8 mm) dia.

TYPE: N2
SS needle 2-15/32" (62 mm) long x 0.095" (2.4 mm) dia.

TYPE: P
Adjustable brass tip

TYPE: S
Nozzle with steel wire brush

TYPE: T1
Extended reach aluminum tube 3" (75 mm) long

TYPE: T4
Extended reach aluminum tube 12" (300 mm) long

TYPE: T2
Extended reach aluminum tube 6" (150 mm) long

TYPE: T3
Extended reach aluminum tube 9" (225 mm) long

TYPE: R
Extended reach telescopic tip 14" (355 mm) to 24" (610 mm)

TYPE: Q
Extended reach 23" (585 mm) long with rubber tip

LEVER AIR BLOW GUNS
METAL BODY - EXTRA LARGE

OSHA OK

NEW!

LAG-XL

- The perfect tool for cleaning inaccessible and hard-to-reach areas
- Extended reach aluminum tube with rubber tip
- Max. Pressure: 150 PSI

TYPE: X1
6" (150 mm) long with rubber tip

TYPE: X2
12" (300 mm) long with rubber tip

TYPE: X3
24" (600 mm) long with rubber tip

TYPE: X4
36" (914 mm) long with rubber tip

TYPE: X5
48" (1200 mm) long with rubber tip

AIR COUPLERS & PLUGS

TYPE: M STYLE AIR COUPLER & PLUG
Milton Interchange Industrial

AIR COUPLER

AIR PLUG

TYPE: T STYLE AIR COUPLER & PLUG
Tru Flate / Parker Interchange Automotive

AIR COUPLER

AIR PLUG

TYPE: A STYLE AIR COUPLER & PLUG
Aero Interchange

AIR COUPLER

AIR PLUG

TYPE: L STYLE AIR COUPLER & PLUG
Lincoln Interchange Automotive

AIR COUPLER

AIR PLUG

TYPE: N STYLE AIR COUPLER & PLUG
Nitto Interchange

AIR PLUG

TYPE: AMT STYLE AIR COUPLER & PLUG
Universal Retail

AIR COUPLER

AIR LINE FITTINGS

NPL-RP

Threads:
1/4" NPT (M)



NPL-KP71

Threads:
1/4" BSP (M)

360° SWIVEL AIR PLUGS

NEW!

AN-M

- Milton Interchange Industrial air plug
- In-built 360° swivel for easy maneuverability

UNIVERSAL Z-SWIVEL ADAPTOR

NEW!

SWV-Z

- Ideal for use with air tools such as Nail Guns, Impact Wrenches, Air Hammers, Ratchets, Drills etc.
- Threaded: 1/4" NPT (M) × 1/4" NPT (F)

TYRE PRESSURE GAUGE

NEW!

TYG 10-150

- Designed to measure wheel pressure of trucks, SUVs, RVs, ATVs etc.
- **Dual Chuck Design**
- 30° Reverse chuck for inner wheels & straight chuck is used for outer wheels
- Pressure Range: 10-150 PSI (1-11 BAR)
- Accuracy: ±3 PSI

Straight chuck with solid brass core

TYRE PRESSURE GAUGE PEN STYLE

TYG

- Compact pocket size air pressure gauge
- Pressure range from 10-50 PSI
- Metallic wear & tear resistant body
- Accuracy: ± 1 PSI



Mate the mouth of the tyre pressure gauge with the air valve of the tyre



Press the tyre pressure gauge on the valve

Check the reading on the pressure reading tube that slides out of the tyre pressure gauge

COOLANT MIXERS

Ensures accurate and uniform blending of metal cutting fluids, coolants, antifreeze etc with water for supply to machines.

CMX

With one piece polypropylene suction tube, 2" bung adaptor & delivery hose. Press fit plastic suction tube can be cut to fit drum height

CMX-SS

With stainless steel 2pc threaded suction tube & 2" bung adaptor & delivery hose

CMX-1

Mixing Ratio: 0-11%

CMX-2

Mixing Ratio: 0-57%

CMX-3

Mixing Ratio: 0-9%

AIR HOSE REEL

AIR HOSE REEL

217 PSI (15 BAR)

HRP-AW

- Compact Design: For use in confined spaces
- Auto Roll Up: Equipped with slow rewinding mechanism ensuring no one gets hurt
- Hose can be locked at any desired position
- 180° Swivel Wall Bracket
- Hose Length: 15m (50') x 3/8" (10 mm)
- Inlet/outlet threads 1/4" BSPT

We also make metal reels. Check out details on page 36

TYRE INFLATOR GAUGE FOR CARS

TIG-12

- 3 in 1 Tyre Gauge is designed to:
  1. Measure Tyre Pressure
  2. Inflate Tyres
  3. Deflate Tyes
- Complete with 12" (300 mm) flexible hose with straight chuck & gauge
- Aluminium die cast gun with flexible hose and straight chuck suitable for cars & other light vehicles
- Gauge dia.: 2-1/2" (63 mm)

Analog Gauge
Accuracy: 3-2-3%
Max. Pressure: Upto 300 PSI (21 BAR)

Digital Gauge
Accuracy: ±1% of full scale
Max. Pressure: Upto 60 PSI (4 BAR)

TYRE INFLATOR GAUGE FOR TRUCKS

TIG-24

- 3 in 1 Tyre Gauge is designed to:
  1. Measure Tyre Pressure
  2. Inflate Tyres
  3. Deflate Tyes
- Aluminium die cast gun with flexible hose, rigid extension & dual chuck suitable for attachment on valves of large tyres
- Gauge dia.: 2-1/2" (63 mm)

Analog Gauge
Accuracy: ±1.6% of Full Scale
Max. Pressure: Upto 210 PSI (15 BAR)

Digital Gauge
Accuracy: ±1% of full scale
Max. Pressure: Upto 300 PSI (21 BAR)

TYRE INFLATOR GAUGE FOR CARS CEE GAUGE

UPTO 140 PSI (10 BAR)

TIGCEE-12

3 in 1 Tyre Gauge is designed to:
1. Measure Tyre Pressure
2. Inflate Tyres
3. Deflate Tyes

Analog Gauge
Accuracy:
±0.08%< 58 PSI (4 BAR)
±1.6%> 58 PSI (4 BAR)

TYRE INFLATOR GAUGE FOR TRUCKS CEE GAUGE

UPTO 140 PSI (10 BAR)

TIGCEE-24

The 3 in 1 Tyre Gauge is designed to:
1. Measure Tyre Pressure
2. Inflate Tyres
3. Deflate Tyes

Analog Gauge Accuracy:
±0.08%< 58 PSI (4 BAR)
±1.6%>58 PSI (4 BAR)

TYRE INFLATOR GAUGE V SERIES

UPTO 60 PSI (4 BAR)

TIG-25

- 3 in 1 Tyre Gauge is designed to:
  1. Measure Tyre Pressure
  2. Inflate Tyres
  3. Deflate Tyes
- Gauge dia: 2-1/2" (63 mm)
- Aluminium die cast gun with 17" (440 mm) flexible hose and straight chuck suitable for cars & other light vehicles

Analog Gauge
with protective shroud
Accuracy: ±4% of full scale

industries

we serve

agriculture
automotive
aviation
chemical
construction
cement
DIY
electrical
industrial
marine
mining
oil & gas
plumbing
railway
steel welding
woodworking
workshop

terms & conditions

Intellectual Property: The intellectual property of this catalogue is assigned to all countries of the world. Reproduction, full and/or partial adaptation of it's content (content, images, diagrams, icons, specifications, tables etc.) by any means without prior written permission from GROZ entails a violation of GROZ ENGINEERING TOOLS's copyrights and constitutes an act of unfair competition

Technical Data: All drawings, weights, units, dimensions, the descriptions & illustrations contained in the company's catalogues are only approximate and intended merely to give a general description of the goods described therein.

Specifications: The information contained in this catalogue is as accurate as possible and complies, as far as possible with existing regulations at the time of it's publication – OCTOBER 2025. We therefore reserve the right to make modifications in line with modifications to regulations and/ or product specifications, drawings, illustrations for continual improvement. Buyers must ensure that goods are suitable for the purpose intended. Imperial dimensions shown as equivalents to metric and vice-versa are approximate.

Delay in Delivery: Delay in completion of work, delivery or in case of a contract for delivery by installments, delay in delivery of an installment shall not give rise to any liability upon the company whether or not any time of date is given in this respect and shall not entitle the customer to terminate the contract.

Liability: All goods are guaranteed to do the work for which they are designed. If the goods or any part thereof are defective solely as a result of faulty materials or workmanship of the company, the company's liability shall be limited, at it's discretion either to replacing such goods or the defective parts. But no such liability shall arise unless notification of any defect is received by the company in writing within 90 days from the receipt of goods by the buyer and the allegedly defective goods are thereafter returned to the company carriage paid with appropriate pre–notification.

Indemnity: The customer shall indemnify the company against all claims in respect of any loss, injury or damage sustained by a third party arising from the sales of the goods to the buyer how so ever caused and also against all actions, proceedings, costs, claims, demands and expenses made, brought or claimed against the company in respect of the infringement of any patent, trademark or registered design.

Groz Engineering Tools Pvt. Ltd.
Groz Net Industries

Village Kherki Daula, National Highway-8
Gurugram -122004, Haryana, INDIA
TEL +91.124.282.7700
E-MAIL info@groz-tools.com
URL www.groz-tools.com

The GROZ name, GROZ logo and the mark are trademarks of Groz Engineering Tools Pvt. Ltd., India